

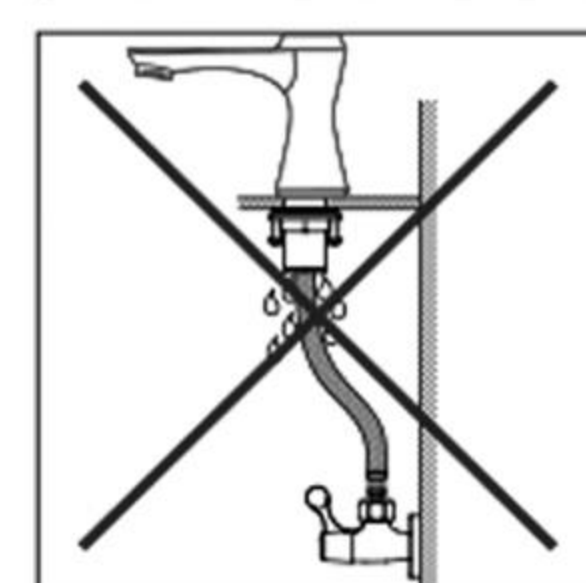


1 Installation Guidelines

1. After opening the product packaging, check the parts against the "Included Items" to make sure that all parts are present. If any parts are missing, please contact your local dealer immediately.
2. Your sink should match the installation dimensions of this product.
3. The faucet cartridge in the main body has already been calibrated at the factory. Disassembly is not recommended.
4. The hot water pipe connection should be marked with a red label or ring, and the cold water pipe connection should be marked with a blue label or ring. If the hot and cold water pipe connections are reversed, the red and blue markings on the faucet handle will be opposite to the actual water temperature. Please verify that the hot and cold water pipe connections are correct before turning on the water supply.
5. Before installing the faucet, flush the pre-embedded water pipes to remove any dirt or sediment to avoid clogging and ensure smooth water flow.
6. After installation, check all joints and connections for leaks.
7. Inlet water pressure requirements: $0.05\text{MPa} \leq \text{inlet water pressure} \leq 0.75\text{MPa}$ (including cold water pressure).

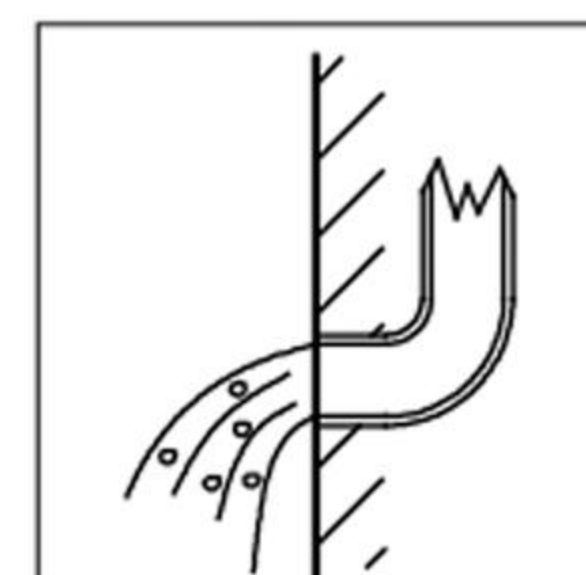


Recommended tools:

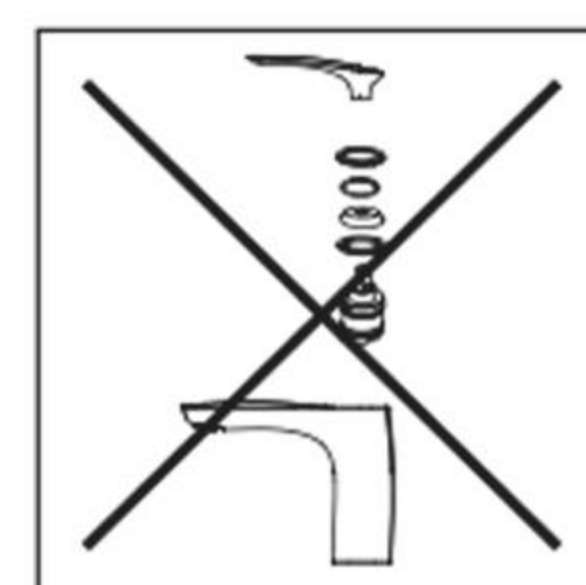

Water sealant



Allen key

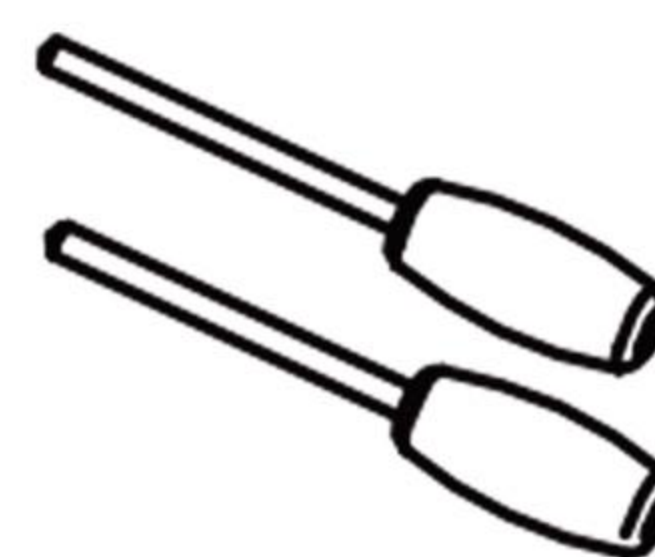

Flat screwdriver
Cross screwdriver

2 Faucet Care And Maintenance

a. To keep the faucet surface bright and clean, please clean the faucet regularly:

1. Use clean water to wash the faucet and wipe it dry with a soft cotton cloth.
2. Avoid using cleaning powder, polishing powder, and other abrasive detergents or nylon brushes, as this may scratch and corrode the product.
3. Do not use acidic cleaning agents to wash the faucet, as this may cause corrosion on the surface of the faucet. If the faucet comes into contact with harmful acidic agents, rinse it off with water immediately.



b. If you need to do a deep cleaning, please follow the following steps:

1. Use clean water and a soft cloth to remove as much surface dirt and grime as possible.


2. Use any of the following cleaning agents to remove surface dirt and grime:

Mild liquid cleanser
Colorless glass cleaner that does not have abrasive properties and can be completely dissolved (according to instructions)
Polish liquid that does not have abrasive properties

3. After cleaning, rinse off all of the cleaning agent with clean water and wipe dry with a soft cotton

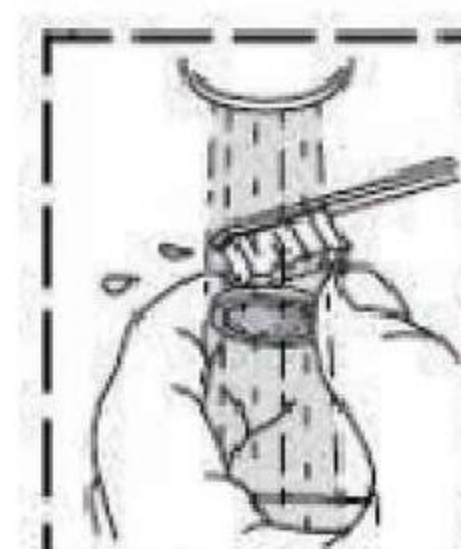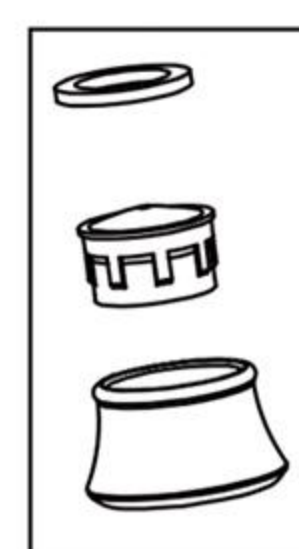

3 Installation Steps

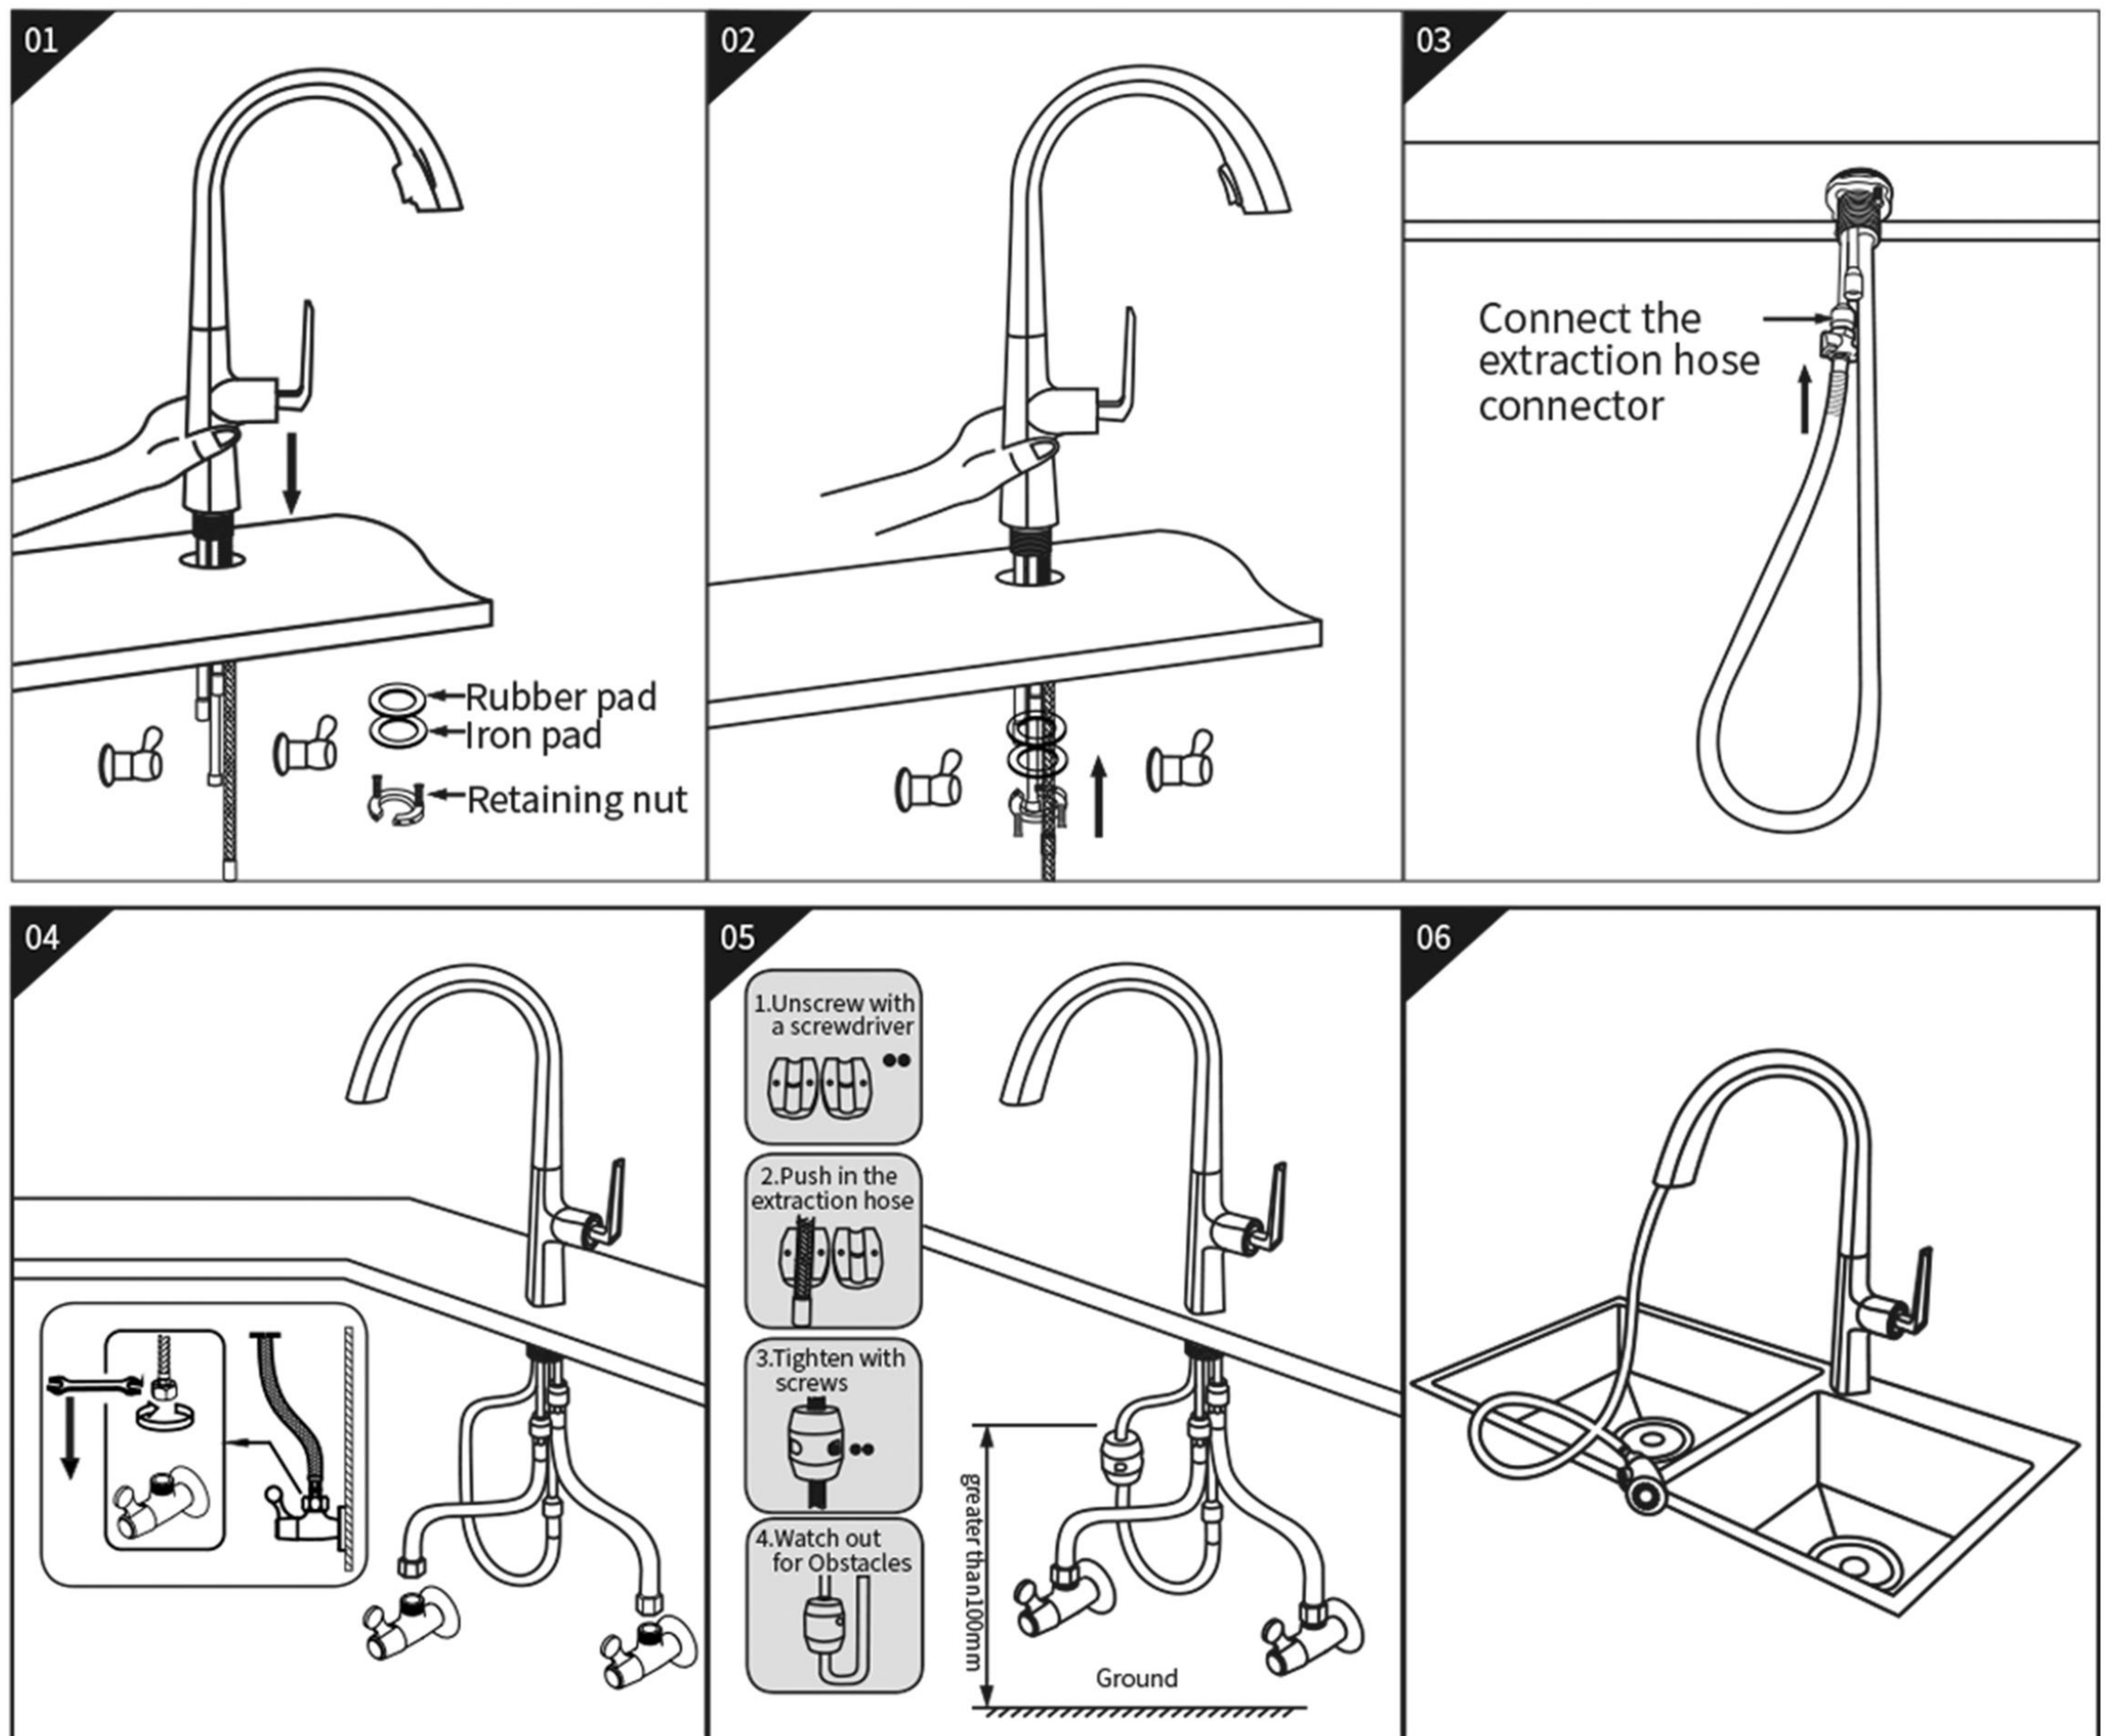

Installation steps:

1. Before installation, please make sure there is a drill on the kitchen basin $\Phi 35$ - $\Phi 40$ mm through-hole, the faucet body assembly is installed into the basin hole, and the bottom of the faucet body must be padded with a sealing ring, as shown in the figure, install the faucet body link from the bottom of the basin.
2. As shown in the figure, insert the parts from the bottom of the table into the faucet tube and fix them firmly to prevent shaking.
3. Rotate the extraction hose upwards and link it with the extraction hose connector
4. Connect the two water inlet hoses on the main body of the faucet to the hot and cold water angle valve respectively. The red water inlet pipe is connected with hot water, and the blue water inlet pipe is connected with cold water.
5. Unscrew the gravity ball from the screwdriver and then cover it on the suction hose (the gravity ball cannot touch the ground or other obstacles), and then tighten it with the screwdriver.
6. After the faucet is installed, test the water outlet mode first, and then debug the pull mode. If there is no problem with the installation, pay attention to the maintenance in the future!