EASTERN KING SIZE BED

ASSEMBLY INSTRUCTIONS




ASSEMBLY TIPS:

- 1. Remove hardware from box and sort by size.
- 2. Please check to see that all hardware and parts are present prior to start of assembly.
- 3 . Please follow attached instructions in the same sequence as numbered to ensure fast & easy assembly.



Warning!

- 1 . Don't attempt to repair or modify parts that are broken or defective. Please contact the store immediately.
- 2. This product is for home use only and not intended for commercial establishment.

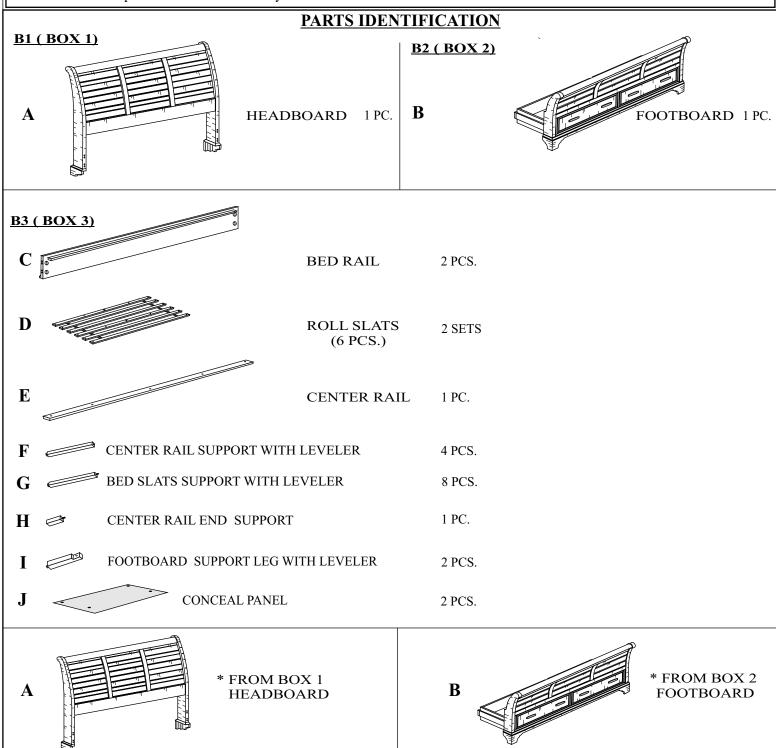

ASSEMBLY TIPS:

- 1 . Remove hardware from box and sort by size.
- 2. Please check to see that all hardware and parts are present prior to start of assembly.
- 3 . Please follow attached instructions in the same sequence as numbered to ensure fast & easy assembly.




Warning!

- 1 . Don't attempt to repair or modify parts that are broken or defective. Please contact the store immediately.
- 2. This product is for home use only and not intended for commercial establishment.


HARDWARE IDENTIFICATION

Z- B3 (BO	X 3) - HARDWARE PACE LOCATED IN (B3)		
1		THREADED BOLT	8 PCS.
2		WOOD DOWEL	8 PCS.
3		U WASHER	8 PCS.
4		SMALL FLAT WASHER	8 PCS.
5		HEX NUT	8 PCS.
6		WRENCH	1 PC.
7	Dimen	LONG SCREW	24 PCS.
8	Этт	SHORT SCREW	8 PCS.
9		LONG BOLT	4 PCS.
10		SHORT BOLT	2 PCS.
11		ALLEN WRENCH	1 PC.
12		LARGE FLAT WASHER	2 PCS.
13		LOCK WASHER	2 PCS.
NOTE . DITH I IDC HEAD CODEW DDIVED IS DECLIDED IN THE ASSEMB			

NOTE: PHILLIPS HEAD SCREW DRIVER IS REQUIRED IN THE ASSEMBLY PROCESS. HOWEVER, MANUFACTURER DOES NOT PROVIDE THIS ITEM.

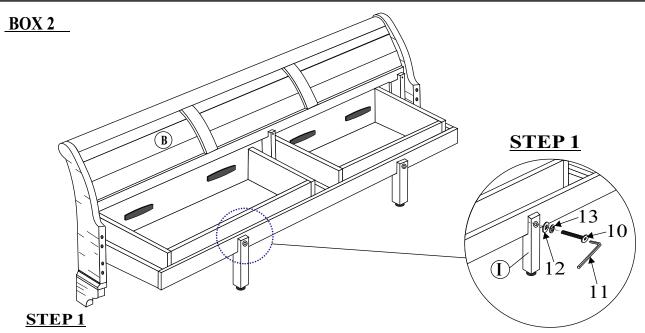


Align & fasten footboard support leg with leveler (I) to footboard (B) using short bolt (10), lock washer (13) & large flat washer (12) and fully tighten with Allen wrench (11).

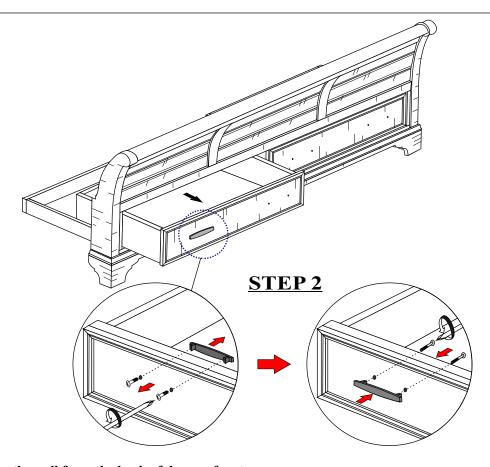


STEP 2

- 2.1) Unscrew the pull from the back of drawer front.
- 2.2) Align & fasten the pull to drawer front using screw and fully tighten with Phillips head screw driver (NOT INCLUDED)

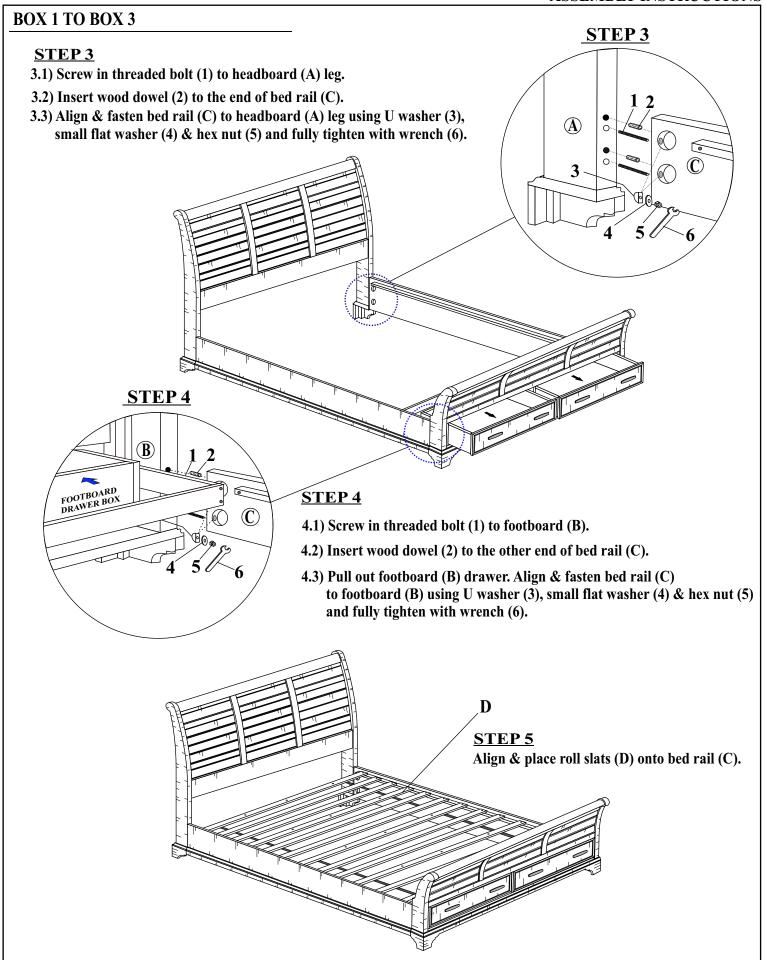


 \mathbf{E}


STEP 6

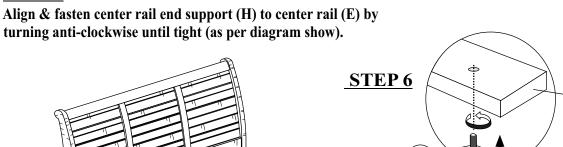

STEP 7

Align & fasten center rail support with leveler (F) to center rail (E) & roll slats (D) using long bolt (9) and fully tighten with Allen wrench (11).

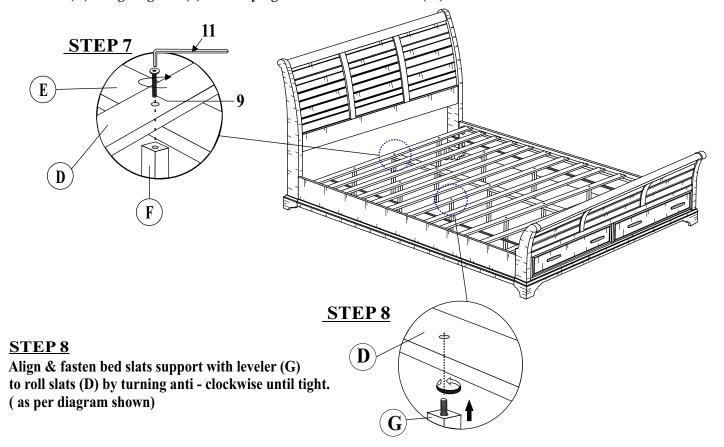

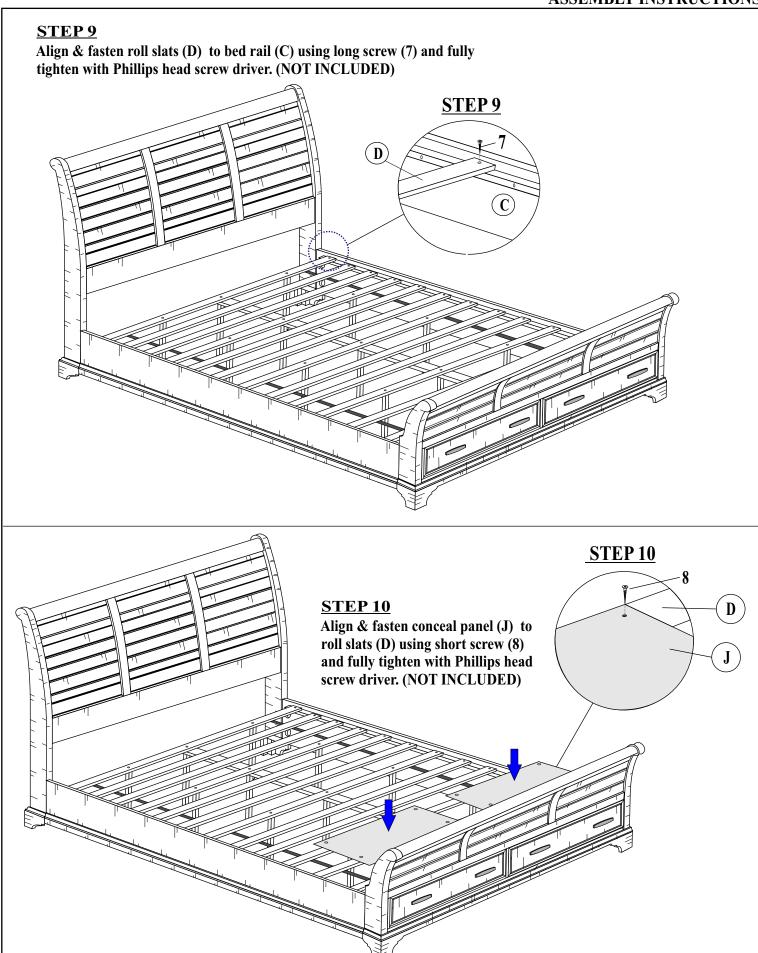

PAGE 7 OF 7