

# TRADITIONAL ROUND

#### **Features**

- Single-function Rain showerhead
- MasterClean™ spray nozzles prohibit mineral buildup for easy cleaning
- Katalyst™ Spray Technology with air induction ball joint (patent pending)
- Optimized sprayface for maximum performance
- Solid brass construction
- 2.5 gallon (9.5 L) per minute flow rate
- 1/2" 14 NPT connection

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992



**RAIN SHOWERHEAD** 



## Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

#### **Accessories**

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

☐ CP

☐ CP

## **Specified Model**

Model	Description	Size	Nozzles	Colors/Fin	Colors/Finishes	
K-13692	Rain showerhead	8-7/16" (214 mm)	78	□ CP	☐ Other	
K-13693	Rain showerhead	10-7/16" (265 mm)	78	□ CP	☐ Other	
K-13694	Rain showerhead	12-7/16" (316 mm)	102	□ CP	☐ Other	
Optional A	ccessories					
K-7392	12" (305 mm) straight ceiling-mount shower arm and flange			□ CP	☐ Other	
K-7394	6" (152 mm) straight ceiling-mount shower arm and flange			□ CP	☐ Other	

3" (76 mm) straight ceiling-mount shower arm and flange

Right-angle shower arm and flange

# **Product Specification**

The single function rain showerhead shall be made of solid brass construction with MasterClean™ spray nozzles to prohibit mineral build up for easy cleaning. Showerhead shall have Katalystm spray technology with air induction ball joint (patent pending) and optimized spray face for maximum performance. Showerhead shall have a flow rate of 2.5 gallons (9 L) per minute. Showerhead shall have a 1/2"-14 NPT connection. Showerhead shall be Kohler Model K-13692-\_ or K-13694-

□ Other

Other


K-7396

K-10124

# TRADITIONAL ROUND

### **Installation Notes**

Install this product according to the installation guide.

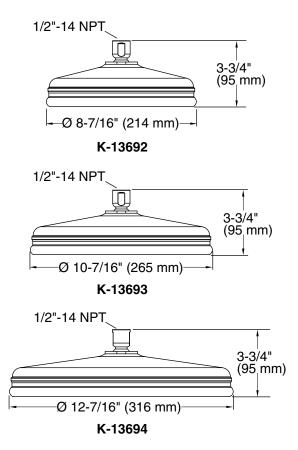

**Product Diagram** 

