



## **Heavy Duty**Rabbit Hutch

**Assembly Instructions** 


Item #01550 Revised: 04.18.16

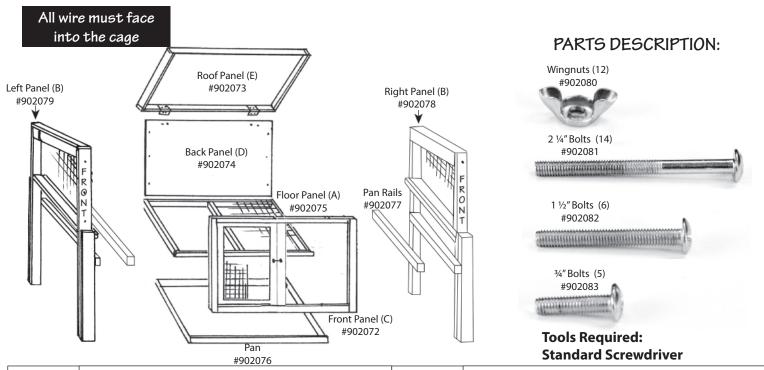

## STEP 1

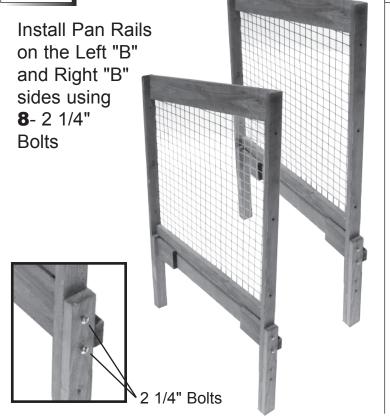

## STEP 2

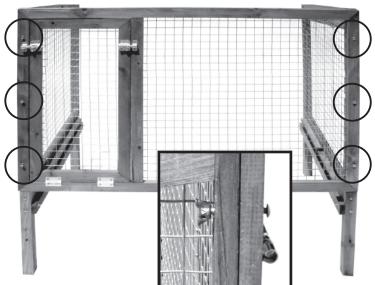



Fasten Side Panels (B) to Front Panel (C). Use 6- 2 1/4" Bolts and 6- Wing Nuts.

Make Sure Door Faces Outward on Left Side and that the Hutch Slants to the Back.



Slide Floor into Bottom of Hutch, Wire Side Up. Align Side Holes and Fasten Back Panel (**D**) to Side Panels using **6**- 1 1/2" Bolts and **6**- Wing Nuts.



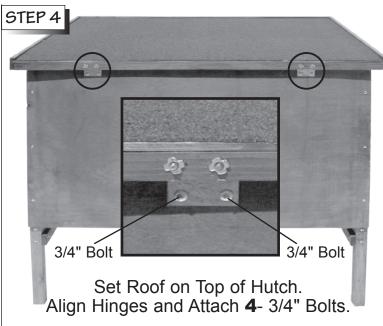

Install "Stop Chain" as Shown Below using **1**- 3/4" Bolt.





STEP 5

Slide Pan in Front Below Floor on Pan Rails. Assembly is Now Complete!



Tip: This item
(as any wood)
should be periodically (every
12 to 18 months
depending on
climate) treated
with a non-toxic
exterior grade
stain.