

Assembly Instructions

Broxton Gazebo



CAUTION: CONSTRUCTION INVOLVES WORKING AT HEIGHT. SUITABLE EQUIPMENT REQUIRED.

(W x D x H) 2.20m x 2.20m x 2.49m

Timber Characteristics...


Natural & Unique, our timber's story

A guide to understanding the natural characteristics of timber and what to do if you feel there is an issue...

Timber is a unique and naturally beautiful material with its own characteristics which makes each piece distinctive.

At we are committed to the environment and we are very proud to be a Forest Stewardship® Certified company. (FSC® C114990) and all timber used has been ethically sourced from responsibly managed forests.

Splits & cracks are to be expected in timber and they naturally appear in the grain due to changing temperatures and humidity levels. They are not a cause for concern as they will not affect the strength or durability of the product.

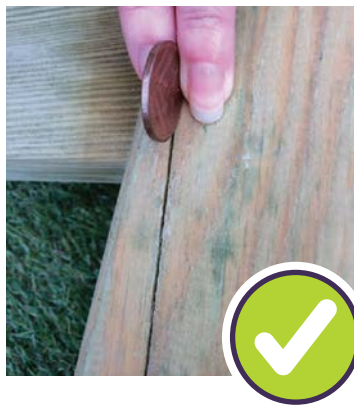


Normal splits are characteristics of timber.



Use the "2p Coin Test" as a guide.

If a particular split or crack becomes visible and is of concern simply use the "2p Coin Test" as a guide. There is no need for concern if the coin will not fit. If the coin does fit in the split, potentially there may be an issue. In this case, in order for customer services to investigate the matter fully, it should be reported in writing to your retailer, along with a clear photograph showing the 2p coin in place.

"Here at we take any complaint very seriously and each one is investigated individually and judged specifically using established guidelines to determine if it is a justified complaint and whether a replacement part is required." *Customer Service Dept.*

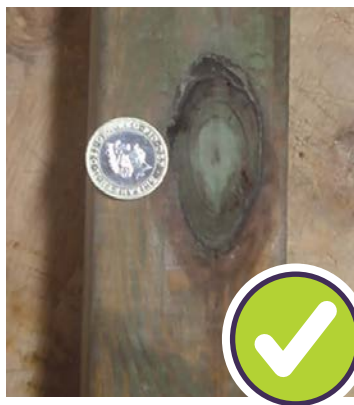

Knots are characteristics of timber.




If you find a dead-knot email your retailer including a photo.

Knots are a natural characteristic of timber however a dead knot may be an issue which can be reported in writing to your retailer and must include photographic evidence to support the query.

Sun Bleaching (from packaging) & **Green Spotting** (Caused by pressure treatment) are not causes for concern and they will fade over time when items are placed outdoors.

Neither will affect the durability of the product.

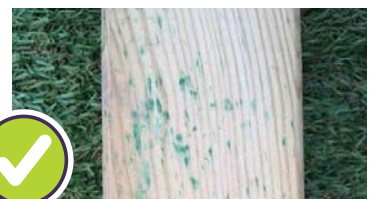

Sun-bleaching & Pressure Treatment green spotting will fade in time.

IMPORTANT INFORMATION regarding further treatment: **Pressure Treated products should not have any further treatment applied for the first 6 months**

Product Assembly Instructions


Requires 2 Person assembly

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.


Please take a few moments to check all pack contents listed

Broxton Gazebo Pack List		
Item	Description	Quantity
A	Side and Back Panel	3
B	Post	4
C	Ring Beam	4
D	Bracing	8
E	Support Beam	1
F	Roof Support	1
G	Roof Panel	4
H	Shelf Support Batten (Long x3 , Medium x2, Short x1)	6
J	Back Shelf	1
K	Side Shelf (Left & Right)	2


Fixings		Quantity
4 x 35mm Screws		26
4 x 60mm Screws		95

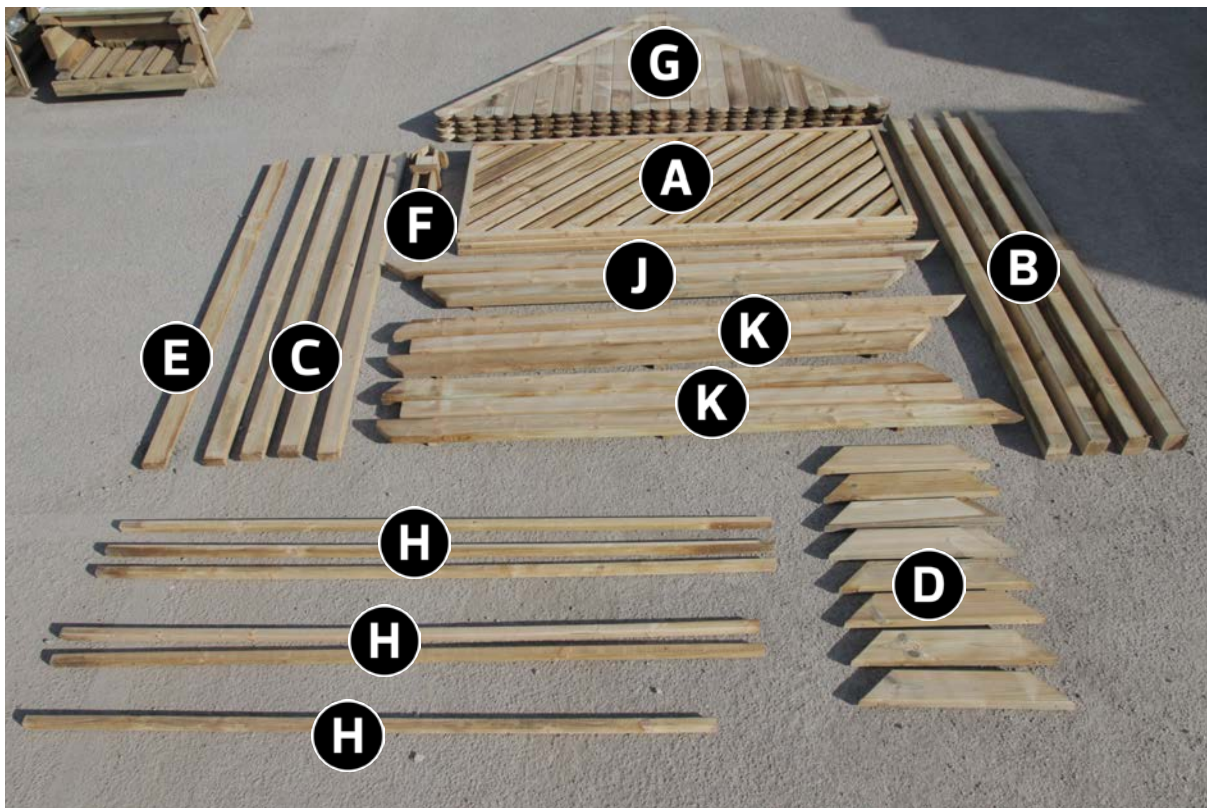


This product is made from pressure-treated timber. It should not be painted or coated with any other treatment until at least 6 months after purchase

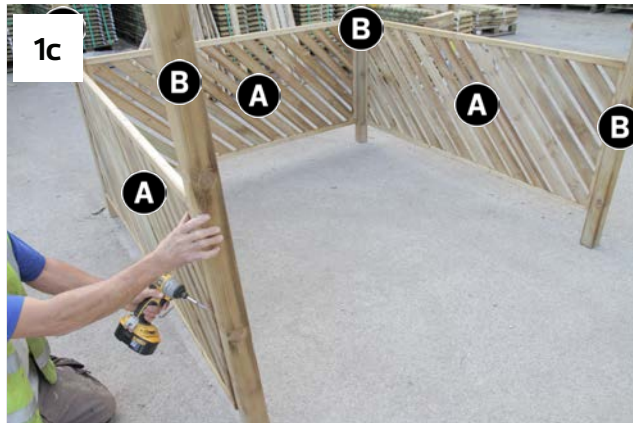1


Attach Back Panel A to 2x Posts B at a nominal height of 150mm from base of posts, ensuring notches (cut outs) to posts are positioned externally and panel is flush with back of post using 6x 60mm screws (3 per post). (See Fig.1a) Attach Side Panels A to post/panel assembly using 6x 60mm screws (3 per post). (See Fig. 1b)
 Fix Side Panels A to remaining Posts B using 6x 60mm screws (3 per post) ensuring notches in posts are positioned externally. (See Fig. 1c)

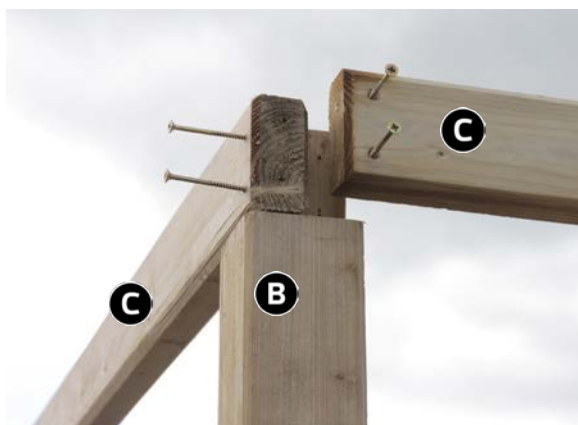2

Position and fix Ring Beams C as shown in Fig. 2 using 4x 60mm screws (2 per beam). Repeat procedure for remaining posts and beams using 12x 60mm screws (4 per post).

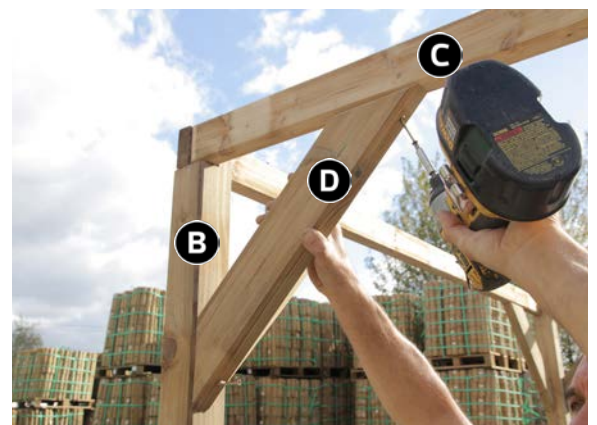3


Fix 8x Bracings D to posts and ring beam assembly using 16x 60mm screws (2 per bracing). (See Fig. 3)

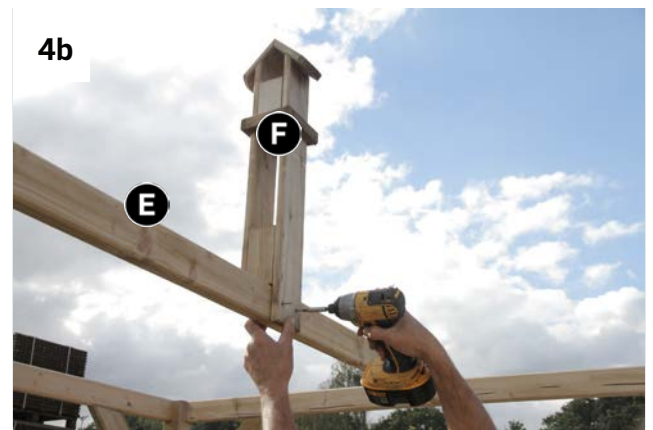4

Fix Support Beam E centrally along ring beam assembly as shown in Fig. 4a using 4x 60mm screws. Position Roof Support F to the centre of Support Beam E and fix using 2x 35mm screws. (See Fig. 4b)

5

Locate Roof Panel G on to ring beam assembly and Roof Support F and fix in position using 6x 35mm screws (1 to Roof Support, 5 to ring beam). Repeat procedure for remaining 3 panels using 18x 35mm screws (6 per panel). (See Figs. 5b & 5c)

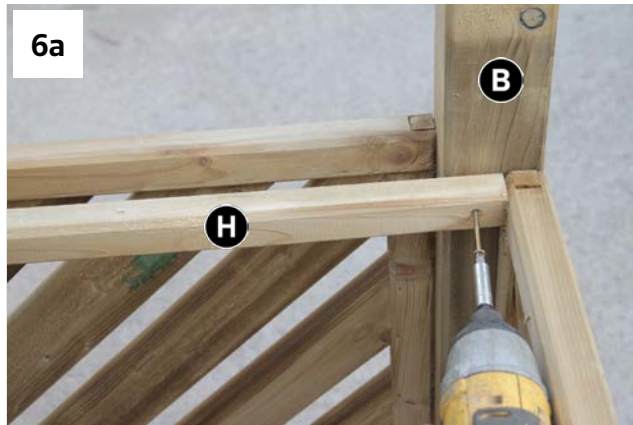

Attach Shelf Support Battens (Med.) internally to left and right hand posts using 4x 60mm screws (2 per batten). (See Fig. 6a)

Attach Shelf Support Batten (Short) internally to top of back panel using 4x 60mm screws. (See Fig. 6b)

Attach Shelf Support Battens (Long) externally as shown in Figs. 6c & 6d using 15x 60mm screws (5 per batten).



Position Back Shelf J and Side Shelves K onto shelf support battens and fix in position using 18x 60mm screws (6 per shelf). (See Fig. 7)



The Broxton Gazebo is now complete