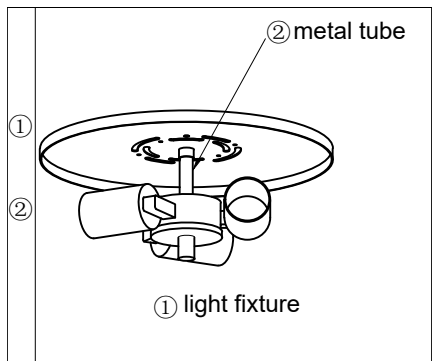
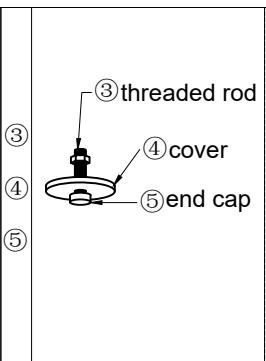
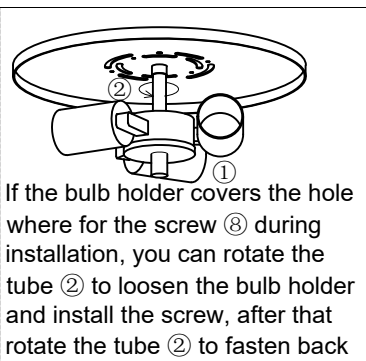
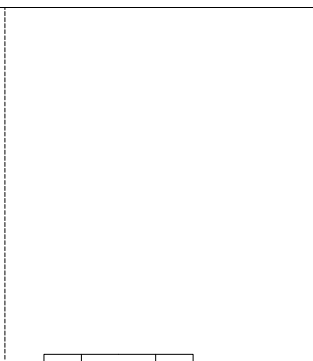
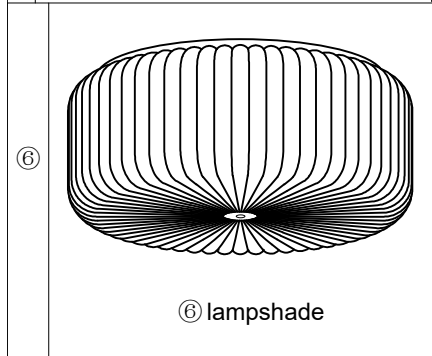
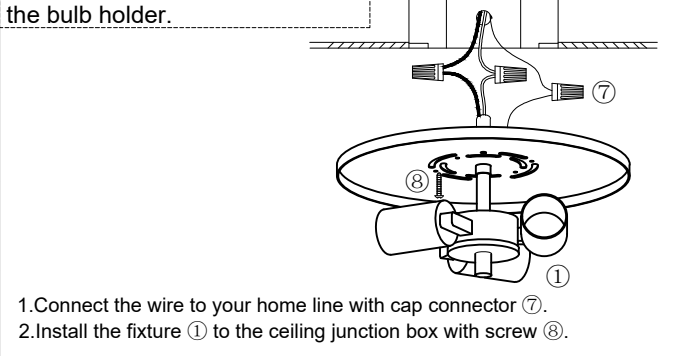
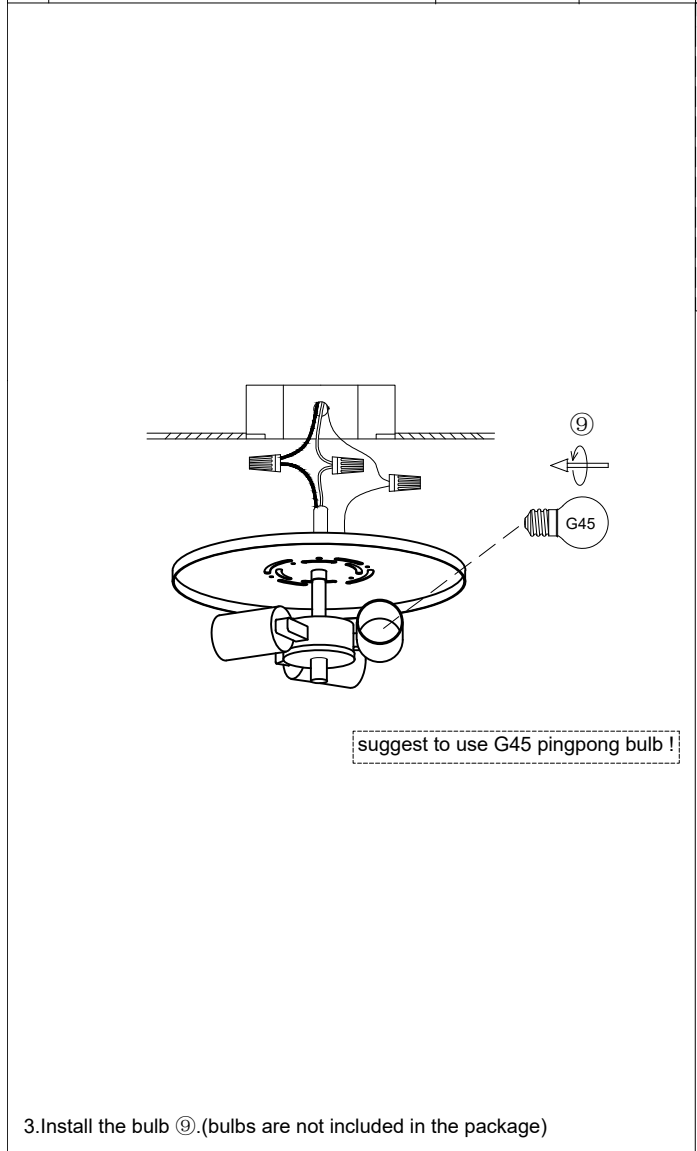
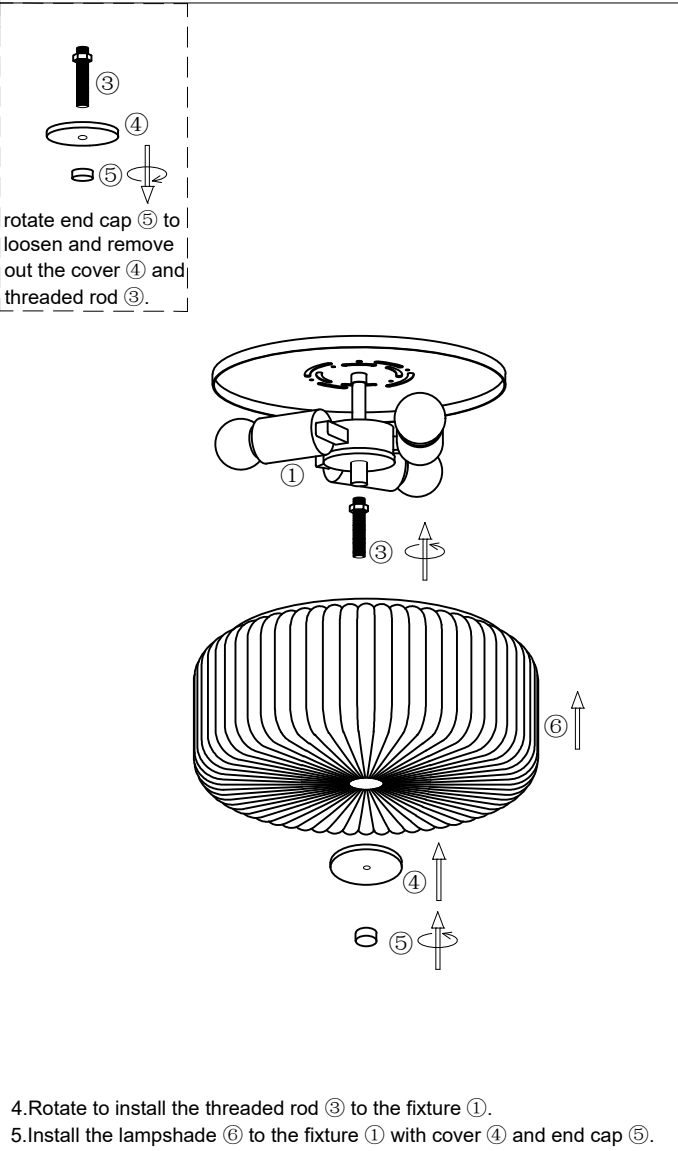


Installation & Assembly

		 If the bulb holder covers the hole where for the screw ⑧ during installation, you can rotate the tube ② to loosen the bulb holder and install the screw, after that rotate the tube ② to fasten back the bulb holder.									
 ⑥ lampshade	<table border="1"> <tr> <td> X 1pcs</td> <td> X 3pcs</td> </tr> <tr> <td> X 3pcs</td> <td></td> </tr> <tr> <td> X 3pcs</td> <td></td> </tr> <tr> <td> X 3pcs</td> <td></td> </tr> </table>	X 1pcs	X 3pcs	X 3pcs		X 3pcs		X 3pcs		 1. Connect the wire to your home line with cap connector ⑦. 2. Install the fixture ① to the ceiling junction box with screw ⑧.	
X 1pcs	X 3pcs										
X 3pcs											
X 3pcs											
X 3pcs											
 ⑨ G45 suggest to use G45 pingpong bulb ! 3. Install the bulb ⑨. (bulbs are not included in the package)		 4. Rotate to install the threaded rod ③ to the fixture ①. 5. Install the lampshade ⑥ to the fixture ① with cover ④ and end cap ⑤.									

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !