

# SPEAKMAN® S-1495-AF

## Exposed Anti-Scald Balanced Pressure Shower

### FEATURES:

- Sentinel Mark II exposed anti-scald balanced pressure Shower.
- Brass lever handle.
- Adjustable temperature limit stop.
- Chrome plated cast brass body.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- 1/2 in. NPTF inlets.
- Vandal-resistant standard.
- Exposed anti-scald balanced pressure shower.
- Adjustable stops and supply connections from floor, ceiling or wall.
- 7-1/2 in. center to center.
- Polished chrome plated brass gooseneck with supporting strap.
- S-2292 showerhead with flow control device reduces flow to 2.5 gpm (9.46 L/min) maximum

### FINISH:



PC

### COMPLIANCE:

- Valve meets ASSE 1016 standard and ASME A112.18.1/CSA B125.1 standard.
- Showerheads meet ASME A112.18.1/CSA B125.1 standard.

### OPTIONS:

Add suffix to model #


- |                        |                              |
|------------------------|------------------------------|
| • Less showerhead      | <input type="checkbox"/> -LH |
| • S-2251 showerhead    | <input type="checkbox"/> -1  |
| • S-2252 showerhead    | <input type="checkbox"/> -2  |
| • S-2253 showerhead    | <input type="checkbox"/> -3  |
| • S-2272-E2 showerhead | <input type="checkbox"/> -5  |

### WARRANTY:

- Shower Head: 1 year limited
- Valve: 5 year limited



**DIMENSIONS:** NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female NPT threads.

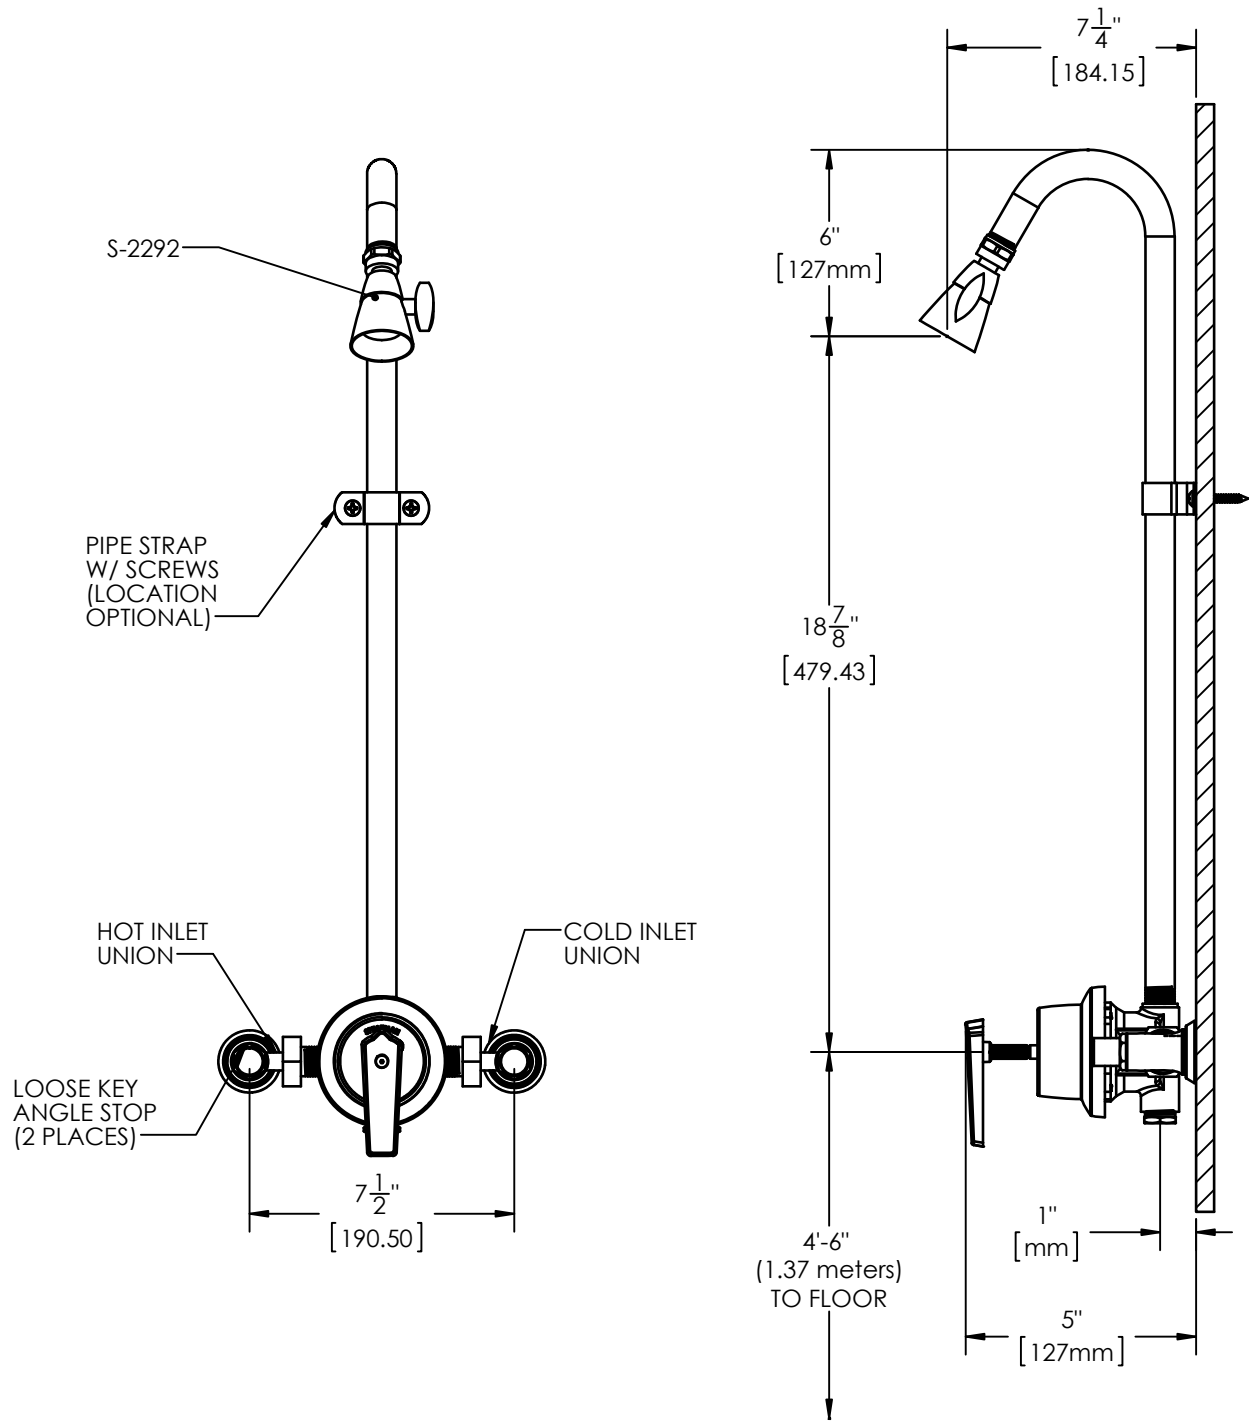

# SPEAKMAN® S-1496-AF

## Exposed Anti-Scald Balanced Pressure Shower

### FEATURES:

- Sentinel Mark II exposed anti-scald balanced pressure Shower.
- Brass lever handle.
- Adjustable temperature limit stop.
- Chrome plated cast brass body.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- 1/2 in. NPTF inlets.
- Vandal-resistant standard.
- Exposed anti-scald balanced pressure shower.
- Galvanized gooseneck with supporting strap.
- S-2272-E2 showerhead with flow control device reduces flow to 2.0 gpm (7.57 L/min) maximum

### FINISH:



PC

### COMPLIANCE:

- Valve meets ASSE 1016, standard and ASME A112.18.1/CSA B125.1 standard.
- S-2252-E2 shower head meets ASME A112.18.1/CSA B125.1 standard and WaterSense.

### OPTIONS: Add suffix to model #

- |                                      |                               |
|--------------------------------------|-------------------------------|
| • Less showerhead                    | <input type="checkbox"/> -LH  |
| • S-2251 showerhead                  | <input type="checkbox"/> -1   |
| • S-2252 showerhead                  | <input type="checkbox"/> -2   |
| • S-2252 vandal-resistant showerhead | <input type="checkbox"/> -2VR |
| • S-2253 showerhead                  | <input type="checkbox"/> -3   |
| • S-2292 showerhead                  | <input type="checkbox"/> -9   |

### WARRANTY:

- Shower Head: 1 year limited
- Valve: 5 year limited



**DIMENSIONS:** NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat.

