

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing the Pandent light.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HARZARDS INVOLVED.**
- We strongly recommend that an authorized and certified electrician install all direct wire fixtures.
- This fixture has been rated from 3x 40watt Max E12 standard bulb(not included).To avoid the risk of fire, do not exceed the recommended wattage.
- The light fixture is meant for indoor use. DRY LOCATION ONLY. It must be connected only to 3-wire. Single-phase electrical systems (provided with Ground wire or equivalent protection system).
- Keep it away from children.

WARNING:

- Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
- To reduce the risk of fire, electrical shock, or personal injury, always turn off the chandelier and allow it to cool Prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb.
- Keep flammable materials away from light bulb.

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

TO ASSEMBLY:

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.


1. Carefully unpack all parts and hardware and lay out on a clear workspace.
2. Twister the threaded rods(K)to the lamp body(J), and lock the wood body(L) arm through the threaded rods(K) with the screw cap(M) .
3. Tighten the wood nut(O) to the bottom of the body(J), and lock the collar loop(I) with body(J) connection.
4. Turn off the power.
5. Pull the wire through the boom, hanging plate, connect the wire with the connector(A), and lock the GROUND WIRE to the GREEN GROUND SCREW (D).
6. Fitted the plastic expansion bolt(B) to the ceiling, install the canopy firmly with tapping screw.
7. Lock the mounting bar(C) to the junction box with screw, cover the canopy(G) and tighten with outer ring.
8. Use the link loop(H) to connect the chain with the collar loop(I) on the lamp body.
9. Install the bulbs(N)/40W on the lamp base.
- 10.Turn on the power.

PARTS ENCLOSED:

- (A)Wire connectors
- (B)Plastic expansion bolt
- (C)Mounting Bar
- (D)Green Ground screw
- (E)Tapping screw
- (F)Mounting screw
- (G)Canopy & Chain
- (H)Link Loop
- (I)Collar Loop(1)
- (J)Body(1)
- (K)Threaded Rods(2)
- (L)Wood body(2)
- (M)Screw cap(2)
- (N)Bulbs(3)
- (O)Wood nut(1)

TOOLS REQUIRED:

- **Philips screwdriver**
- **Electrical tape**
- **Wire cutters**

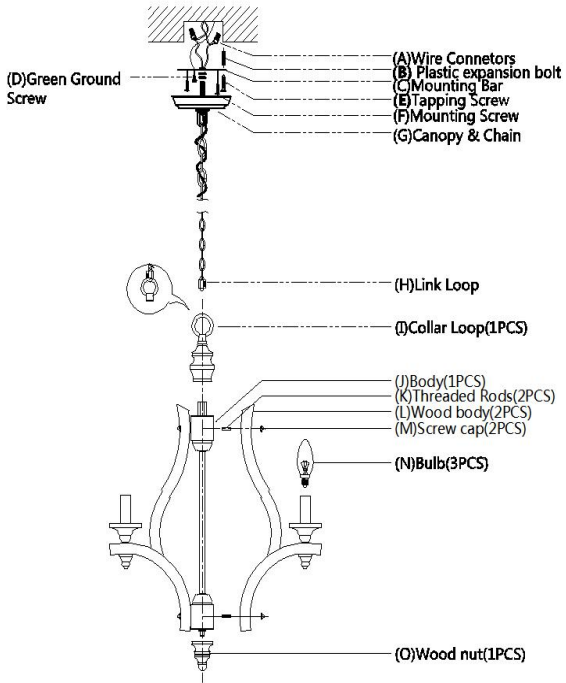

CARE INSTRUCTIONS:

1. Make sure that power is turned off and bulb has cooled before handling.
- 2.Wipe clean with a dry cloth/mid soapy solution. Do not use corrosive cleaners.
- 3.The cable/cord of the chandelier cannot be replaced. If the cable is damaged, do not use the light.