


Features

- Acrylic
- Drop-in installation
- Armrests
- Bask heated lumbar support with three temperature settings
- Textured bottom surface
- Slotted overflow for maximum bathing depth
- Low threshold height
- 60" (1524 mm) x 32" (813 mm) x 19" (483 mm)

DROP-IN BATH WITH BASK™ HEATED SURFACE K-1123-W1

ADA

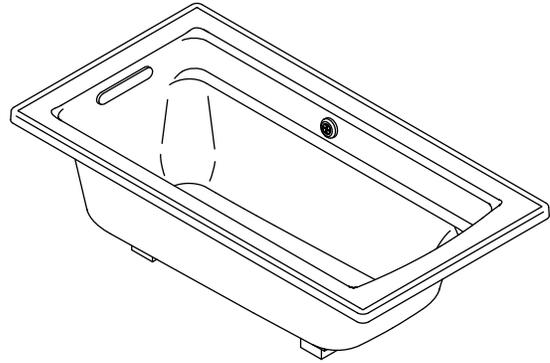

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- ICC/ANSI A117.1
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1123-W1	Drop-in bath with Bask heated surface	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1491	Bath pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1601	Bath footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	

Product Specification

The acrylic drop-in bath shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 19" (483 mm) in height. Bath shall feature slotted overflow for maximum bathing depth and low threshold height. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall have armrests and features a textured bottom surface. Bath shall be Kohler Model K-1123-W1-_____.

ARCHER™

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	45-1/8" (1146 mm) x 19-11/16" (500 mm)			
Basin area, top	52-3/4" (1340 mm) x 25-5/16" (643 mm)			
Weight	70 lbs (31.7 kg)			
To overflow:				
Water depth	15" (381 mm)			
Capacity	58 gal (219.5 L)			
* Approximate measurements for comparison only.				
Drop-in cutout		58-1/2" (1486 mm) x 30-1/2" (775 mm)		
Heater:	W	V	HZ	A
	65	120	60	.5

Installation Notes

Install this product according to the installation guide.

Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.


Floor support under this product must provide for a minimum of 44 lbs/square foot (212 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

Will comply with **ADA** when installed per Section 607 Bathtubs of the ADA 2010 Standards for Accessible Design.

No change in measurements if connected with drain illustrated. (K-7272)

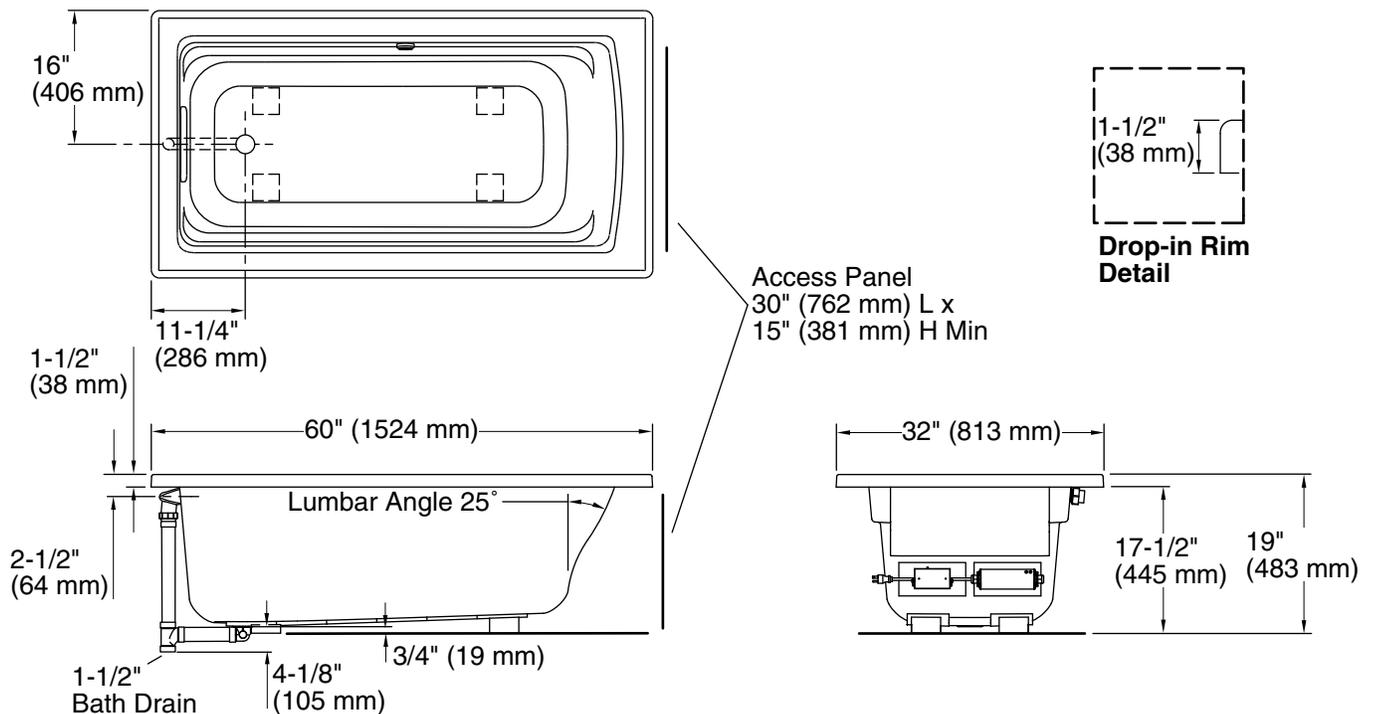

Product Diagram