



# SOLEA

## ® Faucet Installation Procedures Instalación del Grifo Procédures d'installation du robinet

Tools You Will Need / Herramientas Necesarias / Outils dont vous aurez besoin



PART	DESCRIPTION	QUANTITY
A	Faucet	1

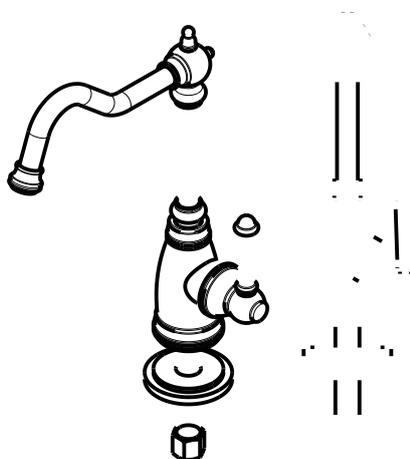

### SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product. ~~before using a flame on these parts.~~ The warranty will be voided on these parts.

#### CAUTION

- If you solder the joints during installation, the faucet, the seats, cartridges, and washers must be removed

- Cover the sink drain to avoid losing parts.

#### WARNING

- Protect your eyes with safety glasses when cutting or soldering water supply lines.

### PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents. If any part is missing or damaged, do not attempt to assemble the product. Contact customer service for replacement parts.

**Estimated Assembly Time: 30 minutes**

Tools Required for Assembly (not included): Adjustable Wrench, Groove Joint Pliers, Pipe Wrench, Phillips Screwdriver, Pipe Tape or Pipe Thread Compound, and Supply Lines

Installations may vary depending on how the previous faucet was installed. Supplies necessary for the installation of the faucet are not all included; however, they are available wherever plumbing supplies are sold.


Prior to beginning installation, turn off the hot or cold water lines, then turn on the old faucet to release built-up pressure. When installing the new faucet, hand tighten the connector nuts. **DO NOT OVERTIGHTEN.** Connections that are too tight will reduce the integrity of the system.

## ASSEMBLY INSTRUCTIONS

1. Turn off water at the supply valve under the sink or at the main water supply, disconnect the supply line, and remove old faucet.


Clean and dry surface area where new faucet will be mounted.

Use PTFE tape or joint compound on all threaded connections (wrapped clockwise).

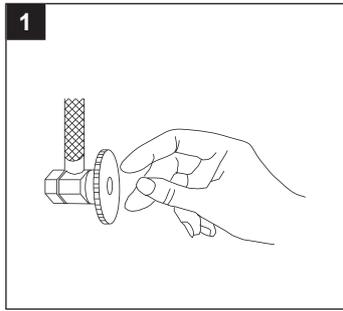

2. If this is a new installation you will need to drill a hole through your counter top to mount the faucet. The hole should be within 2-1/4" of the sink to allow the faucet to drain into the sink.

The hole must be at least 7/16" in diameter but no more than 1-1/2" in diameter. A smaller hole will supply better support for your faucet.

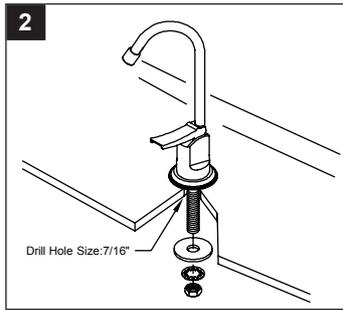


Once you have drilled the hole, insert the packing (rubber) washer, brass washer, another packing (rubber) washer and the iron washer over the faucet shaft. Make sure you follow this order; the iron washer should be on the bottom of the shaft.

3. Insert the faucet shaft through the counter top hole from the top.
4. From under the counter top, slip the lock washer onto the shaft and hand tighten. Make sure the faucet spout is positioned where you want it above the sink and tighten the lock nut.

5. If using a flexible supply line it must have a 1/4" compression nut on the side hooking onto the faucet. The other side must fit onto your filter outlet or water supply.

Discard the compression nut and ring that came with the faucet. Tighten your supply line directly onto the faucet shank.

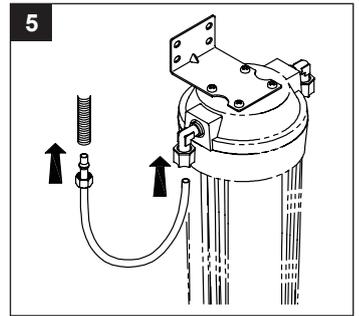


If using 1/4" vinyl tube follow steps above but be sure to insert a 1/4" tubing adapter (not included) into the end of your vinyl tube before attaching the compression ring and nut.

Hook the other end of the supply line up to your water source or filter output per the instructions that came with the filter or valve/fitting.

6. Turn on water and look for any leaks.

Flip the faucet lever up and allow water to run for 30 seconds to clear any debris out of the line.

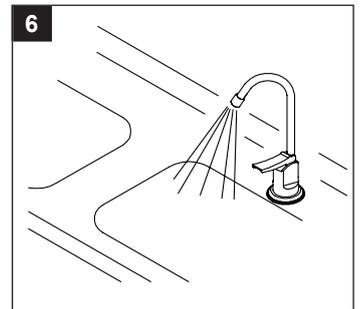

## OPERATION INSTRUCTIONS

Your water faucet is NOT intended for use with hot water. Using it with hot water may damage the faucet and cause leaking and scalding.

Flipping the faucet lever up will cause the water to run continuously from the faucet. To stop the water, push the

faucet lever back down to its starting position.

Pushing the faucet lever down will turn on the water until you release the lever which will then stop the water flow automatically.

## CARE AND MAINTENANCE

Clean periodically with a soft cloth. Avoid abrasive cleaners, steel wool, and harsh chemicals as these will dull the finish and void your warranty.