

**ASSEMBLY & INSTALLATION
INSTRUCTIONS FOR #126**

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Thread the 1/2" IPS HEX NUT (4) onto the NIPPLE (5), and screw the NIPPLE (5) into the MOUNTING BRACKET (2), without tightening the 1/2" IPS HEX NUT (4).
2. Pull the power supply wires out from the OUTLET BOX (1), and mount the MOUNTING BRACKET (2) to the OUTLET BOX (1), using #8-32 IPS MOUNTING SCREWS (3). Mark the position of the PLASTIC ANCHORS(14), tack out the MOUNTING BRACKET (2), and use the appropriate tool to fix PLASTIC ANCHORS(14) in the position marked on the ceiling, then once again mount the MOUNTING BRACKET (2) to the OUTLET BOX (1), using #8-32 IPS MOUNTING SCREWS (3) and ANCHOR SCREW(15).
3. Place the CEILING PAN (18) over the OUTLET BOX (1) so that the NIPPLE (5) protrudes out through the mounting hole located in the center of the CEILING PAN (18) 1/4". Remove the CEILING PAN (18) and secure the position of the NIPPLE (5) by tightening the 1/2" IPS HEX NUT (4) against the MOUNTING BRACKET (2).
4. If your whole lamp weighs more than 50 pounds, it is recommended that you use a weighted mounting method, please see Fig 2. use HEX COUPLING(28) connect 1/2 IPS NIPPER(5) and NIPPER(30), double lock with HEX NUT(29), on the top of the ceiling, slide the BIG SHIM BLOCK(31) over the NIPPER(30), secure with the HEX NUT(32).
5. Install your lamp on the CEILING PAN (18) as normal, Pass the POWER CORD (23) through the CEILING PAN (18), and slide the FIGURE EIGHT STRAIN RELIEF(17) on the wire near to the CEILING PAN (18). and secure the MINI SCREW(20) by SCREW DIVER(19).
6. Attach the power supply wires to the fixture lead wires by connecting, the BLACK FIXTURE WIRE (11) to the BLACK SUPPLY WIRE (10), and the WHITE FIXTURE WIRE (9) to the WHITE SUPPLY WIRE (8) using WIRE NUTS (12). Loop the FIXTURE GROUND WIRE (6) around the GROUND SCREW (13) of the MOUNTING BRACKET (2). Connect the remaining FIXTURE GROUND WIRE (6) to the SUPPLY GROUND WIRE (7) using a WIRE NUT (12).

7. Hang the HOOK OF REPAIR ROPE(16) onto the hole of the MOUNTING BRACKET (2). Place the CEILING PAN (18) back onto the NIPPLE (5), and secure into place using the HEX NUT (21), then Screw the FINIAL(22) onto the NIPPLE(5).
8. Slide the CHECK RING(25) and the GLASS SHADE(26)(not included) over the SOCKET CUP (24), secure with the SOCKET LOCK RING(27).
9. Screw light bulb into the socket and make sure it does not exceed the maximum wattage specified on the fixture's wattage rating label.

INSTALLATION IS NOW COMPLETED

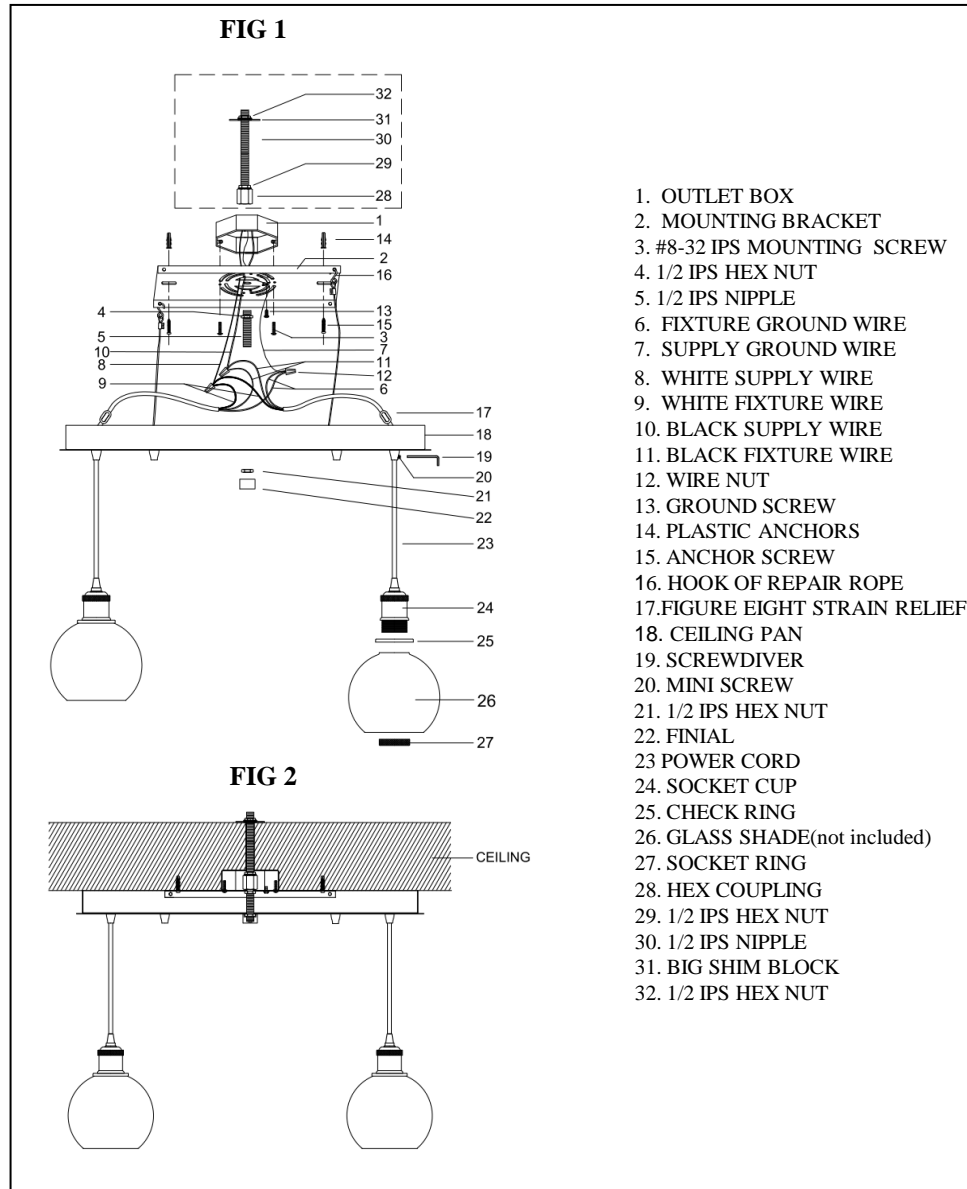

1. OUTLET BOX
2. MOUNTING BRACKET
3. #8-32 IPS MOUNTING SCREW
4. 1/2 IPS HEX NUT
5. 1/2 IPS NIPPLE
6. FIXTURE GROUND WIRE
7. SUPPLY GROUND WIRE
8. WHITE SUPPLY WIRE
9. WHITE FIXTURE WIRE
10. BLACK SUPPLY WIRE
11. BLACK FIXTURE WIRE
12. WIRE NUT
13. GROUND SCREW
14. PLASTIC ANCHORS
15. ANCHOR SCREW
16. HOOK OF REPAIR ROPE
17. FIGURE EIGHT STRAIN RELIEF
18. CEILING PAN
19. SCREW DIVER
20. MINI SCREW
21. 1/2 IPS HEX NUT
22. FINIAL
23. POWER CORD
24. SOCKET CUP
25. CHECK RING
26. GLASS SHADE(not included)
27. SOCKET RING
28. HEX COUPLING
29. 1/2 IPS HEX NUT
30. 1/2 IPS NIPPLE
31. BIG SHIM BLOCK
32. 1/2 IPS HEX NUT