
3 Wheel LED Kick Scooter



Age: 3+


Get To Know Your Scooter

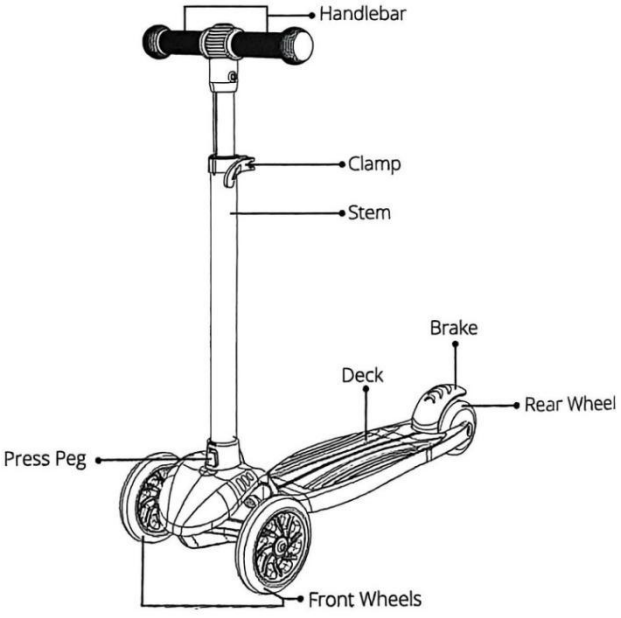

Adjusting the Stem

Open the clamp, press the metal peg in, and raise or lower the stem to one of the the three height levels. The peg should pop into place. Close the clamp to secure the stem.


Note: In order for the scooter to be safe to ride (1) the metal peg must pop into one of the designated holes and (2) the clamp must be closed.

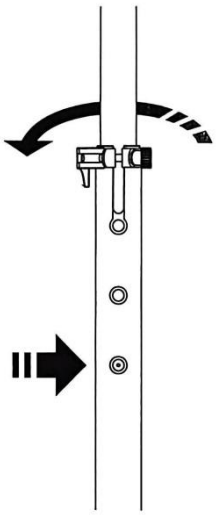


WARNING

The toy is to be assembled by an adult.


Assembling the Scooter

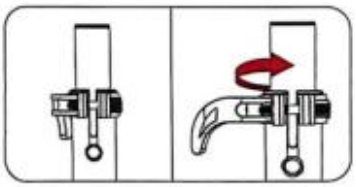


1. Take out stem and open the clamp upward.

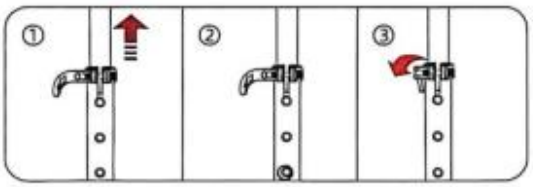


2. ①Pull the stem upward.
②Press the metal peg inside.
③Close the clamp downward.

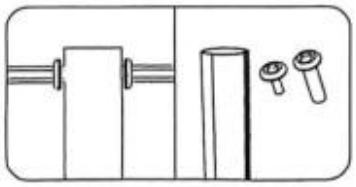


3. Loosen the bolts on the stem with two wrenches.

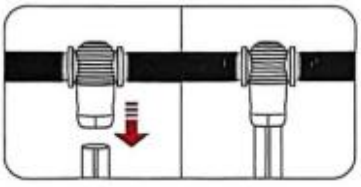


4. Place the handlebar downward with holes on both sides aligned.

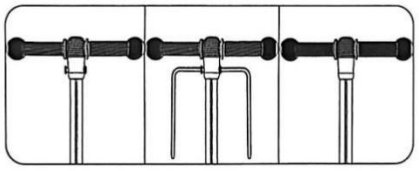


5. Tighten the bolts with two wrenches.

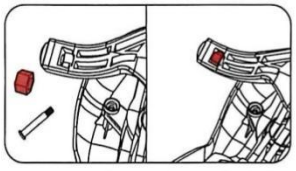


6. Remove the nut from the bolt, then place it in the hole shown in the picture.

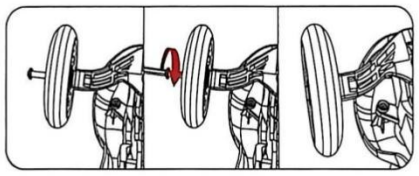

7. Put the bolt on the front wheel, align the hole and tighten the bolt with one wrench.

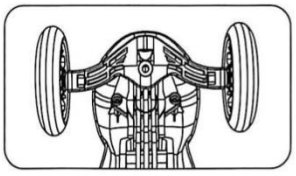

8. Install the other front wheel by steps 6 and 7.

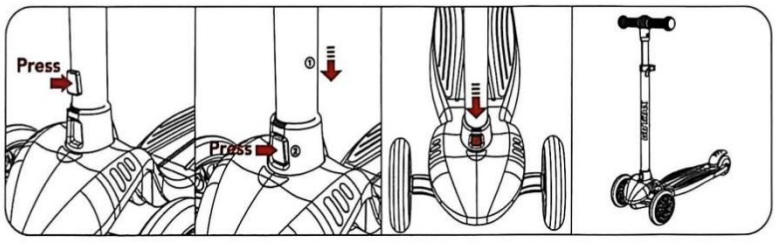

9. Assemble the stem with the body:
①Insert the stem into the body accordingly.
②Press the red button and insert the stem downwards.
③When the red buckle is fastenedonto the vehicle body slot, the scooter is assembled.

Customer Service

Contact us through our website: www.TeamCustomerService.com

If you have any question about assembly, use or possible missing part, please contact us and we will be glad to assist you.