


Shoes Bench

ASSEMBLY INSTRUCTIONS

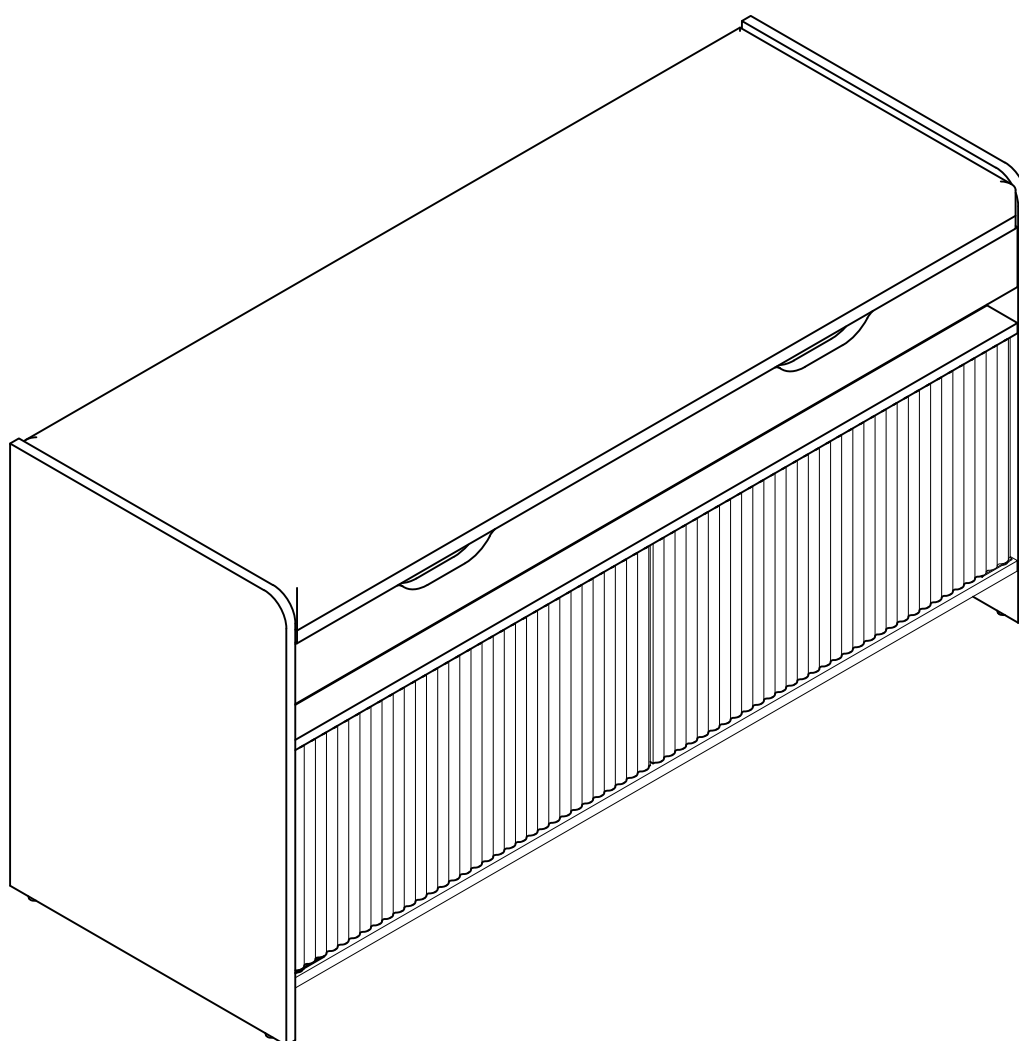

General Guidelines


- * Please read the following instruction carefully and use the product accordingly.
- * Please keep this manual and hand it over when you transfer the product.
- * This summary may not include every detail of all variations and considered steps. Please contact us when further information and help are needed.

Notes


- * The product is intended for indoor use only. The product must be assembled and used in accordance with the provisions of the manual. Personal injury and/or damage to product may occur if products are used outside of their intended purposes and/or if products have been changed/modified from their original design. The seller does not assume any responsibility or liability with respect to any injury/damage caused by incorrect assembly or improper use.
- * If there are any defective or missing parts after unpacking, please cease assembly immediately and contact us.
- * Please wear gloves during the assembly and/or disassembly process to avoid scratches from any sharp edges..
- * Please place this item on level, solid ground during use.
- * Avoid long-term exposure to humid environments to prevent mildew.
- * Keep the product away from fire sources and high temperatures. Do not expose the product to direct sunlight.
- * Do not place any hot objects on the surface of the product.
- * **Do not fully tighten the screws during initial assembly. Fully tighten screws only once all pieces which are correctly assembled**

Warnings

- * Children are not allowed to assemble the product. During assembly, keep all any small parts out of the reach of children as they may be fatal if swallowed or inhaled.
- * Children are forbidden to climb or play on the product to avoid serious bodily injury caused by the toppling.
- * Keep plastic packing bags out of reach of children to avoid any potential danger, such as suffocation.


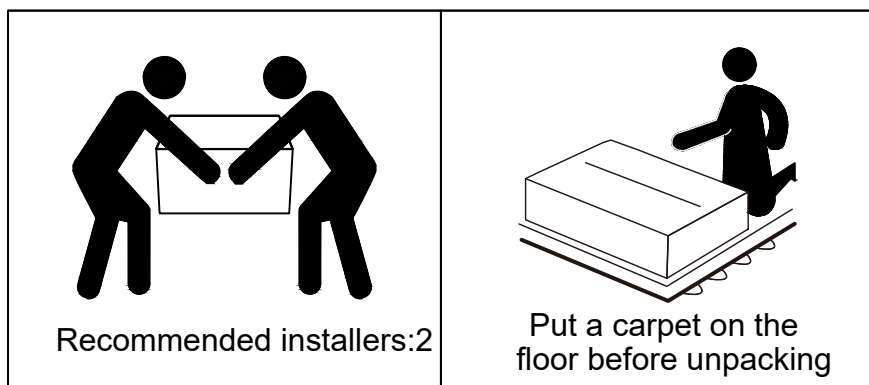


ASSEMBLY TOOLS REQUIRED
(NOT INCLUDED)










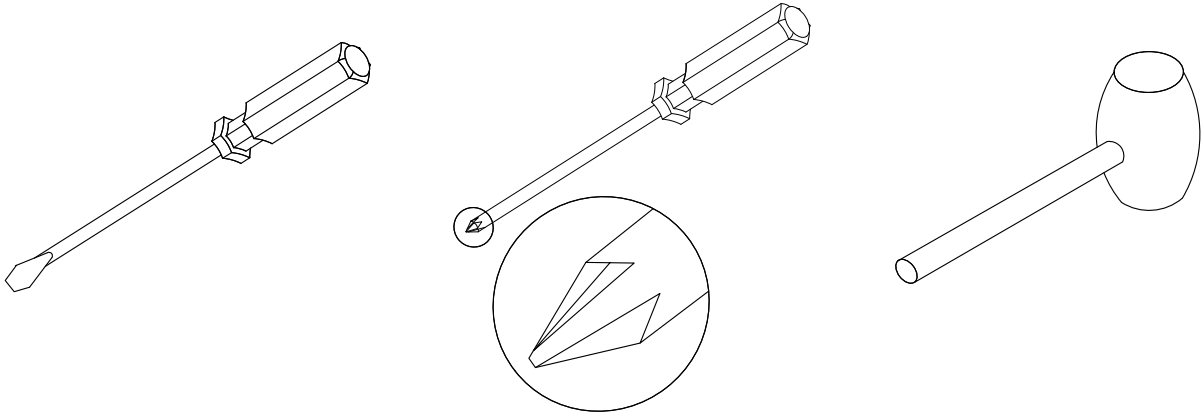


Bolt

















Connecting piece

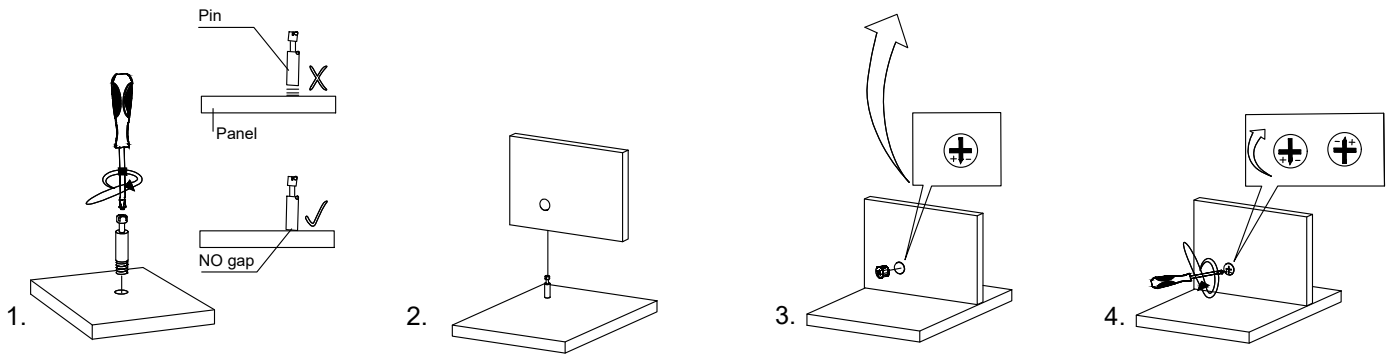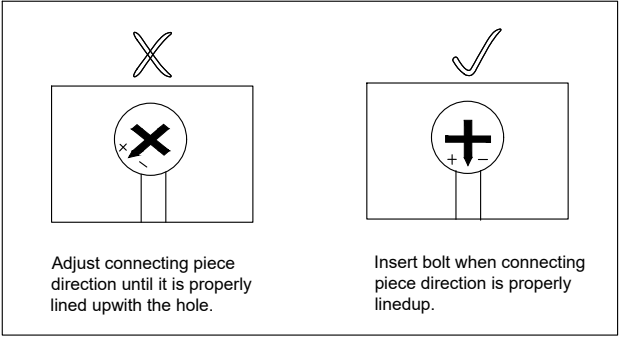


Hardware Provided


A  X 22+2	B  X 22+2	C  X 24+2	D  X 11+1	E  X 2
F  X 2	G  X 42+4	H  X 8+1	I  X 8+1	J  X 4+1
K  X 1	L  X 1	M  X 1	N  X 8+1	O  X 1
P  X 2	Q  X 1	Y  X 2	Z  X 2	 X 1

Parts Identification

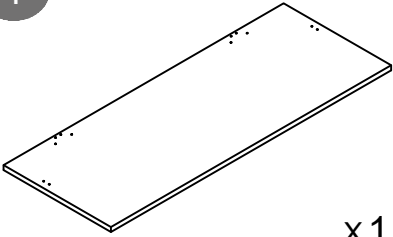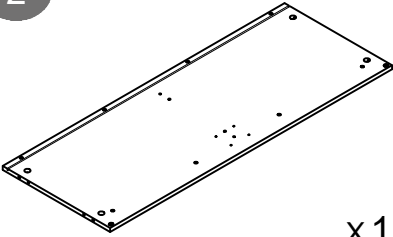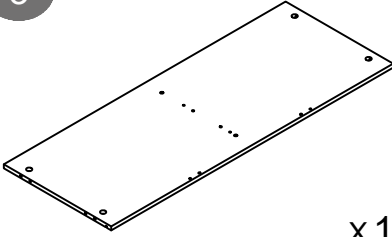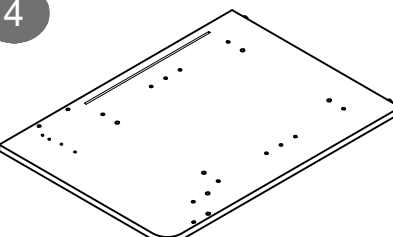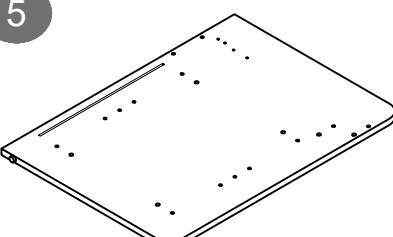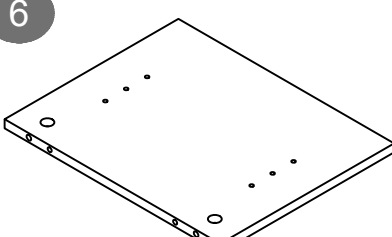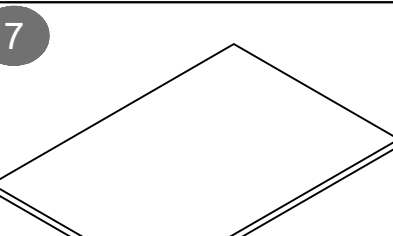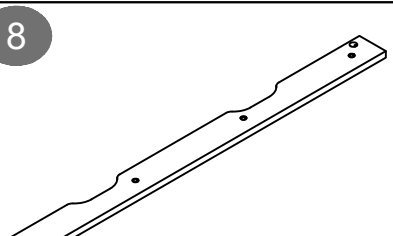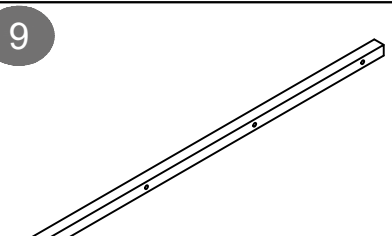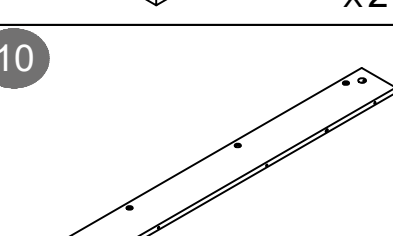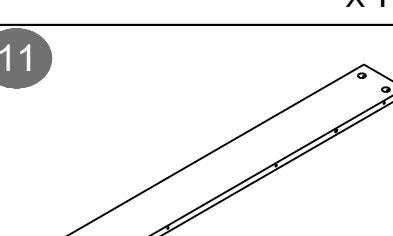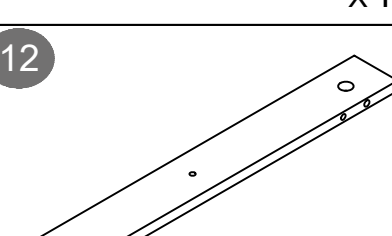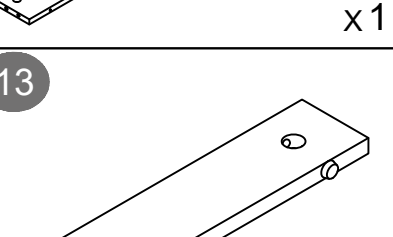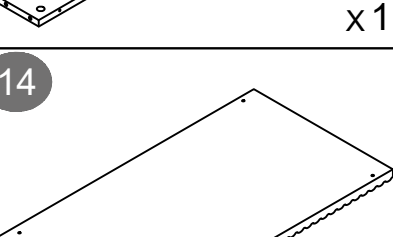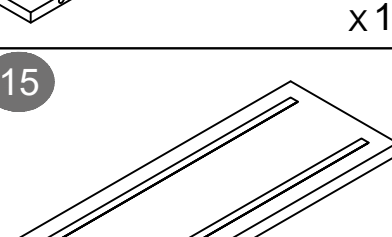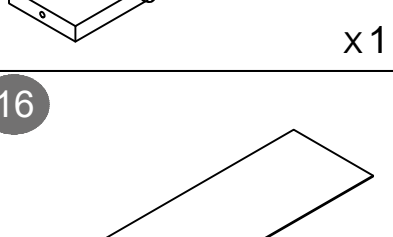1  x1	2  x1	3  x1
4  x1	5  x1	6  x1
7  x2	8  x1	9  x1
10  x1	11  x1	12  x1
13  x1	14  x2	15  x1
16  x1		


Exploded View

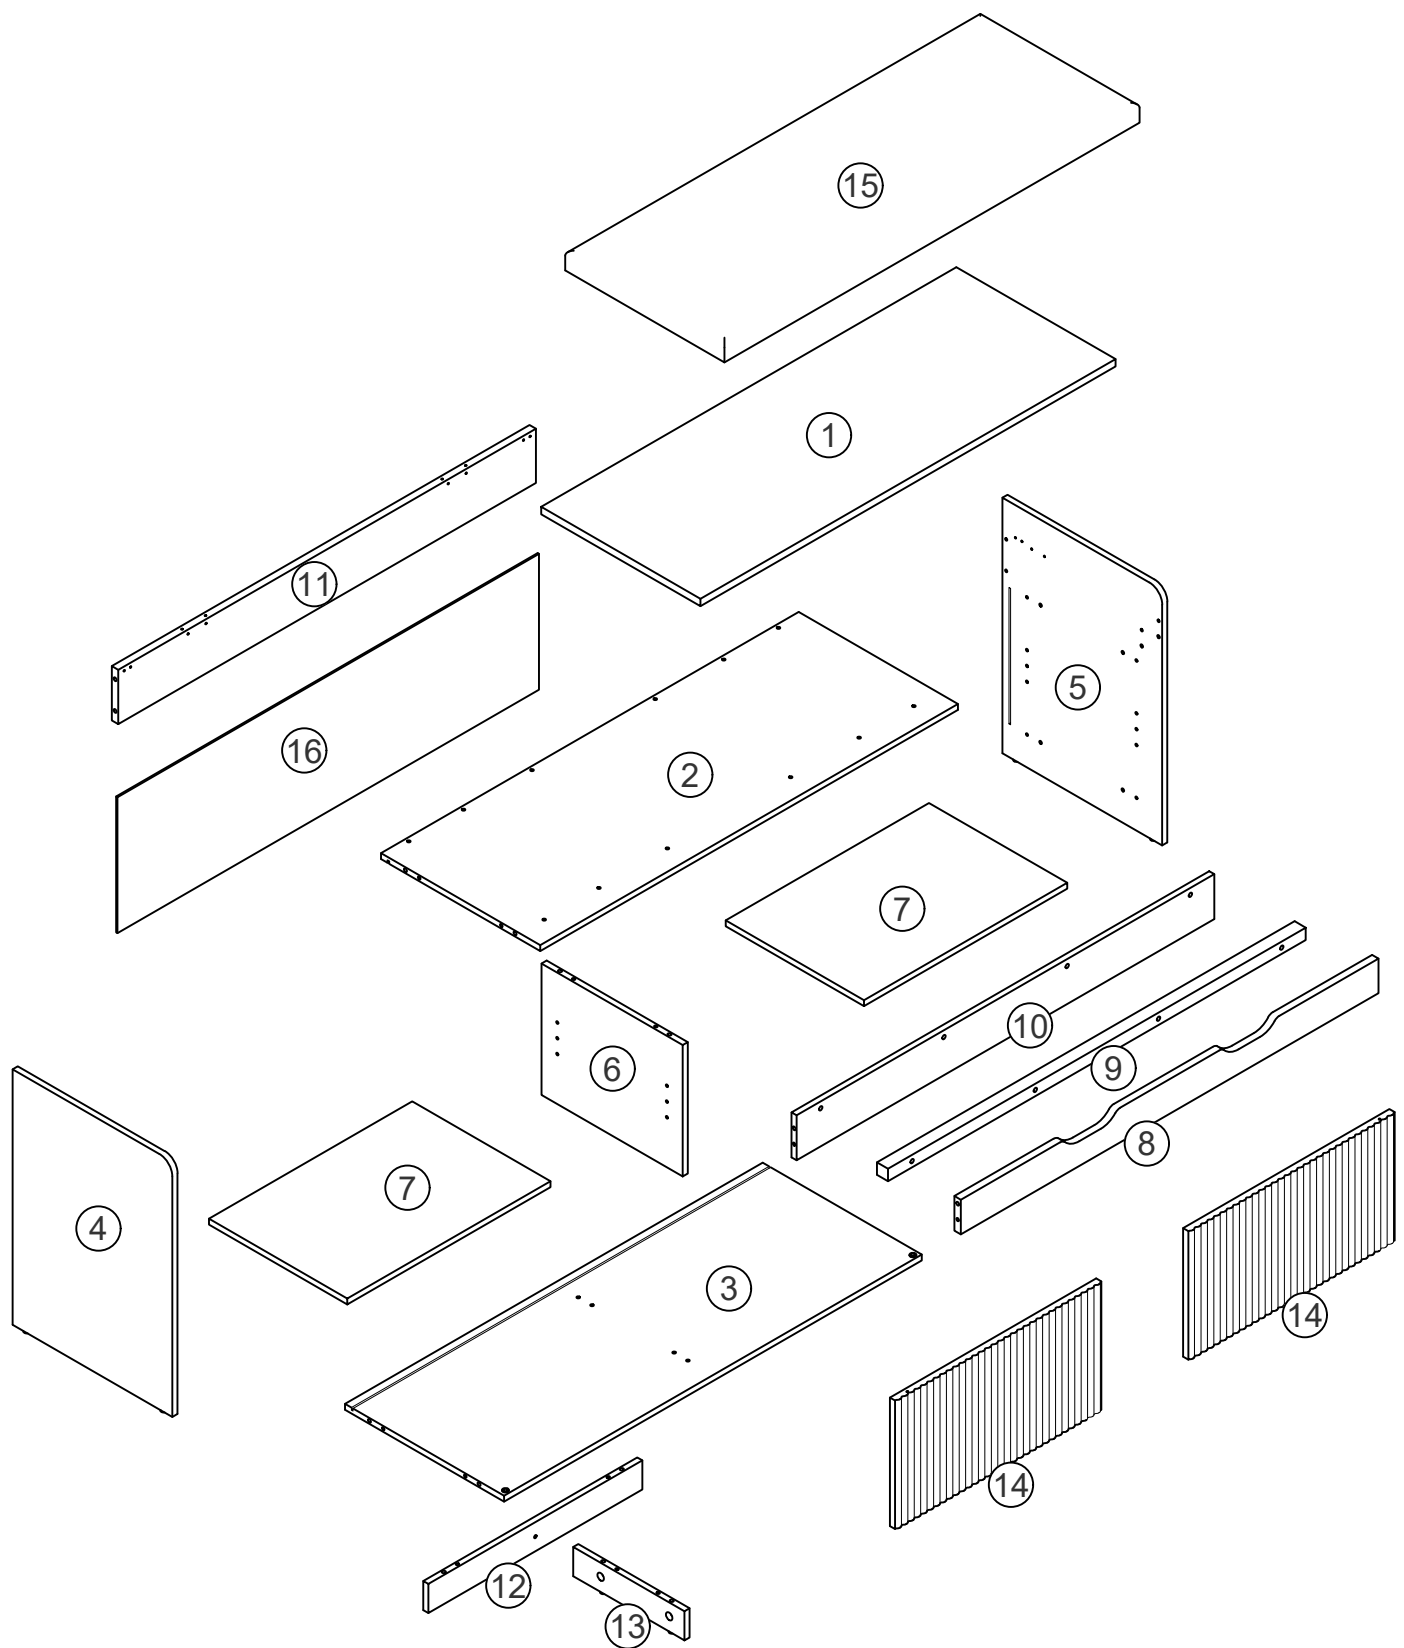

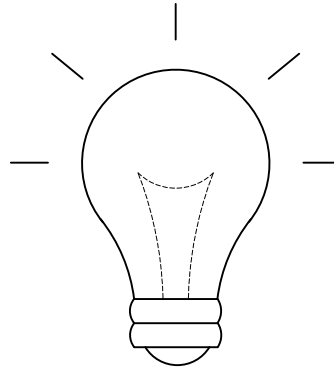


friendly reminder


To avoid errors and confusion during the installation of accessories, use the type and quantity of hardware accessories according to the installation procedure described in the instructions. First, unroll the accessories bag and lay out the hardware accessories, cut holes in the side, and take out the hardware accessories

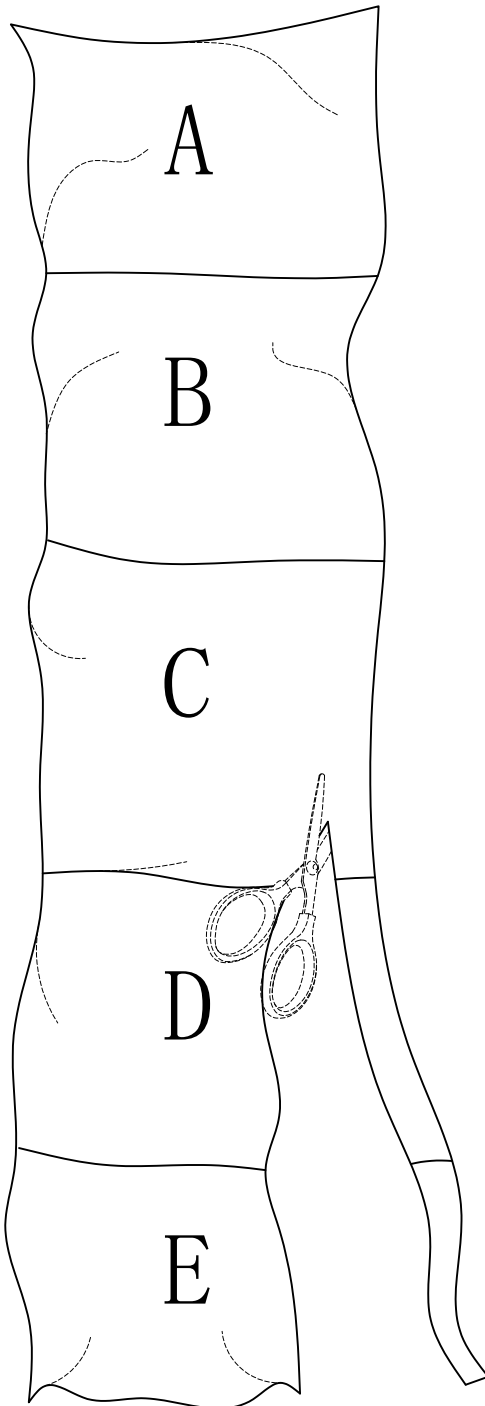


STEP 01

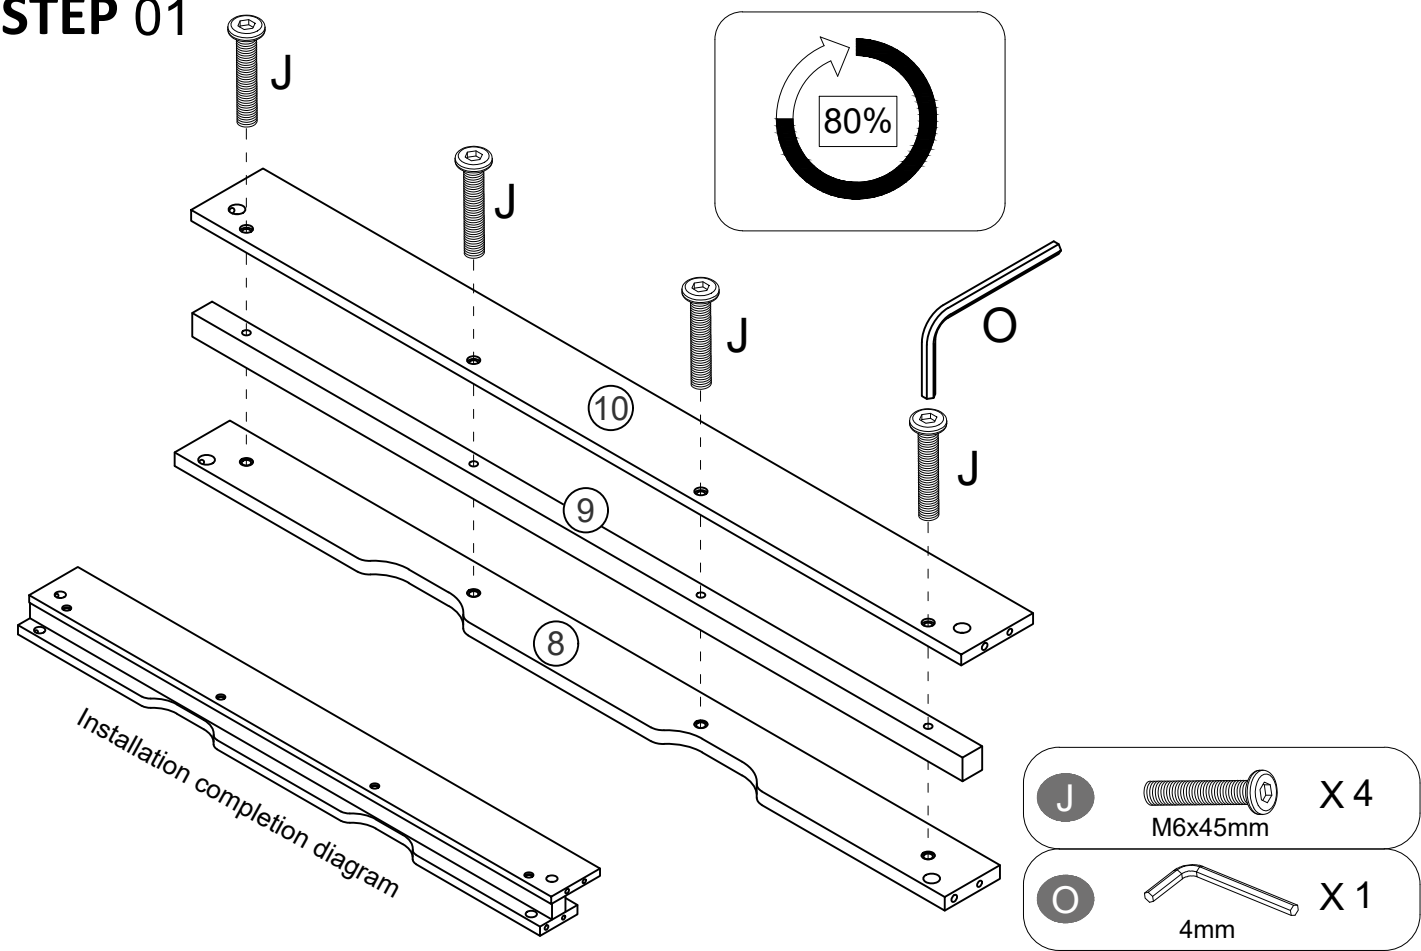


STEP 02

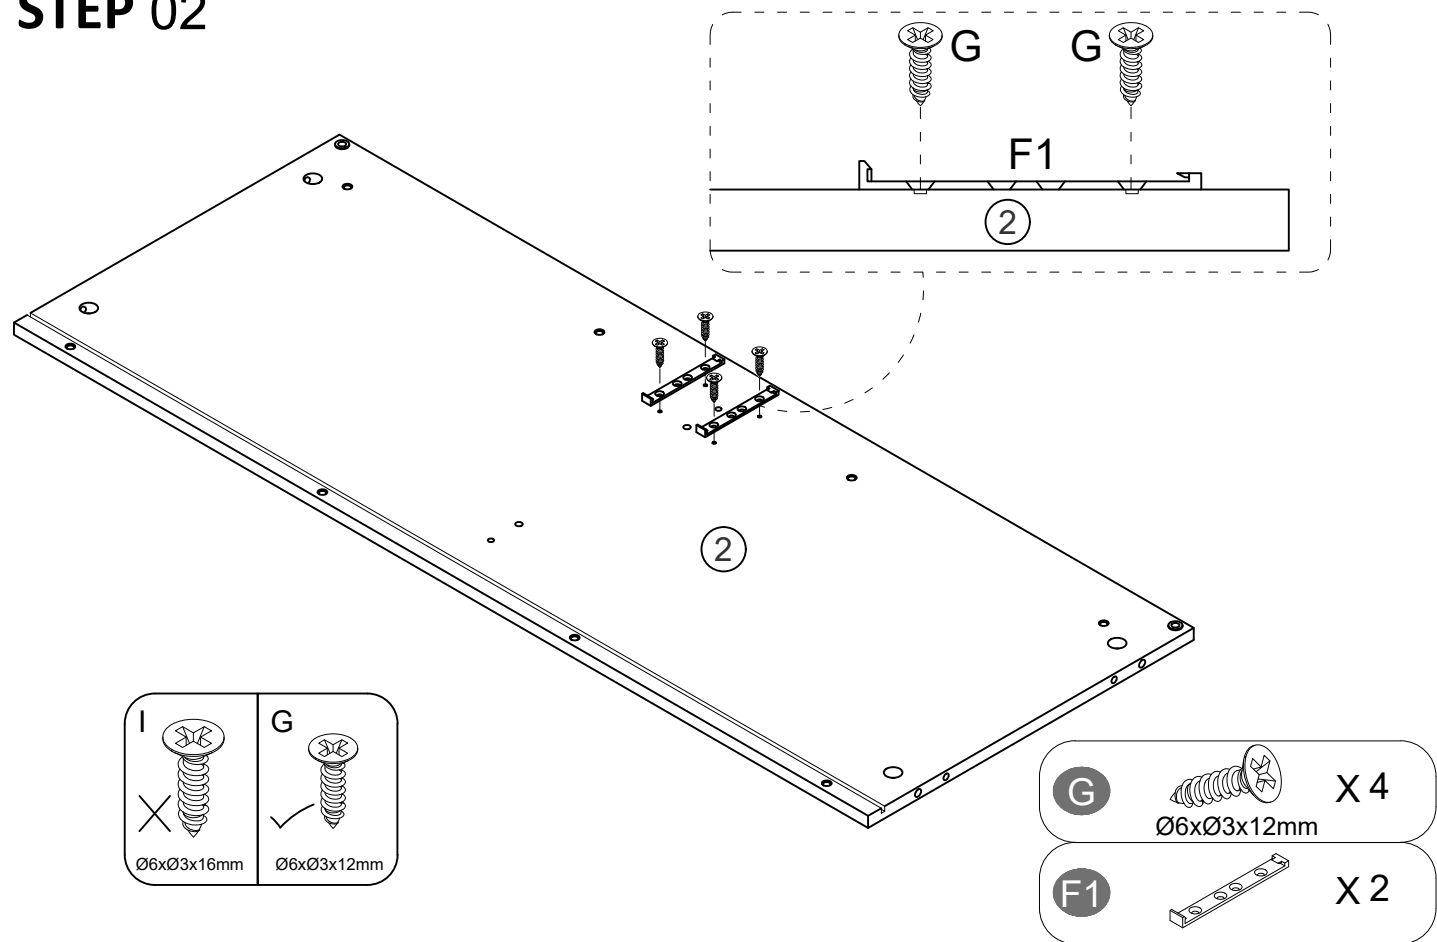


STEP 03

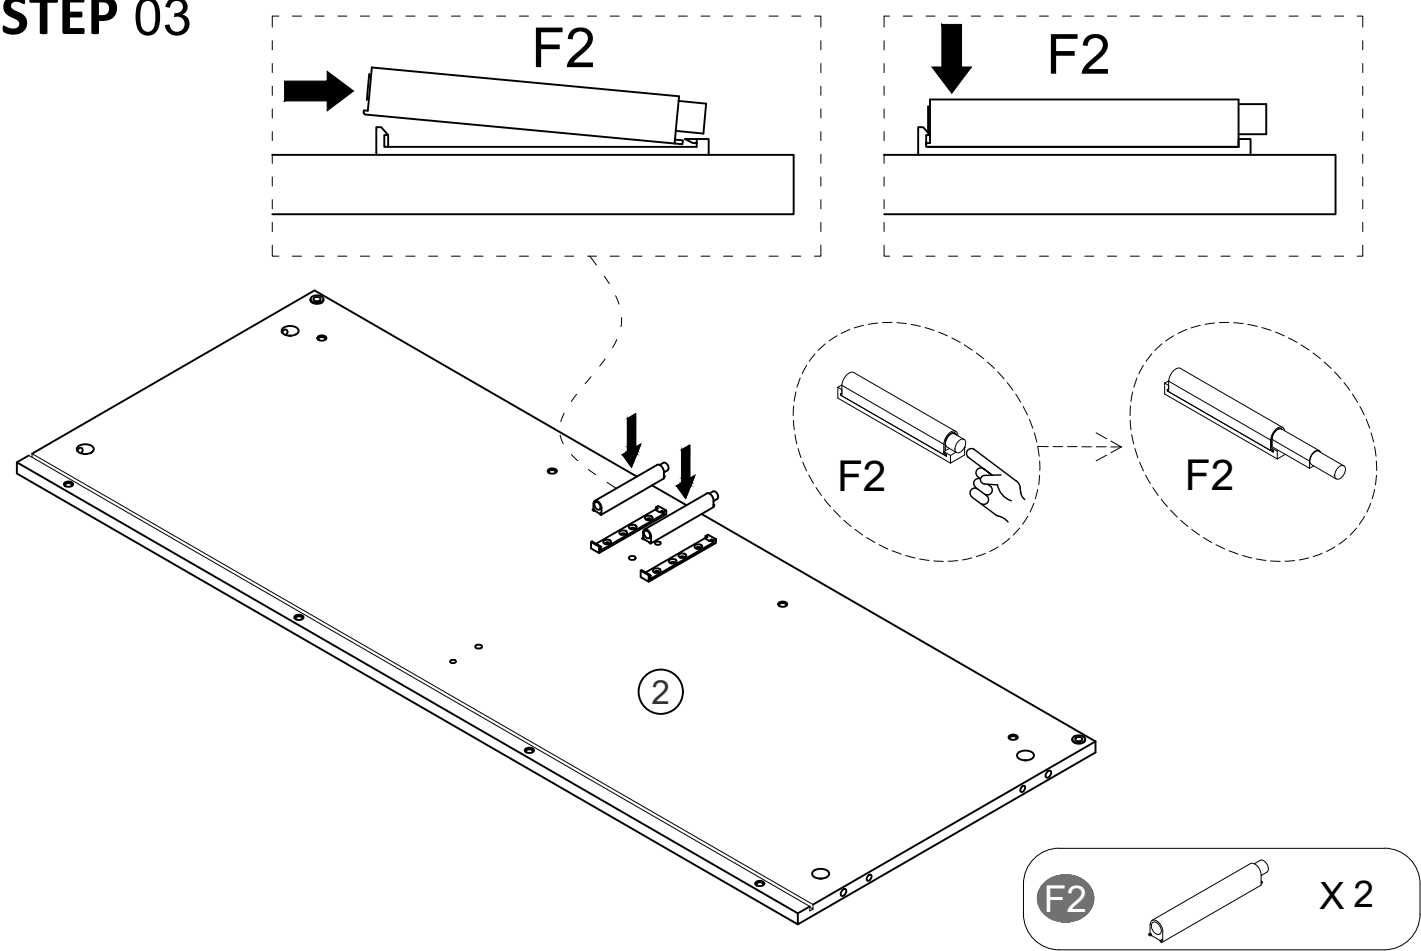


STEP 04

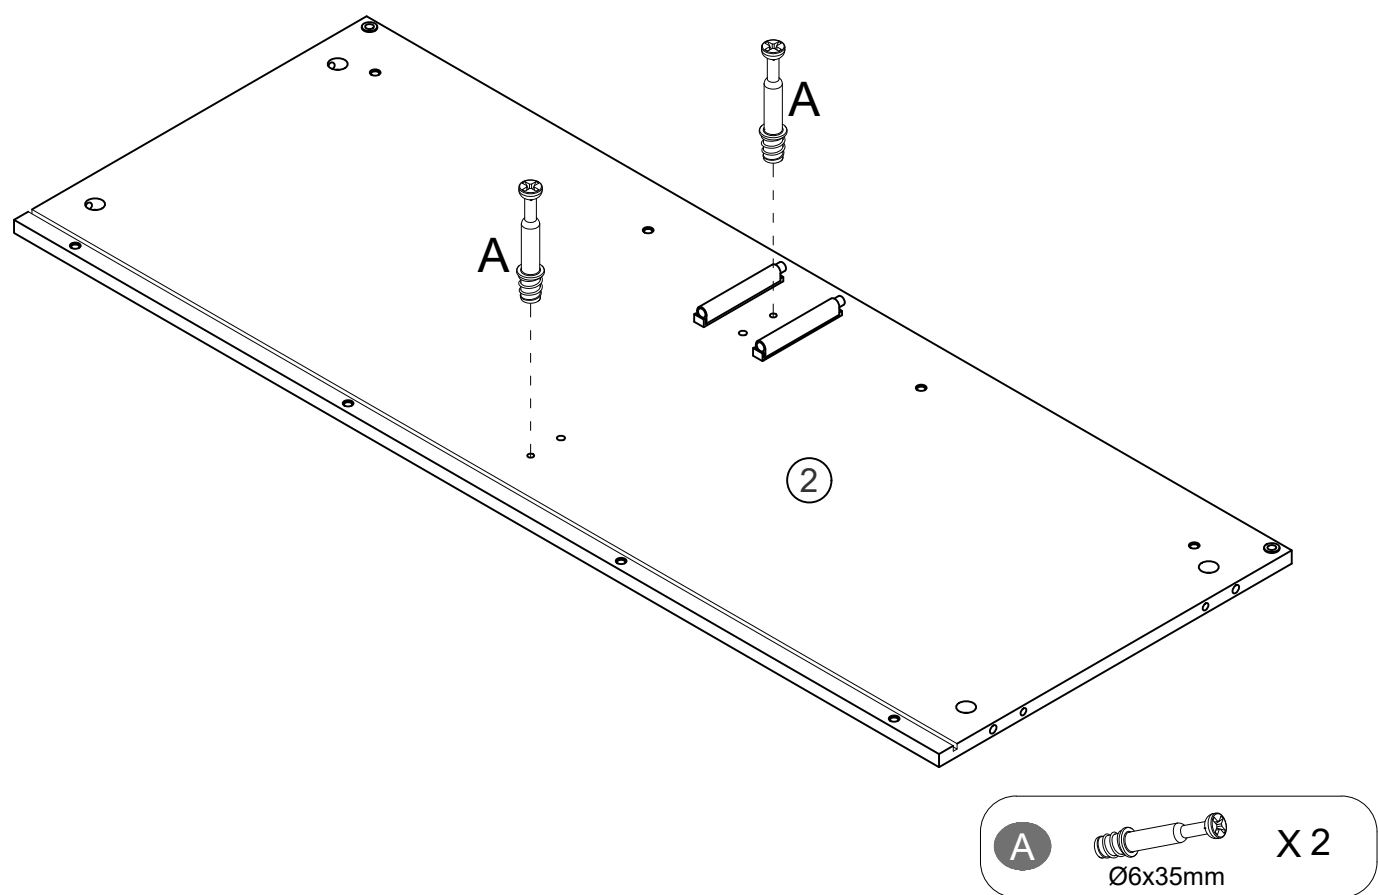


STEP 05

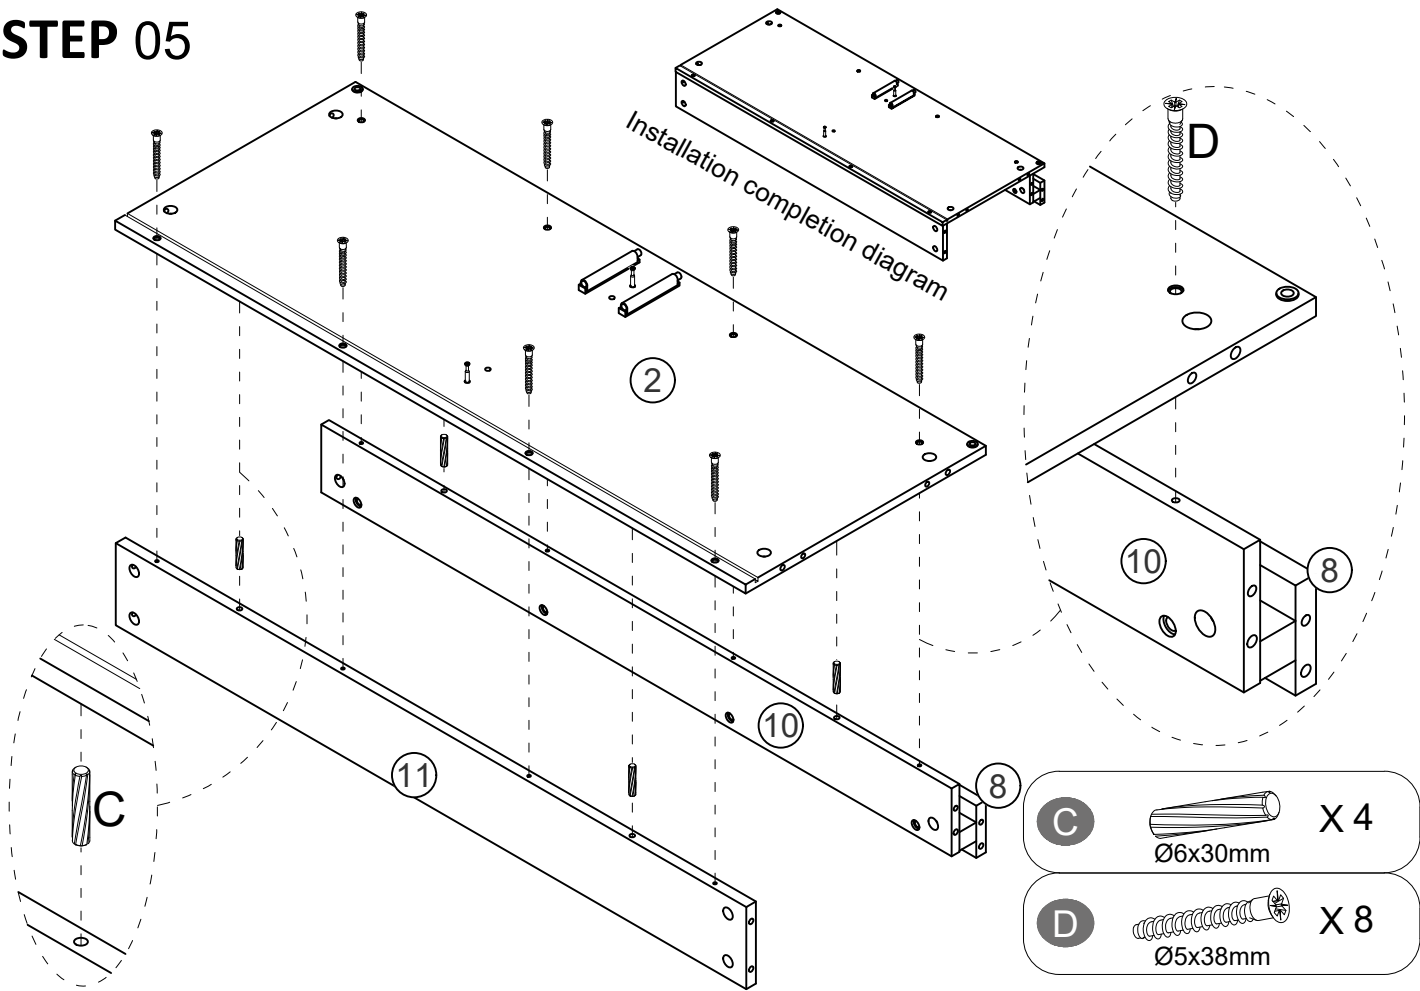


STEP 06

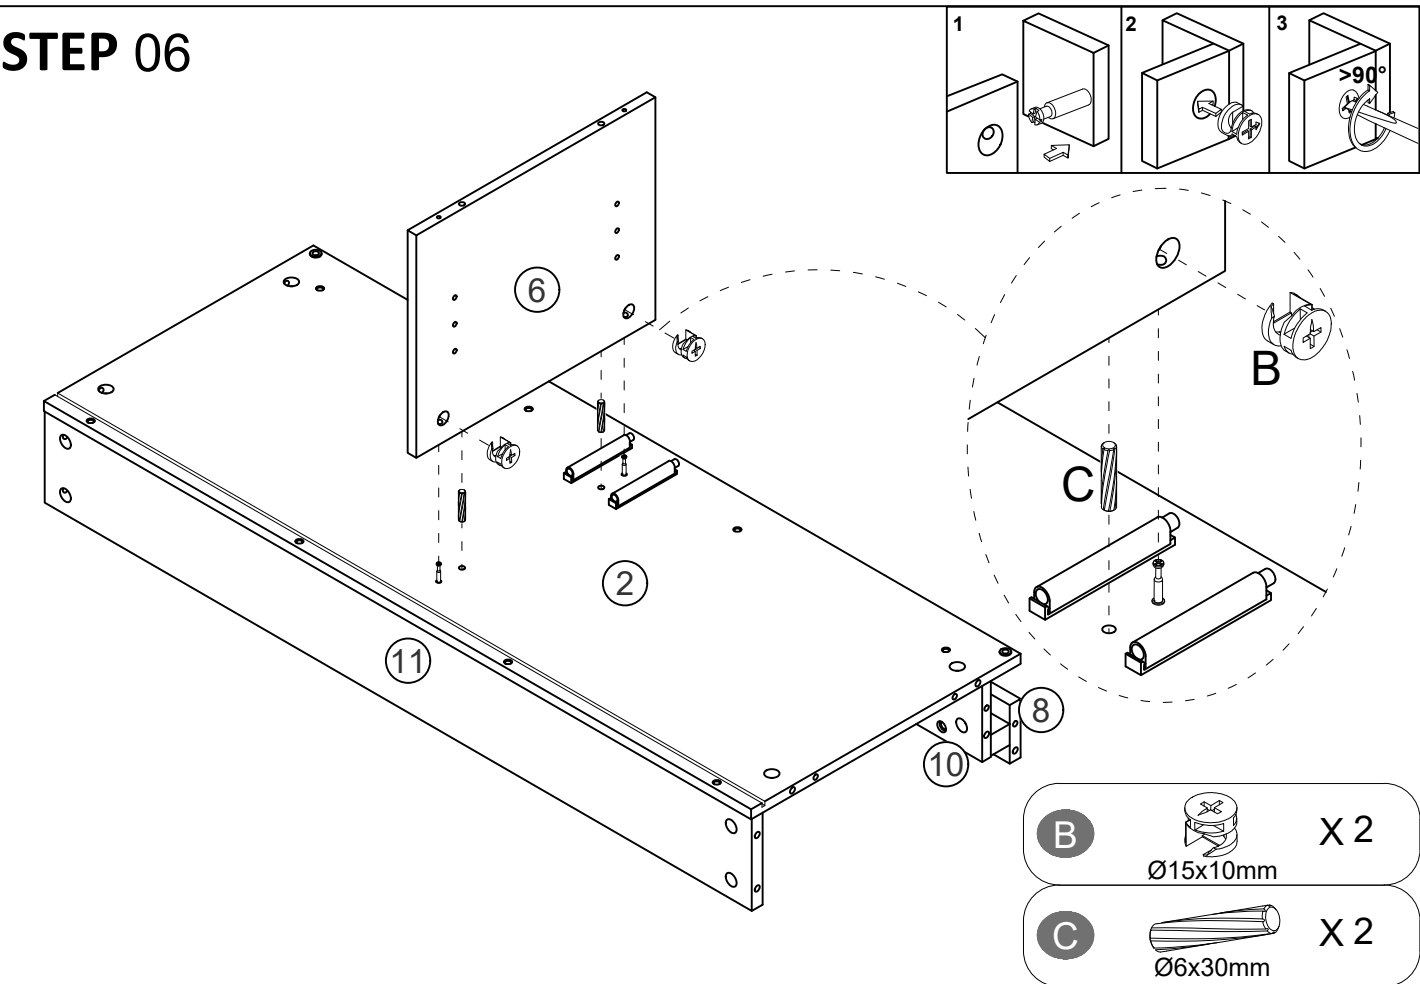


STEP 07

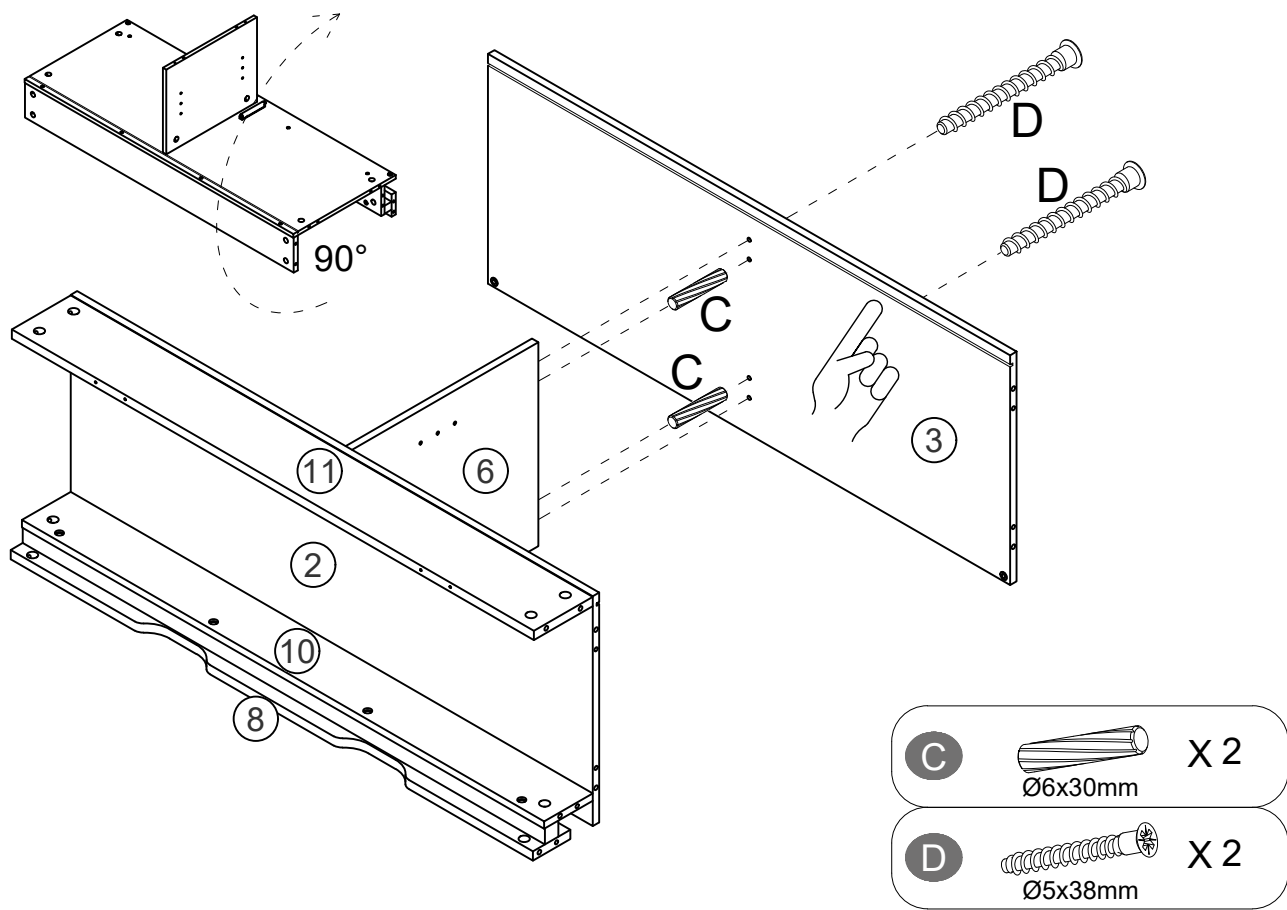


STEP 08

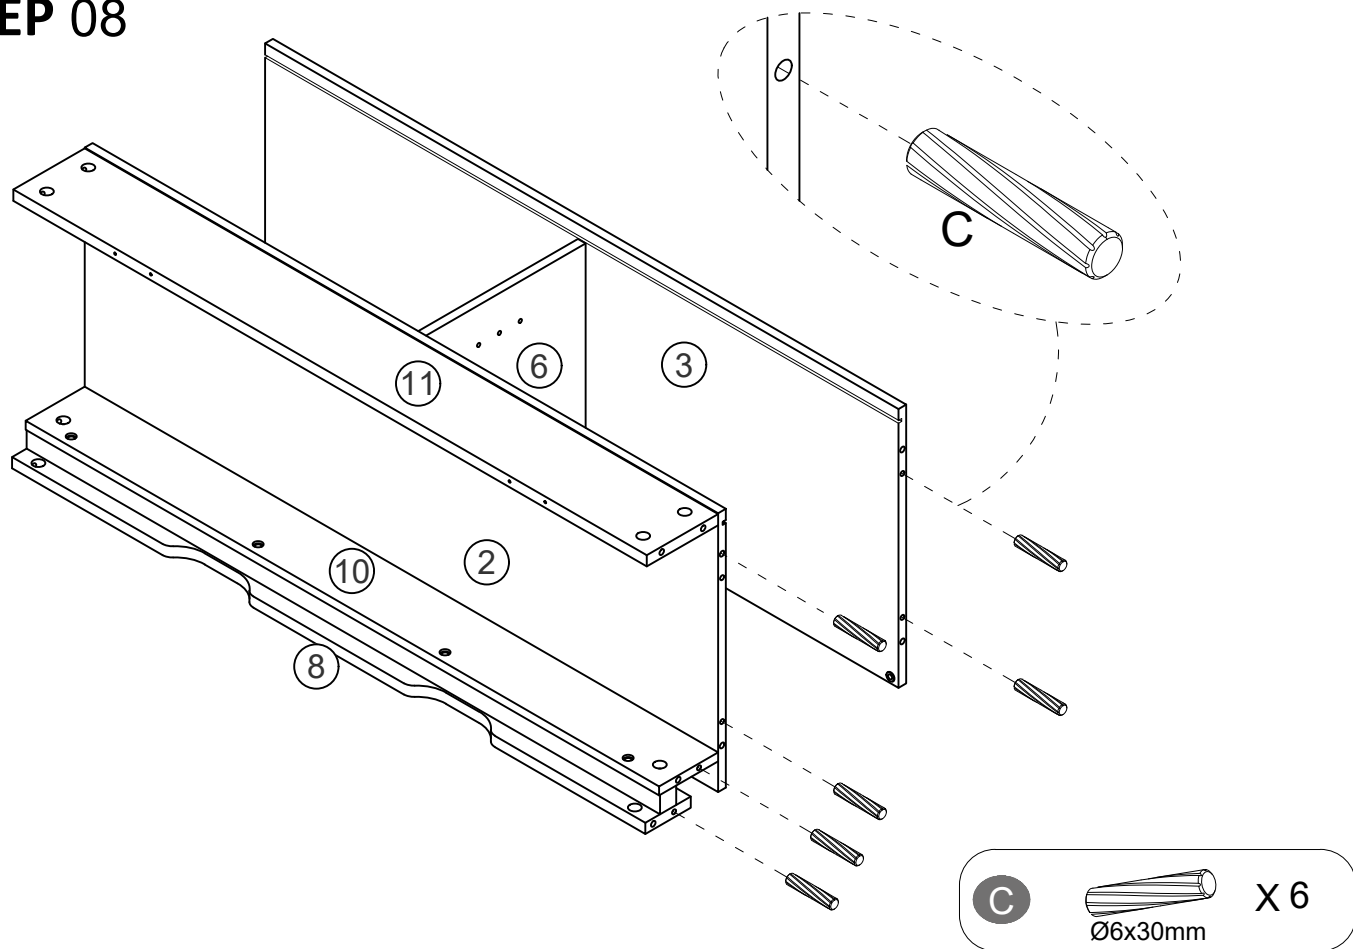

STEP 09

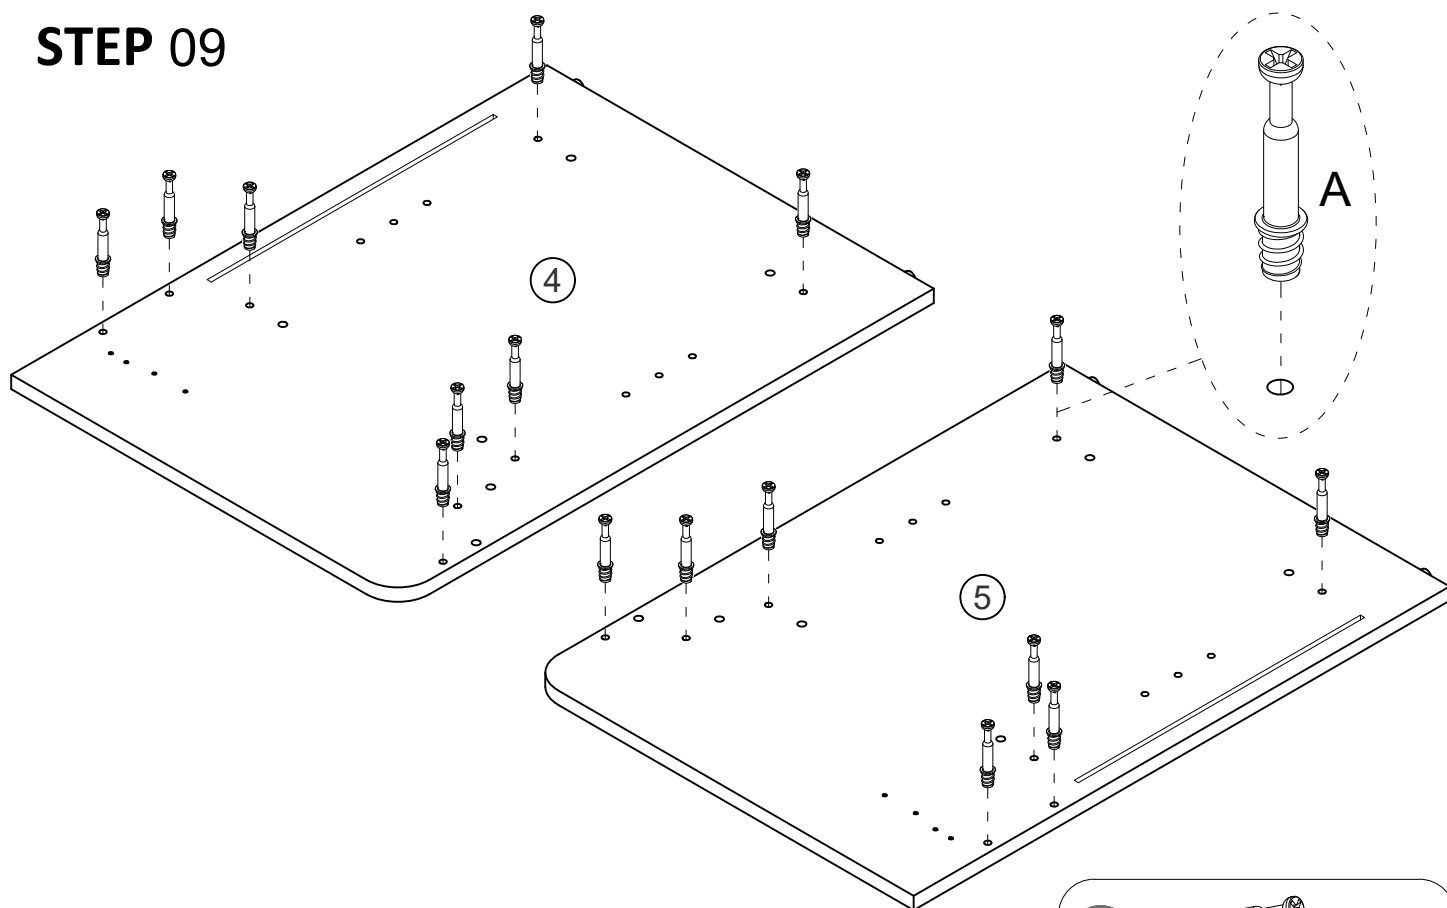


A



X 16

STEP 10

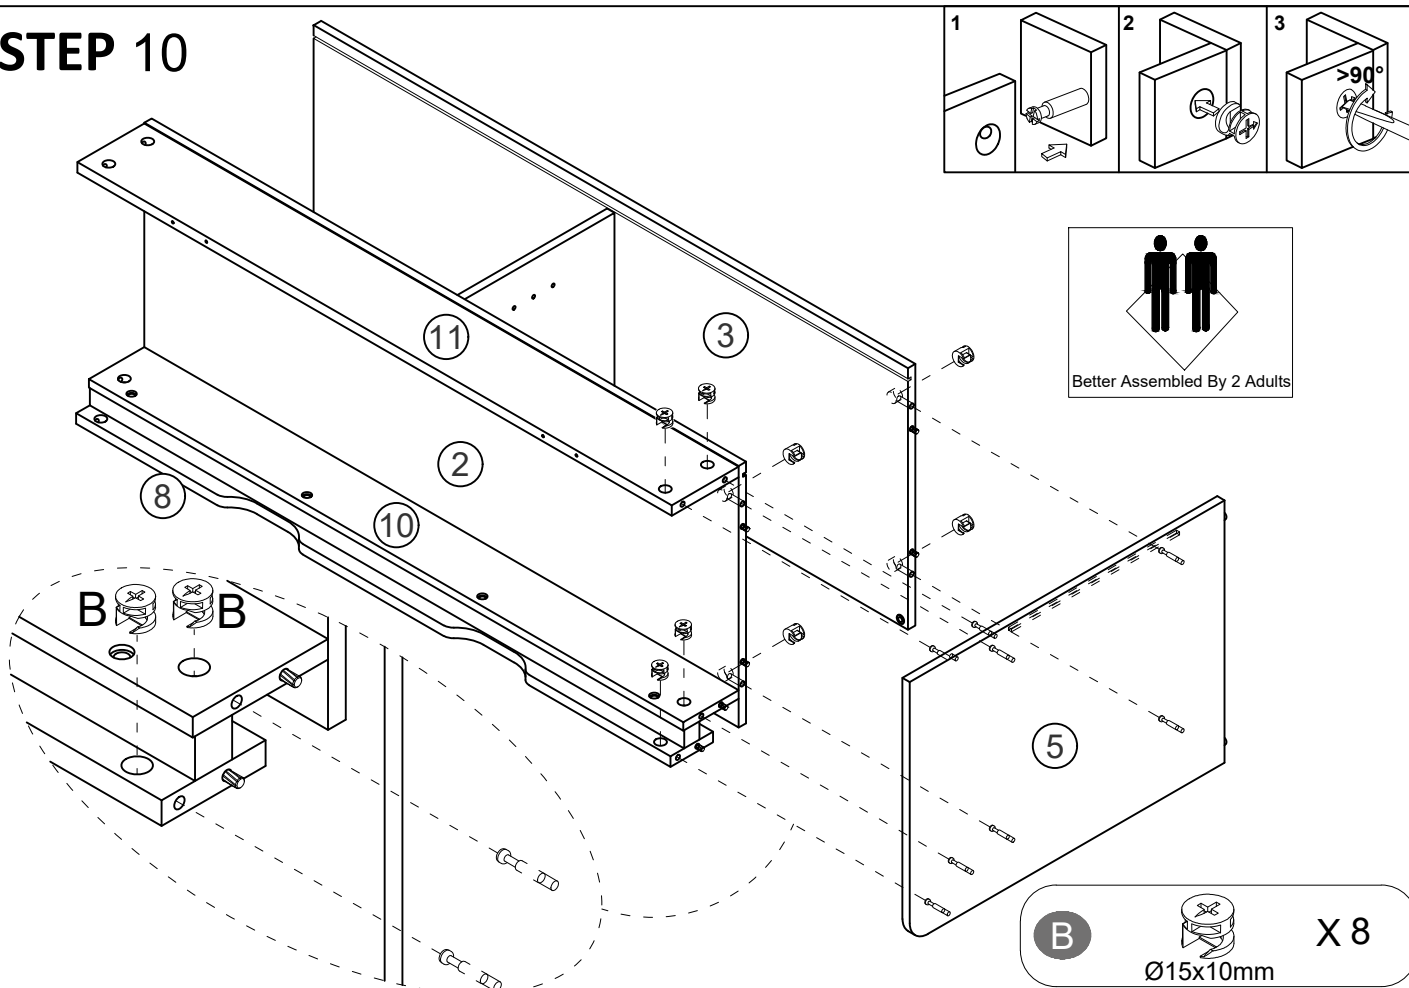



B





X 8

STEP 11




The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.

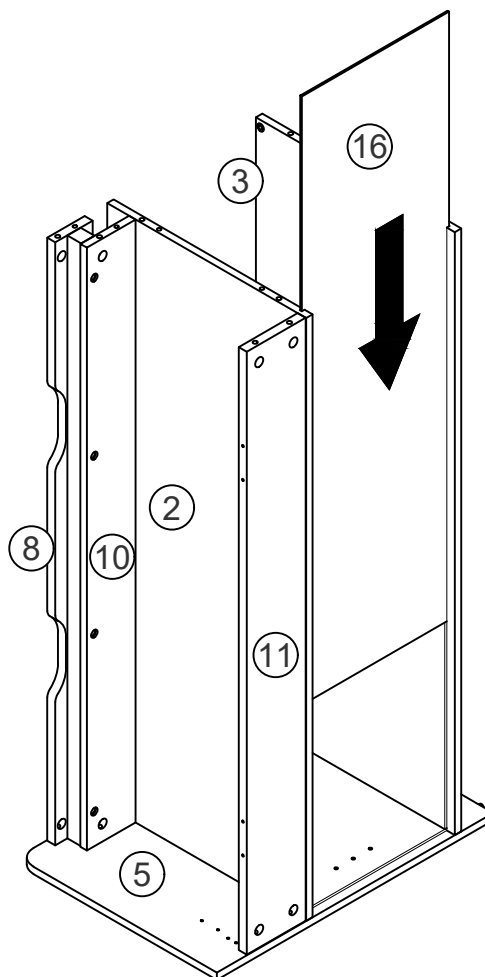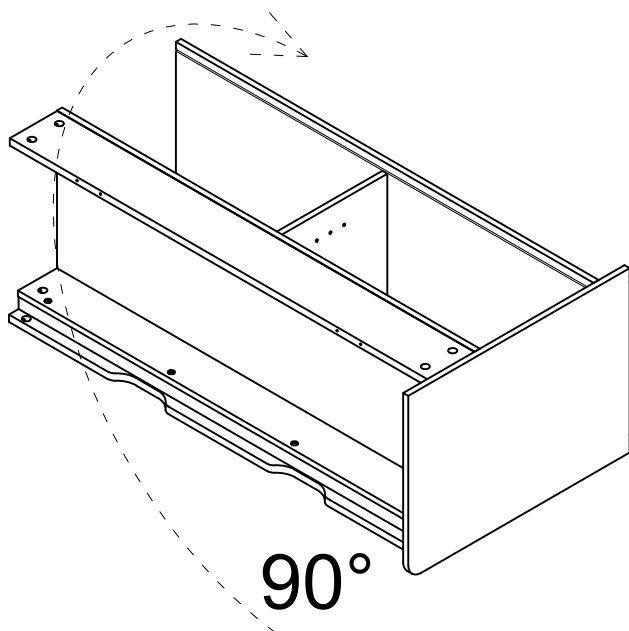


STEP 12

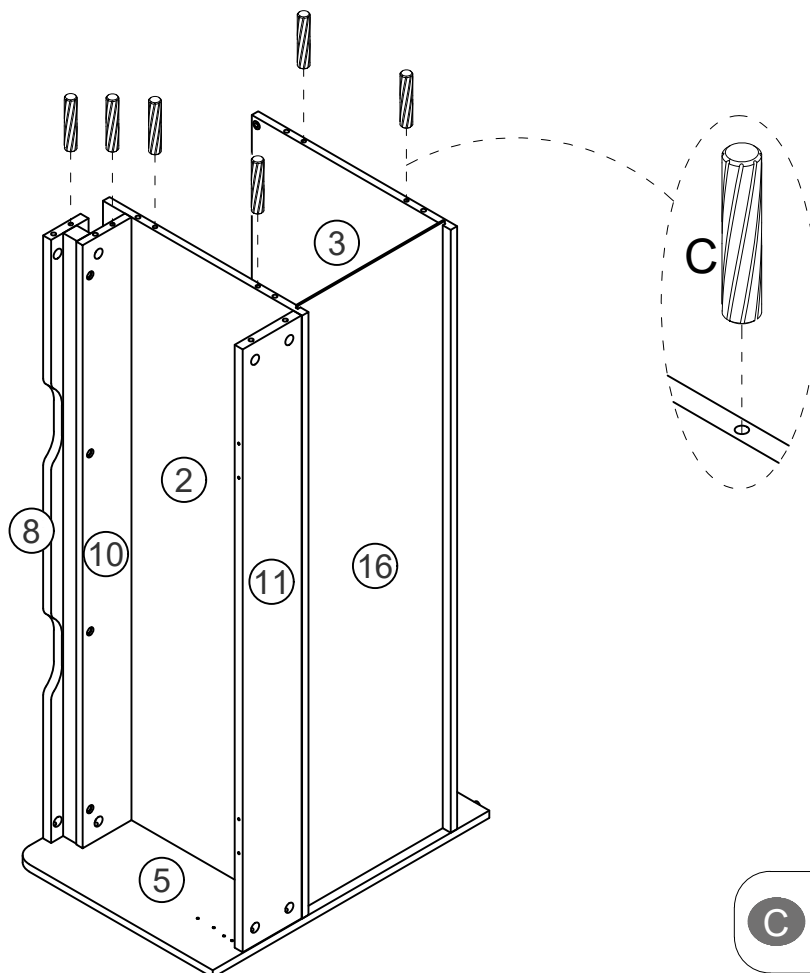


STEP 13

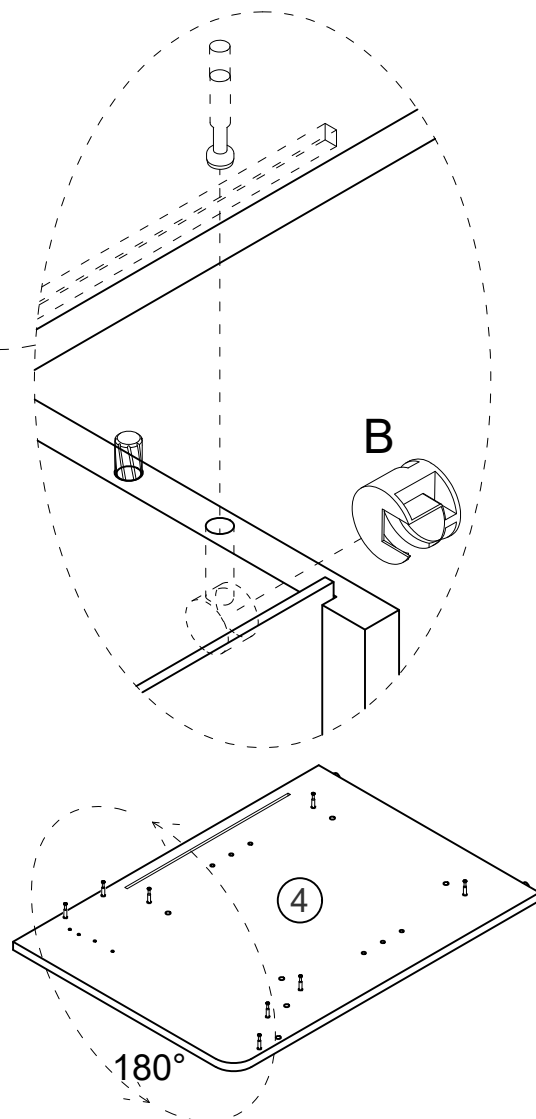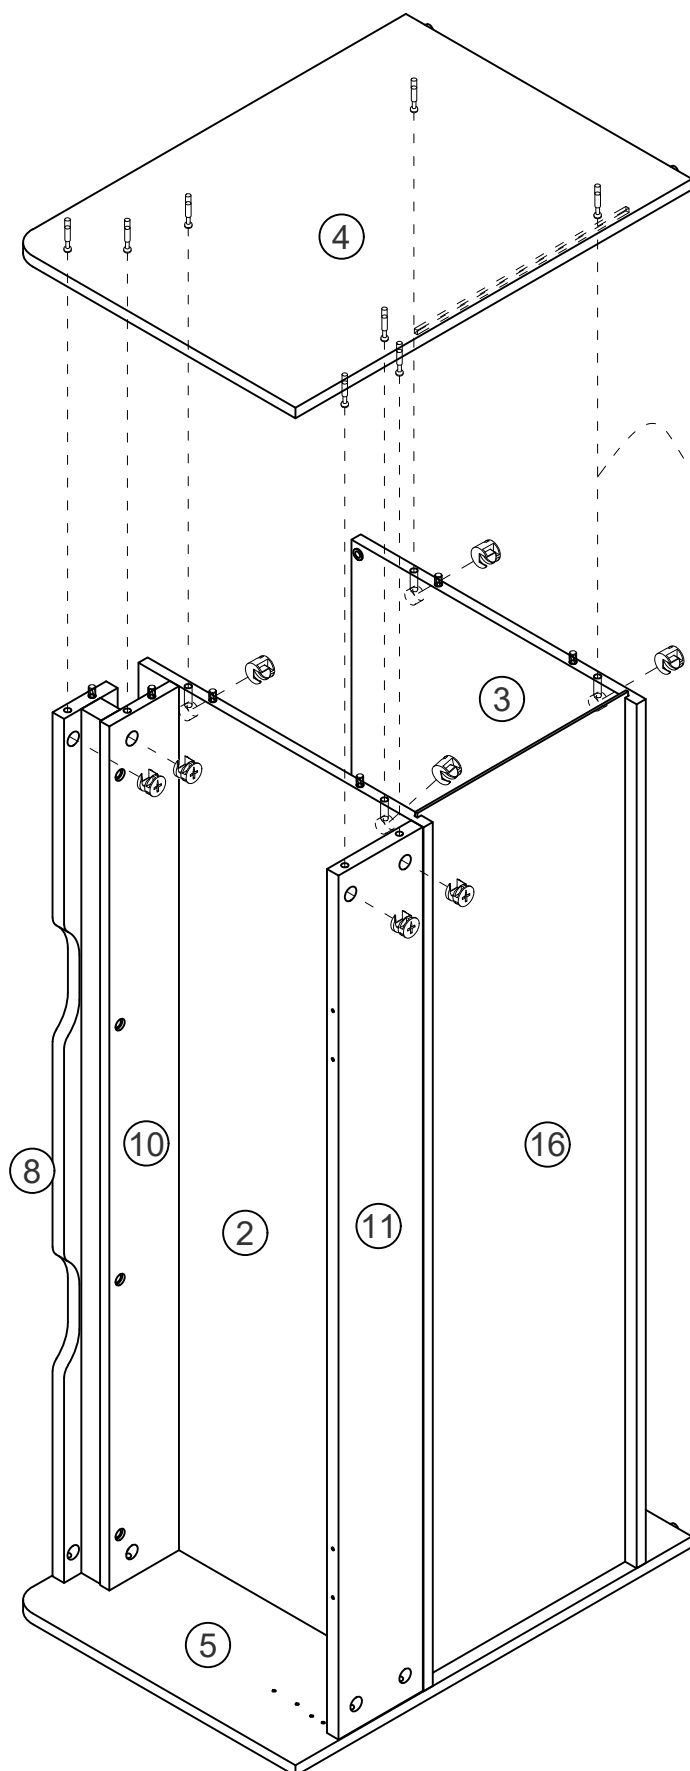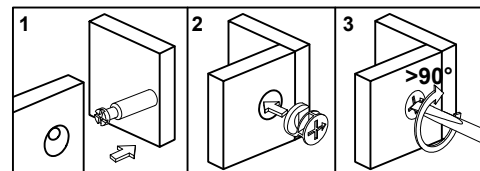



The thin plate needs to be fully inserted into the groove. If the insertion is not smooth, you can try pressing from the front or the back to make adjustments until the thin plate is fully inserted into the groove.




STEP 14





Lock the four screws **J** on component 10 to 100%.

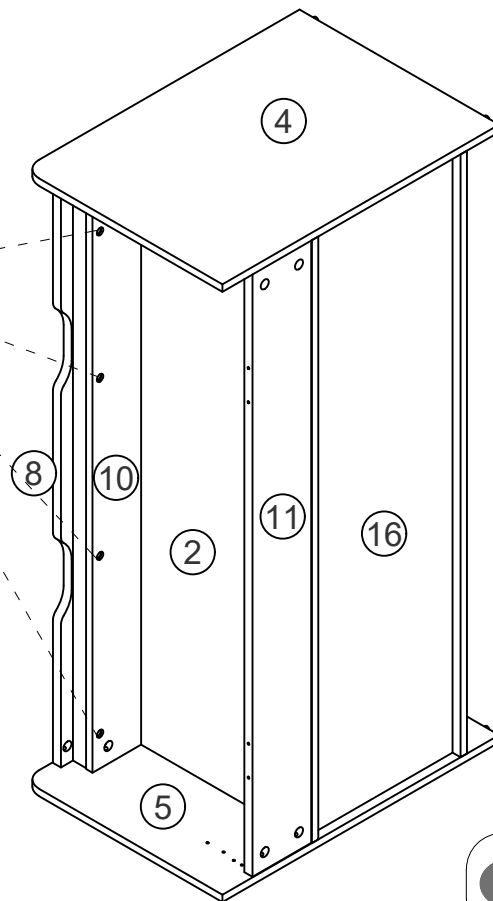


STEP 15

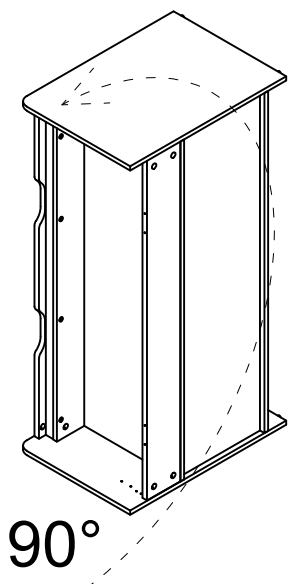


90°

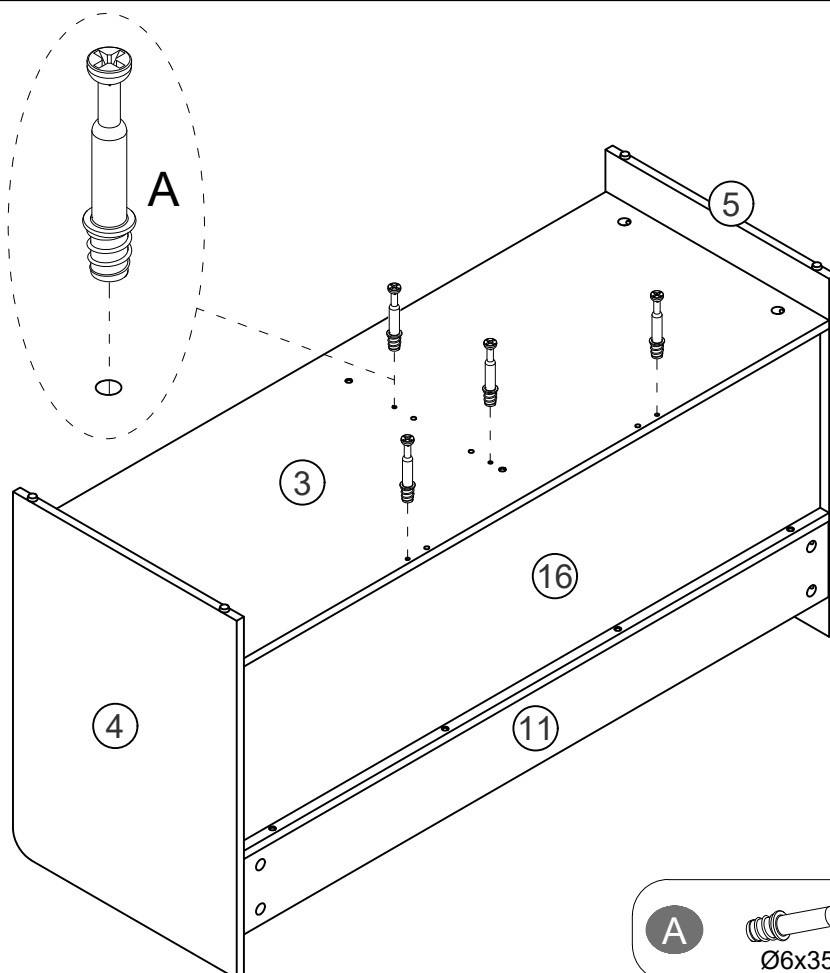


STEP 16

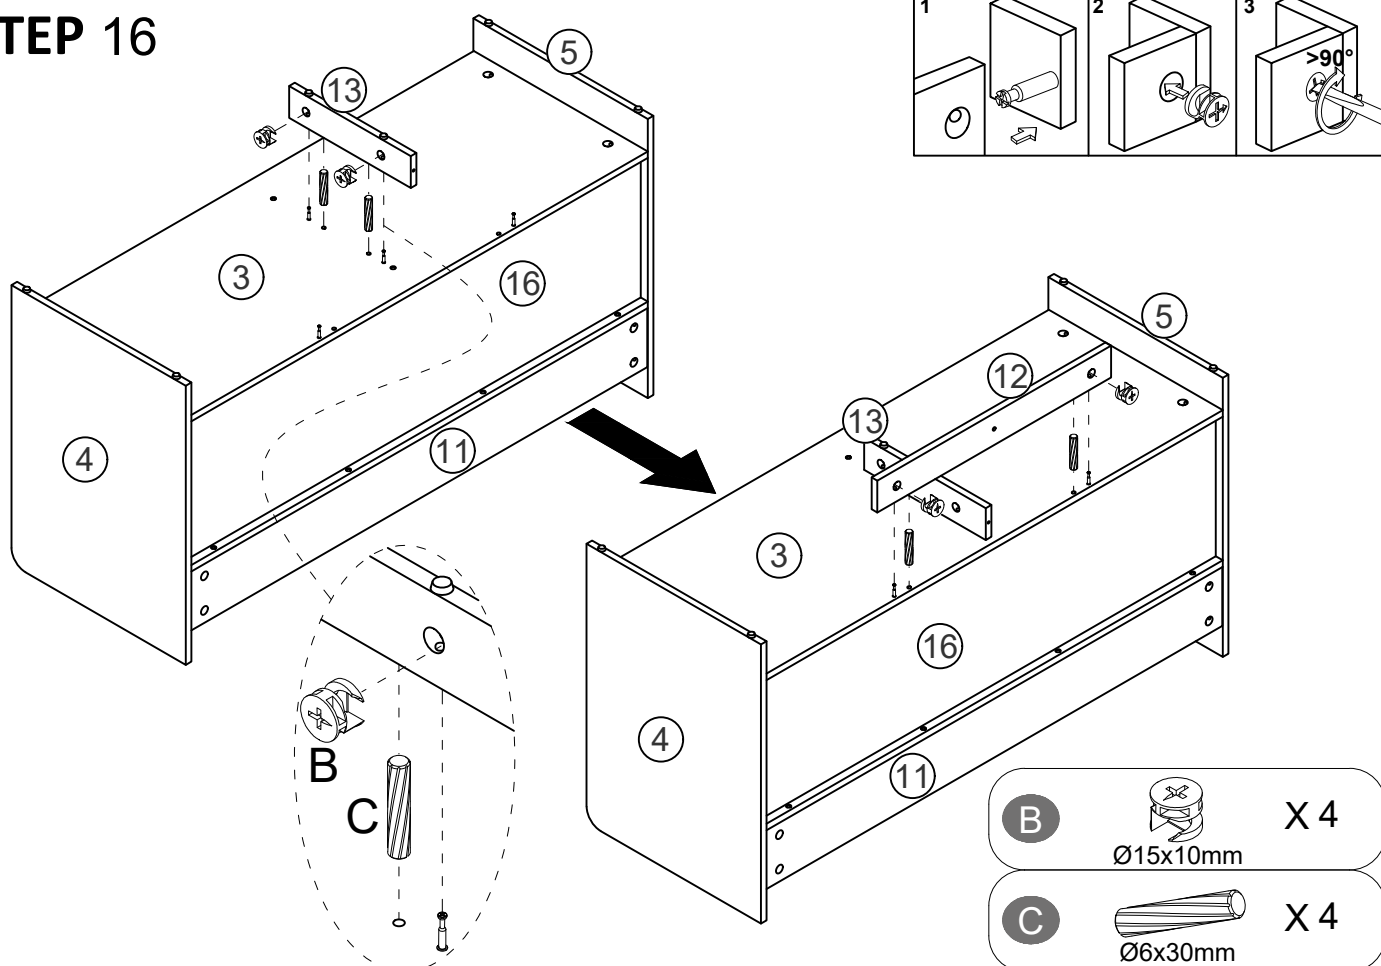


STEP 17

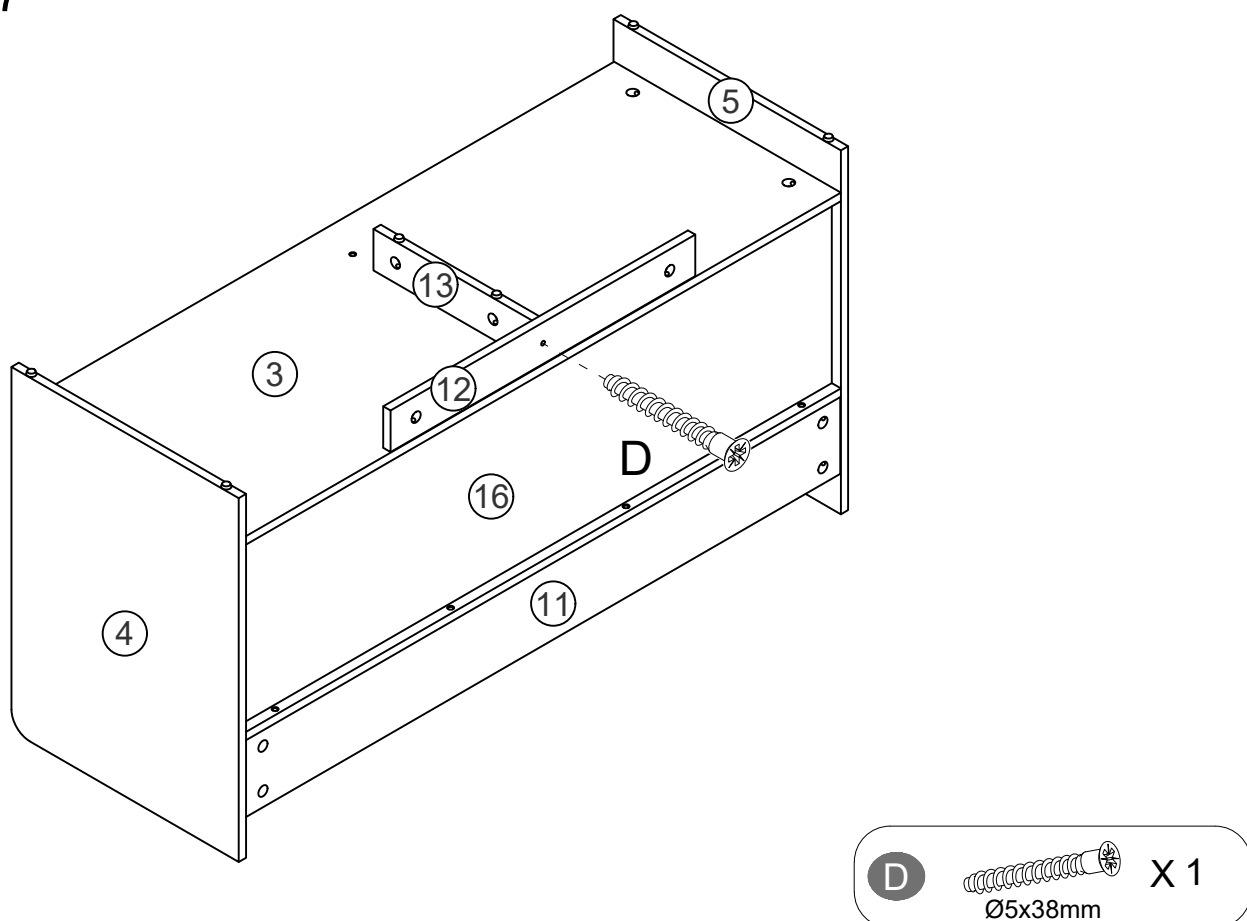


STEP 18

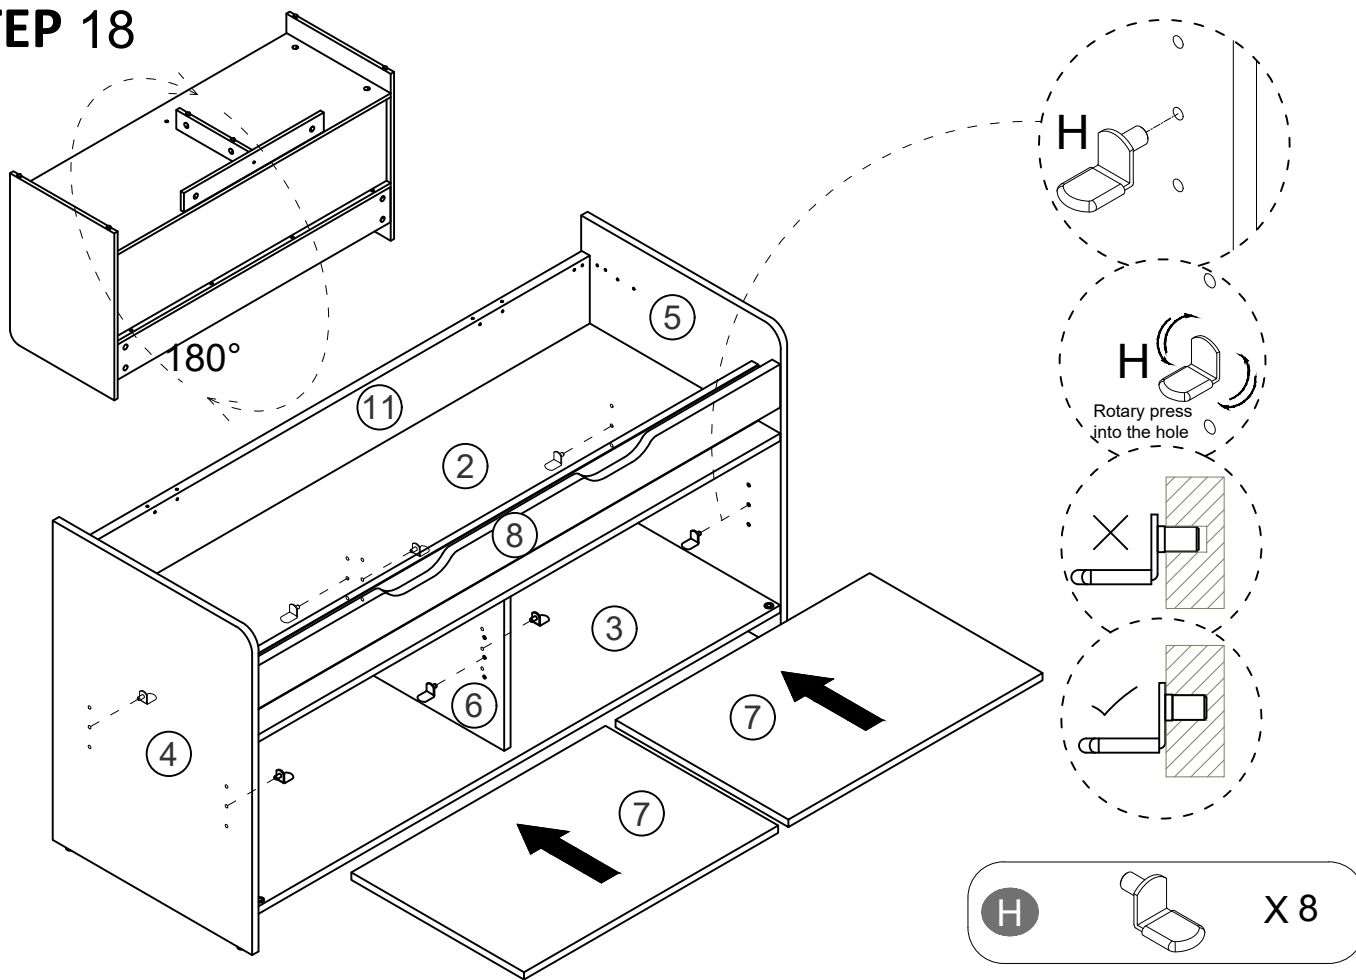


STEP 19

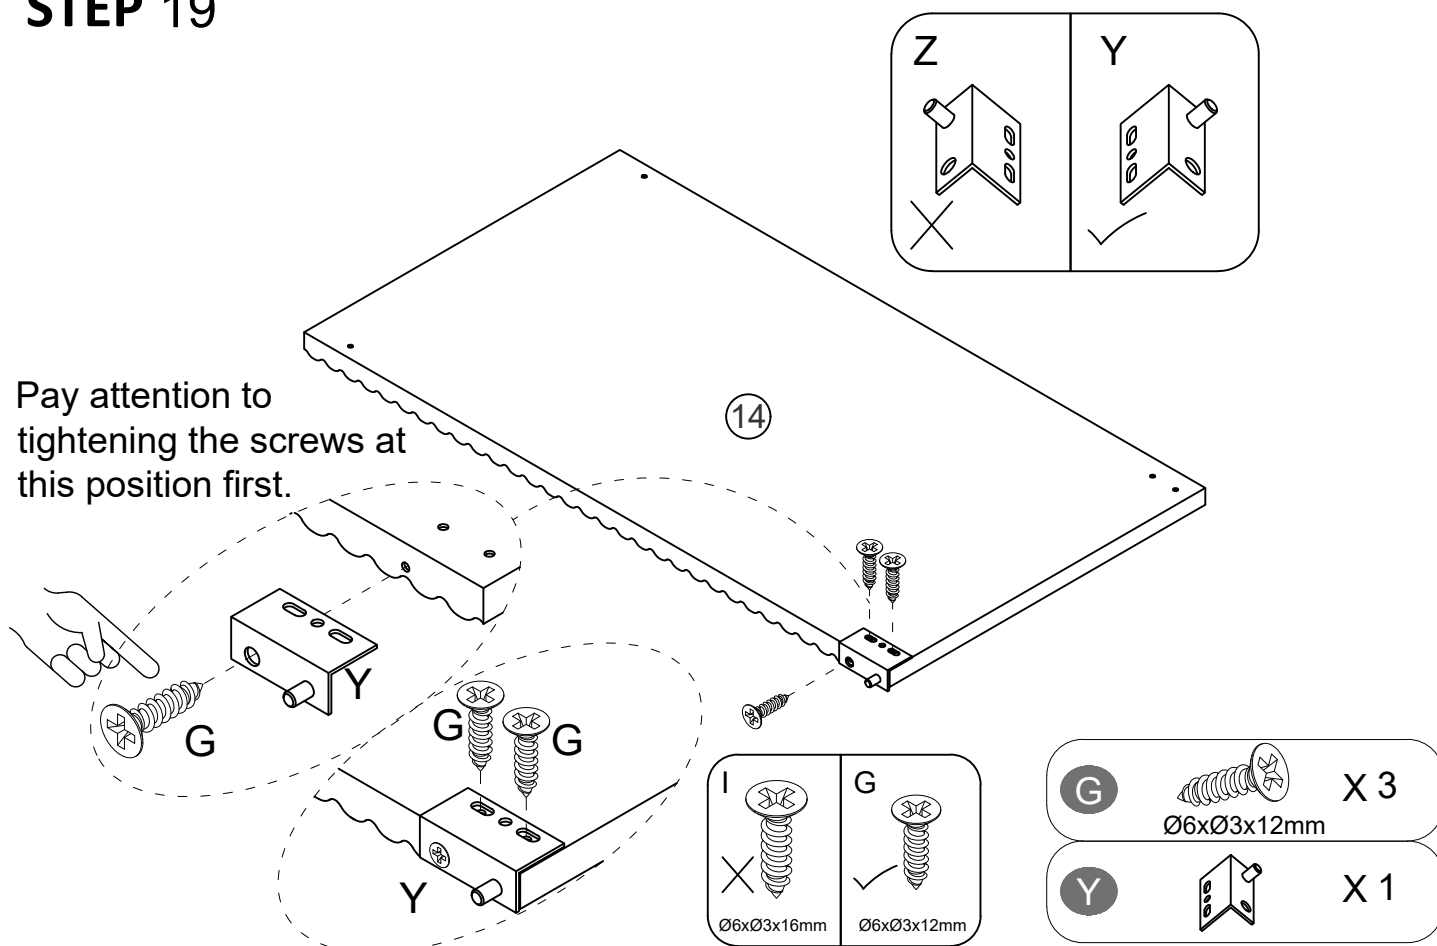


STEP 20

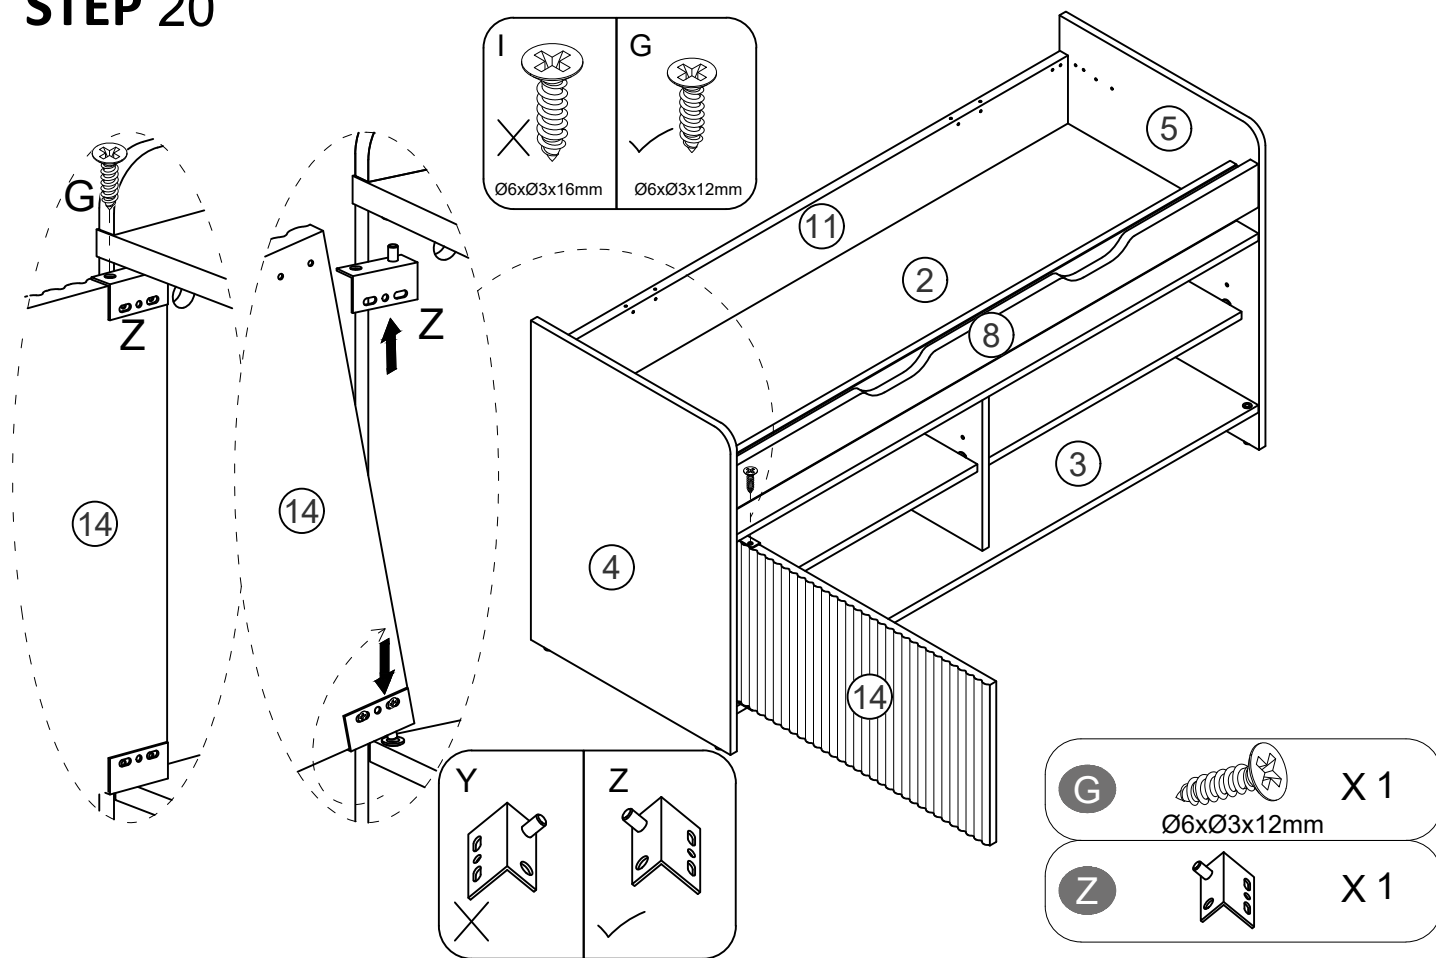


STEP 21

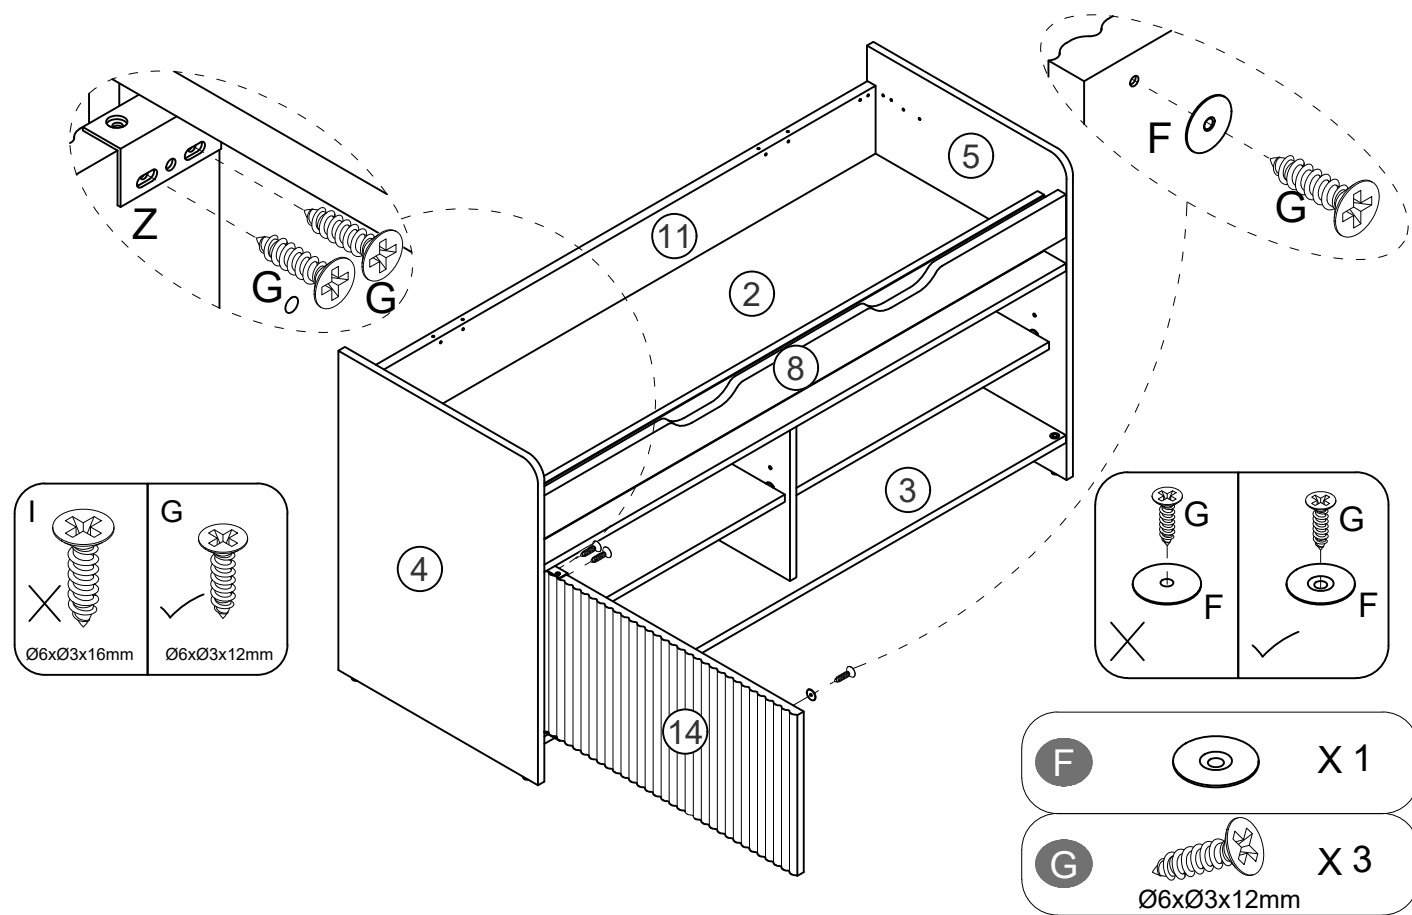


STEP 22

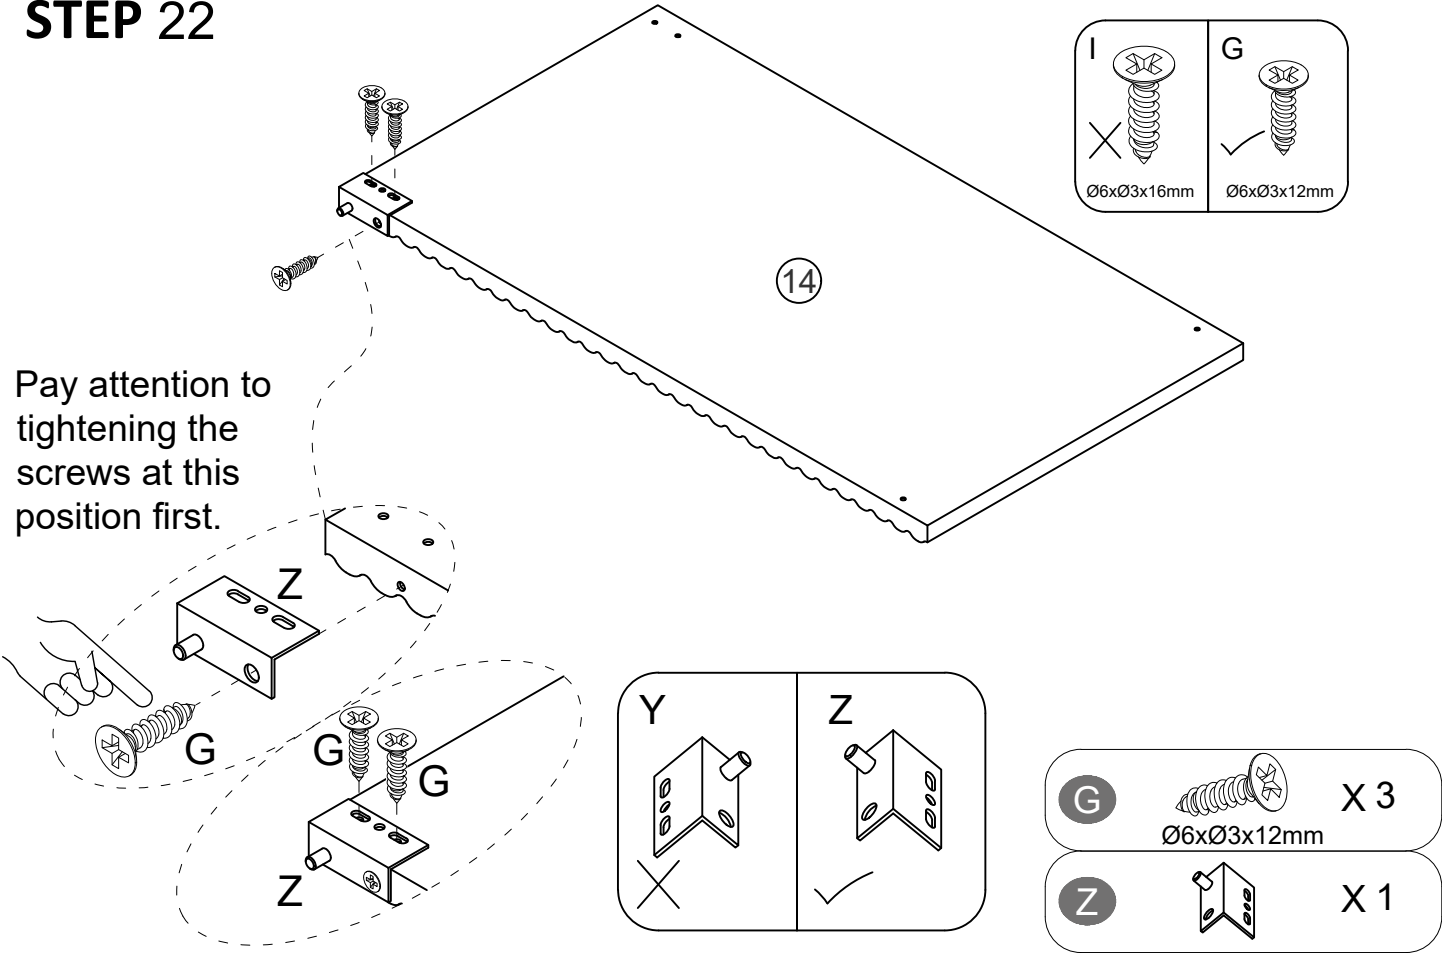


STEP 23

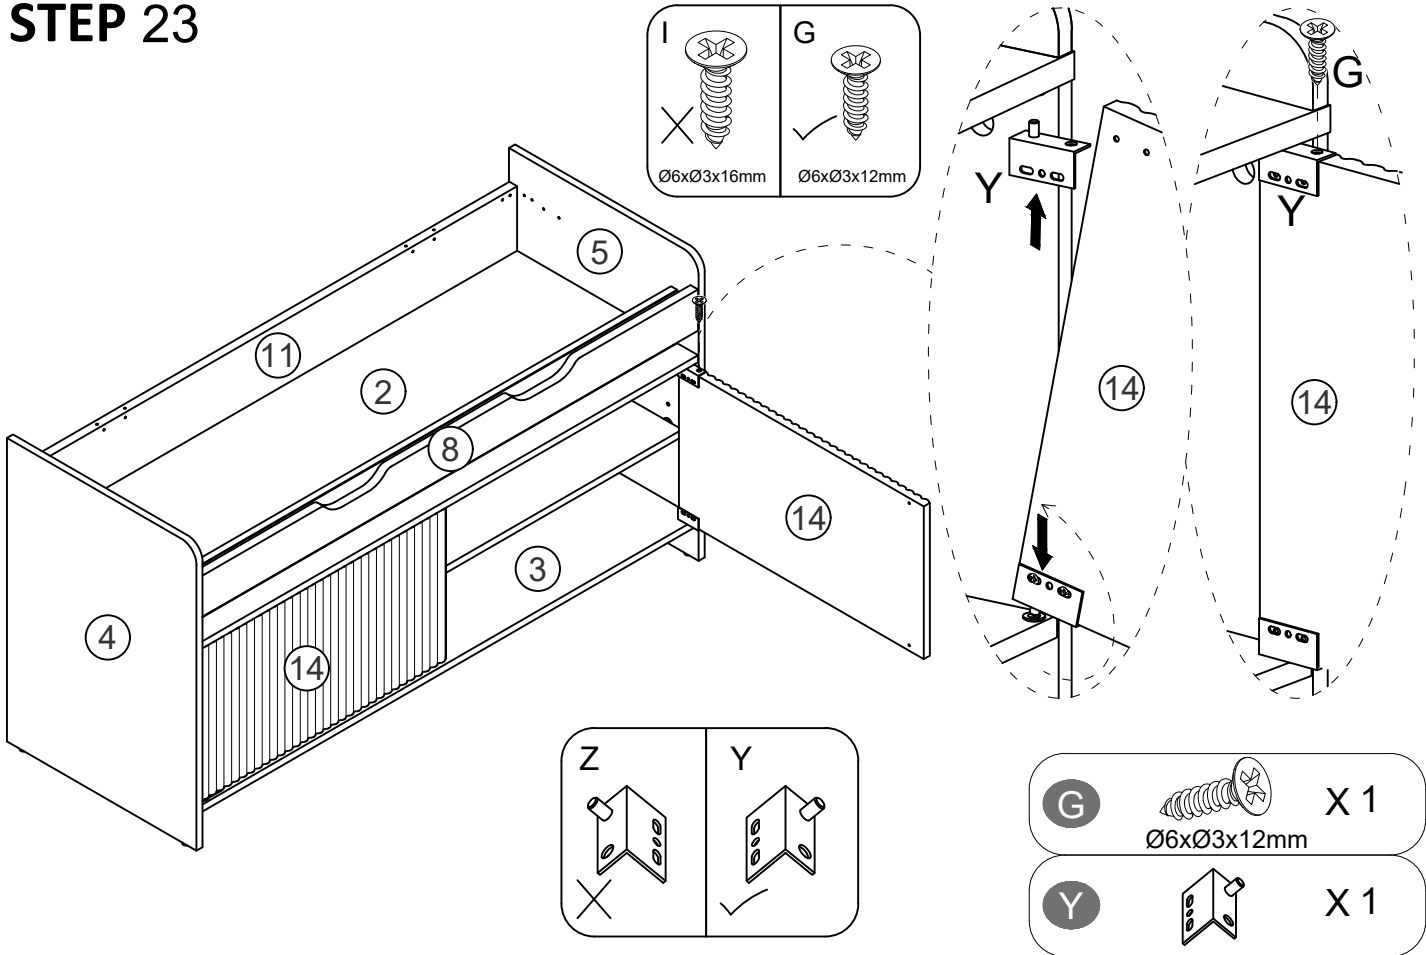


STEP 24

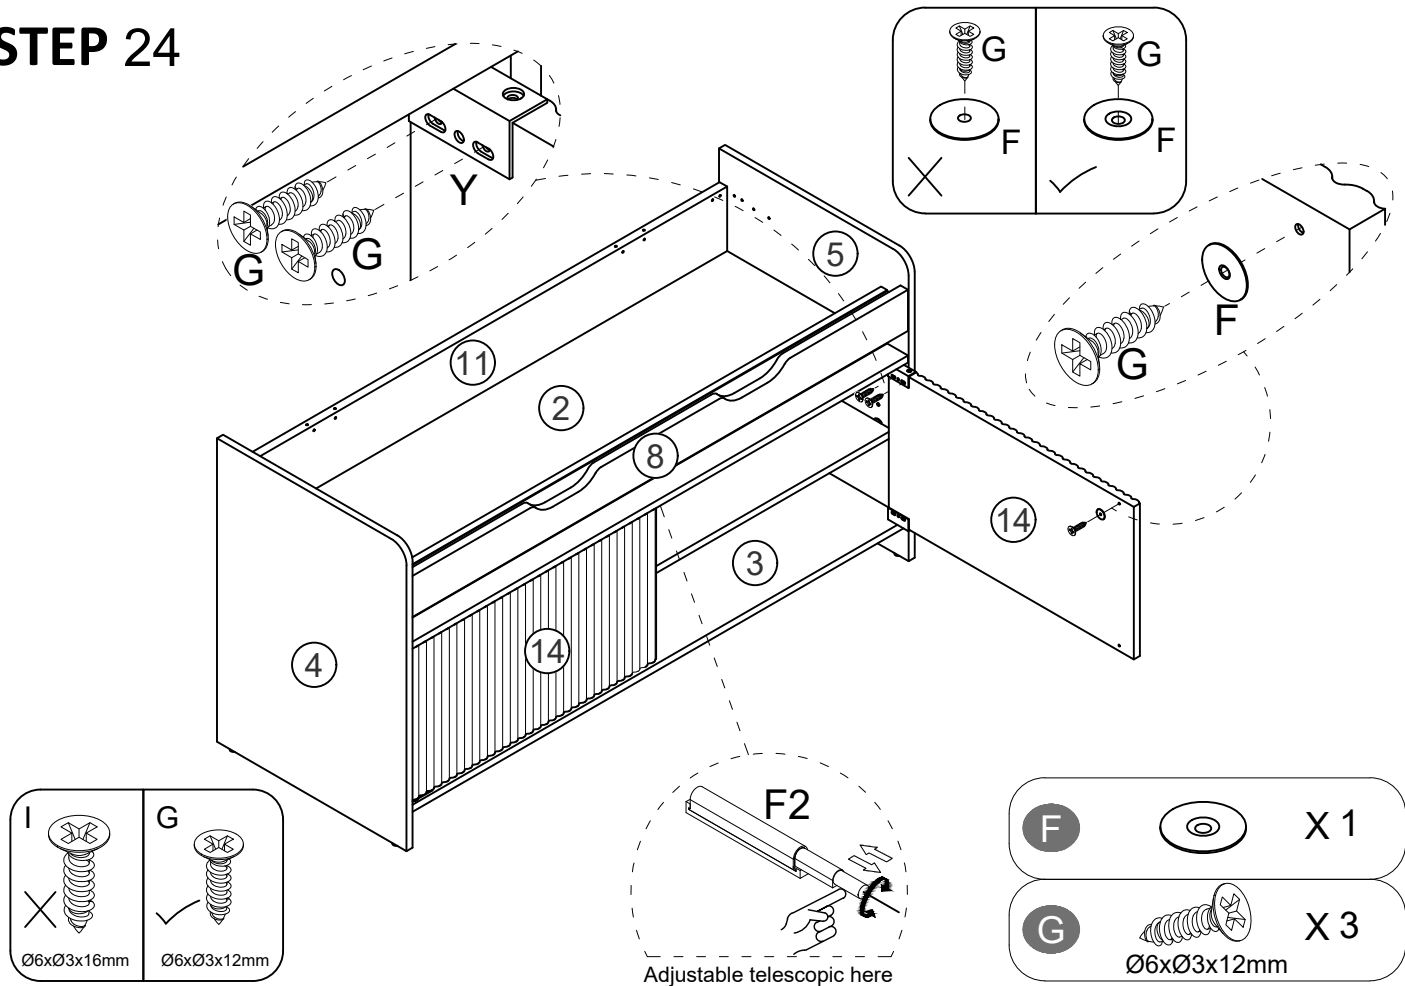


STEP 25

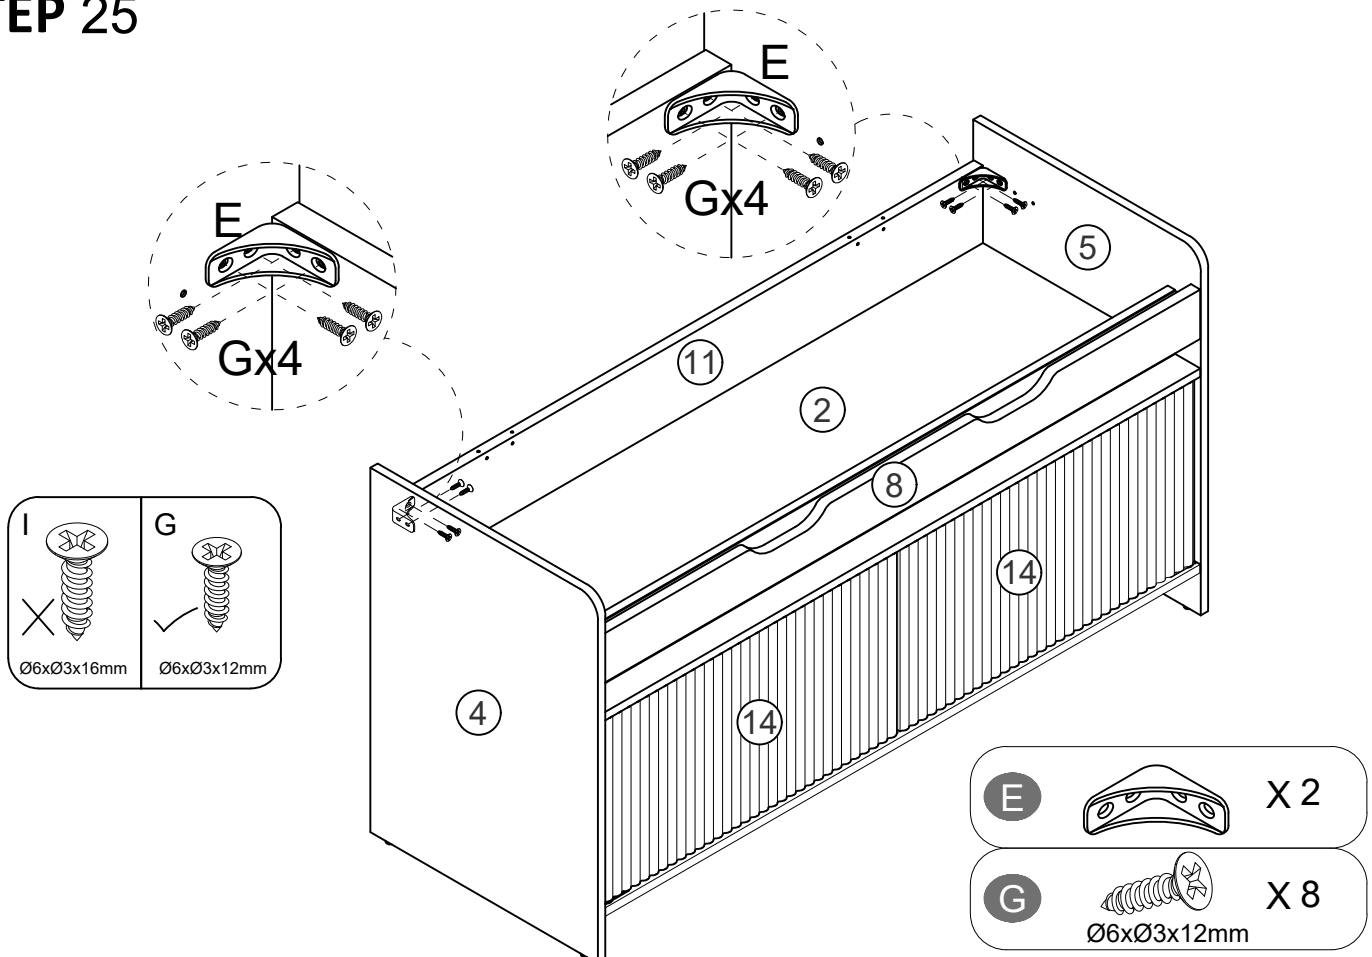



STEP 26

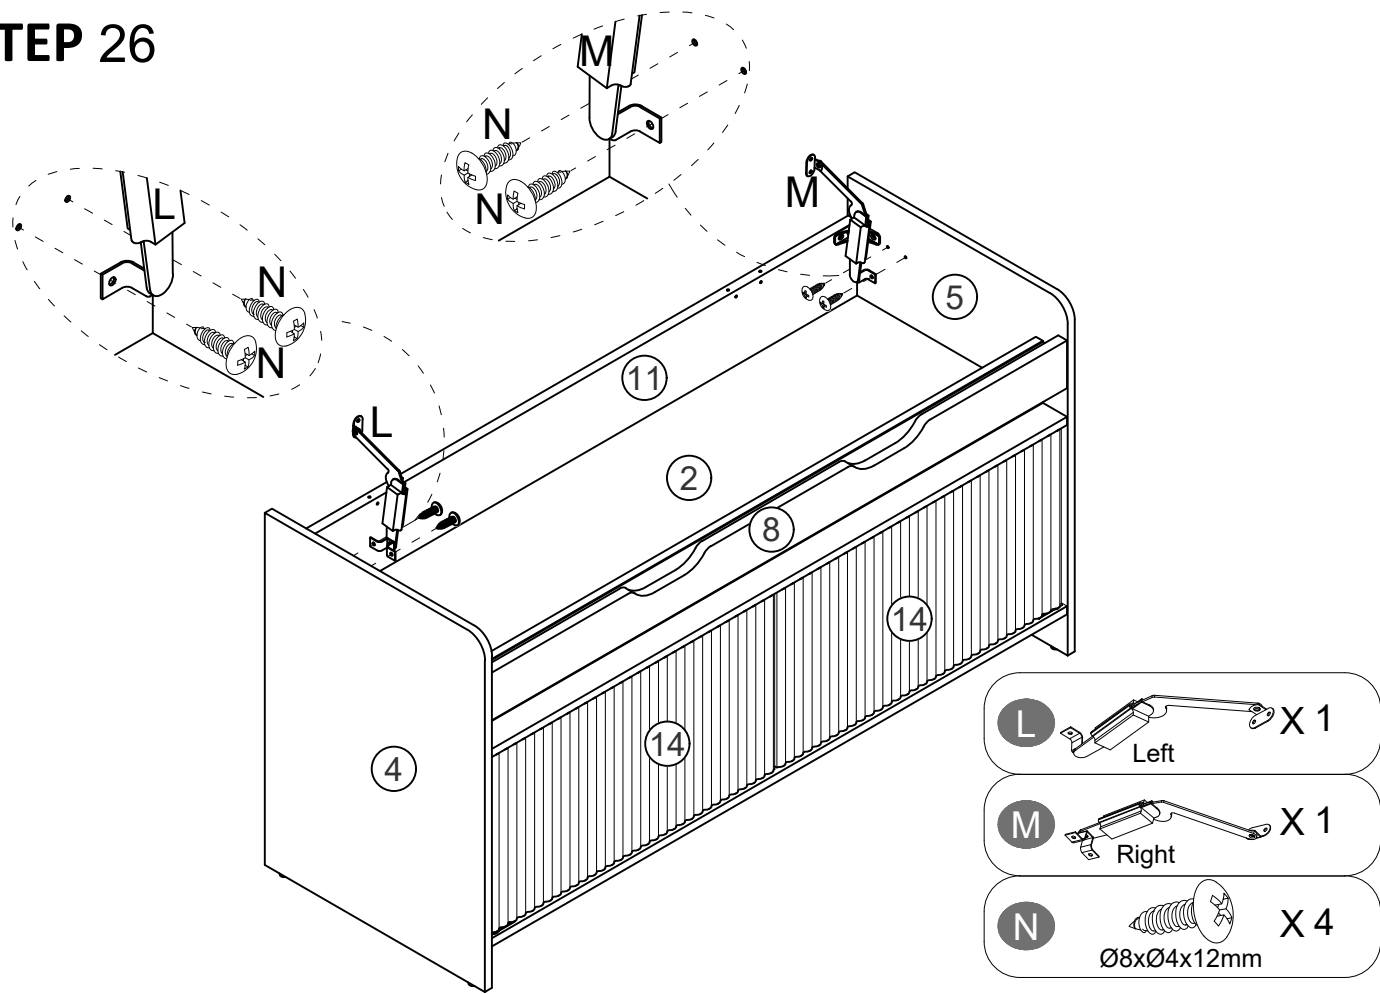


STEP 27

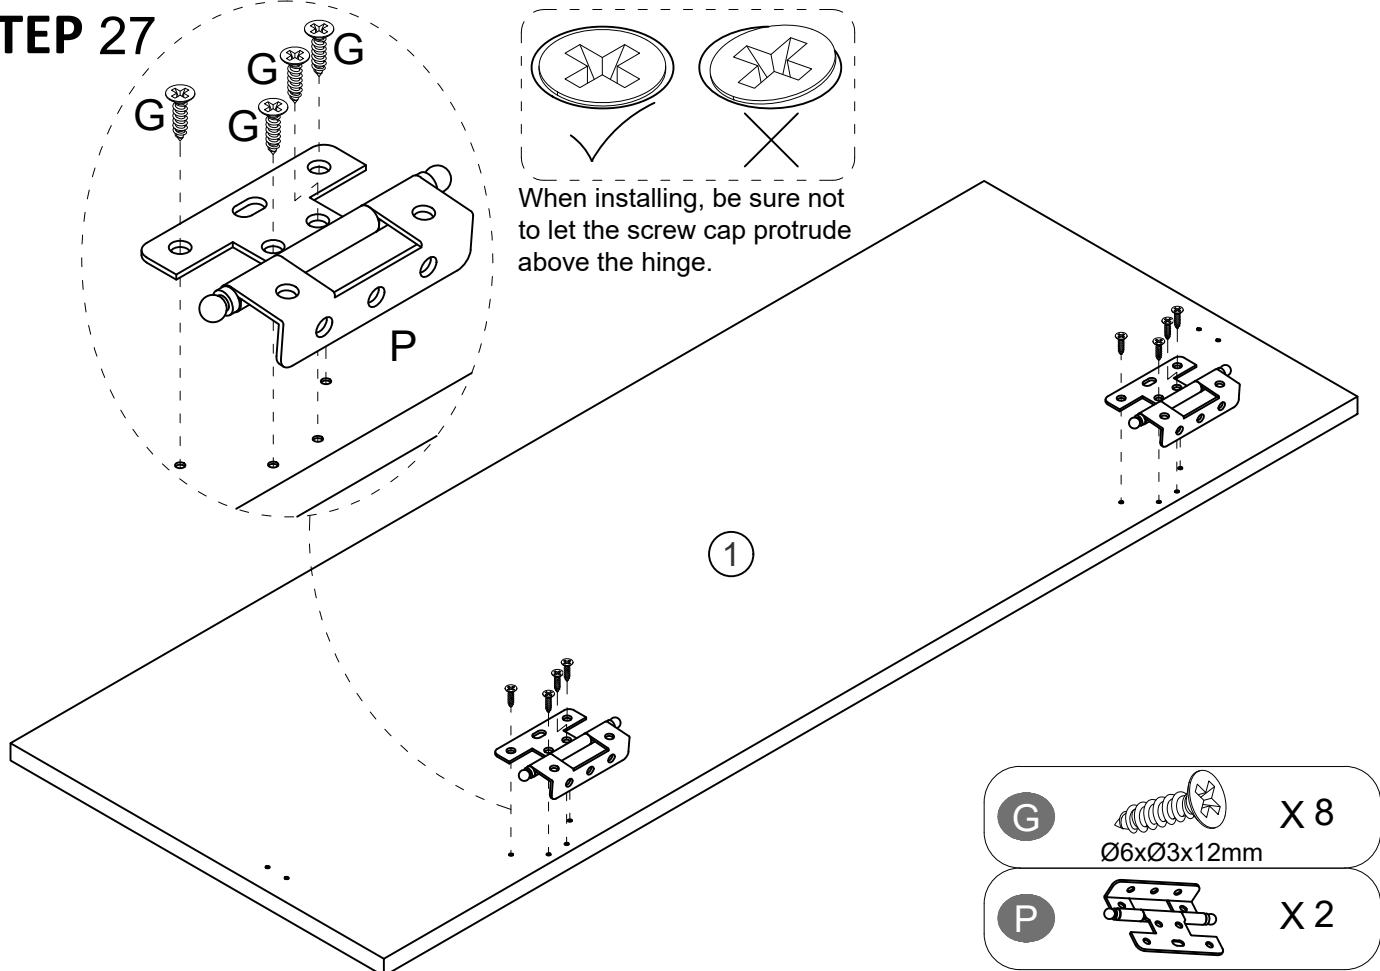



STEP 28

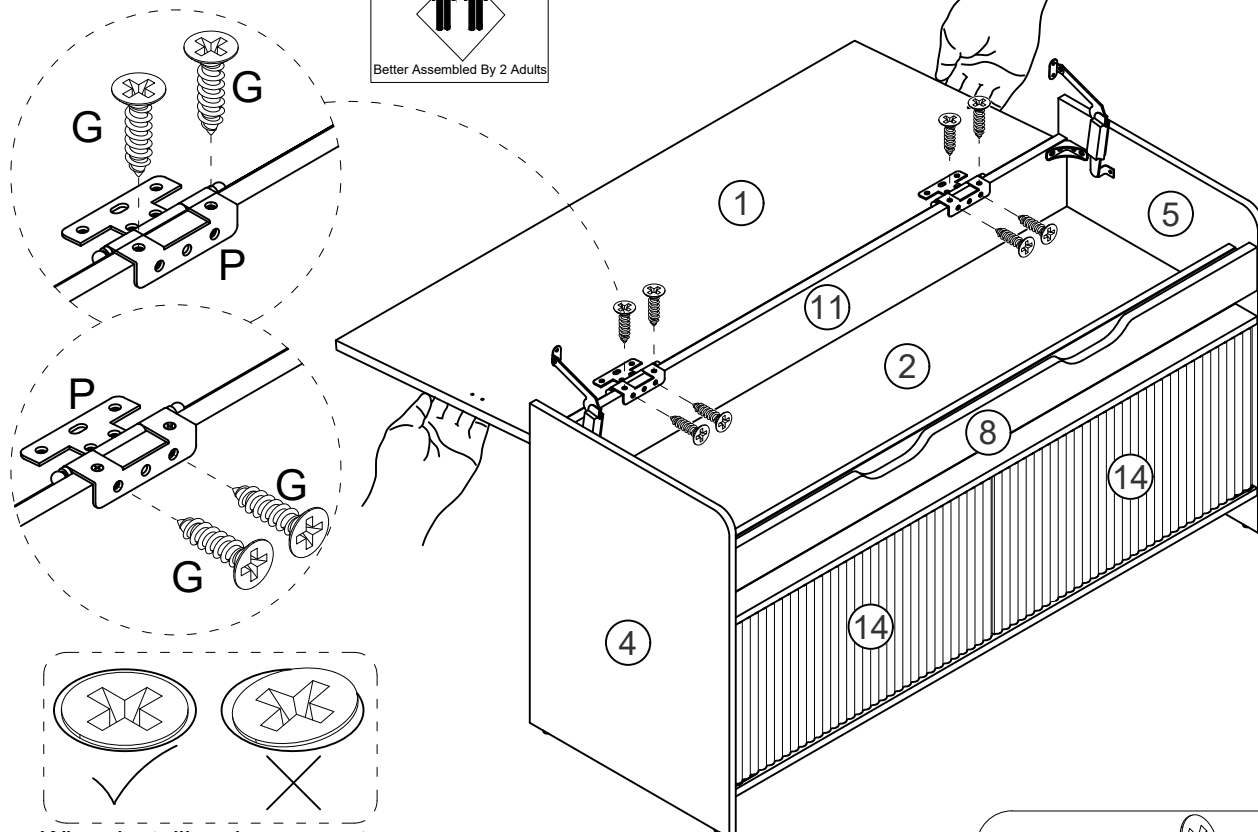


When installing, be sure not to let the screw cap protrude above the hinge.



STEP 29

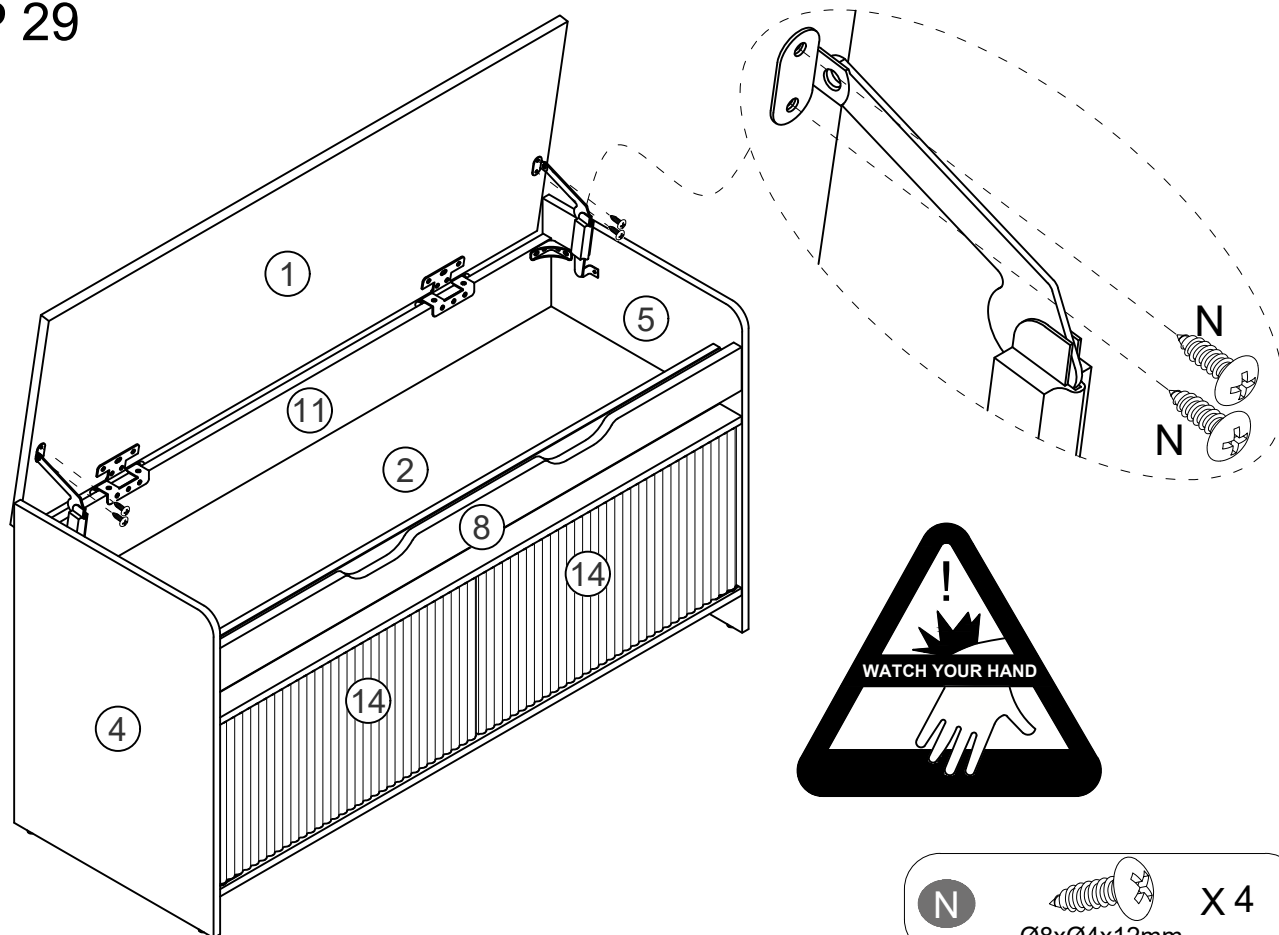


STEP 30

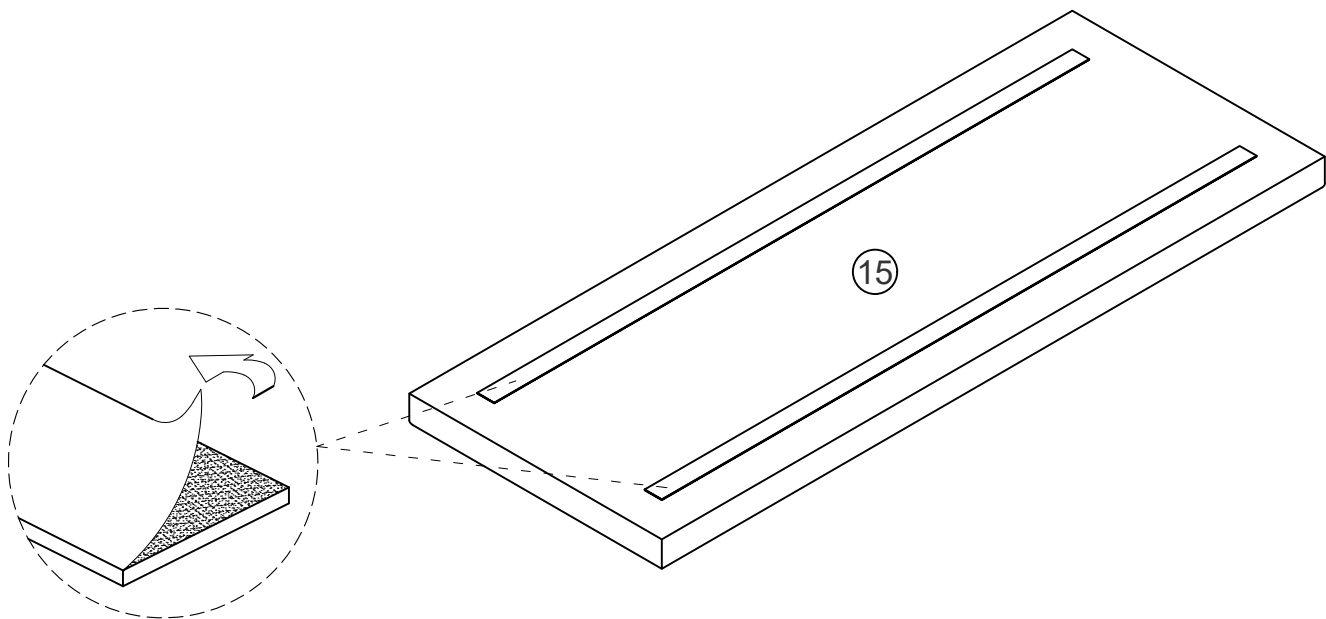


Remove the film from the surface

STEP 31

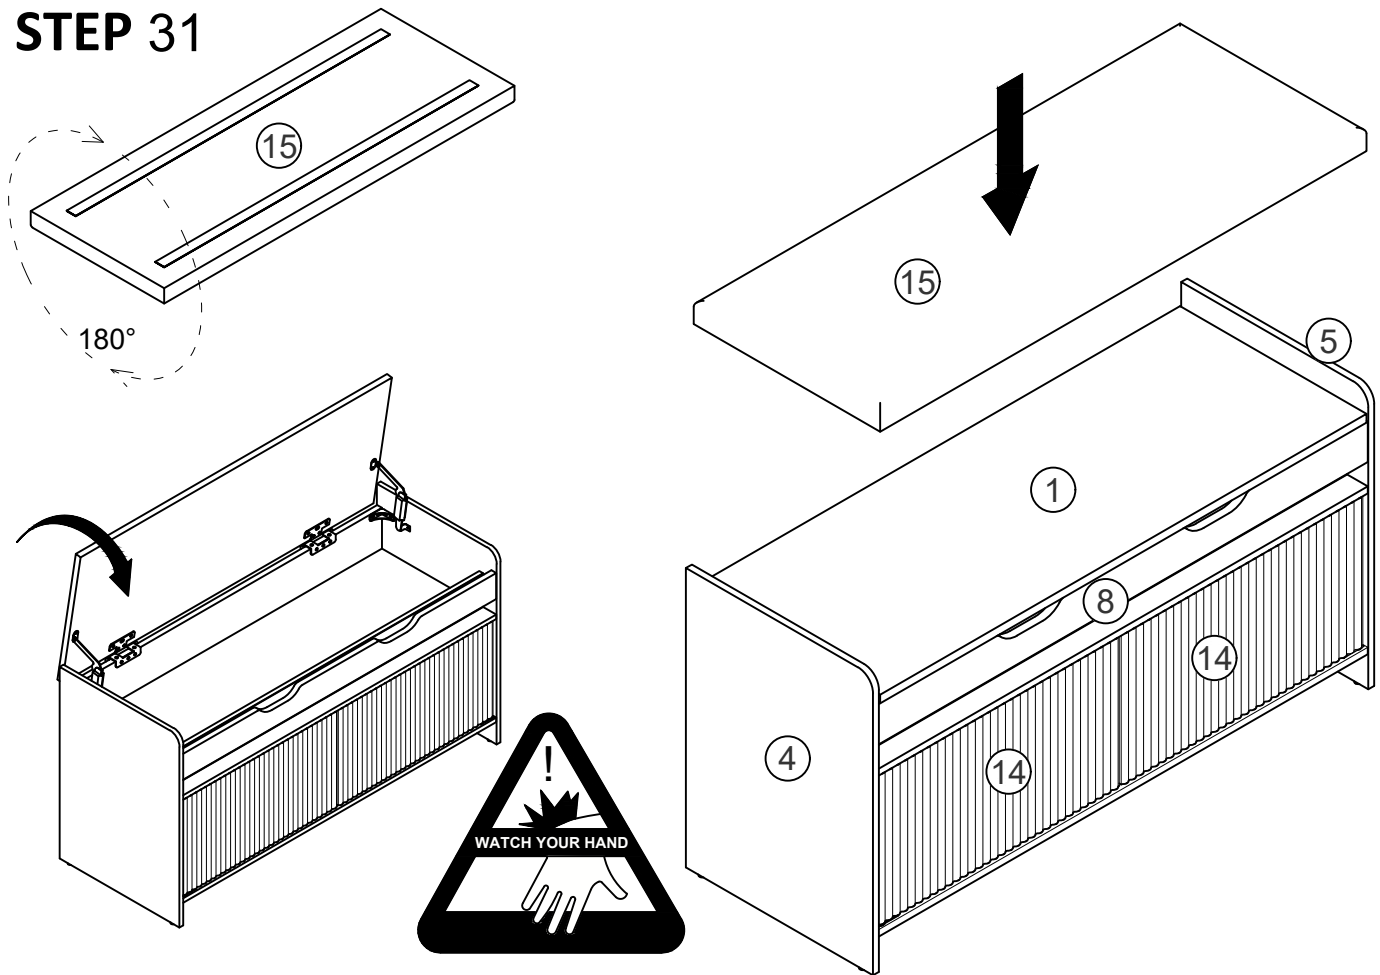



How to adjust the gap between door panels?

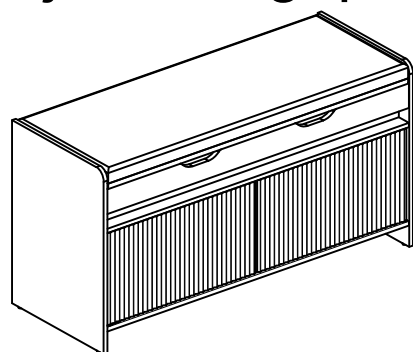

When the space on the four sides is uneven, please refer to the following situations to adjust the hinges

How to adjust a downward-sloping door panel?



1.

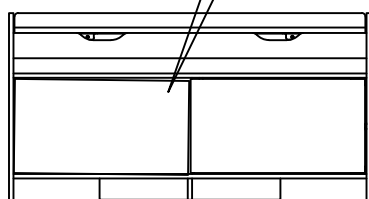

Remove the screws on the top of the door panel, loosen the screws on the side of the door panel (30%), push the door panel inward, tighten the screws on the side, and after confirming that the door panel is flat, tighten the screws on the top.

How to adjust an upward-tilting door panel?




2.

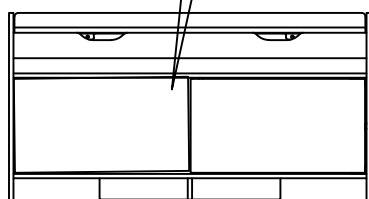

Remove the screws on the top of the door panel, loosen the screws on the side of the door panel (30%), push the door panel outward, tighten the screws on the side, and after confirming that the door panel is flat, tighten the screws on the top.

How to adjust a downward-sloping door panel?



3.

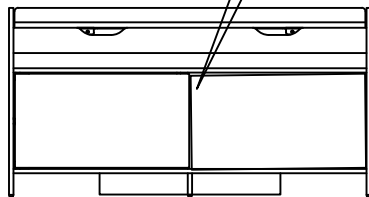

Remove the screws on the top of the door panel, loosen the screws on the side of the door panel (30%), push the door panel inward, tighten the screws on the side, and after confirming that the door panel is flat, tighten the screws on the top.

How to adjust an upward-tilting door panel?

4.

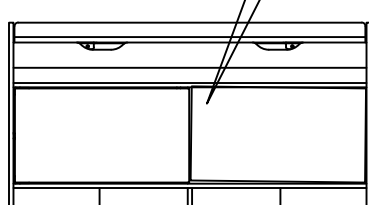

Remove the screws on the top of the door panel, loosen the screws on the side of the door panel (30%), push the door panel outward, tighten the screws on the side, and after confirming that the door panel is flat, tighten the screws on the top.