

Trampoline User Manual



IMPORTANT NOTES

For recreational use only. Not intended for professional or medical purposes.

Maximum weight capacity: ____ KG. Exceeding the recommended weight limit may damage the trampoline, and such damage is not covered by the warranty.

ASSEMBLY SAFETY INSTRUCTIONS

Assembly must be performed by two (2) adults in good physical condition. During assembly, wear appropriate footwear, maintain your balance, and remove any sharp or pointed objects from clothing. Do not attempt any dangerous actions that could lead to a fall. The assembler assumes full responsibility for any consequences resulting from failure to strictly follow these instructions and all warnings.

NOTE: Product appearance and components may vary slightly depending on the model.

BASE FRAME PARTS LIST

NO.	Part Name	6FT	8FT	10FT	12FT	14FT	16FT
1	Spring Arc Tube	6	6	8	8	10	10
2	U-Shaped Foot Tube	3	3	4	4	5	5
3	Connecting Rod	6	6	8	8	10	10
4	Spring	36	48	60	72	80	100
5	Jumping Mat	1	1	1	1	1	1
6	Protective Cover	1	1	1	1	1	1
7	Foot Pad	6	6	8	8	10	10
8	Foot Tube Locking Screw	6	6	8	8	10	10
9	Spring Hook	1	1	1	1	1	1
10	Lock Nut	6	6	8	8	10	10
11	Metal Washer	6	6	8	8	10	10
12	Wrench	1	1	1	1	1	1



Spring Arc Tube



U-Shaped Foot Tube



Connecting Rod



Spring



Jumping Mat



Protective Cover



Foot Pad



Foot Tube Locking Screw



Spring Hook



Lock Nut




Metal Washer




Wrench

BASE FRAME ASSEMBLY

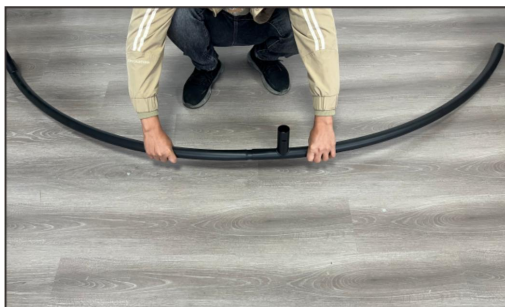

1. Connect the two spring arc tubes together.

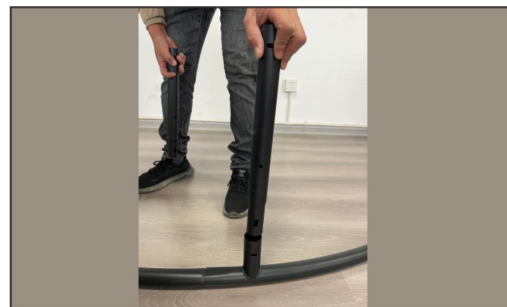

2. Insert the connecting rods into the arc tubes that were assembled in the previous step.



3. Insert the foot tubes onto the connecting rods. Please ensure that the holes on the foot tubes are properly aligned with the holes on the connecting rods. If the holes are misaligned, please reverse the connecting rod.




4. Fit the foot pads into the holes located at the base of each foot tube.




5. Repeat the process to assemble all of the U-shaped foot tubes.



6. Connect the assembled foot tube sections together to form a complete circular frame.

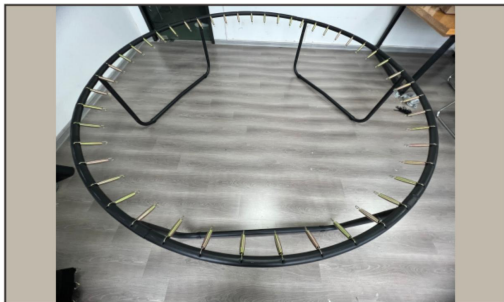

7. Hang the springs onto the holes of the circular frame. The larger end of the spring hook should attach to the frame, and the smaller end to the jumping mat.

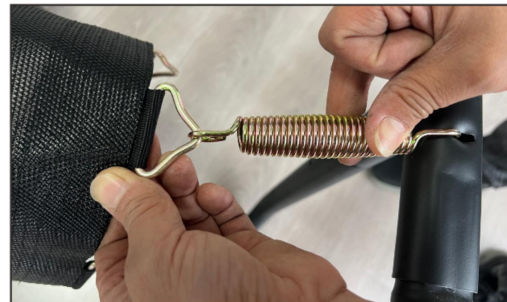


8. Find the jumping mat and connect its hooks to the opposite ends of the springs.



9. Begin by attaching one spring in each of the four primary directions of the mat.

Note: Springs should not be installed in a consecutive or clockwise order.

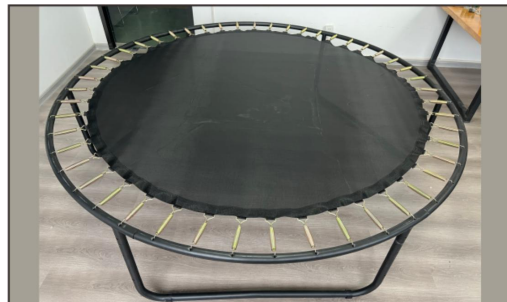

10. Continue to attach the remaining springs, working in an alternating pattern around the frame. Should you encounter a spring that is difficult to attach, please use the provided spring puller tool.



11. Drape the protective spring cover over the entire spring assembly. Secure the cover by fastening its bottom straps to the triangular rings on the frame.



12. Fasten the connecting rods to the spring frame using the screws. For each screw, place a metal washer between the rod and the lock nut, and then tighten firmly with the small wrench.

ENCLOSURE SYSTEM PARTS LIST

NO.	Part Name	6FT	8FT	10FT	12FT	14FT	16FT
1	Bottom Guard Rail	6	6	8	8	10	10
2	Top Guard Rail	6	6	8	8	10	10
3	Rail Sleeve	6	6	8	8	10	10
4	Fiberglass Pole	6	6	8	8	10	10
5	Pole Connector	6	6	8	8	10	10
6	Safety Net	1	1	1	1	1	1
7	Fastening Rope	1	1	1	1	1	1
8	Rail Bolt	12	12	16	16	20	20
9	End Cap Fitting	6	6	8	8	10	10
10	Plastic Washer	12	12	16	16	20	20
11	Metal Washer	12	12	16	16	20	20
12	Wrench	1	1	1	1	1	1
13	Lock Nut	12	12	16	16	20	20
14	Ladder	1	1	1	1	1	1



Bottom Guard Rail



Top Guard Rail



Rail Sleeve



Fiberglass Pole



Pole Connector



Safety Net



Fastening Rope



Rail Bolt



End Cap Fitting



Plastic Washer



Metal Washer



Wrench




Lock Nut



Ladder


ENCLOSURE SYSTEM ASSEMBLY

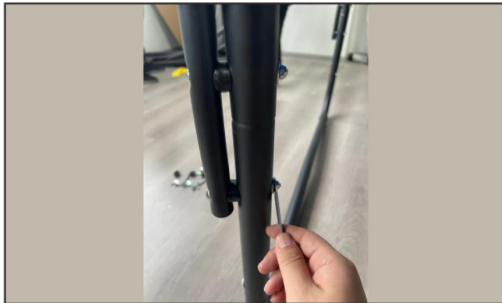

1.Align the lower guard rail with the two holes on the foot tubes, and fix it into place with screws.



2.Install all of the lower guard rails one by one.

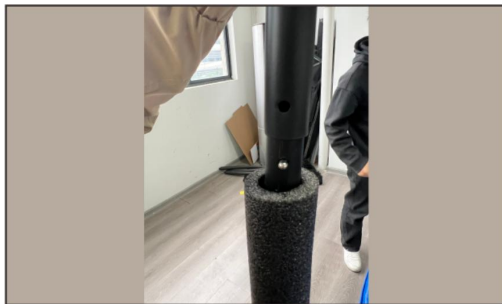

3.Insert the upper guard rail into the lower guard rail, and fix it with the ball catch.



4.Install all of the guard rails in order.



5.Place the protective sleeves over the guard rails.



6.Insert the short metal tube into the eagle-beak sleeve.



7.Insert the fiberglass poles into the fabric loops located at the top of the enclosure net.



8.Insert all fiberglass poles one by one, using the components from Step 6 to link them together into a circular shape.



9.Lift the entire connected enclosure net assembly and place it on the highest point of the guard rails.



10.Fix the bottom of each eagle-beak sleeve to the top of the upper guard rail with the buckles, securing them one after another.



11.Pass the net' s tie-down straps through the reserved holes along the bottom edge.



12.Attach the ladder to the spring arc tube.



33.The trampoline installation is now complete.

SAFETY INSTRUCTIONS FOR USE

1. **WARNING:** Misuse of this product can result in serious injury.
2. **NEVER** allow children to use the trampoline without adult supervision.
3. **ALWAYS** read and understand all safety instructions before use.
4. **DO NOT** perform difficult or dangerous maneuvers while jumping.
5. **NEVER** attempt somersaults. Flips can result in catastrophic neck injury, paralysis, or death.
6. **DO NOT** jump off the trampoline onto the ground.
7. **DO NOT** use the trampoline as a launching device to jump into a pool or onto other objects.
8. **ALWAYS** jump in the center of the mat.
9. Remove all sharp objects, jewelry, and accessories from your person before use.