

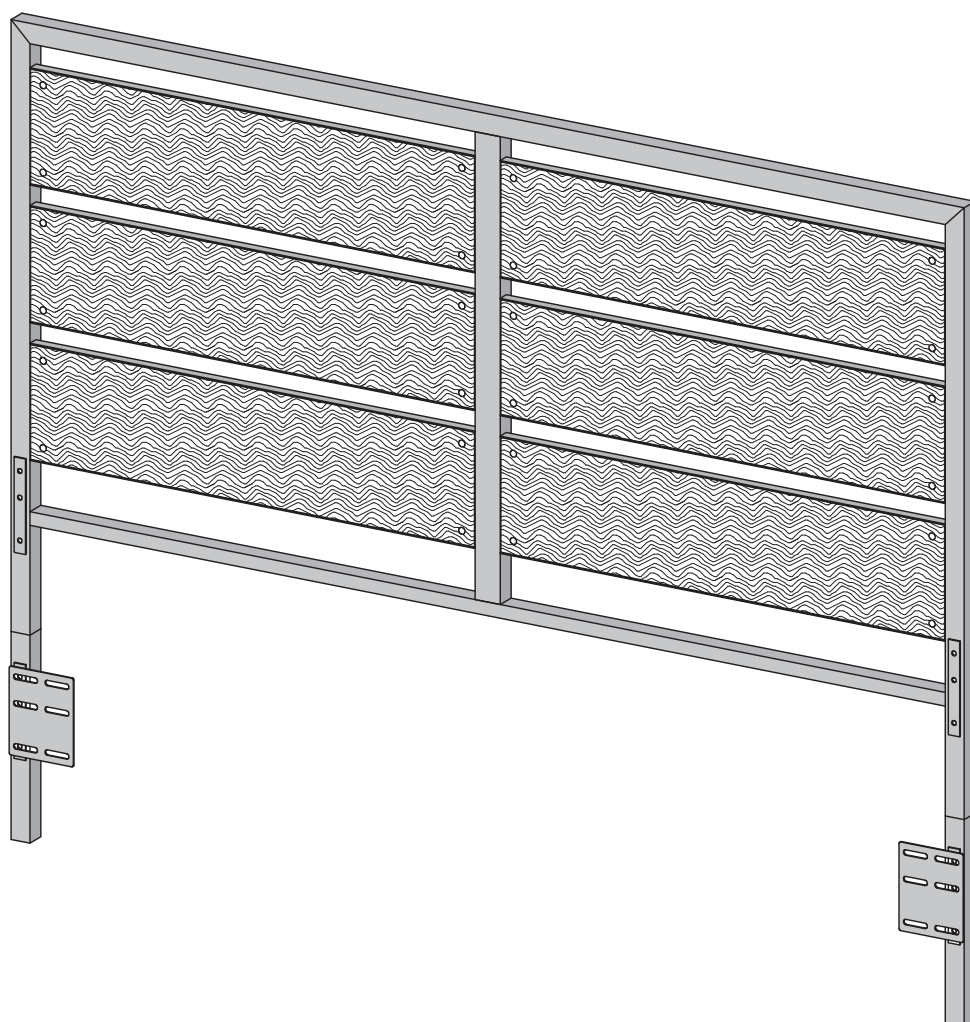





Assembly Instructions




Please visit our website for the most current instructions, assembly tips, report damage, or request parts.

Parts List

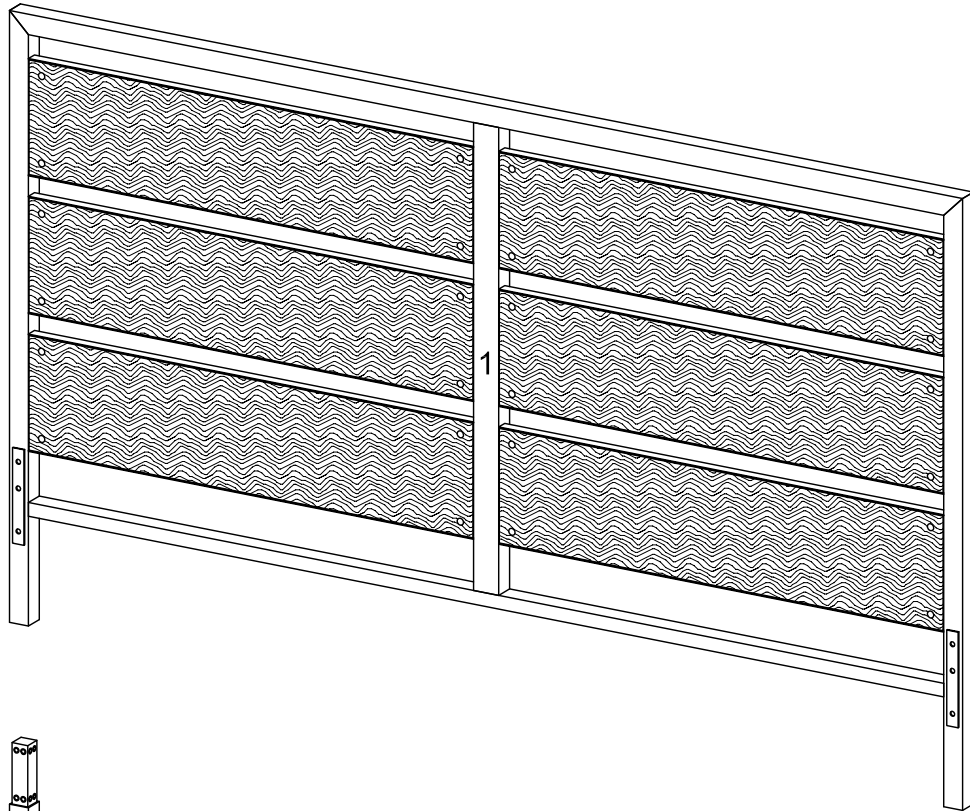

Hardware List

A		Ø1/4"*7/8"	Bolt	8 pcs
B		Ø1/4"*1/2"	Bolt	4 pcs
C		Ø16*Ø7.0*1	Washer	16 pcs
D		Ø25*Ø7*4	Washer	8 pcs
E		M4*4*60L	Wrench	1 pc
F		M11.3	Wrench	1 pc
G		Ø1/4"*8	Nut	4 pcs
H			Feet	2 pcs


*The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.*

FOUR ASSEMBLY OPTIONS

Option A

(60" Queen size, Low)


To build this option follow steps 1, then follow step 2A.

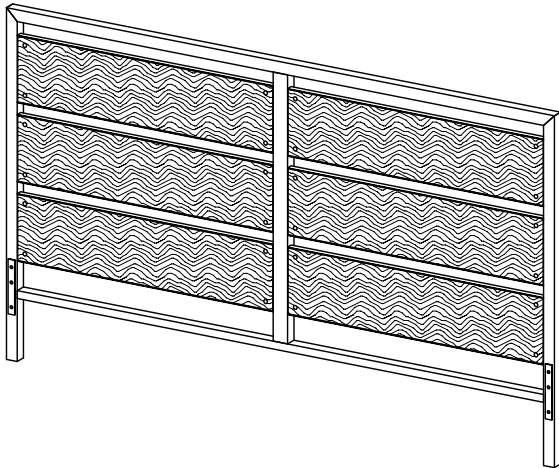

Option B

(54" Full size, Low)


To build this option follow steps 1, then follow step 2B,3B.

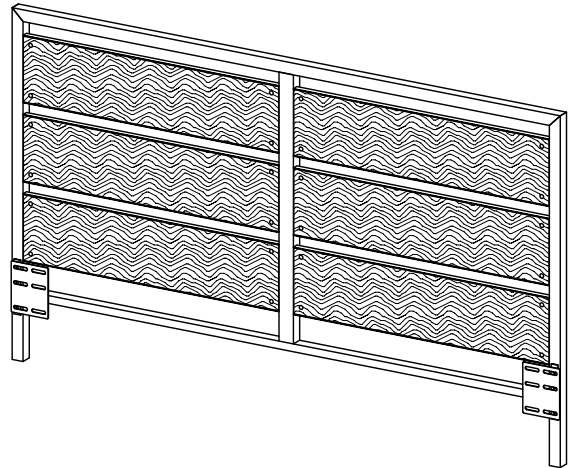

Option C

(60" Queen size, Tall)


To build this option follow steps 4, then follow step 5C.

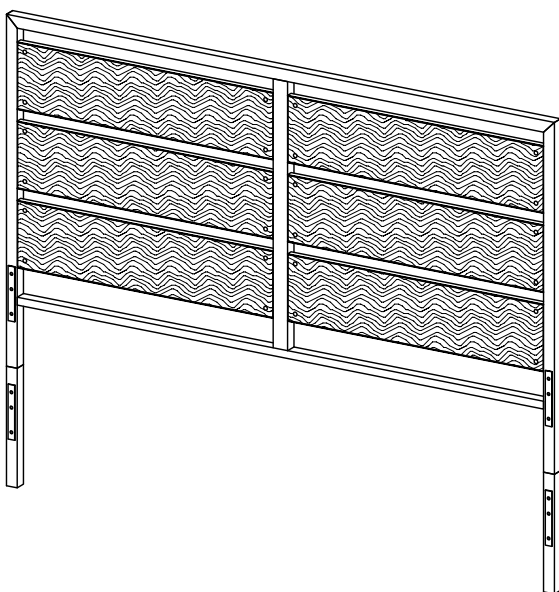


Option D

(54" Full size, Tall)

To build this option follow steps 4, then follow step 5D,6D.

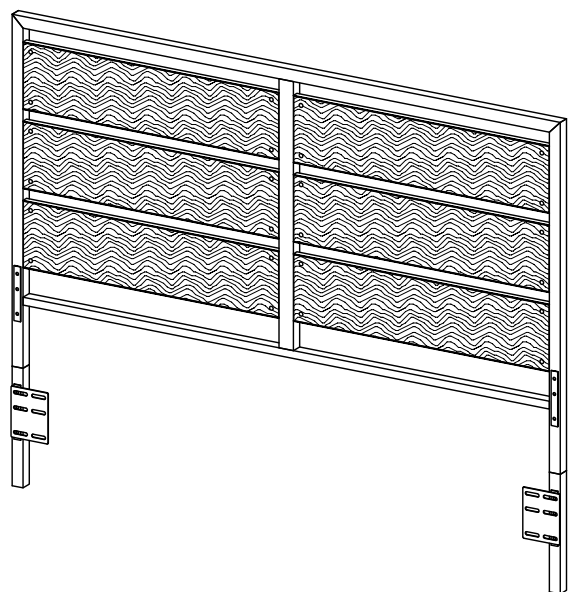


Step 1

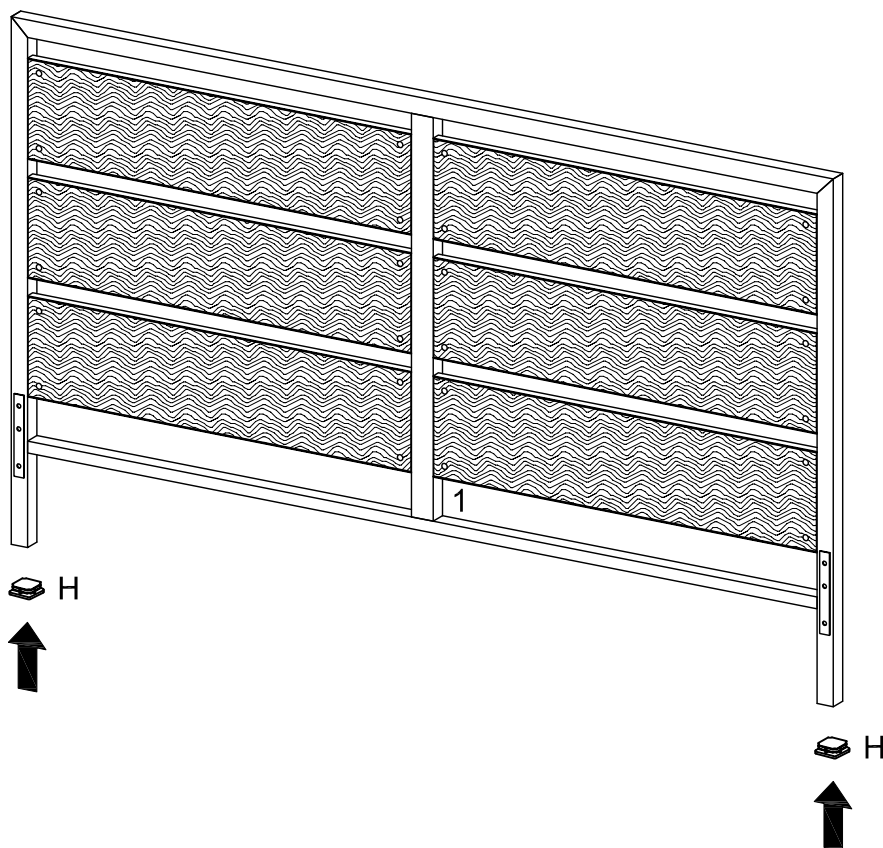


Insert feet (H) into head board (1).

Step 2A

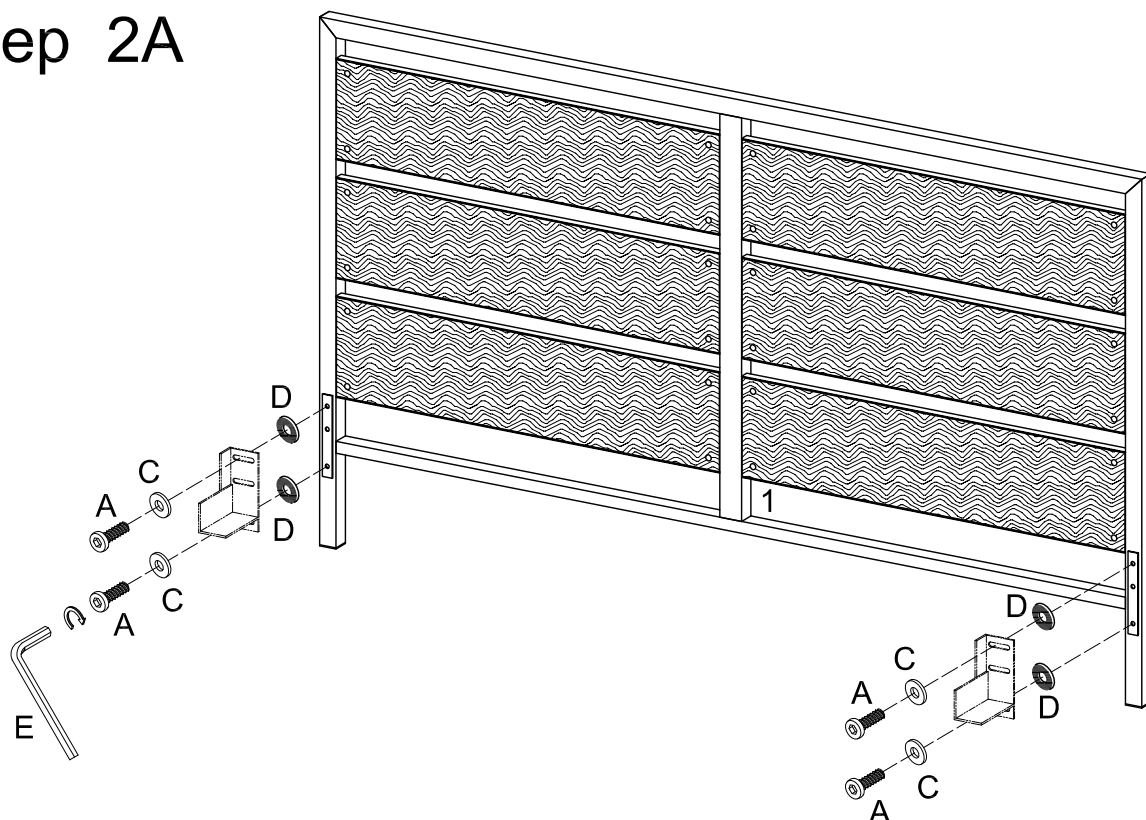


Use wrench (E) to secure bed rail (not included) to head board (1) with bolt (A), washer (C) and washer (D).

Step 2B

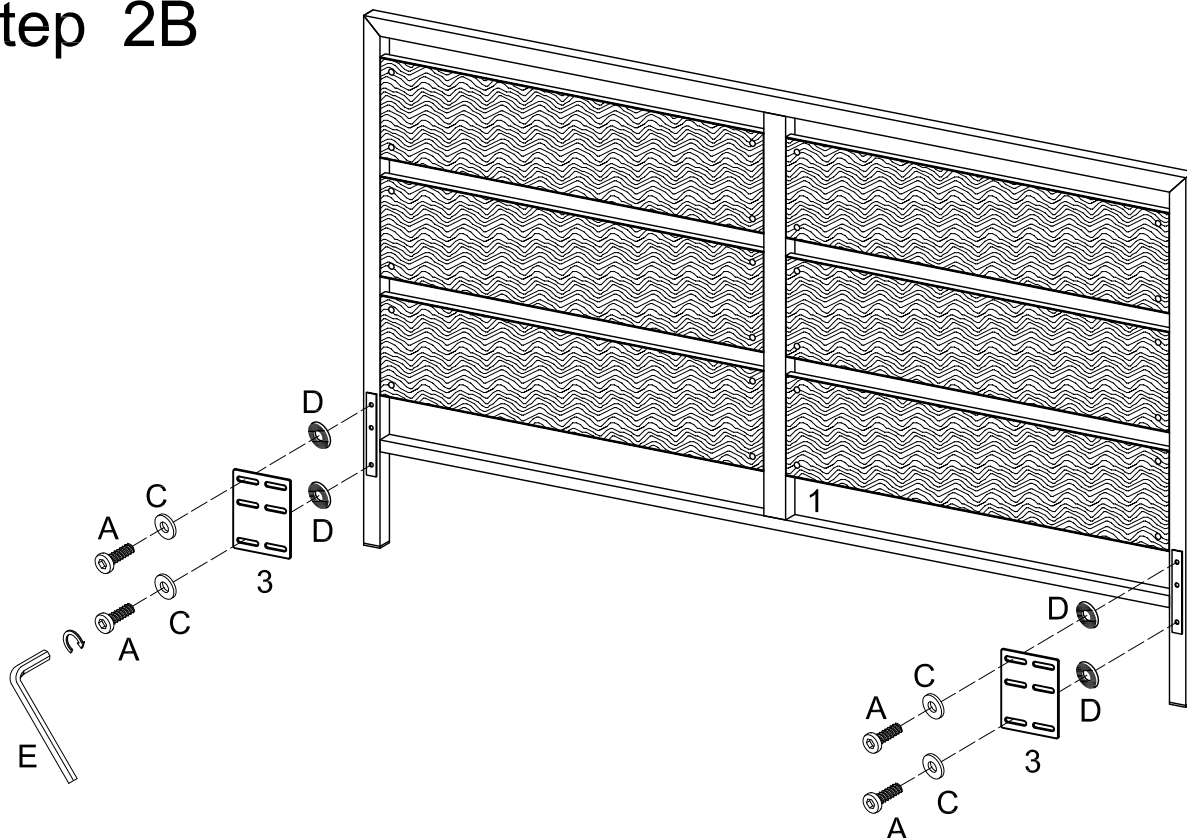


Use wrench (E) to secure plate (3) to head board (1) with bolt (A), washer (C) and washer (D).

Step 3B

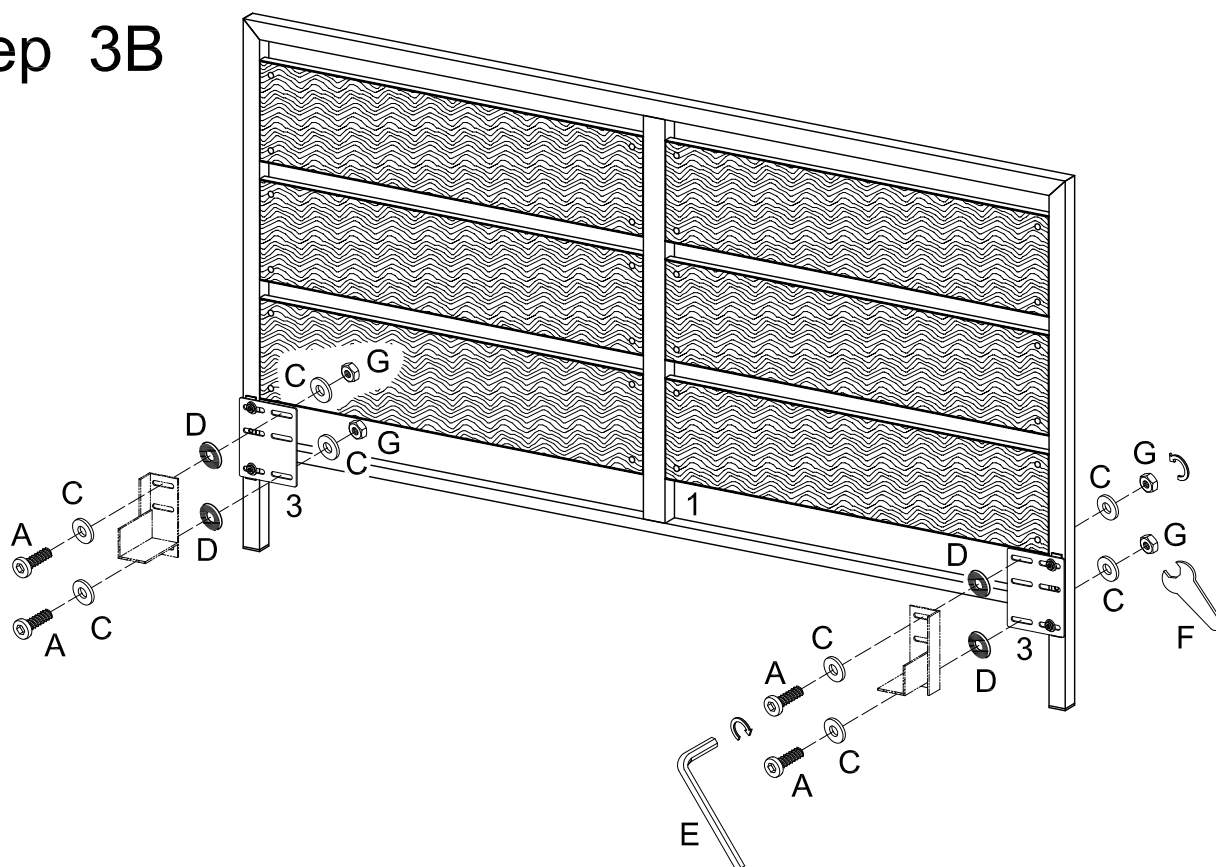


Use wrench (E) to secure bed rail (not included) to plate (3) and head board (1) with bolt (A), washer (C), washer (D) and secure nut (G) by using wrench (F).

Step 4

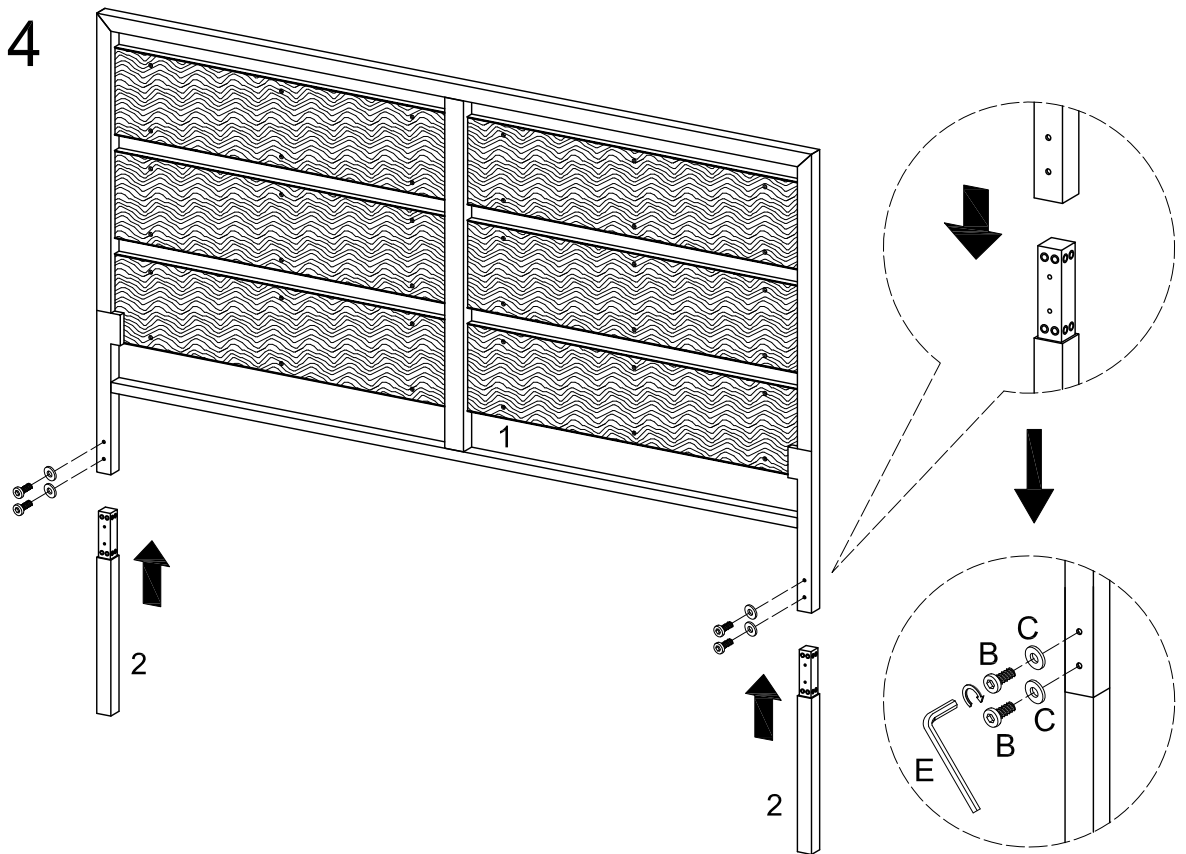


Insert leg (2) into head board (1), use wrench (E) to secure it with bolt (B), washer (C).

Step 5C

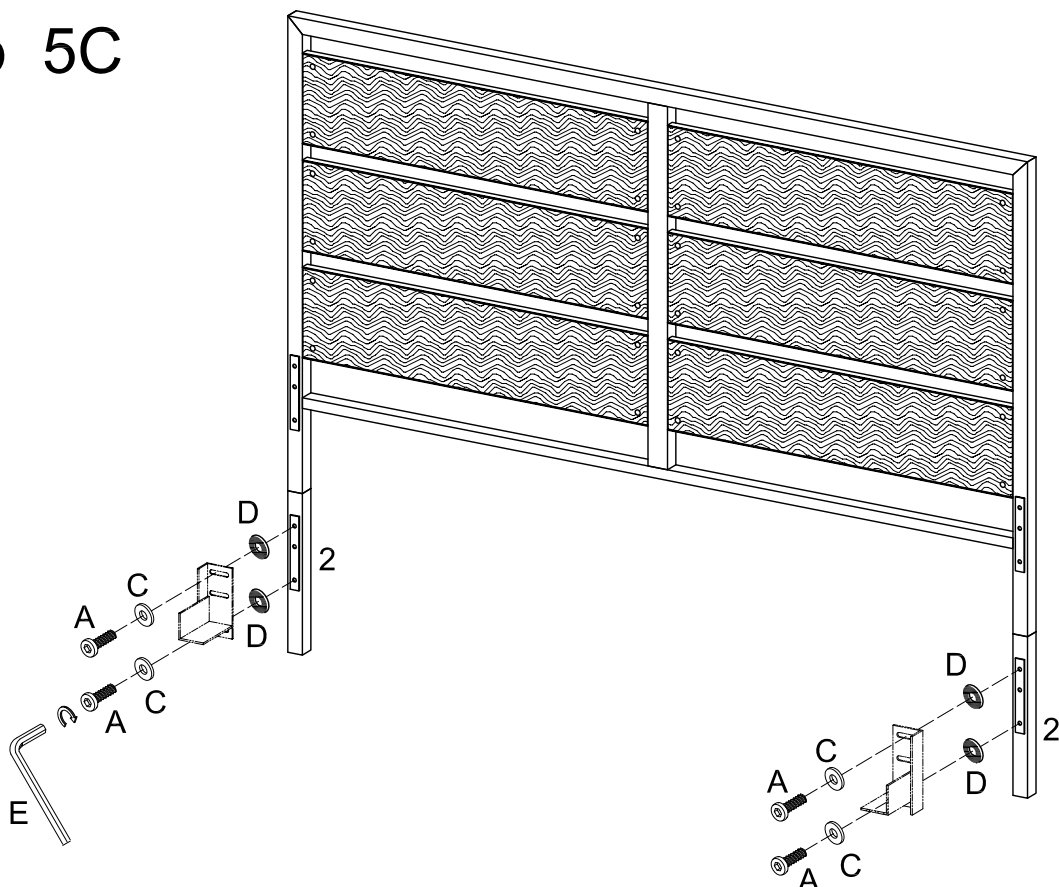


Use wrench (E) to secure bed rail (not included) to leg (2) with bolt (A), washer (C) and washer (D).

Step 5D

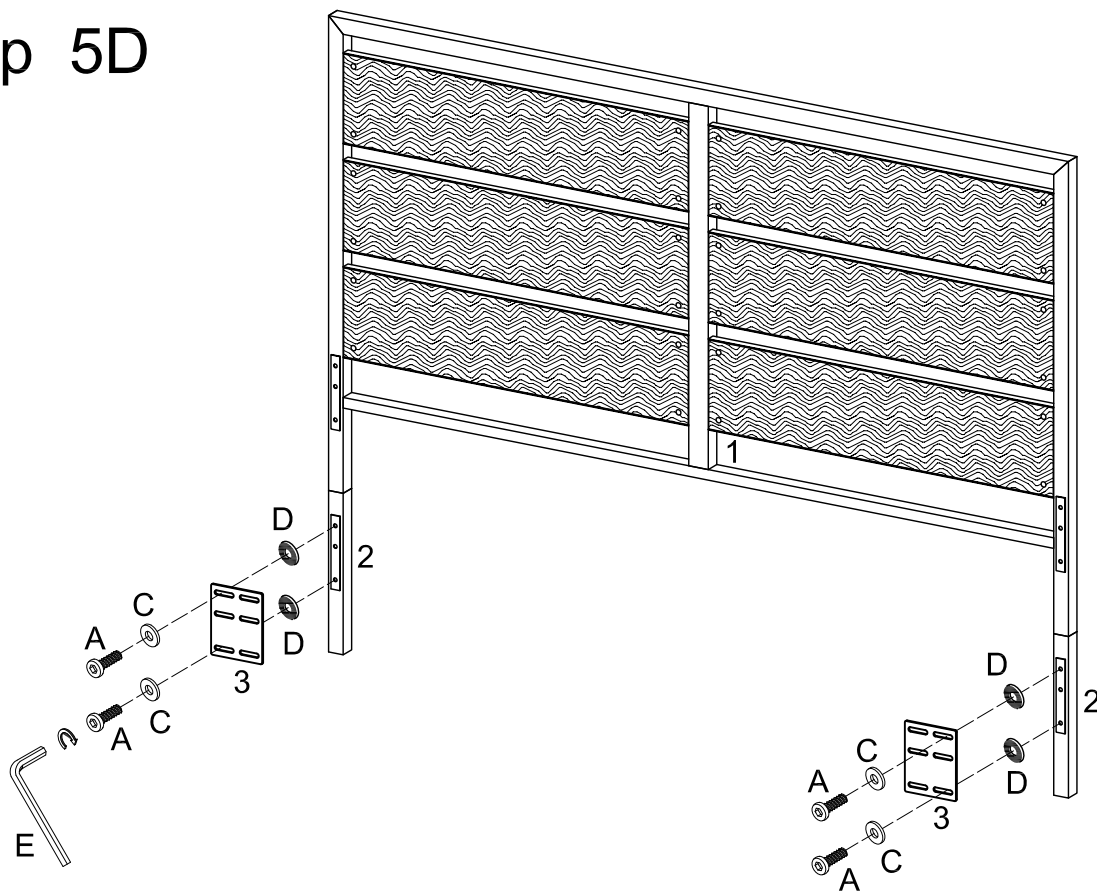

Use wrench (E) to secure plate (3) to leg (2) with bolt (A), washer (C) and washer (D).

Step 6D

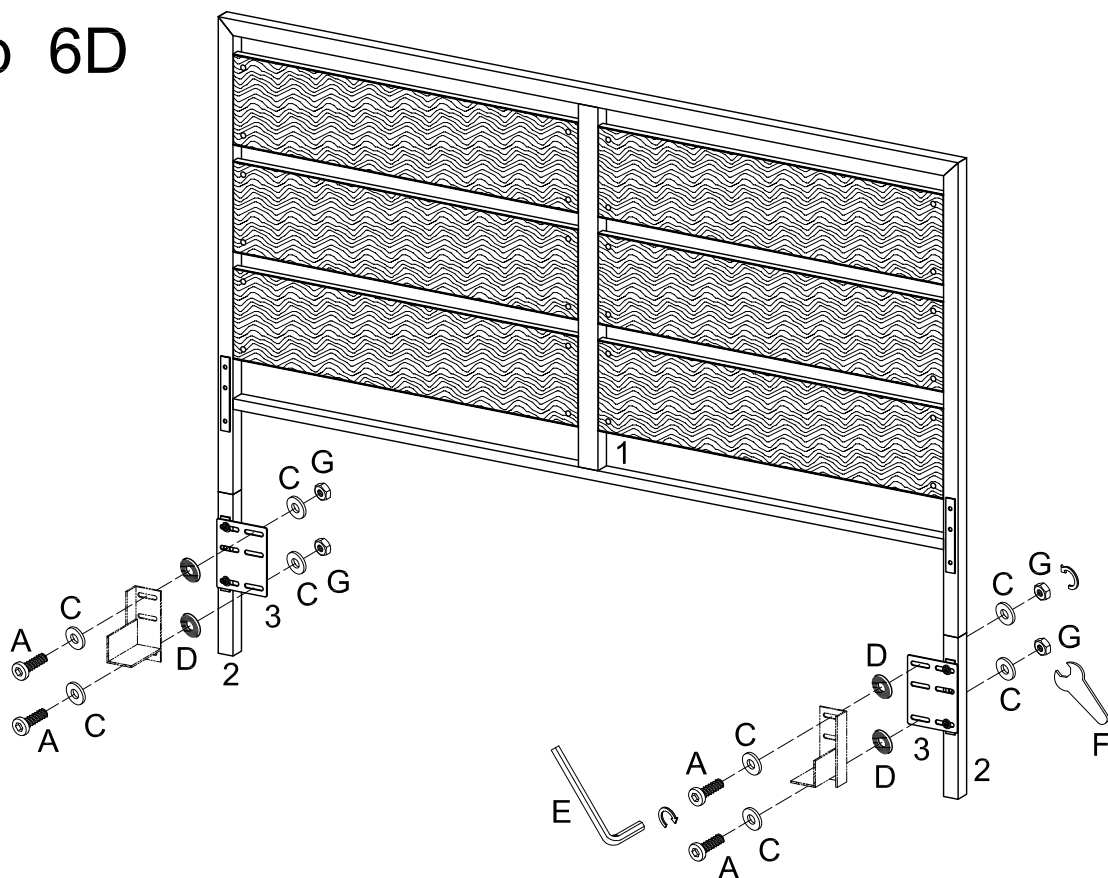

Use wrench (E) to secure bed rail (not included) to plate (3) and leg (2) with bolt (A), washer (C), washer (D) and secure nut (G) by using wrench (F).