



# Underscore® | K-1822-XHGH

66" x 32" drop-in Heated BubbleMassage™ air bath with whirlpool

## Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Eight Proflex® hydromassage jets can be individually adjusted for water flow and direction
- Single-speed whirlpool offers performance and value with 8 fully adjustable jets
- Built-in heater
- Automatic and manual purge cycles remove residual water from air channels after use
- 60-minute automatic shutoff timer
- Slotted overflow allows for deep soaking
- Spacious design accommodates up to two bathers
- Integral lumbar support
- Keypad control
- Textured bottom surface



## Available Colors/Finishes

*Color tiles intended for reference only.*

|    |             |
|----|-------------|
| 0  | White       |
| 96 | Biscuit     |
| 95 | Ice Grey    |
| 7  | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

8-11-2026 18:01 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.19.7/CSA B45.10  
 CSA B45.5/IAPMO Z124  
 ASTM E162  
 ASTM E662  
 UL 1795  
 CSA C22.2 No. 218.2  
 cUL Listed  
 UL Listed

## Technical Information

*All product dimensions are nominal.*

|                        |                                               |
|------------------------|-----------------------------------------------|
| Drain Location:        | Reversible                                    |
| Drain Hole Diameter:   | 2-3/16" (56 mm)                               |
| Minimum Flat for Door: | 2-7/16" (61 mm)                               |
| Basin Area, Bottom:    | 44-1/2" x 22-1/2" (1130 mm x 572 mm)          |
| Basin Area, Top:       | 59-9/16" x 25-1/2" (1513 mm x 648 mm)         |
| Water Depth:           | 18" (457 mm)                                  |
| Water Capacity:        | 85.8 gal (324.8 L)                            |
| Minimum Floor Load:    | 61.5 lbs/ft²                                  |
| Weight:                | 172 lbs (78 kg)                               |
| Cutout:                | Drop-in, 65-1/2" x 31-1/2" (1664 mm x 800 mm) |

## Material

- Acrylic

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable  
 K-1601 Bath/whirlpool footstop, removable  
 K-550 Undermount kit for select 66" Underscore bath models  
 K-706000-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass  
 K-706000-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass  
 K-706003-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass  
 K-706004-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass  
 K-706004-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass  
 K-706007-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain

## Technology

- Heated BubbleMassage™ technology warms and humidifies air before it enters the bath



Required Electrical Service

Three dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

|               |                    |
|---------------|--------------------|
| Blower:       | 120 V, 15 A, 60 Hz |
| Heater, Pump: | 120 V, 15 A, 60 Hz |
| Heater:       | 120 V, 15 A, 60 Hz |

Electrical Component Ratings


|         |                    |
|---------|--------------------|
| Blower: | 120 V, 10 A        |
| Heater: | 120 V, 5 A, 60 Hz  |
| Pump:   | 120 V, 7 A, 60 Hz  |
| Heater: | 120 V, 12 A, 60 Hz |

Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited  
Warranty|KOHLER® Hydrotherapy Components Five-Year  
Limited Warranty



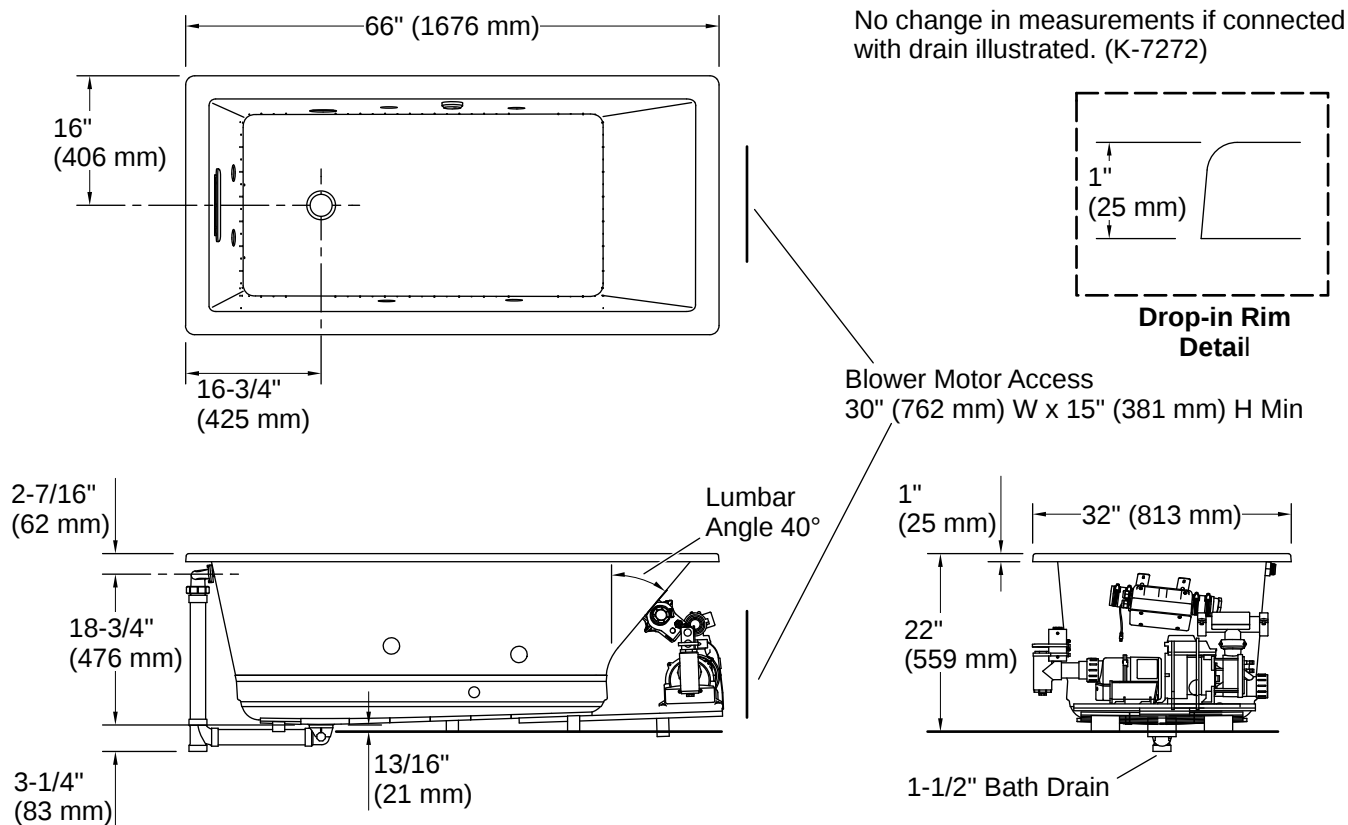

## Installation

- Drop-in or undermount
- Reversible drain
- 120 V electrical requirement allows for easy installation with standard outlet
- Requires three dedicated circuits
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.  
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

