



Anthem® Duo | K-37930

Two-outlet bath/shower digital control

Features

- Digital control with large temperature display and intuitive icons
- Precise temperature control for one shower outlet and bath faucet
- Easy-to-grip dial adjusts temperature and cycles through settings menu
- Eight user-definable presets allow you save your favorite shower settings
- Bath preset lets you replicate your desired temperature and fill duration
- Ice shower preset drops showerhead temperature to the coldest level for an invigorating experience
- System warm-up and pause features reduce water waste
- Eco mode limits total flow to 1.75 gpm (6.6 lpm) from one outlet for installations where water conservation or CEC compliance is desired
- Water usage appears on screen after each shower
- Available languages: English, Spanish, French, and Chinese



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 06:09 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

CSA C22.2 No. 14
CSA C22.2 No. 68
ADA
ICC/ANSI A117.1

Valves

Required Valve: Digital

Material

- Premium metal dial for durability and reliability

Recommended Products/Accessories

K-28213 Remote on/off button for digital thermostatic valve

Required Products/Accessories


- K-28209 Two-port digital thermostatic valve

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty



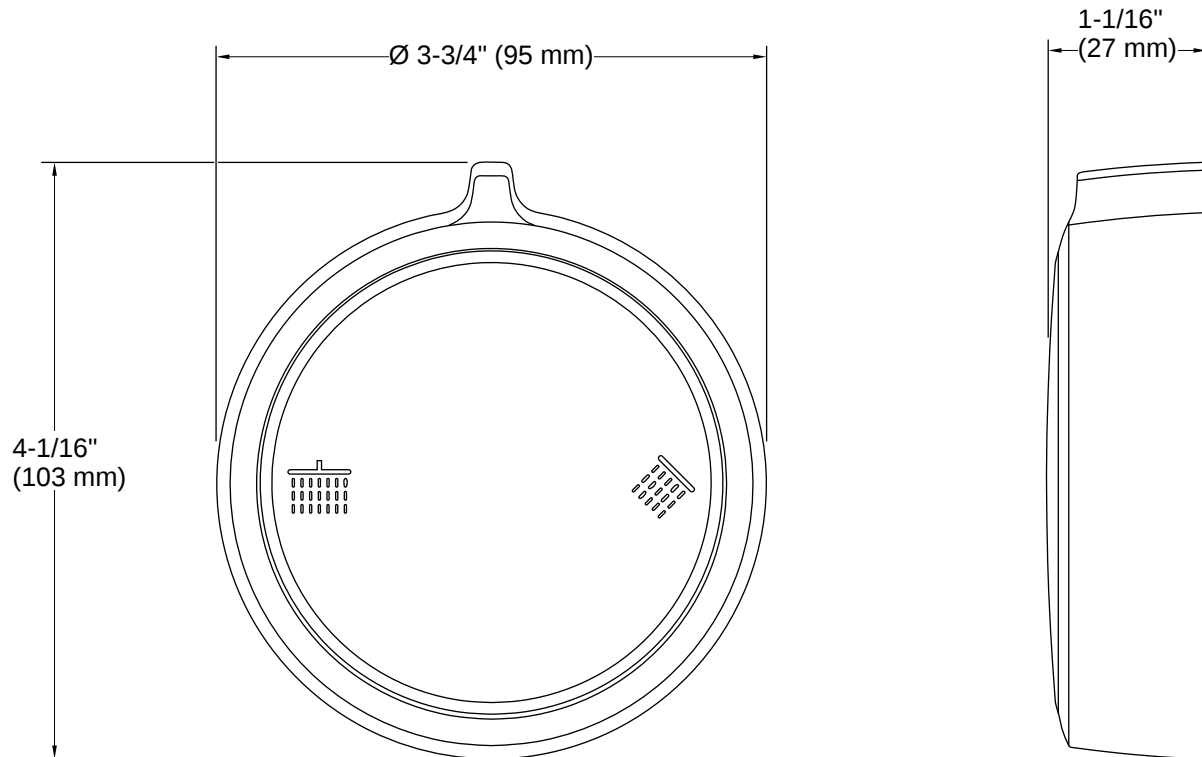

Installation

- Wall-mount
- Suitable for bath/shower applications
- After digital control is connected to valve and power source, follow on-screen prompts for easy setup; no Internet needed

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.

