



CORNER RACK PR7a or PR7b



If you need assistance, please call 1-877-ENCLUME
Enclume Design Products
24 Colwell Street, Port Hadlock, WA 98339


Enclosed you will find everything needed for the assembly and use of your pot rack. Two people make assembly and installation easier. The parts and hardware included are:

Hardware included:

- 4 – 1 ½" Flat head rivets
- 2 – 1 ½" Round head rivets
- 6 – Push nuts
- 4 – 1 ½" Screws
- 1 – Toggler® Kit Bag (4 Toggles)
- 12 – Angled pot hooks (PR7a)
- 6 – Angled pot hooks (PR7b)

Components included:

- 1 – Rack Body
- 1 – Grid

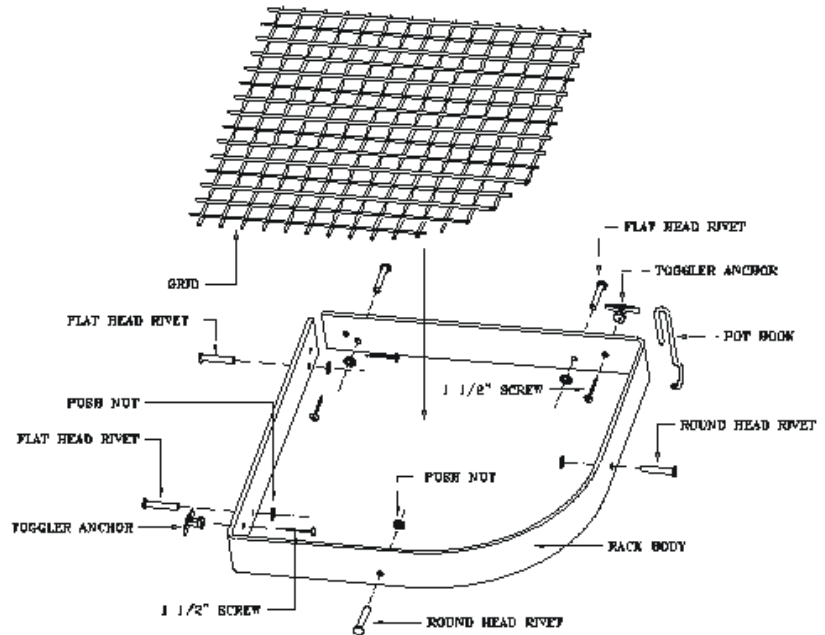

ASSEMBLY AND INSTALLATION INSTRUCTIONS

Rack Assembly

- 1) If your rack is plated it is best to keep the tissue on during installation to avoid fingerprinting.
- 2) Position the rack body flat on a table. Locate the six off-center holes. On the straight portions of the rack, insert the four flathead rivets so they protrude into the rack's interior. Slide a push nut onto each rivet and push toward the rack body so the rivets are held tightly. Find the two off-center holes next to the curve. Insert the two round head rivets. Lock the push nuts as you did above. The two centered holes on each straight side are mounting holes, not rivet holes.
- 3) If mounting in solid wood, use the 1 ½" screws. If mounting in sheetrock use the Toggles (instructions in the kit). For instance, if two of the marked holes are in wood and two are not, use two wood screws provided and then two of the Toggles in the other two holes where only sheetrock is found. In most homes, the two corner holes often find wood. The holes are placed on 32" centers.
- 4) Position the rack at the desired location. Measure from the ceiling to the inside and outside corners of both sides to ensure it is level. Mark the centers of the 4 mounting holes. If you are working on a sheet rocked wall, drive a small nail as a test to determine if the wall is hollow or has a wooden support. If it is not convenient to hang your rack directly into wood joists you may use the included DRYWALL anchors enclosed with your rack. See Toggler® brand manufacturer recommendations for weight limits included in the instructions in the Toggler kit.
- 5) Place the grid on the rivets. Distribute your cookware uniformly around the rack and grid.

WARNING: It is important that your pot rack is assembled correctly. If the unit is assembled or used incorrectly, it could become unstable and collapse, possibly causing injury.

LIMITED WARRANTY: This product is warranted to be free of material defects, other than that from normal use, for a period of five years from the date of purchase. Customer's exclusive remedy shall be the repair or replacement of the defective product and shall be subject to the following conditions: (1) notice of any defect is received by Enclume within the warranty period and (2) customer returns the defective product to Enclume Design Products, 24 Colwell St., Port Hadlock, WA 98339, postage prepaid within 20 days following a return authorization number (which may be obtained by telephoning the number at the top of this instructions) being provided to the customer by Enclume. There are no other warranties, expressed or implied. THERE ARE NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ENCLUME SPECIFICALLY DISCLAIMS ANY AND ALL INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE PURCHASE OR USE OF ENCLUME'S PRODUCTS.