

### Product Information

Applicable product:	
6' (1.8 m) BubbleMassage bath – less chromatherapy	K-865-G
6' (1.8 m) BubbleMassage bath – with chromatherapy	K-865-GC

Fixture*:	
Bathing well:	
Basin area, bottom	49" (1245 mm) x 22" (559 mm)
Basin area, top	62" (1575 mm) x 28" (711 mm)
Weight	455 lbs (206.4 kg)
To overflow:	
Water depth	17" (432 mm)
Capacity	89 gal (336.9 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	70-1/4" (1784 mm) x 34-1/2" (876 mm)
Cut-out for undermount	K-582

Blower motor:	Heater	V	Hz	A
	300 W	220-240	50/60	3

### Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor/control	220-240 V, 15 A, 50/60 Hz

### Installation Notes

Install this product according to the installation guide.


**NOTICE: If the blower motor and check valve are relocated**, two access panels are required. Locate one access panel at the blower motor/control location and the other at the control box. Locate the blower motor and check valve together.

Floor support under bath must provide for a minimum of 69 lbs/square foot (333 kg/square meter) loading.

Splitting the deck/surround is recommended if installing into a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.

Fixture conforms to ASME Standard A112.19.1/CSA B45.2. All dimensions are nominal.

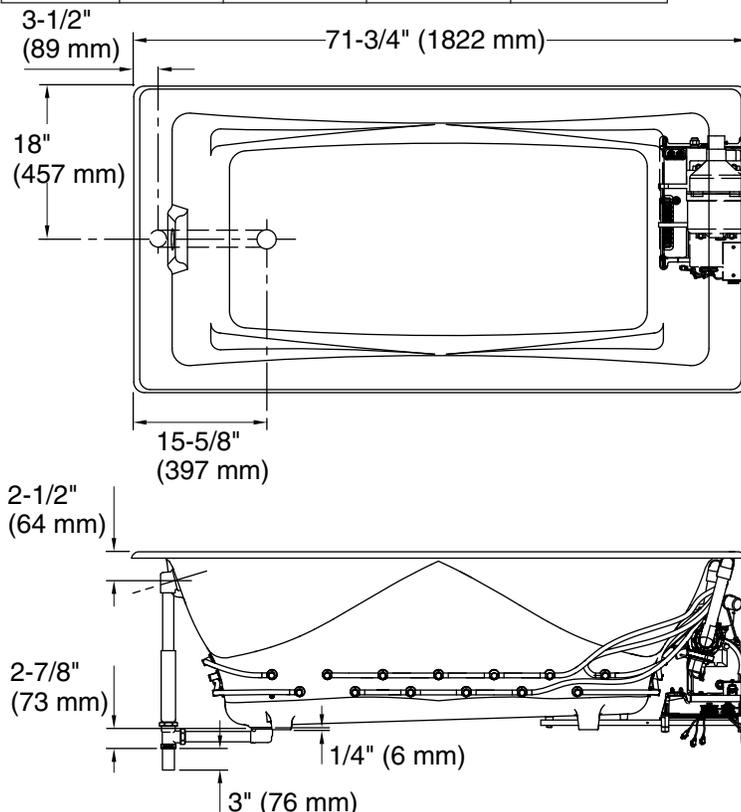

No change in measurements if connected with drain illustrated. (K-7169-AF)

Blower Motor/Control Access  
 34" (864 mm) W x  
 15" (381 mm) H

