



# K-45202

8" rainhead, 2.0 gpm

## Features

- Optimized sprayface creates a denser uniform spray pattern for consistent coverage and feeling of warmth
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.0 gpm (7.6 lpm) maximum flow rate
- 1/2" NPT connection
- Requires K-7392, K-7394, or K-7396 shower arm (sold separately)



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-29-2026 23:46 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992

## Technical Information

*All product dimensions are nominal.*

### Flow Rate

Shower/Rainhead Rated      2 gpm (7.6 l/min)  
Maximum Flow:

## Material

- Solid-brass construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Technology


- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty



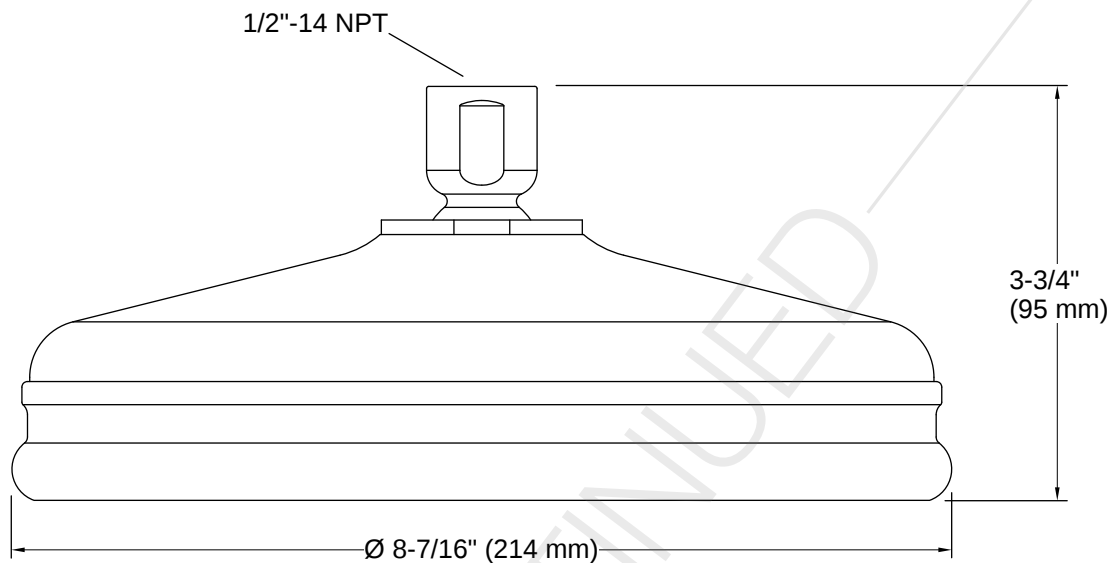

## Installation

- Ceiling-mount

## Installation Notes

*Install this product according to the installation instructions.*

**NOTICE:** To ensure your valve will provide safety at the lowest flow rates, choose an automatic compensating valve with the appropriate minimum flow rating. For a showerhead rated at 2.0 gal/min (7.6 l/min) maximum, use with an automatic compensating valve rated at 1.6 gal/min (6.1 l/min) or less.

