

# OUTDOOR 3PCS ROCKING CHAIR SET

## ASSEMBLY MANUAL









### ASSEMBLY INSTRUCTIONS




- Prior to assembly, make sure you lay out and identify all the parts listed below in the parts list.
- Tighten all nuts and bolts securely. All bolts should be hand tightened before use. Never use power tools or excessive force during assembly and tightening of bolts.



Part list


Chair

Part	Description	Qty
A	 Left Leg	1
B	 Right Leg	1
C	 Seat	1
D	 Back	1
E	 Cap	12
F	 M6*16 Screw	6
G	 M6*30 Screw	6
H	 Washer	12

Part	Description	Qty
I	 Screw driver	1
J	 Seat Cushion	1
K	 Back Cushion	1


- 1.** Connect Left Leg (Part A) and Right Leg (Part B) with Seat (Part C) using Screws (G), Washer (H) and Cap (E) as shown in diagram.

⚠ Don't fully tighten all screws until Final step.

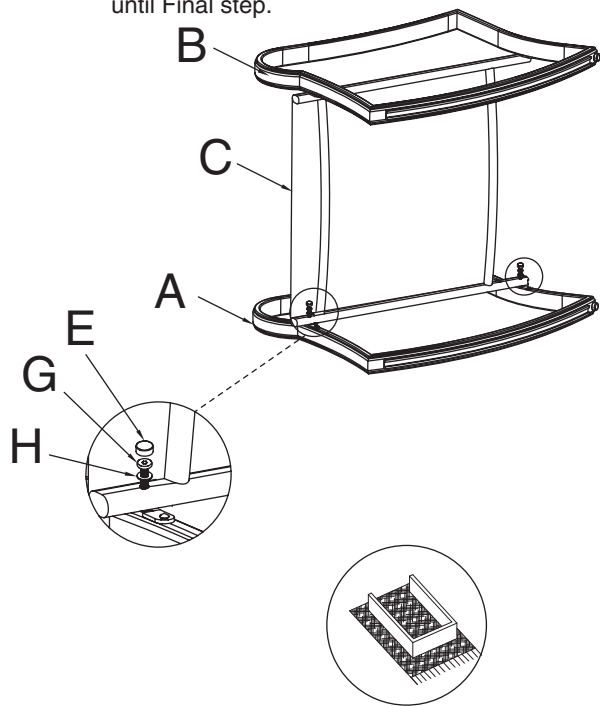


Reminder: All parts must be placed on carpet during assembly.

- 2.** Connect Left Leg (Part A) and Right Leg (Part B) with Seat (Part C) using Screws (F), Washer (H) and Cap (E) as shown in diagram.

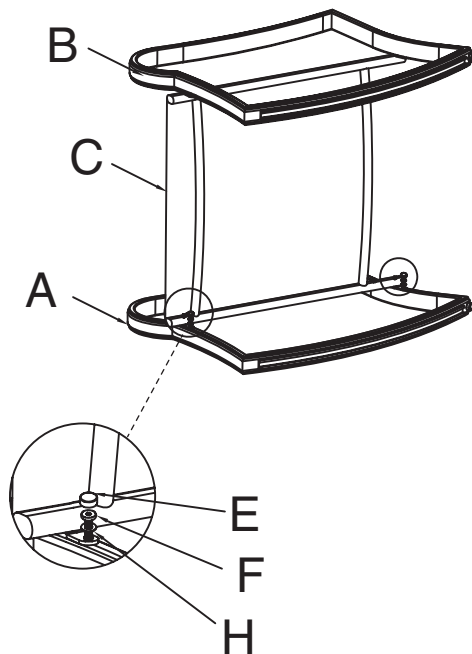


- 3.** Connect Back (Part D) with Legs (Parts A&B) using Screws (G), Washer (H) and Cap (E) as shown in diagram.

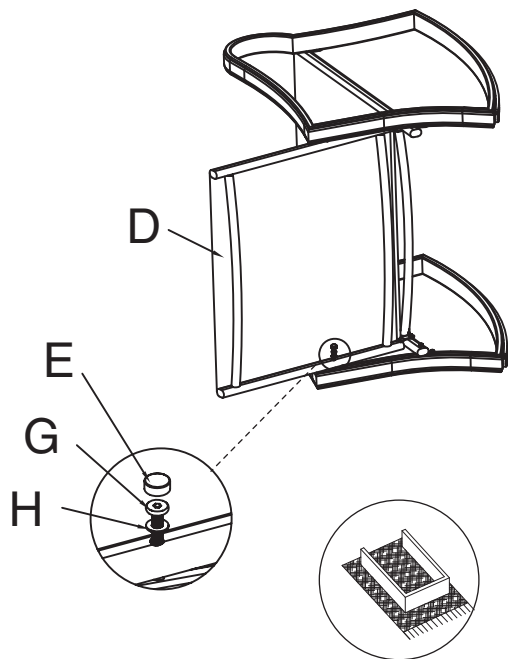


Reminder: All parts must be placed on carpet during assembly.

- 4.** Connect Back (Part D) with Legs (Parts A&B) using Screws (F), Washer (H) and Cap (E) as shown in diagram.

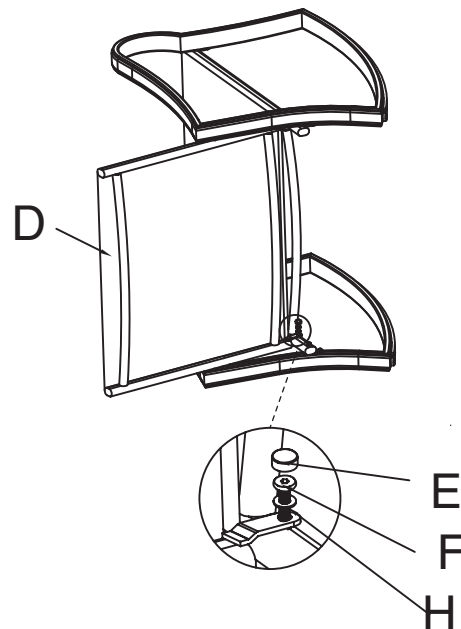




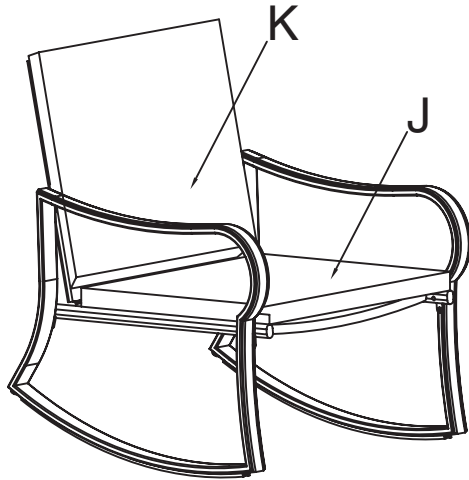




# 5. Place Back Cushion (Part K) and Seat Cushion (Part J) on chair.



Tighten and check all screws before using  
on level ground  
Repeat for other rocking chair.



## Part list

## Table

Part	Description	Qty
A1	 Top Top	1
B1	 Glass Glass	1
C1	 Connector Connector	1
D1	 Leg Leg	4
E	 Cap Cap	12
F1	 M6*16 Screw	4
G1	 M6*22 Screw	8
H	 Washer Washer	12


- 1.** Connect Leg (Part D1) with Top (Part A1) using Screw(F1), Washer (H) and Cap (E).

⚠ Don't fully tighten all screws until Final step.

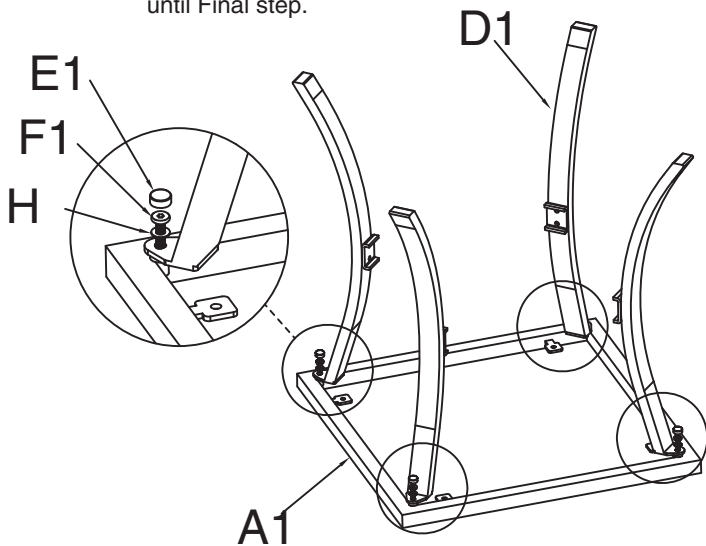


Reminder: All parts must be placed on carpet during assembly.

- 2.** Connect Connector (Part C1) with Leg (Part D1) using Screw(G1), Washer (H) and Cap (E).

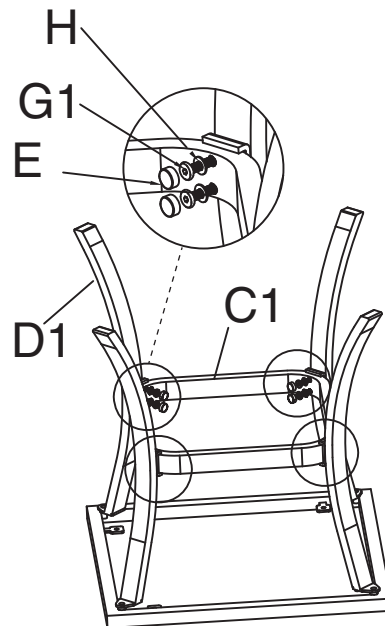

**3.** Place Glass (Part B1) on top.

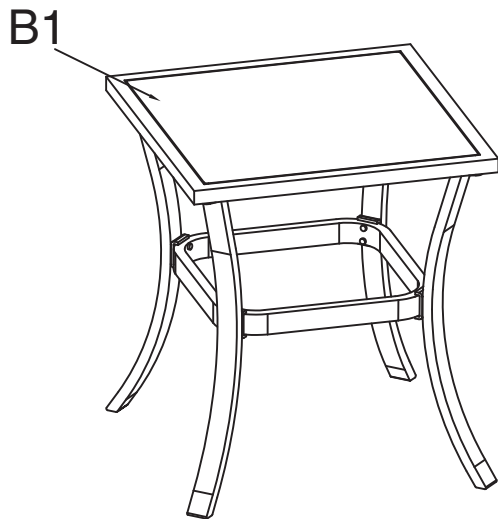

Tighten and check all screws before using  
on level ground.