



ASSEMBLY INSTRUCTION

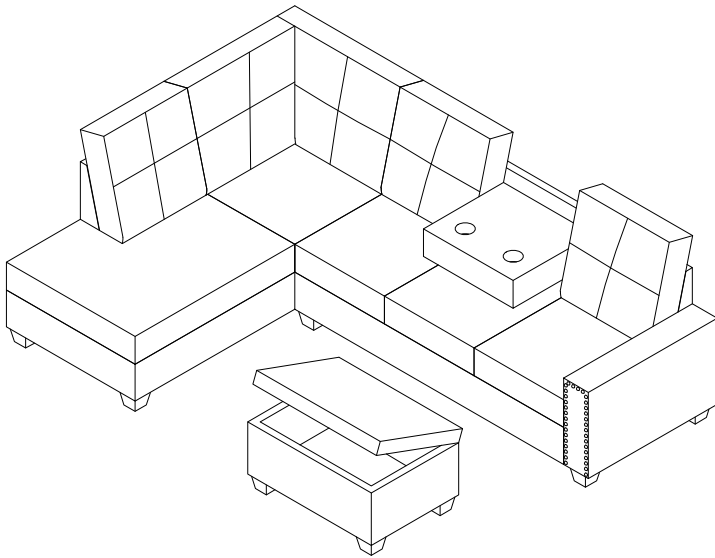


OPTION 1: CHAISE ON LEFT

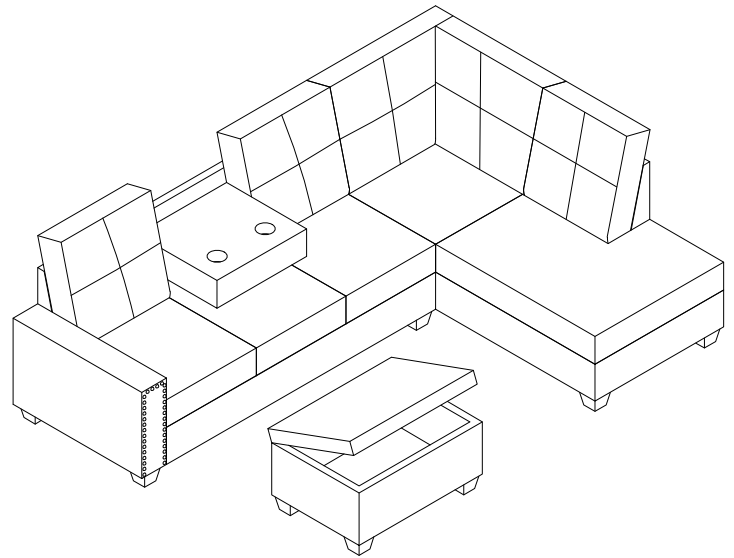


OPTION 2: CHAISE ON RIGHT

PARTS

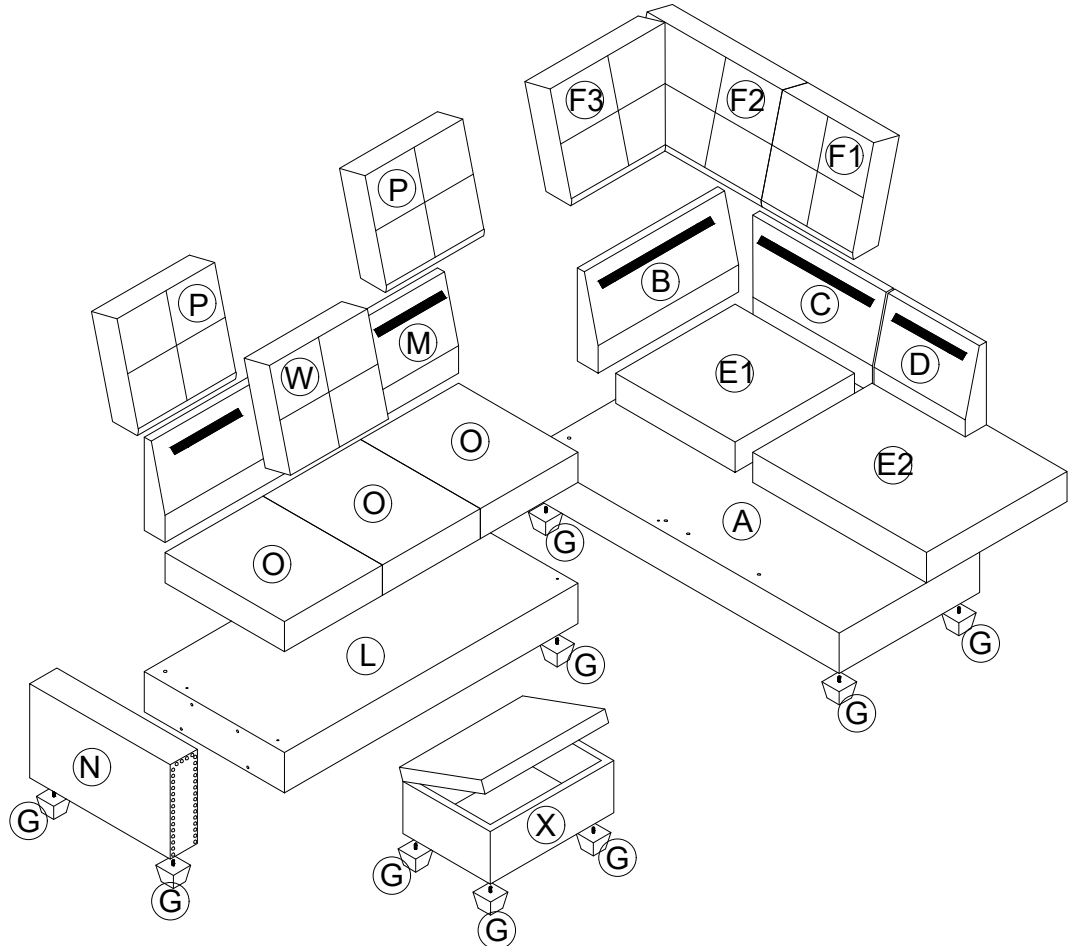


TIPS

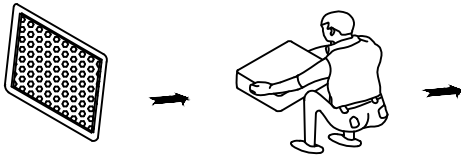


Please allow at least 24 hours for the cushions to recover to its natural state after removing from the package.

COMPONENT LIST

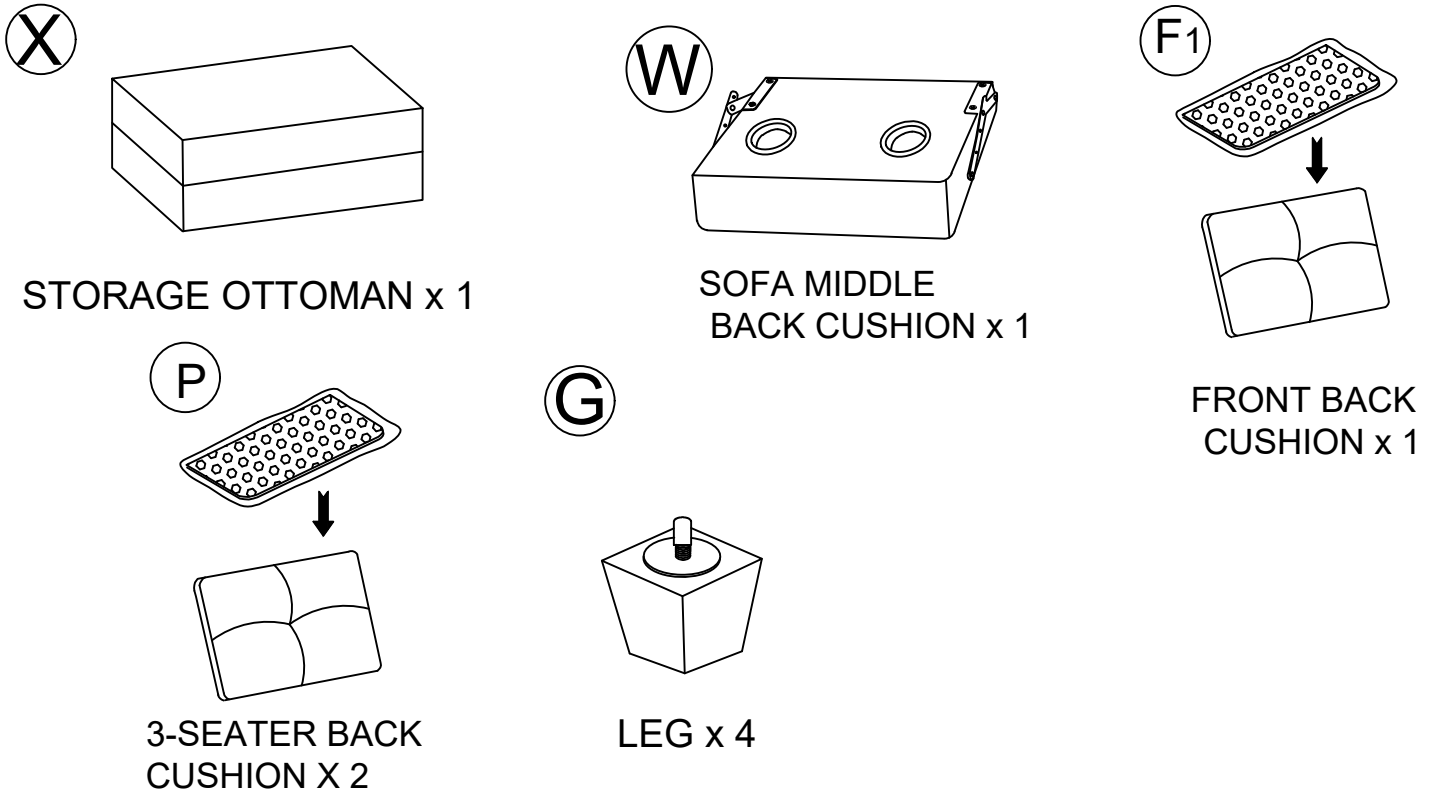


COMPONENT LIST

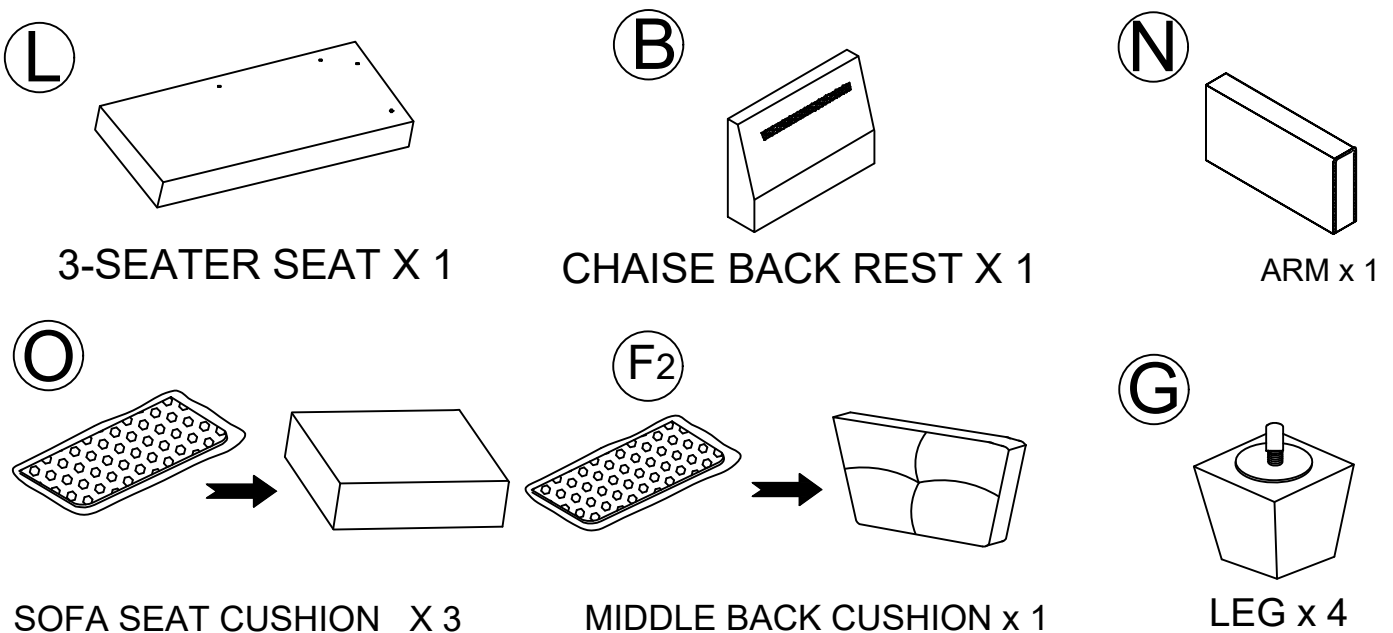


COMPONENT LIST

(A)

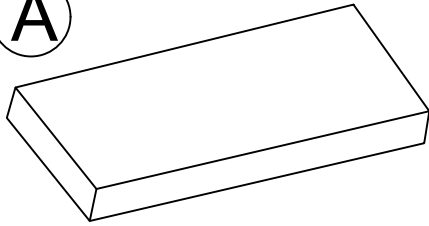


CHAISE SEAT x 1

(C)




RSF CHAISE
BACK REST X 1

(D)




CHAISE BACK
REST x 1

(M)




BACK REST WITH MIDDLE
BACK CUSHION x 1

(E1)

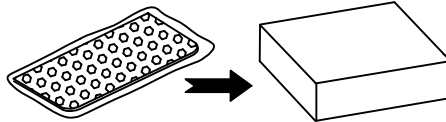


REAR SEAT CUSHION x 1

(E2)




FRONT SEAT CUSHION x 1

(F3)



REAR BACK CUSHION x 1


(G)



LEG x 4


HARDWARE

(H)



FLAT WASHER
Ø5/16" x 22MM
13PCS

(I)




HEX NUT
Ø5/16" x 12MM
9PCS

(J)




BOLT Ø5/16" x 90MM
9PCS

(R)



BOLT Ø1/4" x 65MM
4PCS

(T)




BOLT Ø1/4" x 20MM
4PCS

(Q)




METAL CONNECTOR
2PCS

(S)



ALLEN KEY
1PC


(K)



OPEN WRENCH
1PC


Step 1:

Remove the hardware and the leg box from packet.
Place all parts on a clean, smooth surface

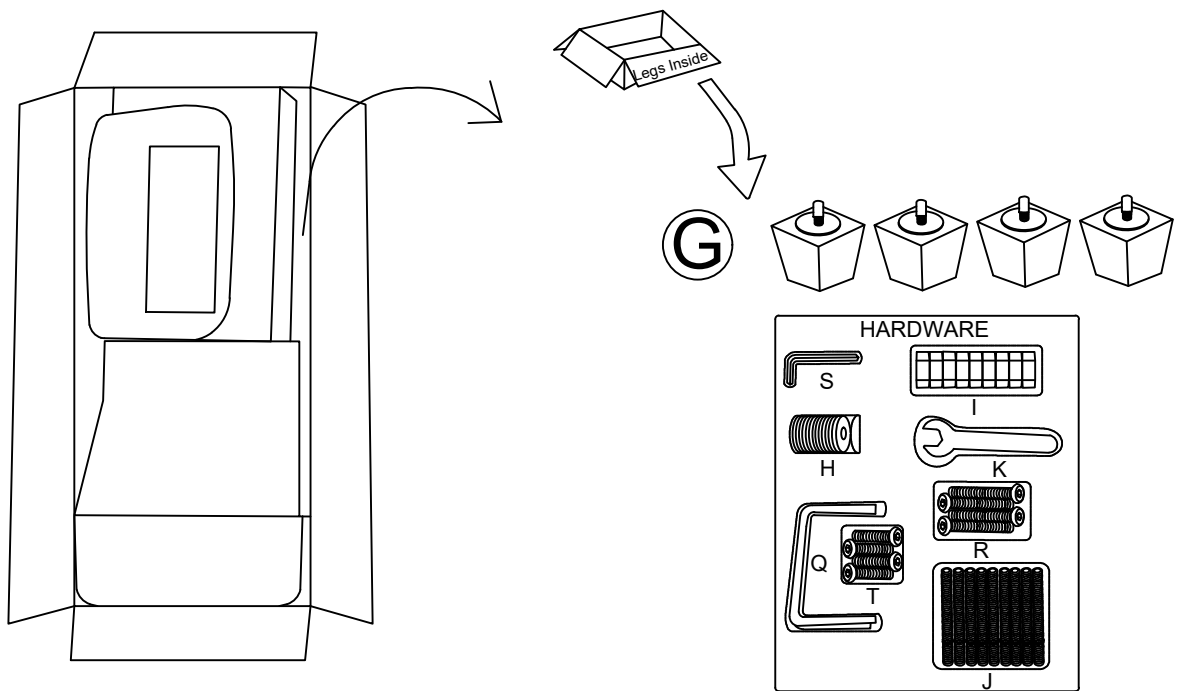

Step 2:


Manually screw J to C , B and D as shown.

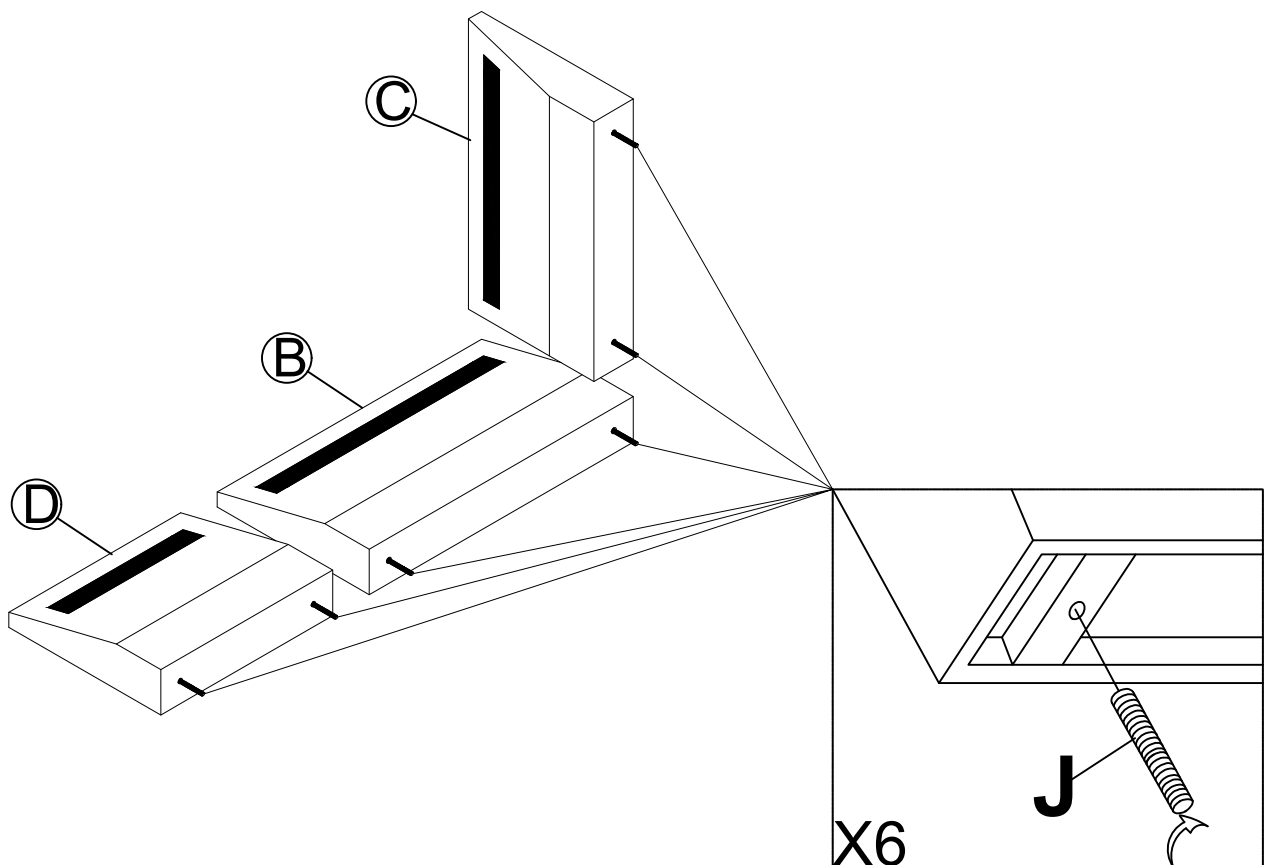


Step 3:

Align the backrest B,C and D with the hole in A. Fix it by using H&I

Option 1

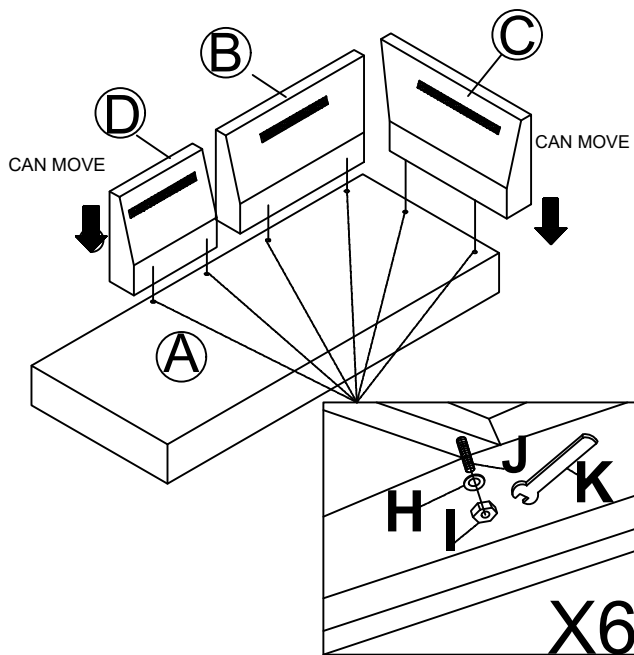



Option 2

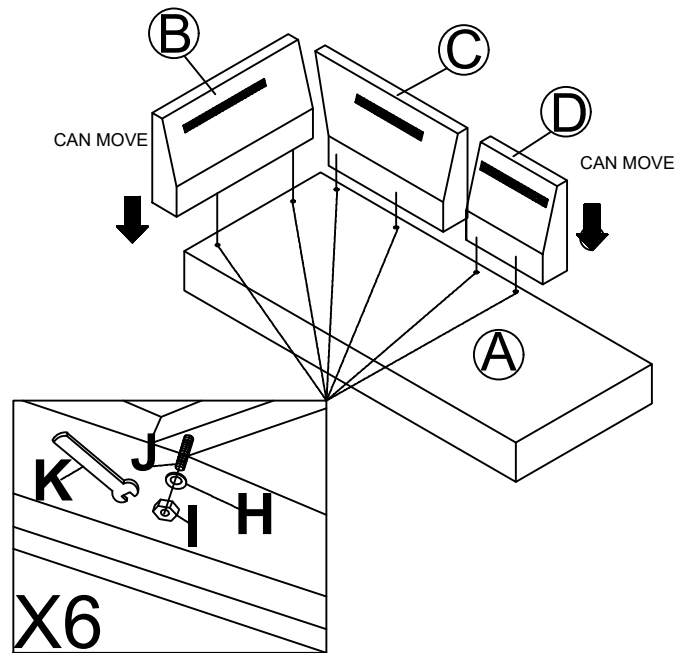



Step 4:

Manually legs G x 4 to A , as shown

▲ Please remove the protective cap on the tip of thread before assembling.

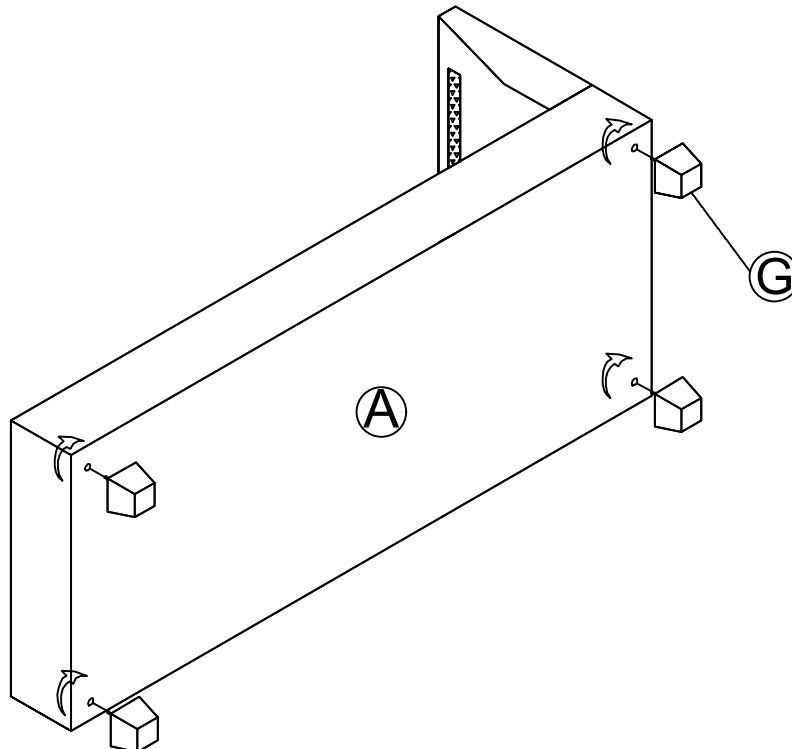



BOTTOM VIEW

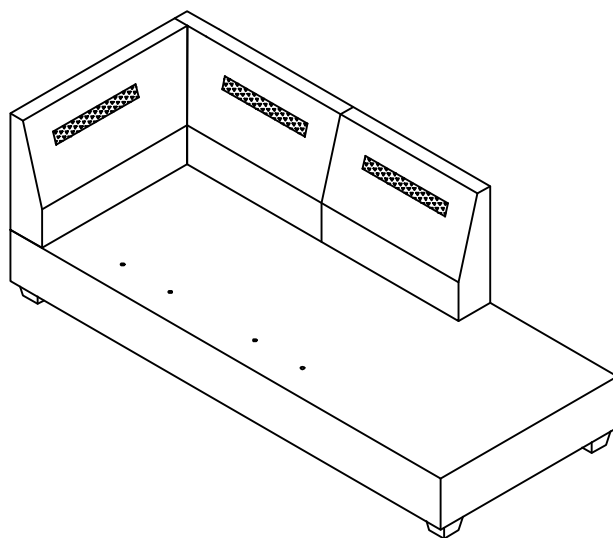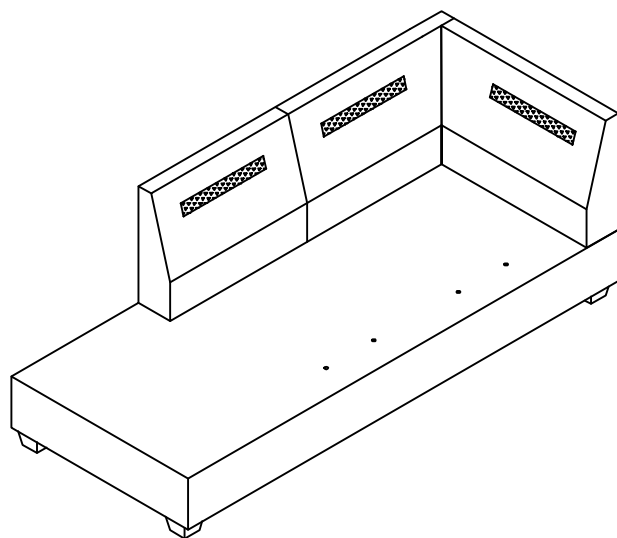

Step 5:


Manually screw J to M as shown.

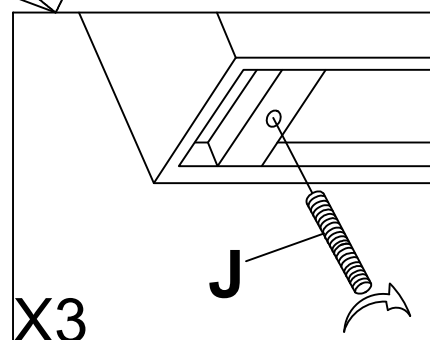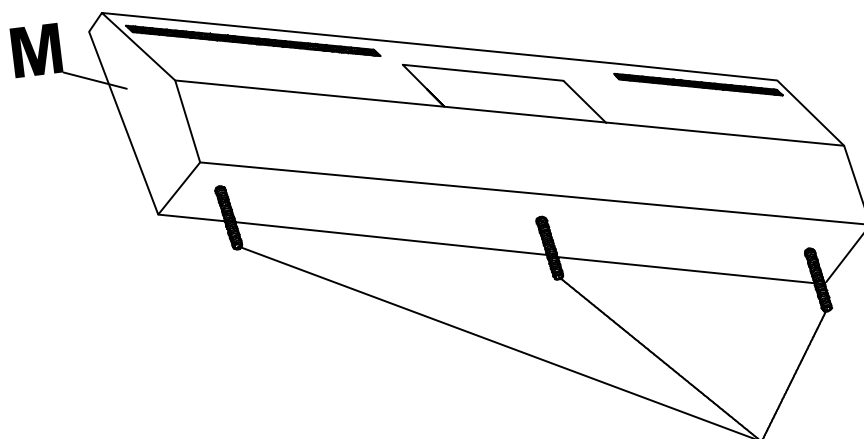


Step 6:

Align the backrest M&N with the hole in L. Fix it by using H & I.

Option 1

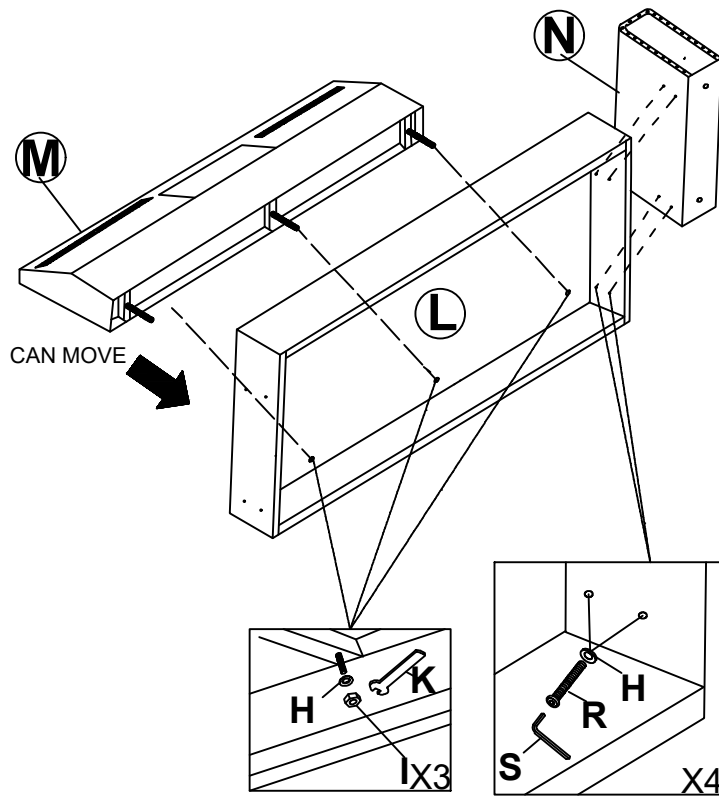


Option 2

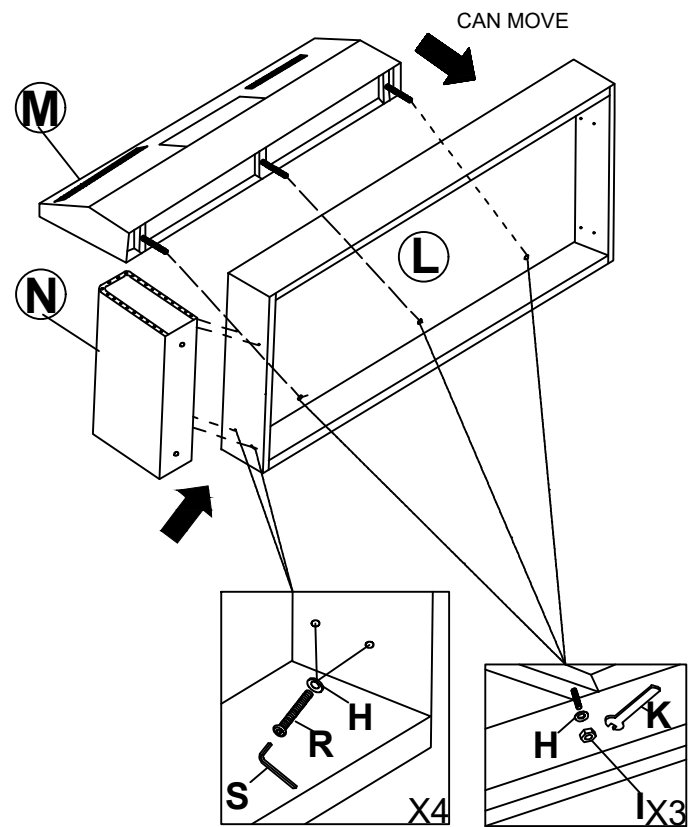



Step 7:

Manually legs G x 4 to L , as shown

▲ Please remove the protective cap on the tip of thread before assembling.

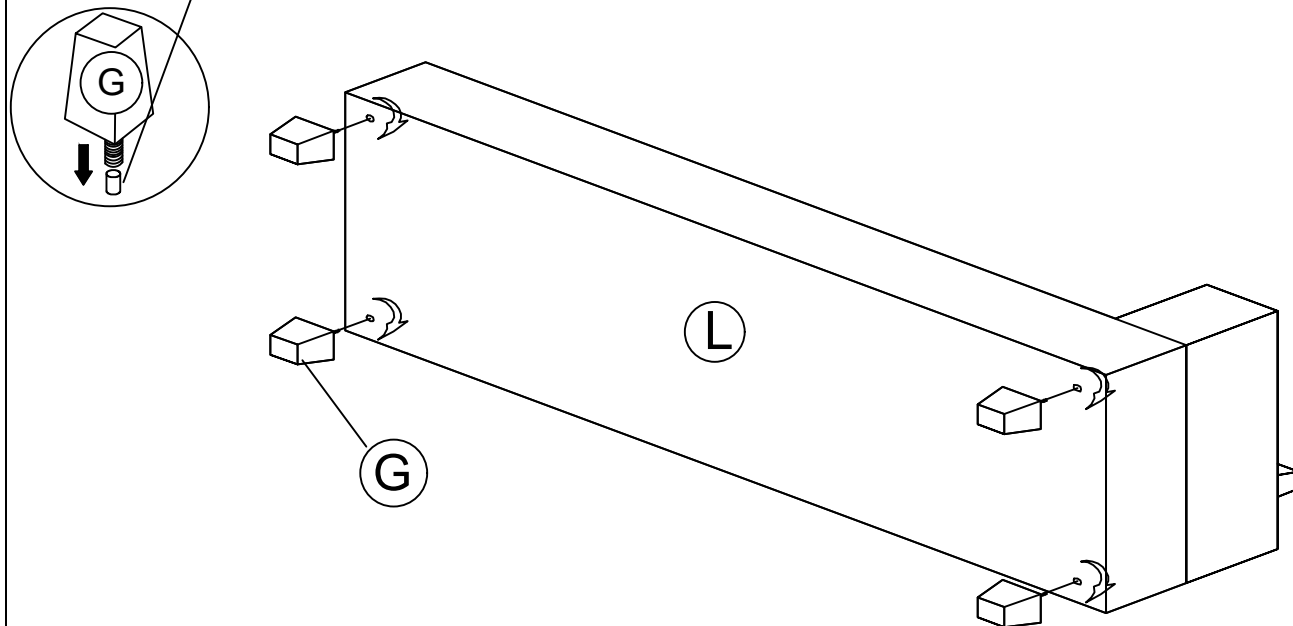


BOTTOM VIEW

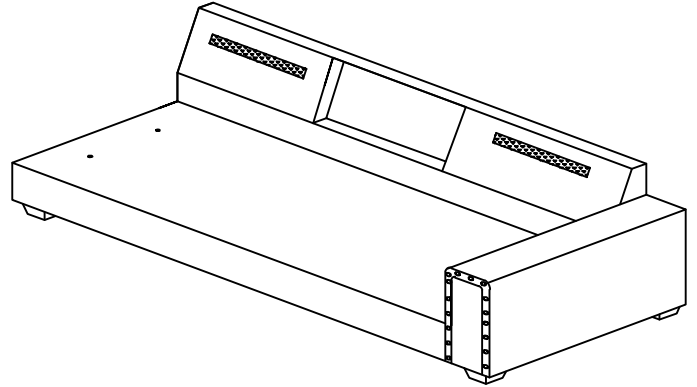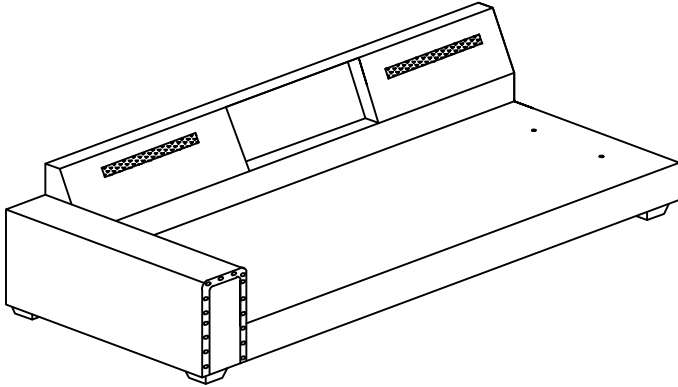


Step 8:

Attach base of A with L.

Option 1

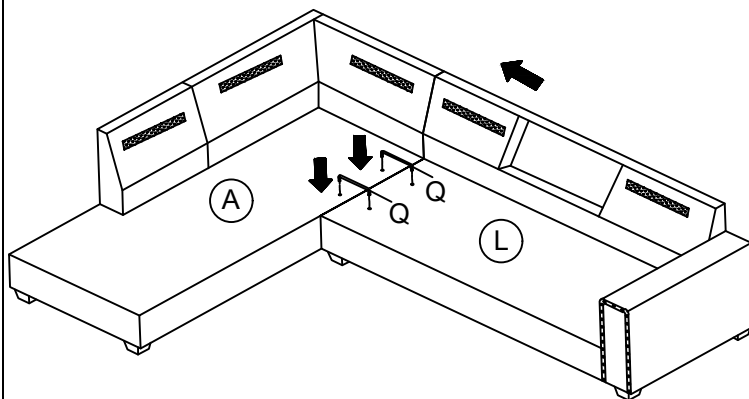


Option 2

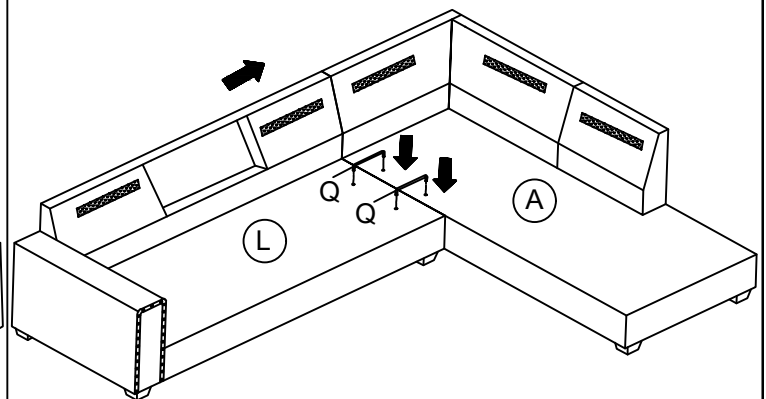


Step 9:

Attach W to the back rest M by using T x 4.

Option 1

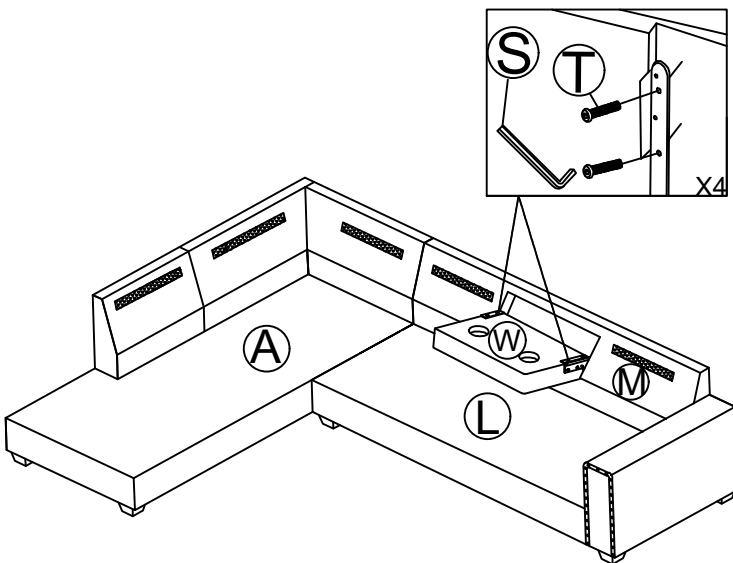

Option 2

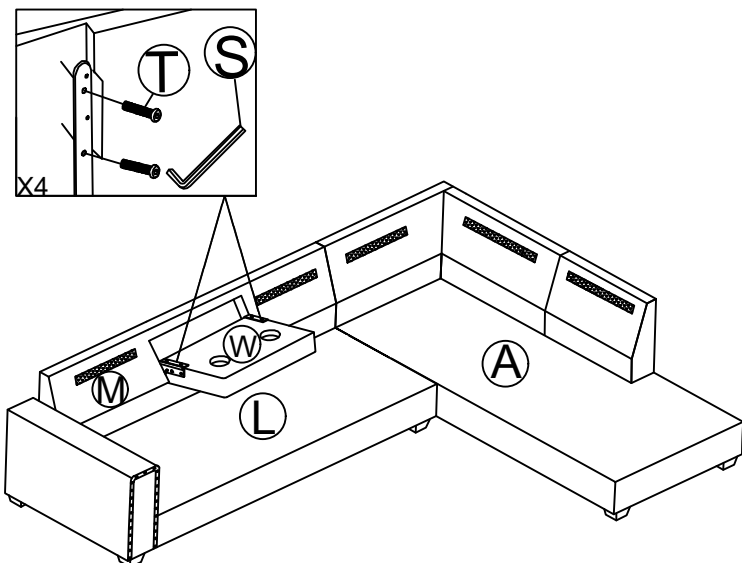


Step 10:


Remove seat cushion from their package

Place E1x1, E2x1, and Ox3 onto the sofa as show below.

Option 1

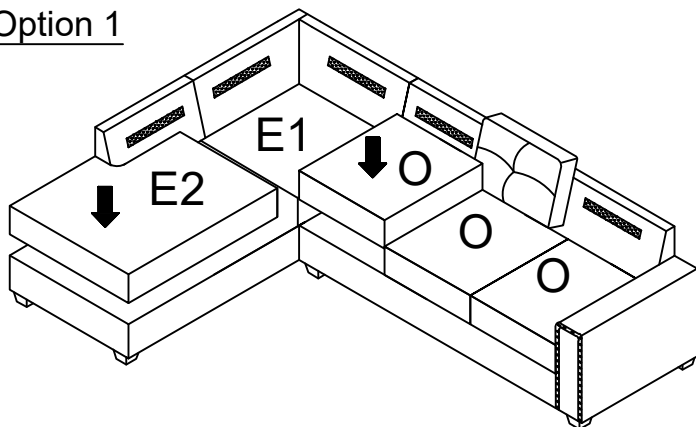

Option 2

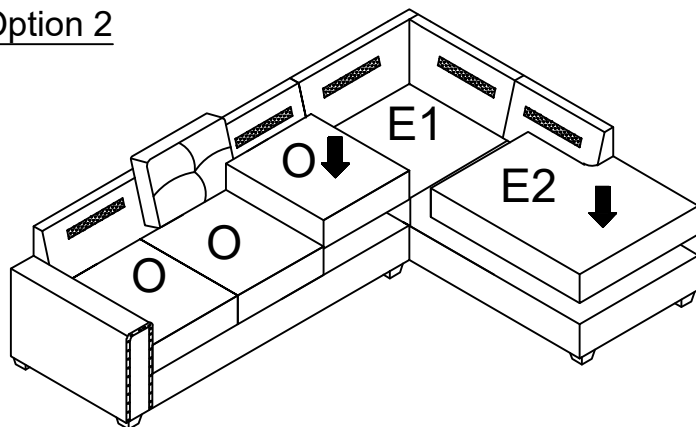


Step 11:


Remove back cushion from their package

Place F1x1, F2x1, F3x1 and Px2 onto the sofa. As show below.

Option 1

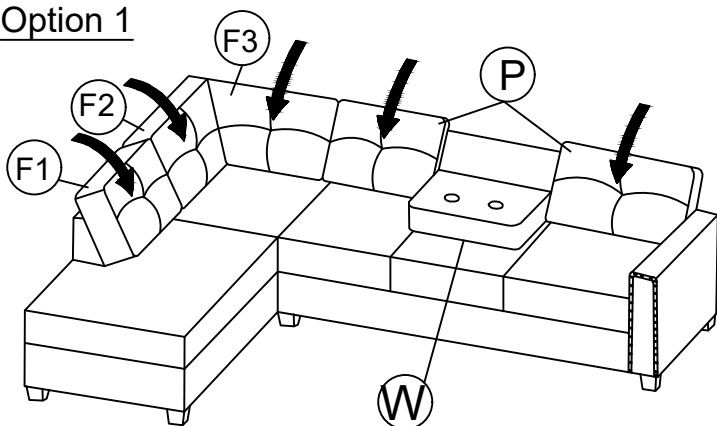




Option 2

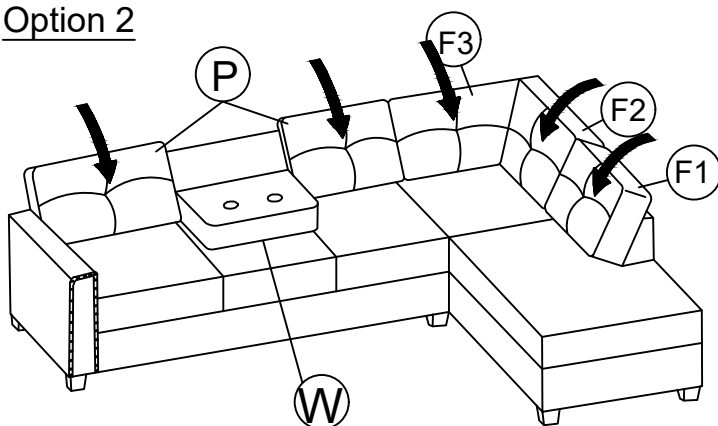



Step 12:

Manually legs G x 4 to X, as shown.

▲ Please remove the protective cap on the tip of thread before assembling.

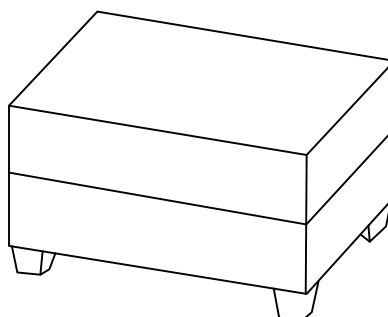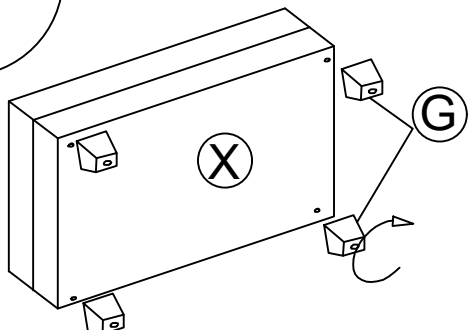


Tips: Stretch, pull down and pat seat cushions and back cushions to return nature shape and state.

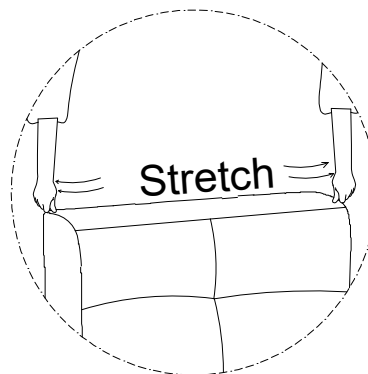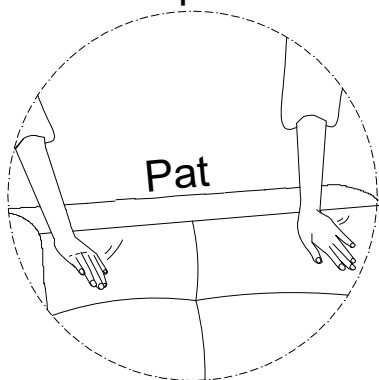


Assembly Completed !

THE CONSOLE PIECE CAN BE DROPPED DOWN AND TURN INTO AN ARMREST PANEL WITH CUP HOLDERS

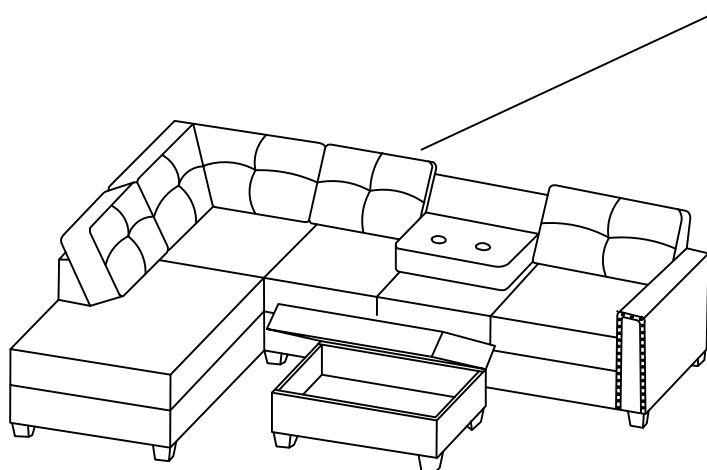

OPTION 1: CHAISE ON LEFT

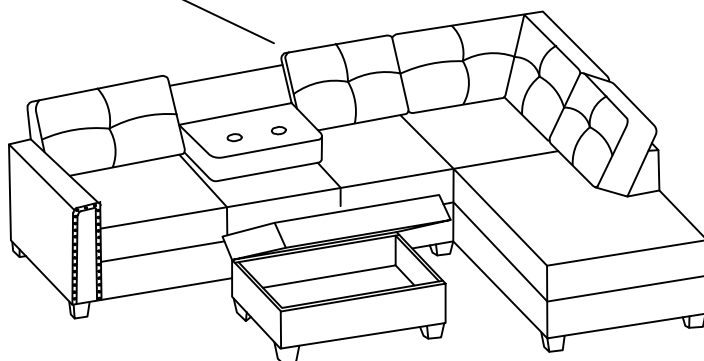

OPTION 2: CHAISE ON RIGHT