


Installation & Assembly

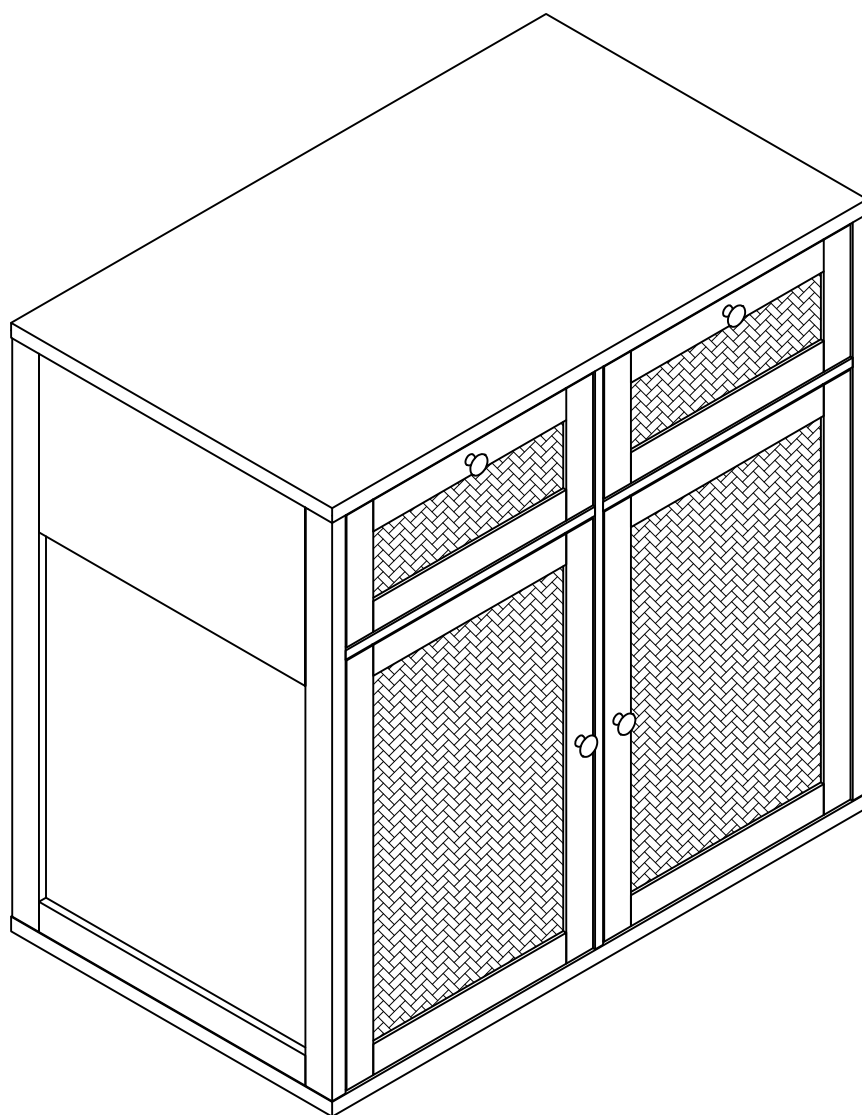

Made In China

Assembly Instructions

Before beginning the assembly process, please read and save these instructions for reference. Following these guidelines will ensure a smooth and successful assembly of your product.

1. Part Identification:

Carefully separate and identify all the parts included in your package. Confirm that you have all the components listed in the instruction manual. This step will help you avoid any missing or misplaced parts during assembly.

2. Work Surface:

To prevent any scratches or damage to the product, assemble it on a soft mat or a similar protective surface. This will provide a cushioned area for the components and protect the surfaces from unwanted marks.

3. Step-by-Step Assembly:

Follow the assembly instructions provided, proceeding one step at a time. Take care to understand each step properly before proceeding to the next one. This sequential approach ensures that the assembly is done correctly and minimizes the chance of errors.

4. Proper Screw Seating:


When attaching screws and nuts, it is essential not to fully tighten them until all screws are correctly seated. By partially tightening each screw and nut initially, you can ensure that they are aligned properly and fit securely before final tightening.

5. Avoid Over-Tightening:

While each screw and nut should be tightened correctly, it is crucial not to over-tighten them. Over-tightening can cause damage to the product or compromise its structural integrity. Use the appropriate amount of force to secure the components without excessive tightening.

If you encounter any questions or problems during the assembly process, please do not hesitate to contact us. We strive to provide excellent customer support and will respond to your inquiries within 24 hours. Our team will offer you a suitable solution to address any concerns you may have.

Parts List

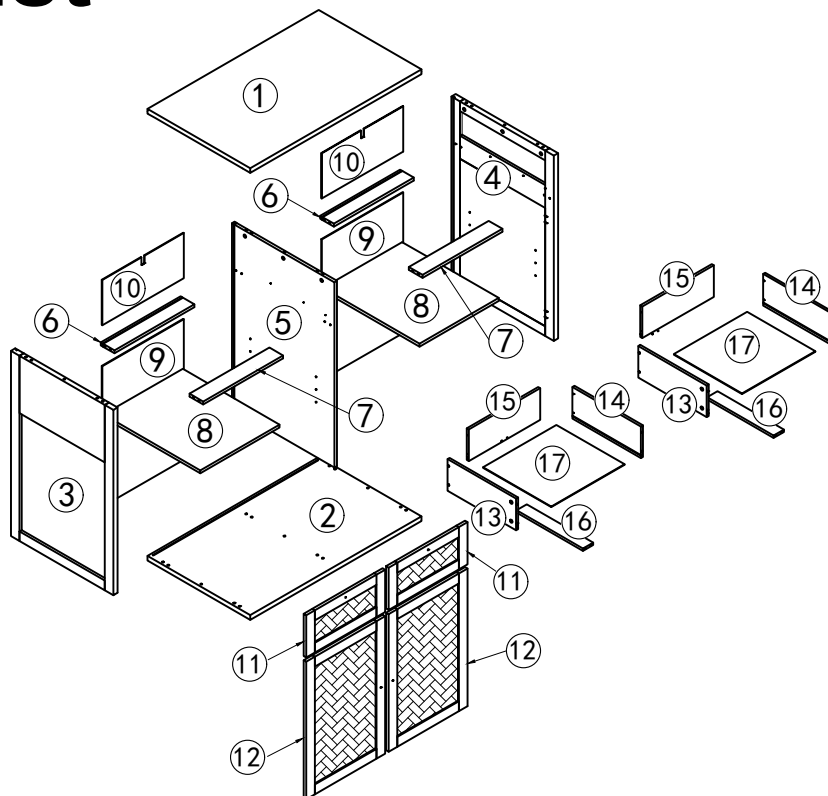


Hardware List

Ax37 M6x35mm	Bx37 Ø15x10mm	Cx12 Ø8x30mm	Dx37 Ø20mm	Ex9 M7x50mm	Fx4 Hinges	Gx66 Ø3.5x12mm	Hx16 Backboard clip
Ix2 65x32x15mm	Jx2 Plastic expansion screw	Kx1 M4	Lx14 Ø4x35mm	Mx8 Ø5x13mm	Nx6 Ø20x9mm	Ox4 Hand in hand	Px4 M4x20mm
CLx2 400mm	CRx2 400mm	DLx2 400mm	DRx2 400mm				


Code	Description	Quantity
A	M6x35mm Cam bolt	37+2
B	Ø15x10mm Cam lock	37+2
C	Ø8x30mm Wood dowel	12+2
D	Ø20mm Hole sticker	37+2
E	M7x50 Broken tail screw	9+1
F	Hinges	4
G	Ø3.5x12 self-tapping screw	66+2
H	Backboard clip	16+2
I	Lock wall accessories	2
J	Plastic expansion screw	2
K	Hexagon socket wrench	1

Code	Description	Quantity
L	Ø4x35 self-tapping screw	14+2
M	Movable Shelf	8+1
N	Ø20x9mm Felt foot nail	6
O	Hand in hand	4
P	M4x20mm Handle screw	4+1
CL	400mm Second section guide rail left outer rail	2
CR	400mm Two section guide rail, right outer rail	2
DL	400mm Two section guide rail left rail	2
DR	400mm Two section guide rail right rail	2


Step 1

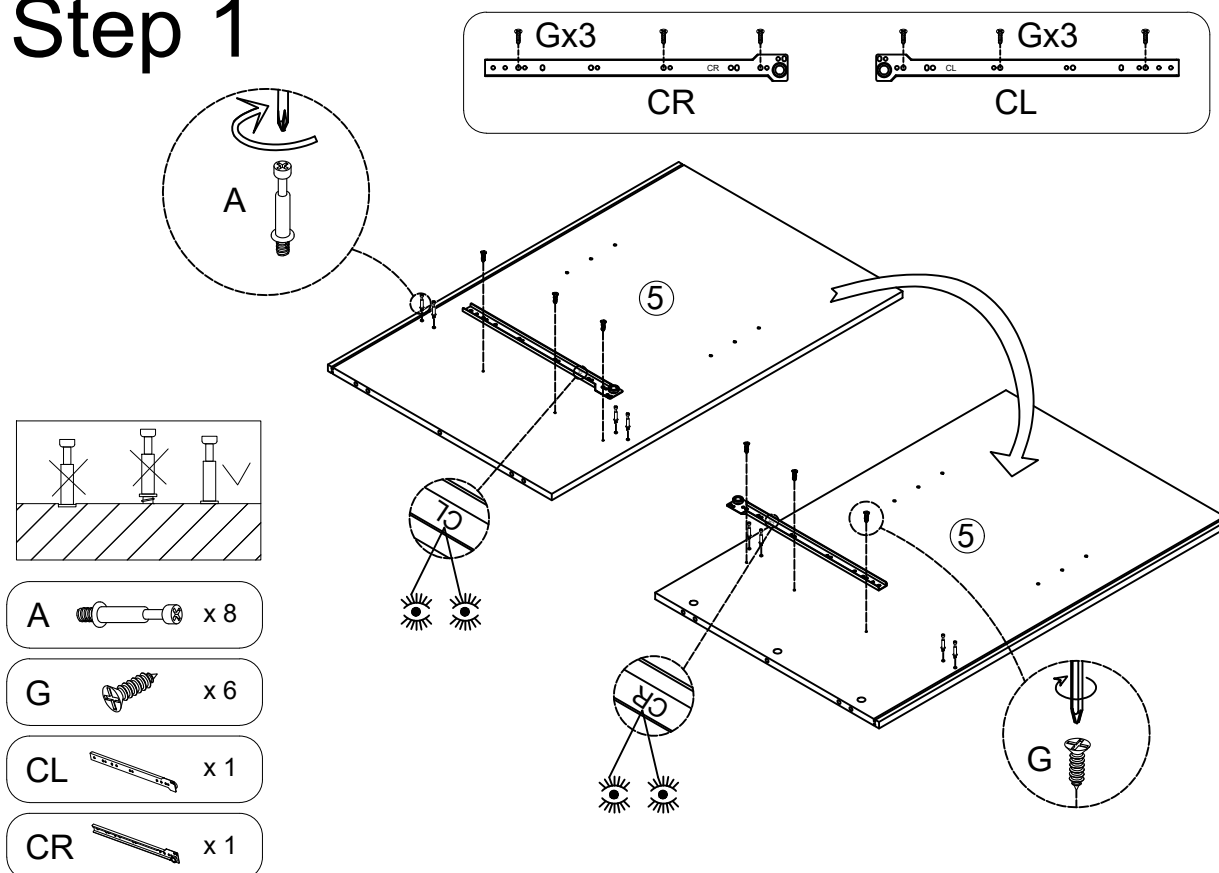


Step 2

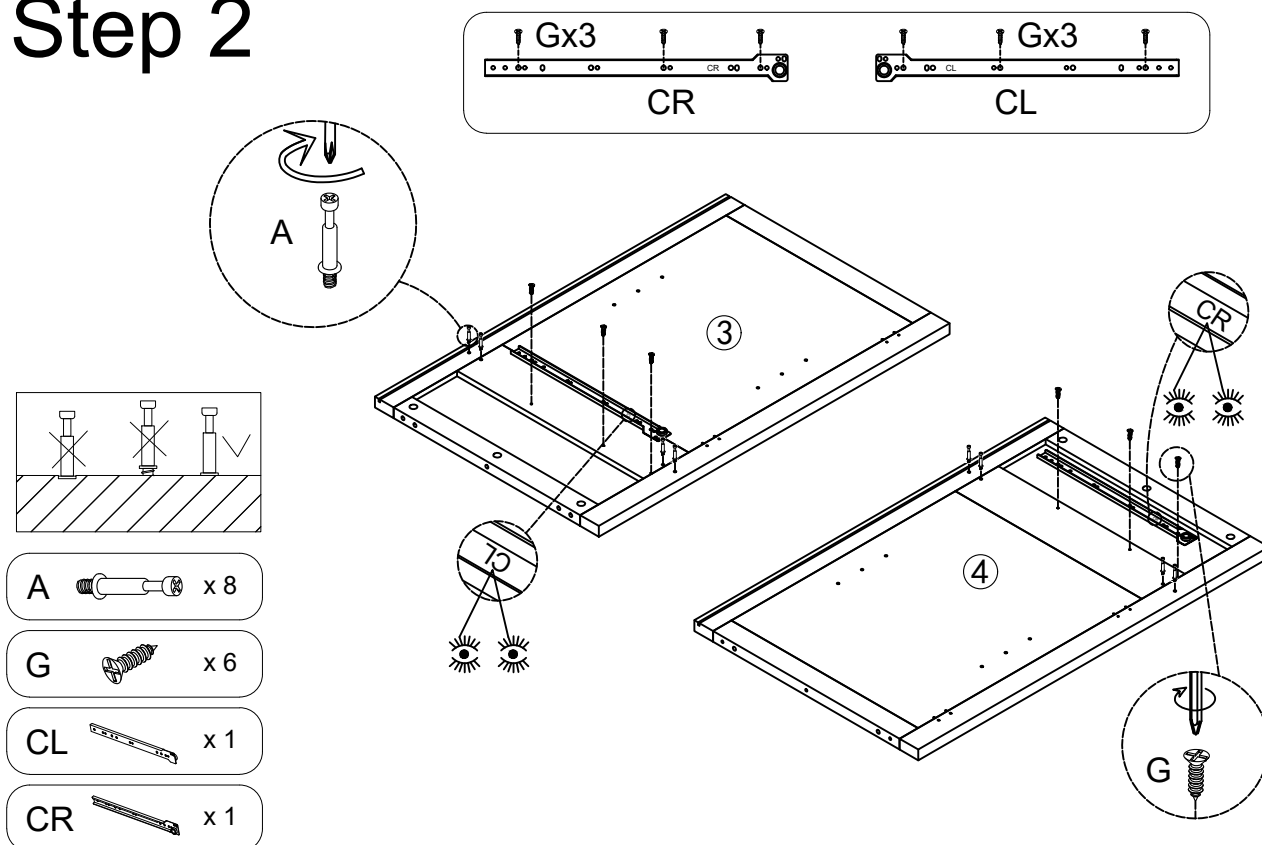


Step 3

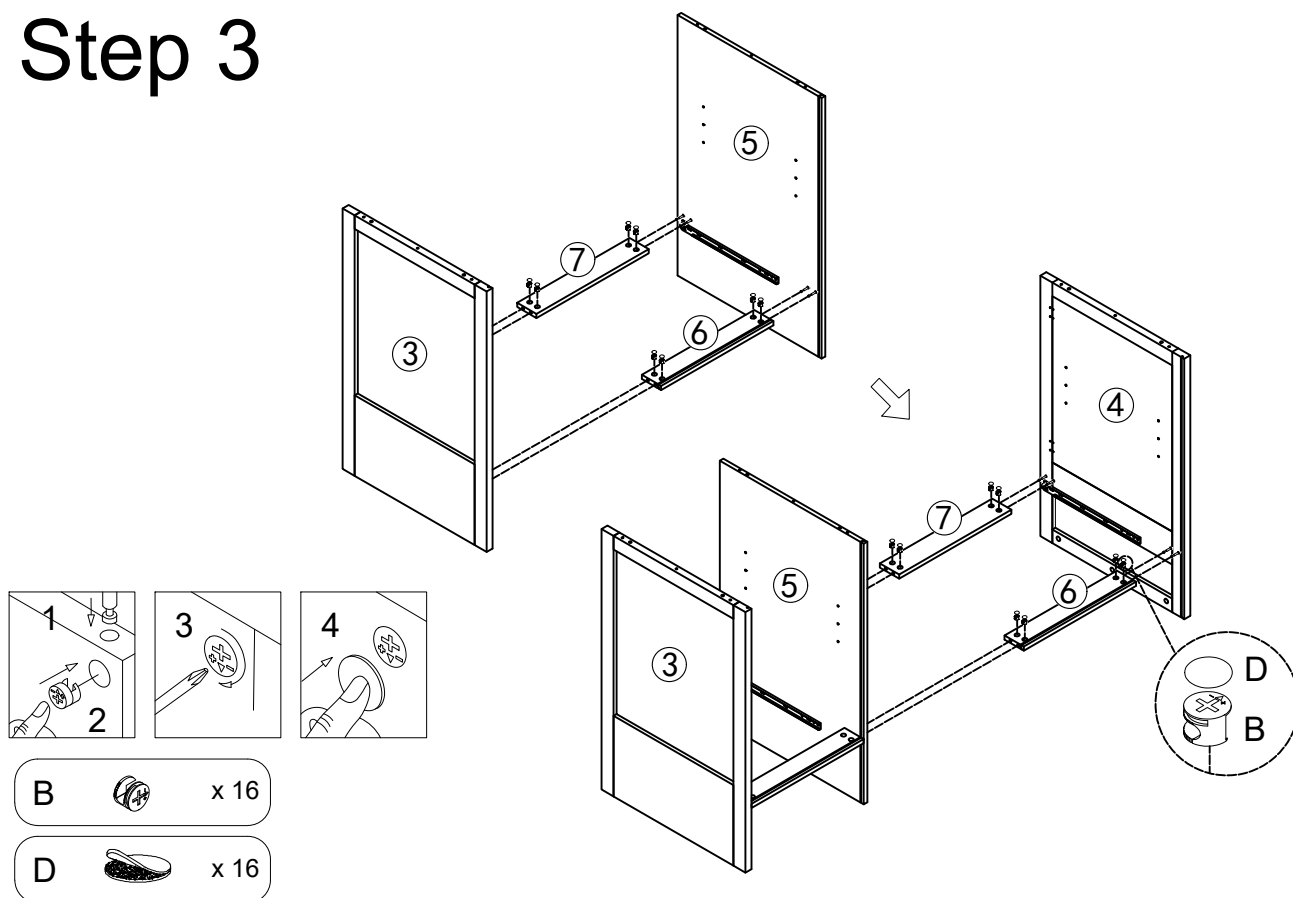

Step 4

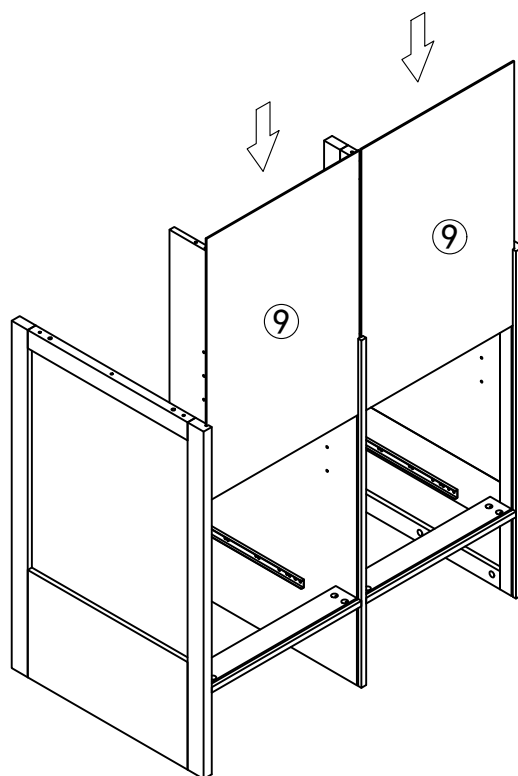

Step 5

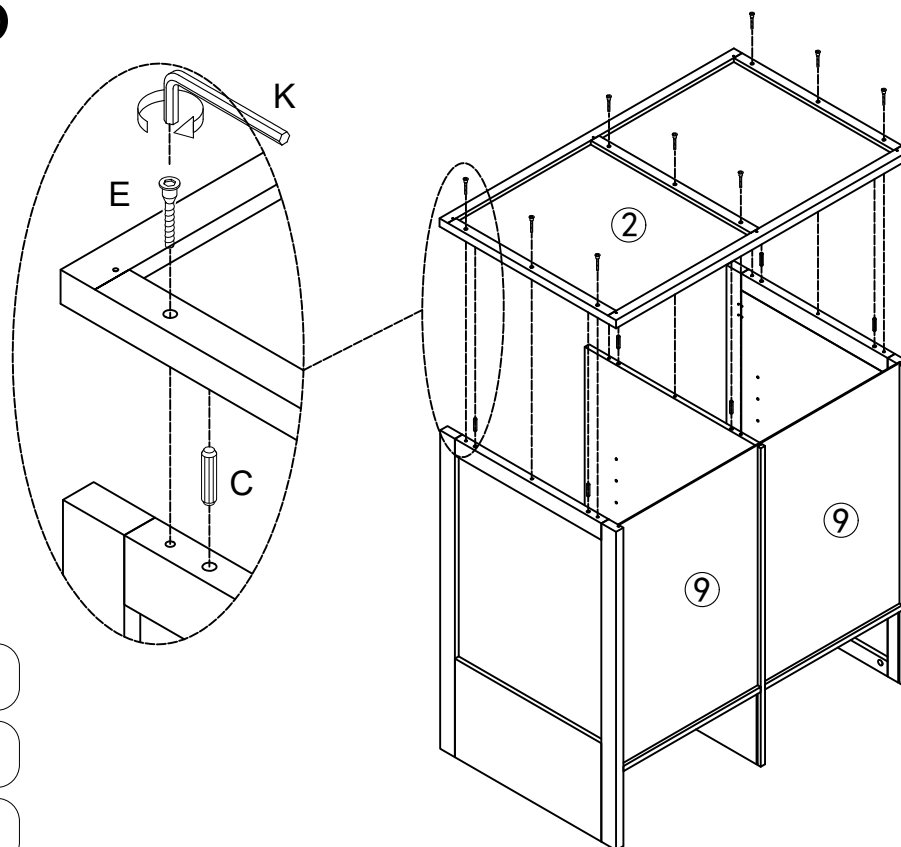


C  x 6

E  x 9


K  x 1

Step 6


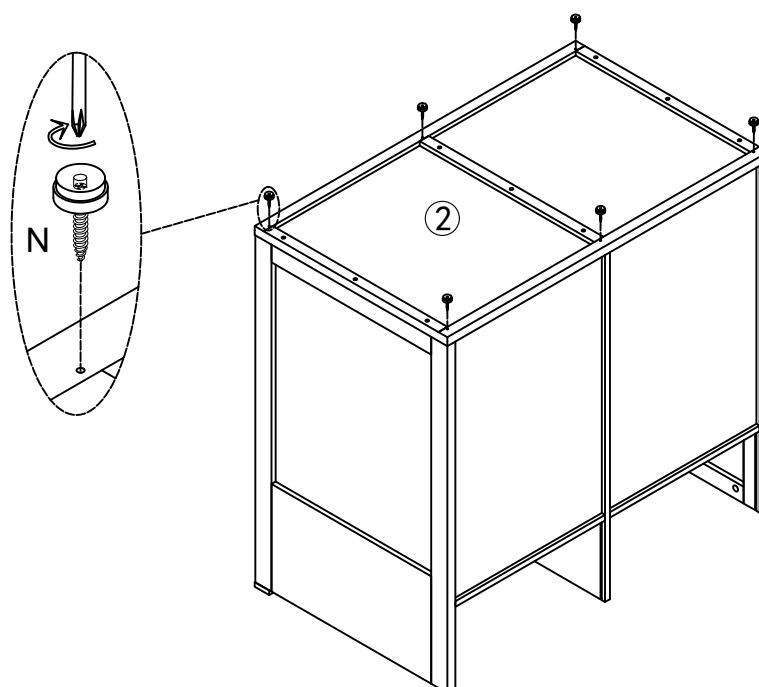



N  x 6

Step 7

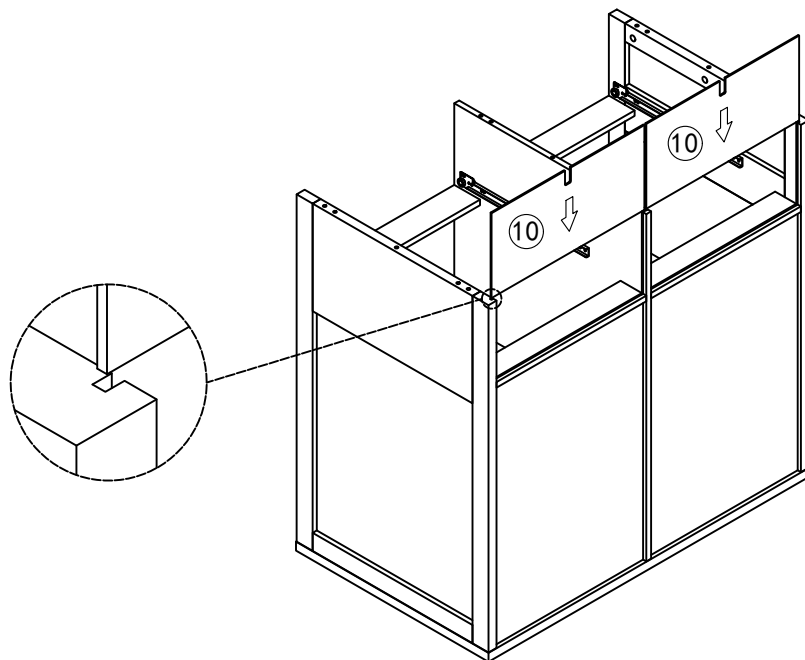

Step 8


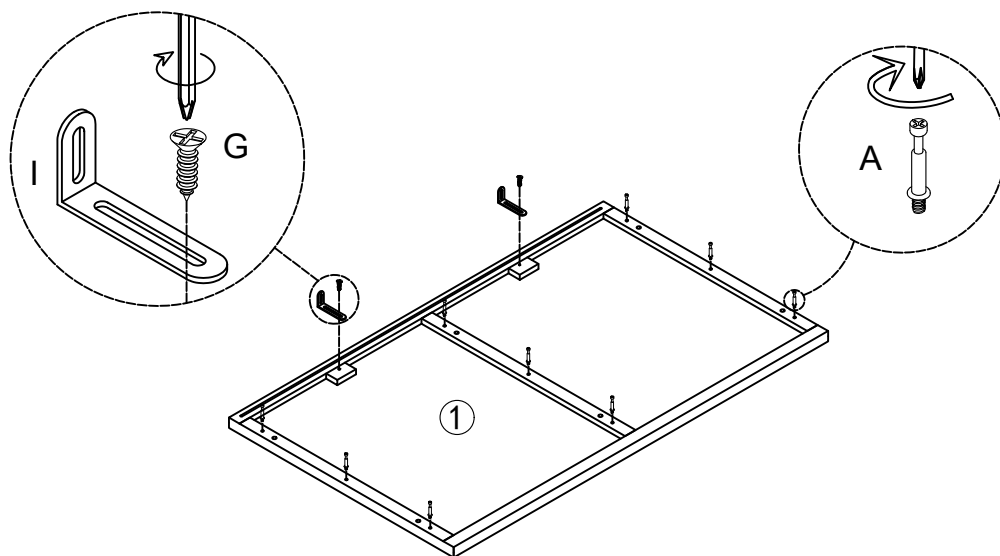


A  x 9

G  x 2

I  x 2

Step 9

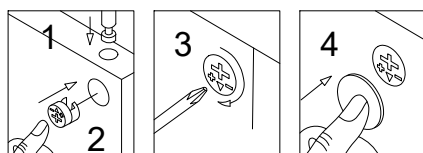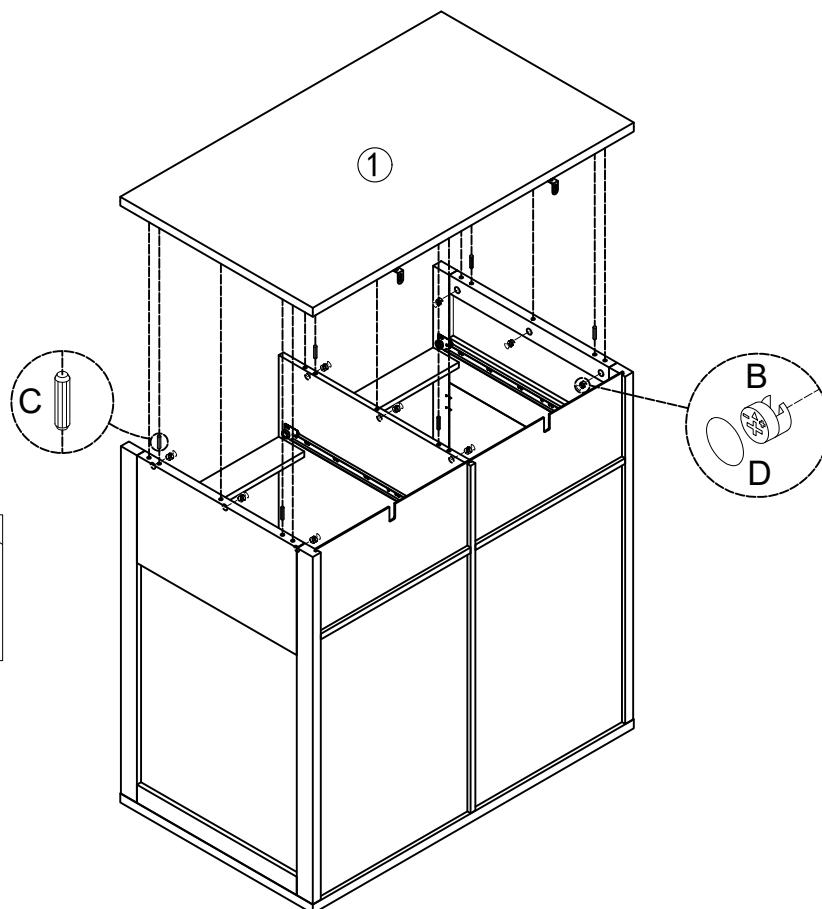


B  x 9

C  x 6


D  x 9

Step 10


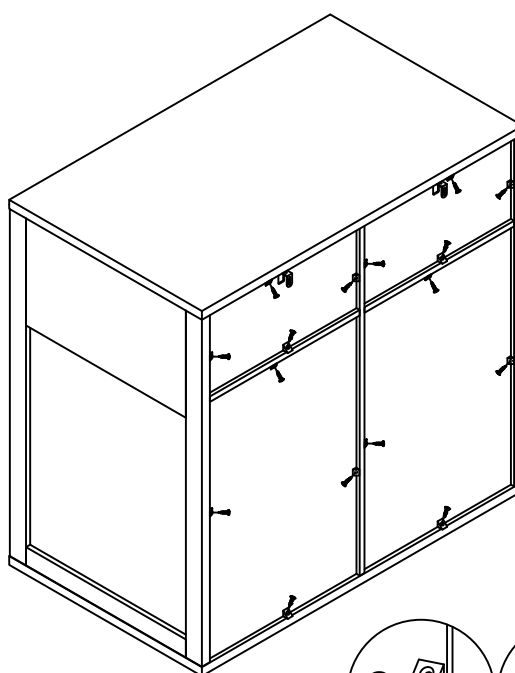


G  x 16

H  x 16

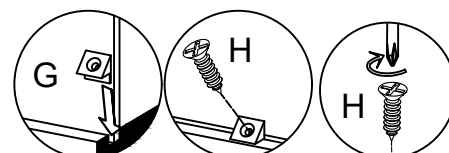


Step 11

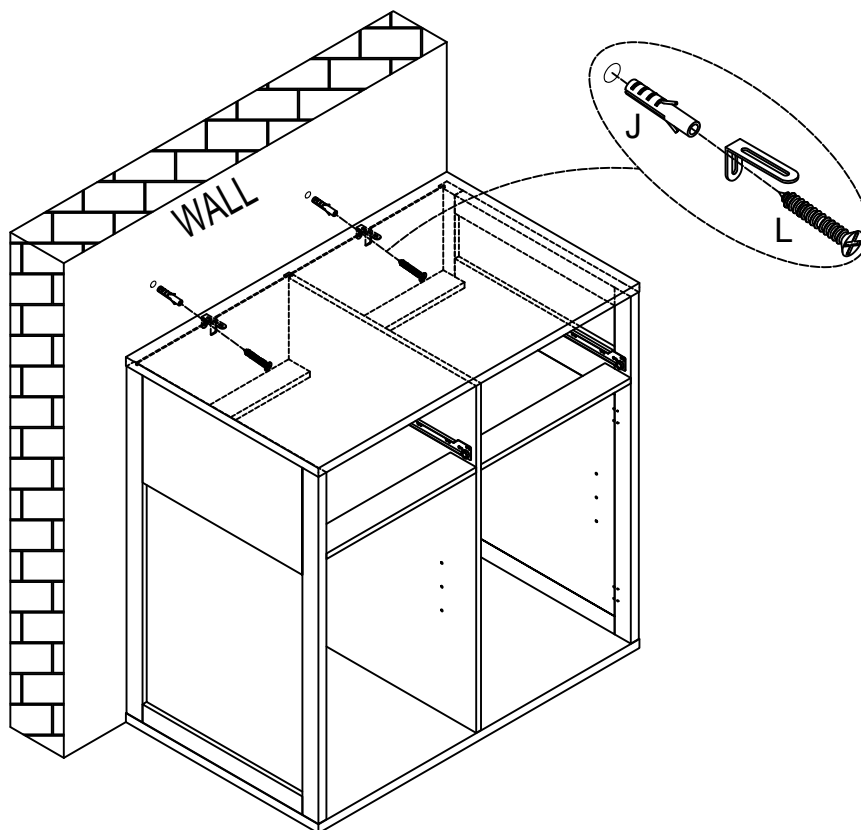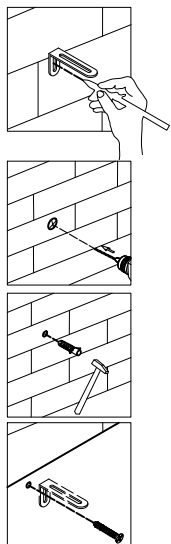

J  x 2



L  x 2


Step 12

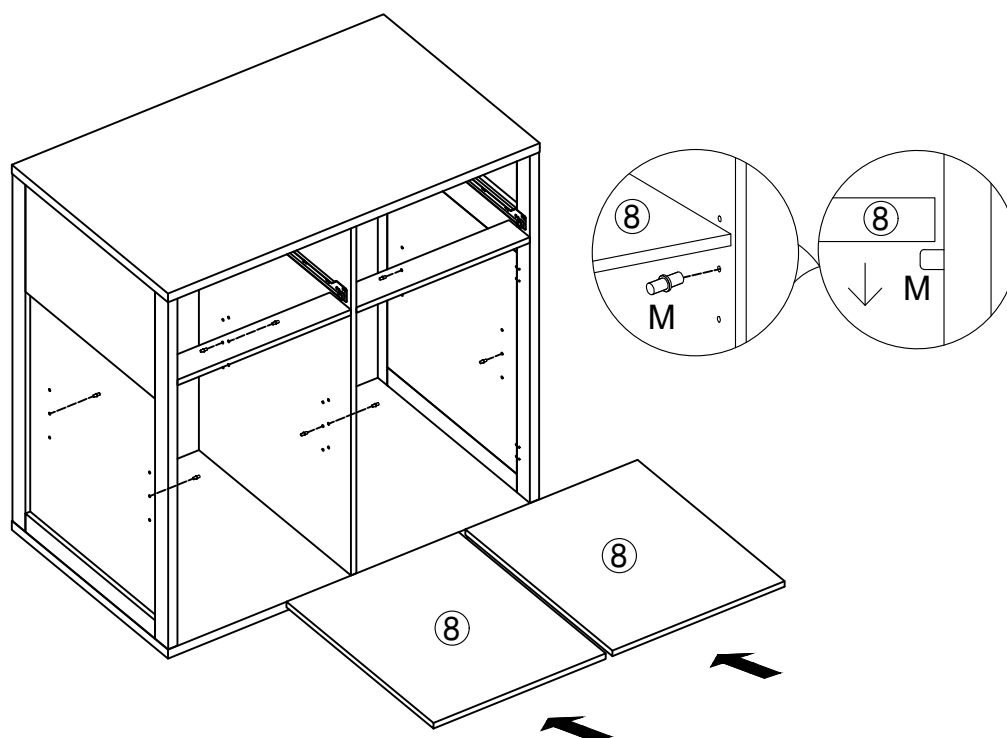


M  x 8

Step 13

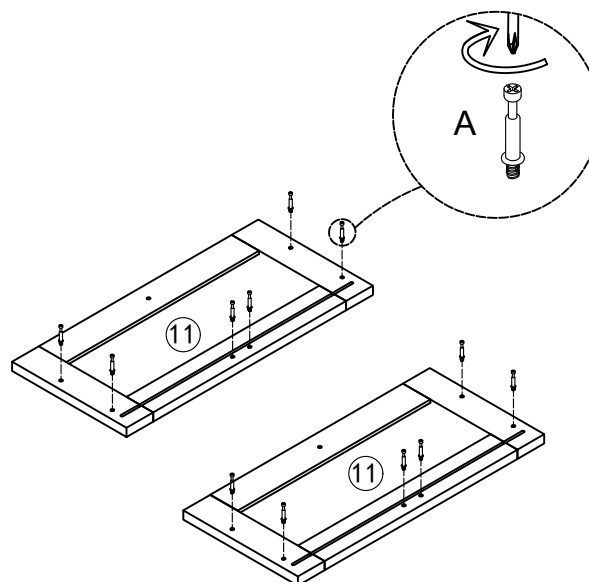


A  x 12

Step 14

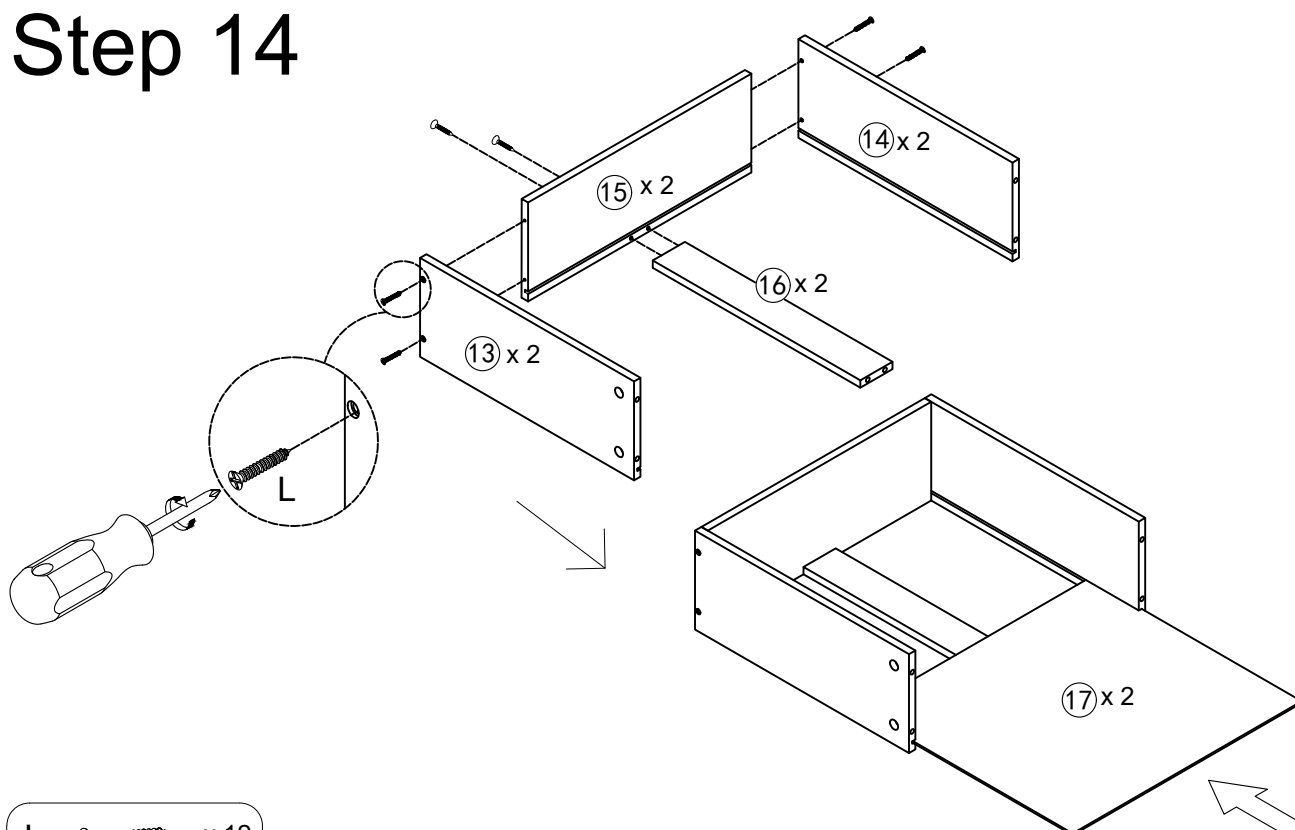


L  x 12


Step 15

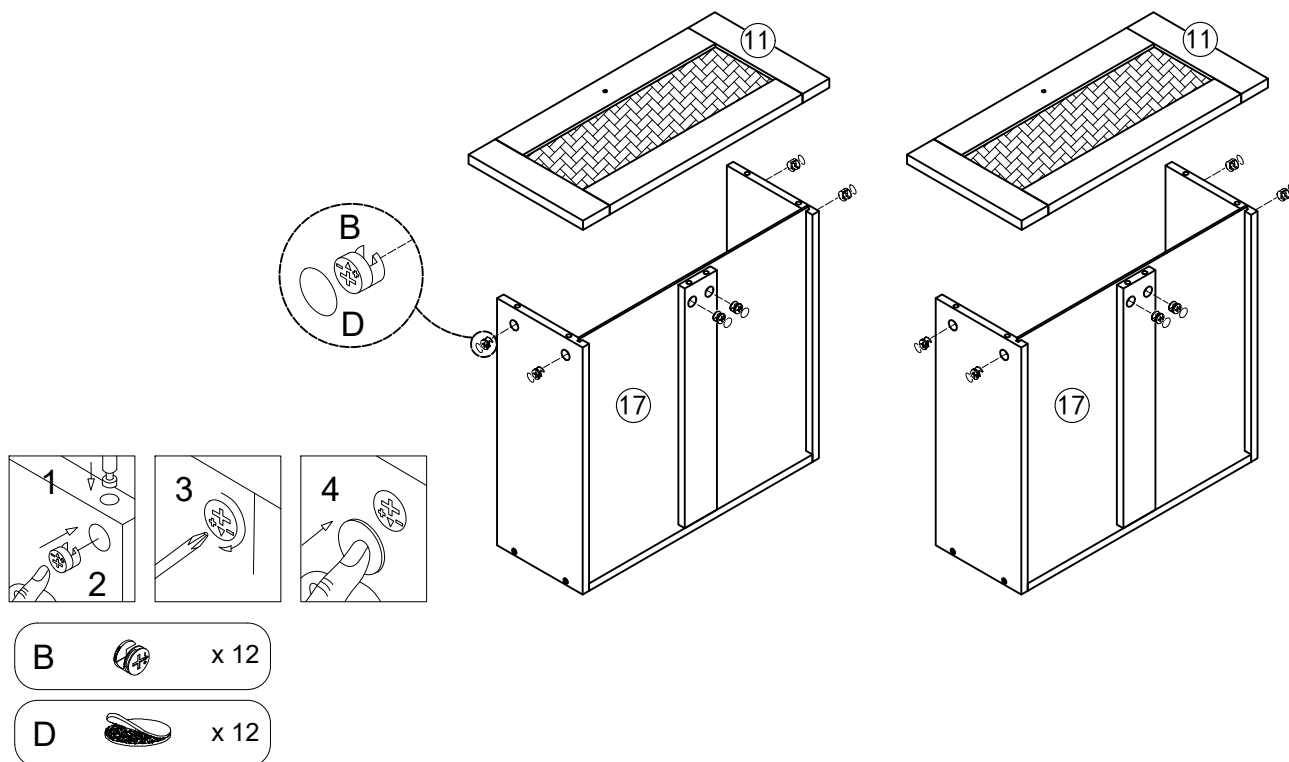

Step 16

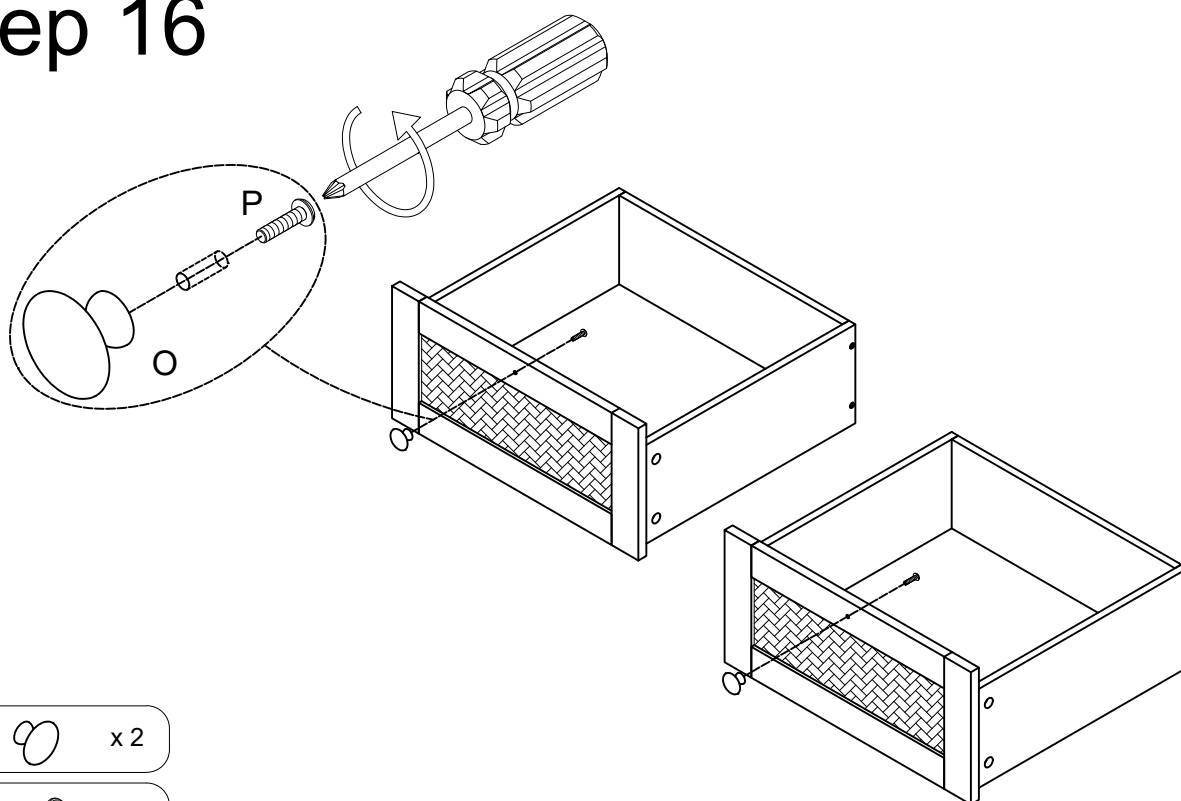

Step 17

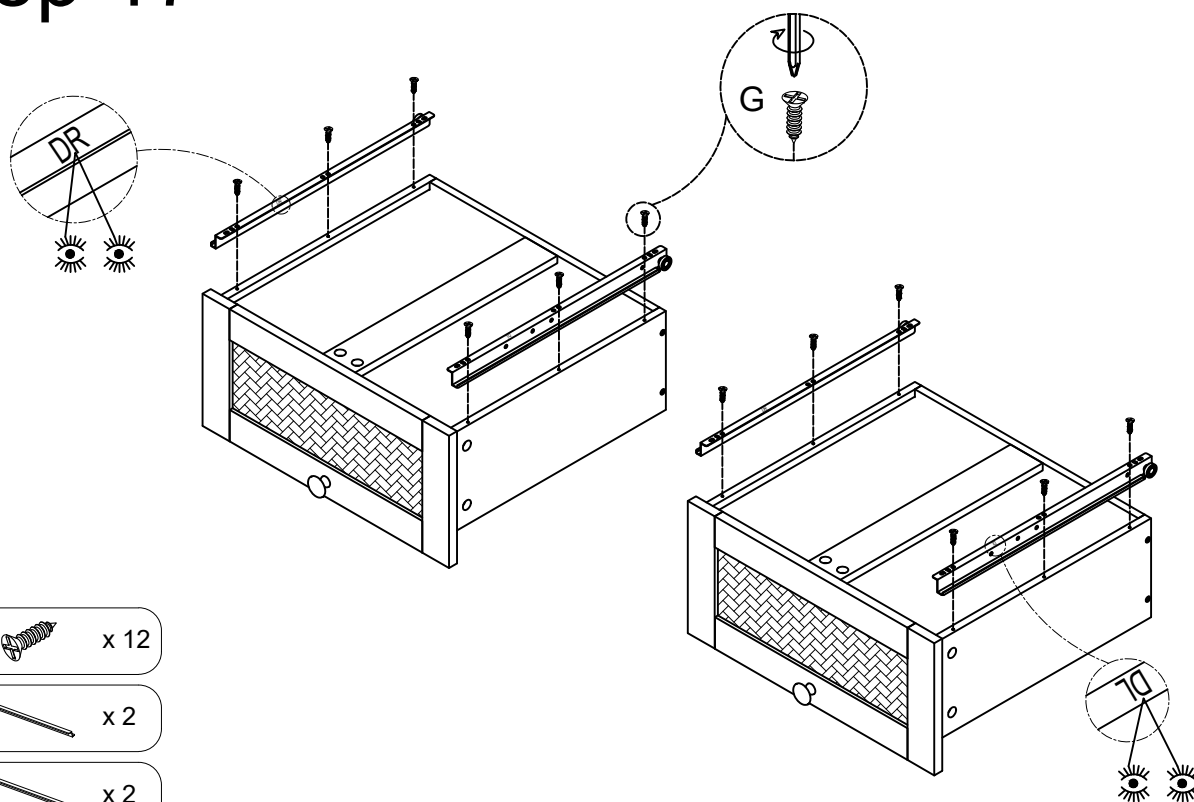


G  x 12


DL  x 2

DR  x 2

Step 18

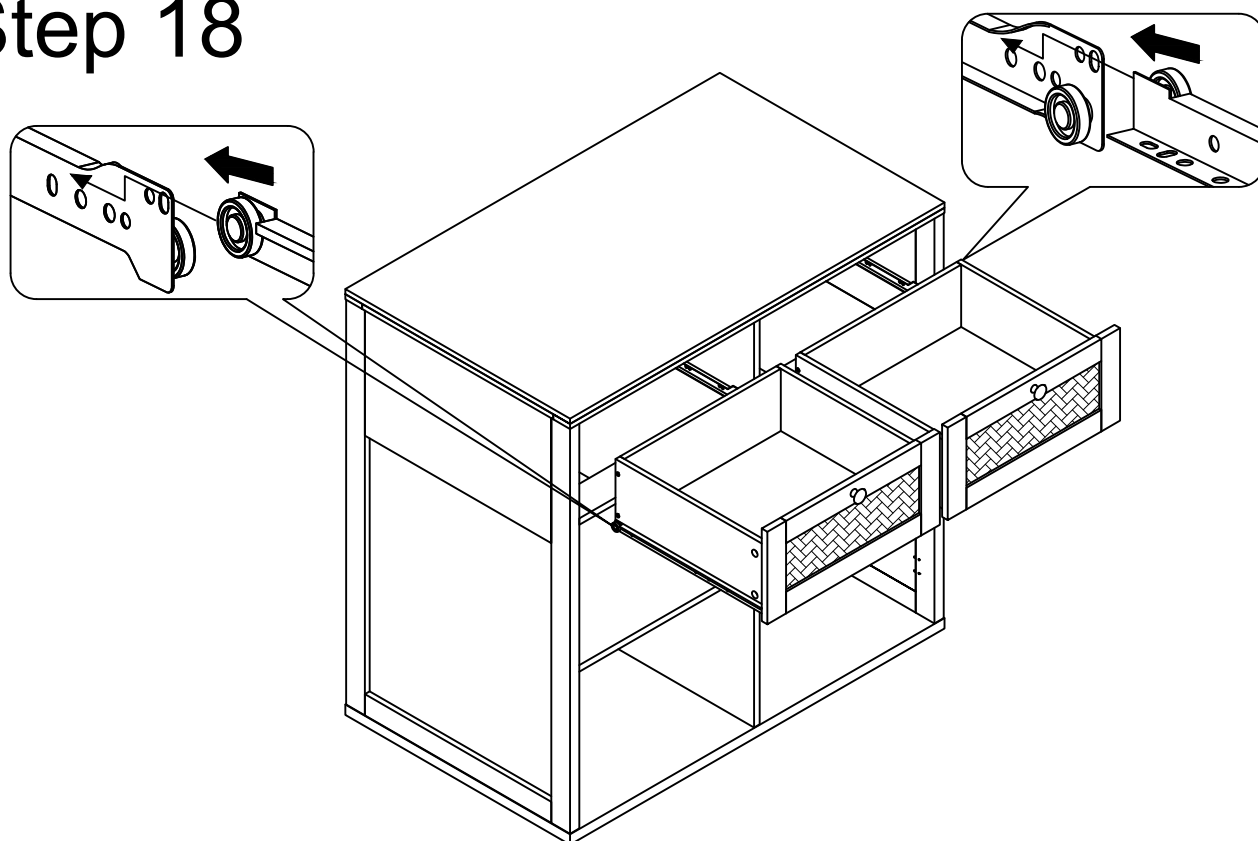

Step 19

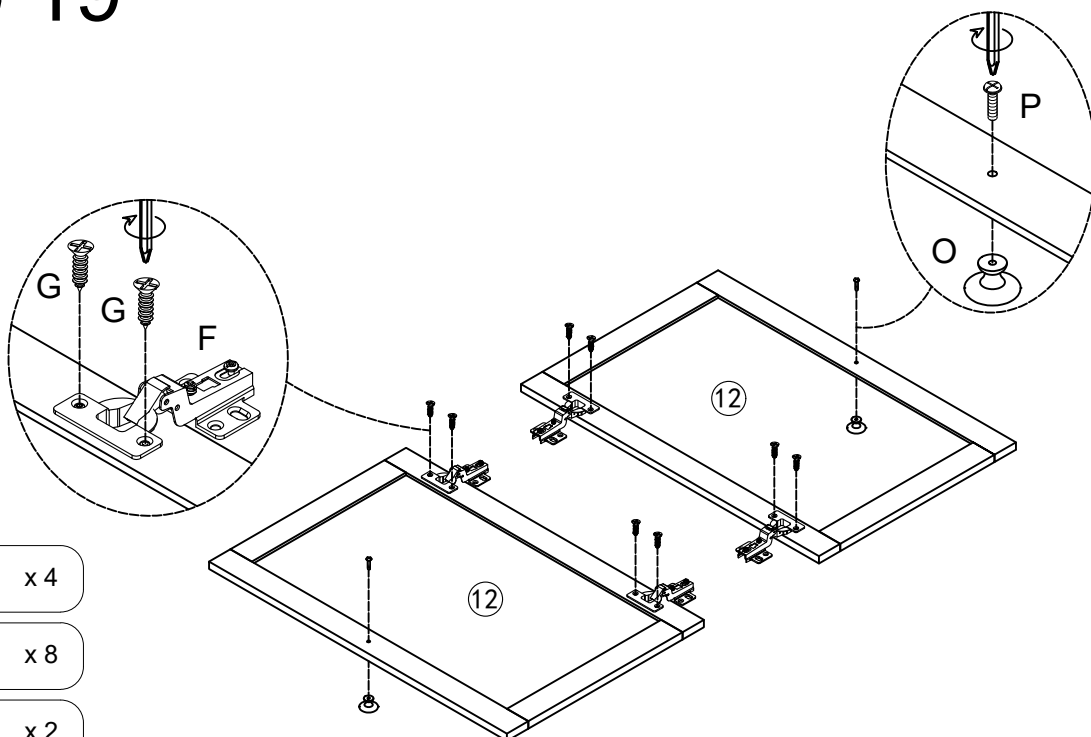


F  x 4

G  x 8

O  x 2

P  x 2

Step 20

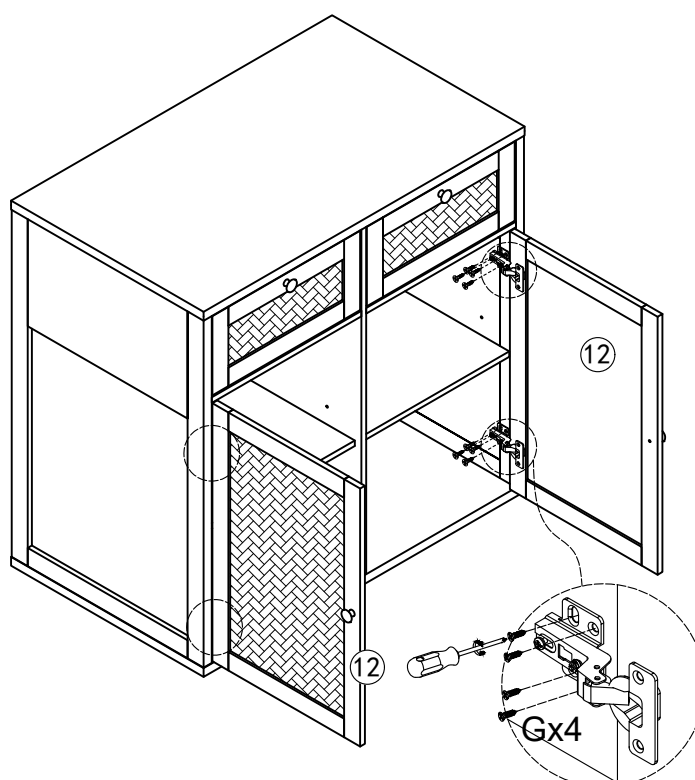


G  x 16

Cabinet Door Adjustment Instructions


Height adjustment:

- Locate the height adjustment screws on the hinge.
- Use the Phillips screwdriver to either tighten or loosen the screws to raise or lower the cabinet door as desired.

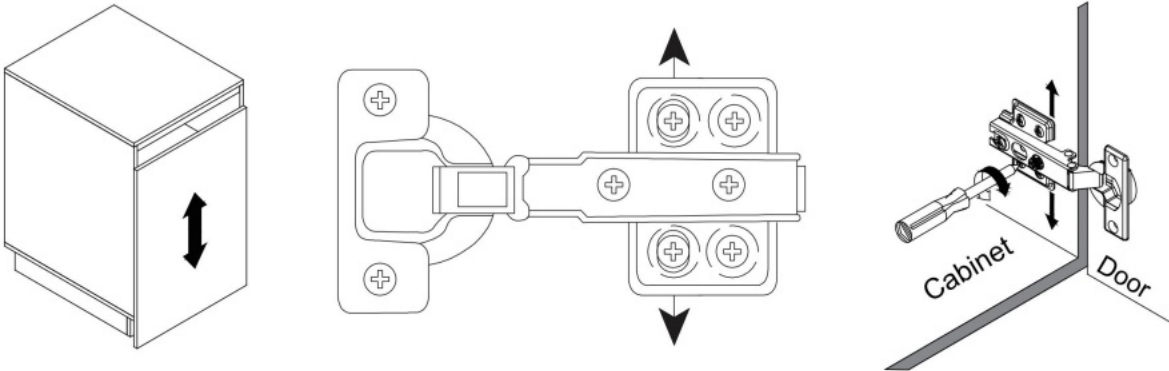


Side-to-side adjustment:

- If the cabinet door needs to be moved closer to or away from the cabinet frame, locate the side-to-side adjustment screws on the hinge.
- Use the Phillips screwdriver to adjust these screws and gradually move the door in the desired direction.

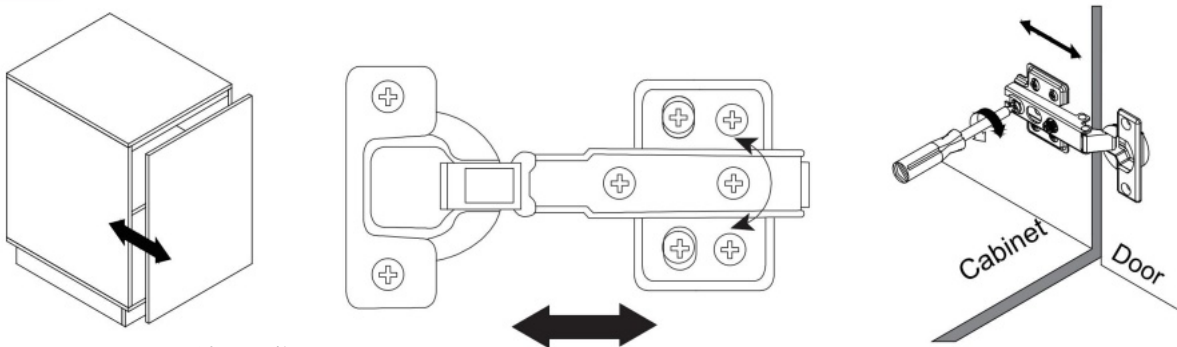

Depth adjustment (if applicable):

- Check if the cabinet door needs to be brought closer to or further away from the cabinet frame.
- For-depth adjustment, locate the depth adjustment screws on the hinge.
- Use the Phillips screwdriver to turn these screws clockwise or counterclockwise accordingly.

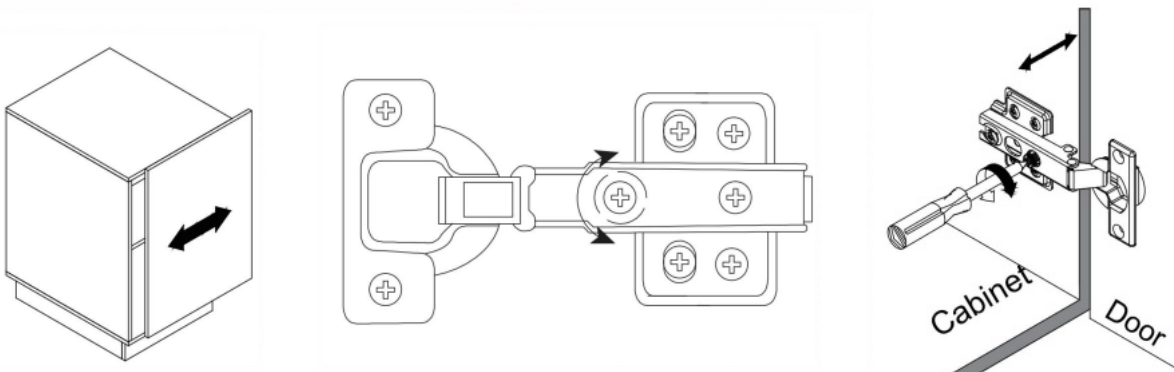

Step 21

