


Assembly Instructions

CHAIR

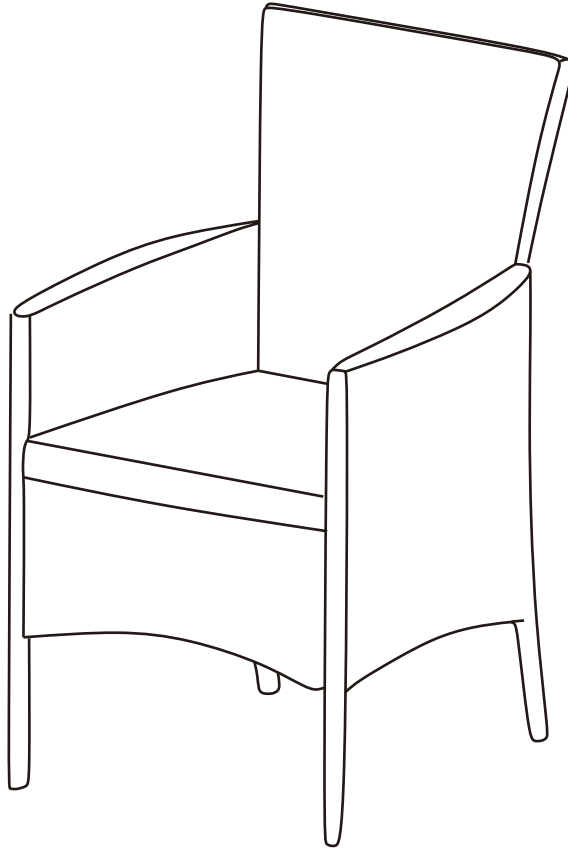

N768P375856A

1. 50% Tighten before fixing all screws, Allen wrench is recommended instead of an electric drill.
2. Place the item on a flat ground to adjust and make sure it remains stable.
3. Tighten up all screws with tools gradually.
4. If the screws are not aligned with holes during assembly, please loosen all the other screws to 50% and continue the assembly process.
5. If the item is not stable, please loosen all the screws, adjust it on a flat ground and tighten up all screws again.
6. Note : If one or some screws are fully tightened during assembly, chances are the others will not be aligned with holes. In addition, all the holes are designed to be relatively larger to provide more space for the adjustment of the screws.

Assembly Instructions


Caution : You must read this before you proceed

Care & Maintenance



- ⊘  • Not for commercial use. For residential use only.
- ⊘  • Prolonged exposure to rain may cause rusting which can stain floors.
- ⊘  • Do not put hot items directly on furniture surface.
- ⊘  • Do not clean furniture with harsh cleansers or polish.
- ✓  • To obtain the longest lifespan of your outdoor products, minimizing exposure to direct sunlight is recommended.
- ⊘  • Children should not climb or jump on the furniture.
- ⊘  • Do not write on furniture without a padded barrier to protect the surface.
- ✓  • To obtain the longest lifespan of your outdoor products, avoid extended and lengthy exposure to rain, snow, and direct sunshine. Whenever possible cover the product and /or place under patio or awnings.
- ⊘  • Stains may be removed with mild soap solution and damp cloth.
- ✓  • Keep away from sources of ignition.
- ✓  • Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in boxes for hardware packs and legs.
Sets often ship in multiple boxes and may arrive a day or two apart.



Chair

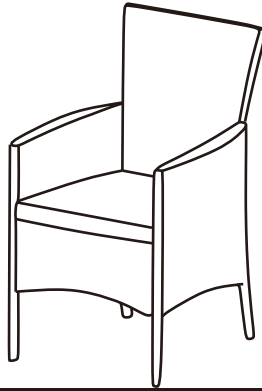

Parts List


Label	Picture	Description	QTY
A		Backrest	1
B		Seat	1
C		Right Armrest/Leg	1
D		Left Armrest/Leg	1
E		Seat Cushion	1

Hardware

Label	Picture	Description	QTY
①		Bolt (M6*35mm)	11
②		Bolt (M6*40mm)	5
③		Washer	15
④		Allen Wrench(4mm)	1

Assembly Preparation

Before
Beginning
Assembly:

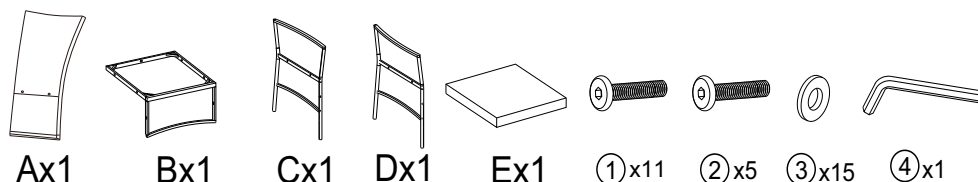

- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-


Assembly Steps

Overview

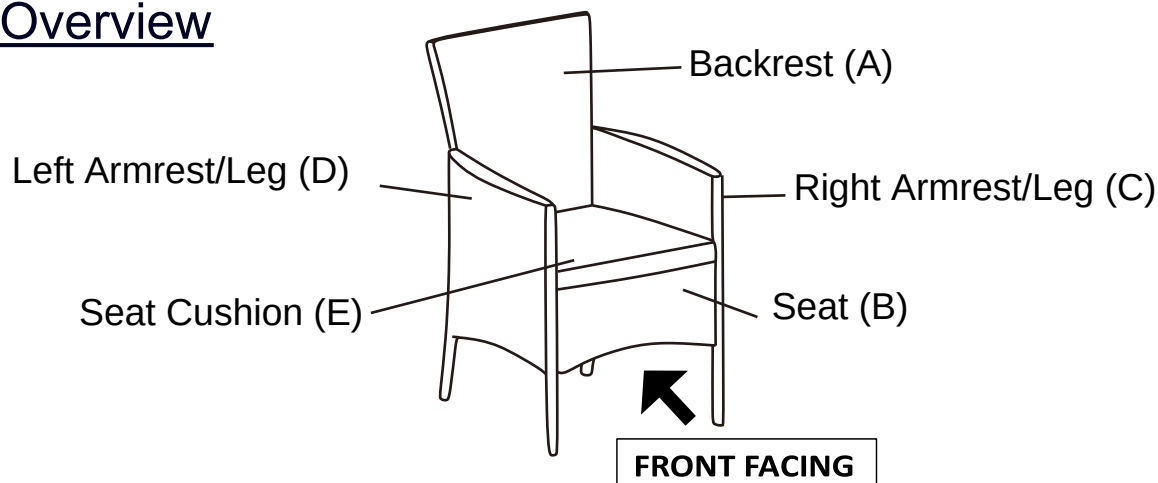

This Chair has multiple parts and may require up to some 30 minutes to assemble. To give you an overview of the Chair parts, the above picture is to help you put the various parts into perspective. Please read through the instructions here below to familiarise yourself with the parts and steps before assembly.

Step 1

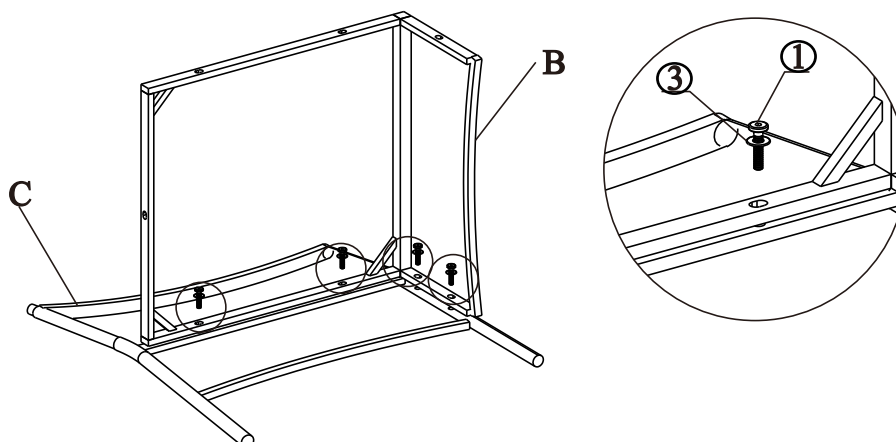

Open the carton and place all the parts onto a clean and soft surface.
Unpack all packages of hardware.


Attach Seat (B) to Right Armrest/Leg(C) using Bolts (①) and Washers (③) with Allen wrench (④) as shown in Picture.

DO NOT FULLY TIGHTEN THE BOLTS.

ATTENTION: Occasionally some of the PE Wicker shifts and covers the mounting position preventing easy assembly.

The PE wicker should never be cut, but moved away from the mounting positions.


Step 2

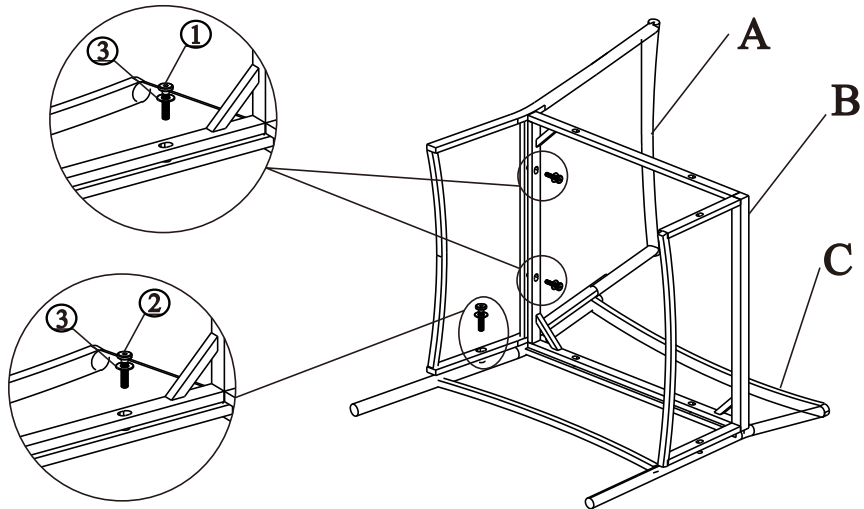

Attach the Backrest (A) and Right Armrest/Leg (C) together using Bolts(①&②) and Washers (③) with Allen wrench (④) as s as shown in Picture.

DO NOT FULLY TIGHTEN THE BOLTS.


Step 3

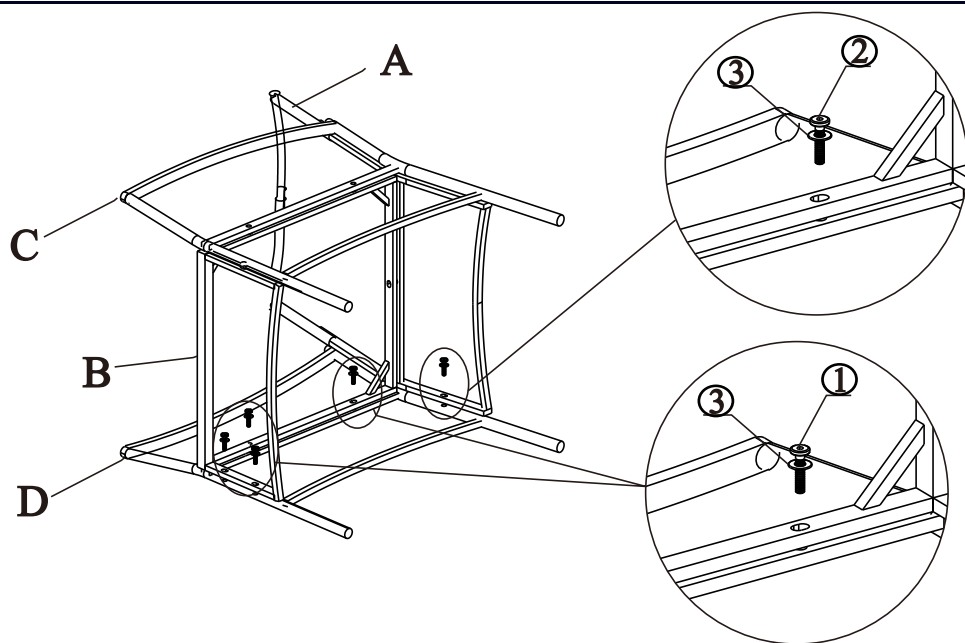

Place the Left Armrest/Leg (D) as pictureed above and affix to the Backrest (A) and Seat (B) using Hardware (①&②&③) with Allen wrench(④)

DO NOT FULLY TIGHTEN THE BOLTS.


Step 4

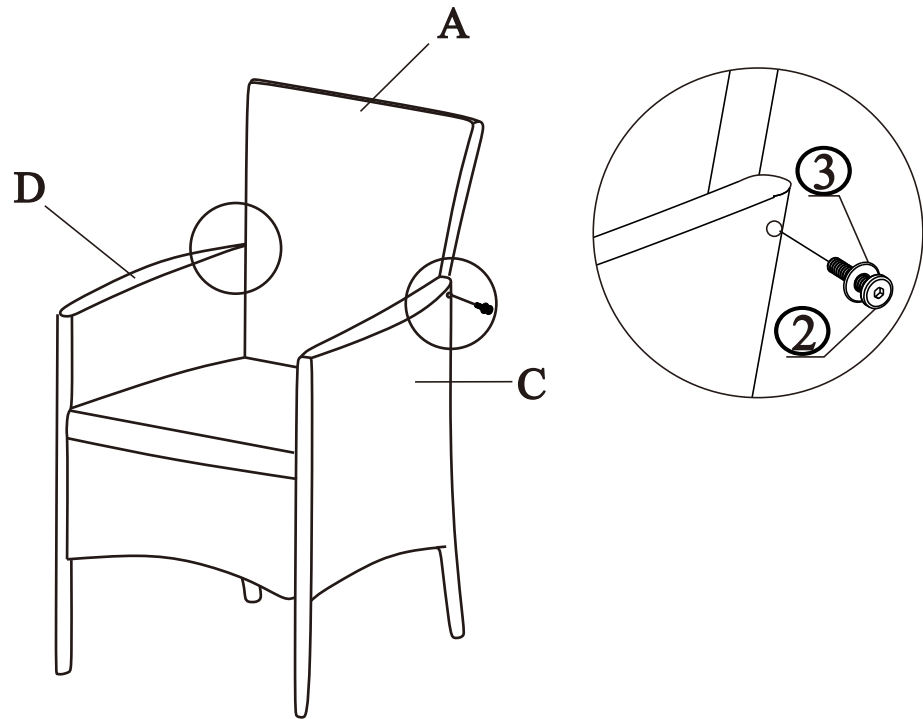

Attach the Backrest (A) with Right Armrest/Leg (C) and Left Armrest/Leg (D) together using Bolts (2) and Washers (3) with Allen Wrench (4)

DO NOT FULLY TIGHTEN THE BOLTS.


Step 5

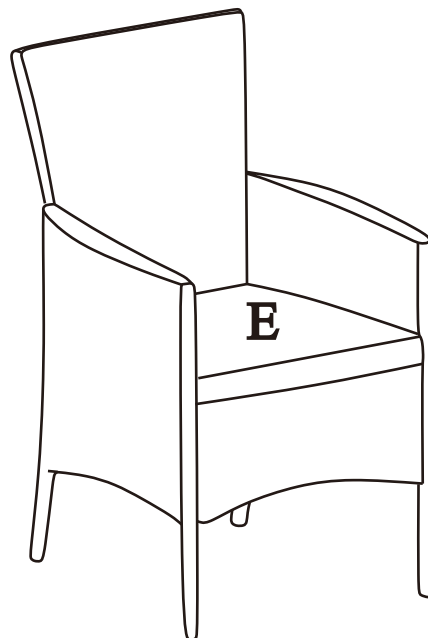

Put the Seat Cushion (E) on the Seat.
Your Chair is ready for use.

The Chair can only be used on the flat and level surface.

Step 6

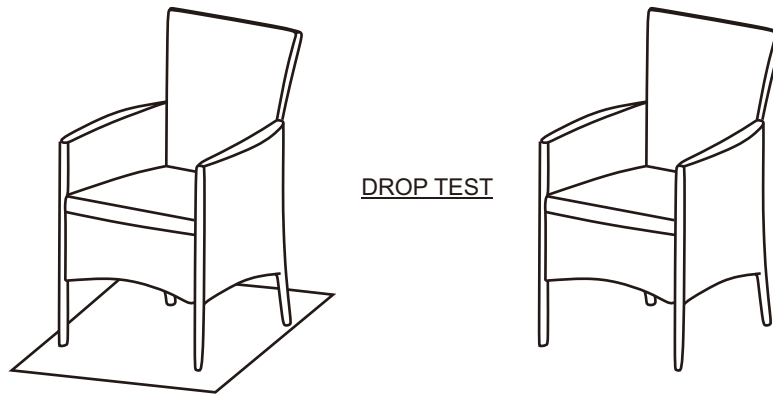

Stand CHAIR right side up.

Check stability and then tighten the bolts.

If it wobbles, lift the chair some 30cm to 50cm high from the ground.

Keep your feet and toes well away from the drop zone.

Drop the chair freely and vertically with all four legs, hitting the ground, all at the same time.

Test again for evenness on a LEVEL SURFACE.

If no wobbles are found, slowly and steadily, place the chair facedown.

Then, proceed to tighten all bolts in a sequential manner.

When tightening any bolt, tighten sequentially.

Note: DO NOT fully tighten a BOLT in one go and then move on to the next. Rather, in a sequential manner, gradually tighten each Bolt until all bolts are evenly secured. This methodology will ensure maximum evenness once all Bolts are fully tightened.