

Features


- *ExoCrylic™*
- *Oval shape*
- *Drop-in installation*
- *Six individually adjustable ProFlex® hydro-massage jets*
- *Pump with air switch and grounding-type plug-in cord*
- *Molded lumbar support and armrests for comfort*
- *Optional K-9696 whirlpool trim kit in additional finishes*
- *Custom pump locations*
- *60" (1524 mm) x 40" (1016 mm) x 17-5/8" (448 mm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.19.7/CSA B45.10*
- *CSA B45.5/IAPMO Z124*
- *UL 1795*

CUSTOM WHIRLPOOL BATH K-1146-CK ALSO K-1146-CN

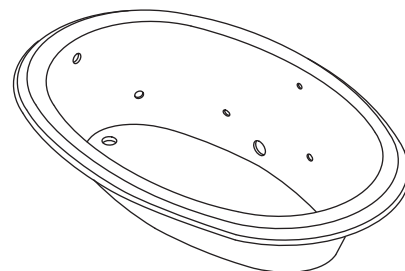

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1146-CK	Custom whirlpool bath (top view shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1146-CN	Custom whirlpool bath (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories			
K-11677	Swiftflo™ adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
Optional Accessories			
K-1491	Removable bath pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Removable footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-9696	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____

Product Specification

The ExoCrylic whirlpool shall be 60" (1524 mm) in length, 40" (1016 mm) in width, and 17-5/8" (448 mm) in height. Whirlpool shall be oval shaped and for drop-in installation. Whirlpool shall have six individually adjustable ProFlex hydro-massage jets, and pump with air switch and grounding-type plug-in cord. Whirlpool shall have custom pump locations and molded lumbar support and armrests for comfort. Whirlpool shall feature optional K-9696 whirlpool trim kit in additional finishes. Whirlpool bath shall be Kohler Model K-1146-____-____.

PROFLEX® 6040

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	46" (1168 mm) x 19" (483 mm)
Basin area, top	55" (1397 mm) x 29" (737 mm)
Weight	56 lbs (25.4 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	54 gal (204.4 L)
* Approximate measurements for comparison only.	

Pump:	V	Hz	A
1-speed	120	60	7.5

Included components:	
Cutout template	114859-7

Required Electrical Service

Dedicated circuit required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 32 lbs/square foot (156 kg/square meter) loading.

NOTICE: The pump must be relocated to its custom position at the time of installation. Provide adequate clearance between the floor and the pump.

No change in measurements if connected with the drain illustrated. (K-11677)

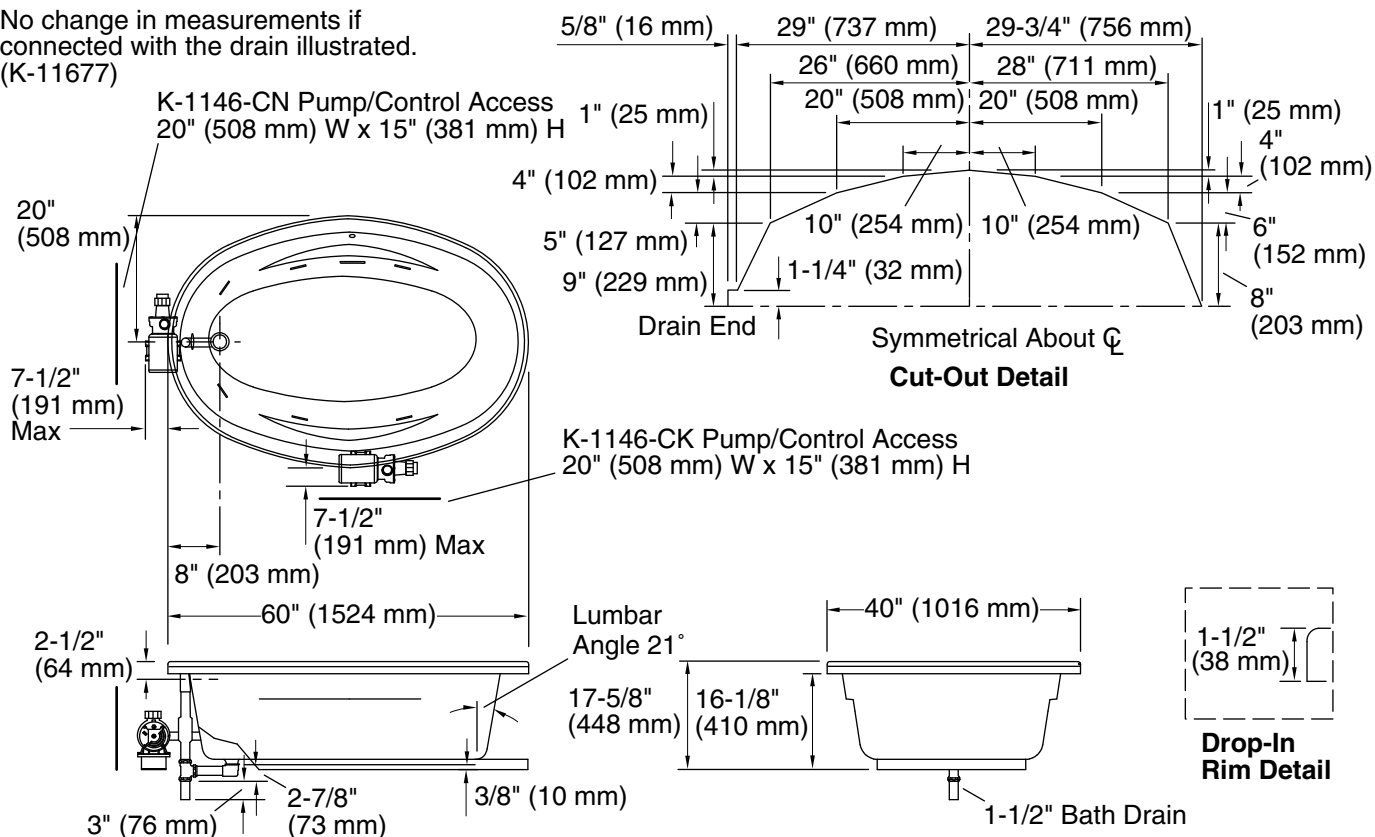

Product Diagram