


eSenlite[®]

Smart Illumination for Indoor & Outdoor Use

Invisible Motion Activated Retrofit Light Bulb Socket

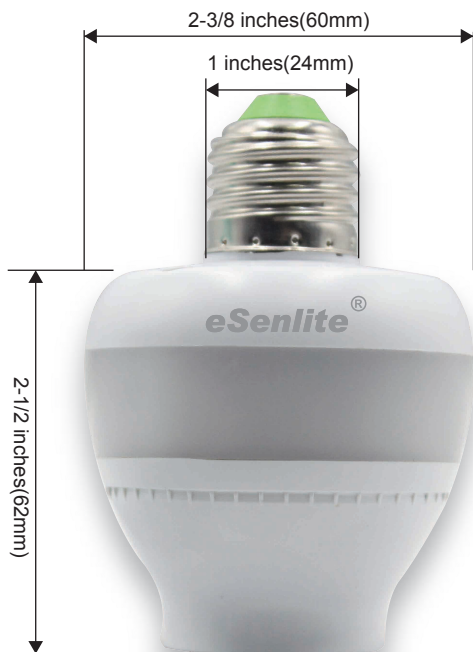

**Utility Cost Savings
Of Up To 98%**

A smart, simple add-on socket to most existing light bulbs. Attach a standard E26 or E27 bulb into the eSenLite[®] socket, and customize a preferred light profile to enjoy dynamic lighting and cost-saving benefits.



Application



Built with exclusive eSenlite[®] Technology :

- Effectively extends the lifespan of an existing light bulb up to 10 times
- Utility cost savings of up to 98%
- Provides security illumination throughout the night
- Flexible setup with two selectable lighting profiles
"Auto On & OFF" or "SMART/Moonlight – Max Bright"

Worldwide Patents Pending

eSenlite®


Smart Illumination for Indoor & Outdoor Use

Installs into existing light socket or light fixture housing for utility saving & safety enhancement




Default setting


(1) Time setting (2) Detection range setting (3) LED switch setting



S1	S2	Time setting
0	0	5s
1	0	30s
0	1	1min
1	1	3min



S3	S4	Detection range
0	0	6.6ft/2m
1	0	13.1ft/4m
0	1	19.7ft/6m
1	1	26.3ft/8m



S5	Mode
1	SMART
0	AUTO

"SMART" Location, Dark Environment Without Motion: Moonlight Illumination (Saving Mode)



A

Dark Environment When Motion Been Detected: Automatically Turn to Max Brightness



B

Daylight Environment: OFF



C

Feature and Function:

- Built-in Doppler/Microwave SMART sensor: penetrate physical barriers, overcome temperature changes, no motion sensing delay
- Innovative lighting no motion sensing delay modes with extremely low-low power consumption: SMART- moonlight mode (fixed 1W / 80 Lumen) or traditional Auto-on mode (Make your own choice!)
- Featured with photocell sensors for true Dusk to Dawn illumination all night long
- Easy-DIY: keep your existing stylish light fixture with added-on user-friendly lighting profiles and SMART saving feature

Specifications (model:EE101WLS)

Operating power: 90-230VAC/50/60Hz

Operating power load: 60W (max)

Built on LED light load: 1W/80LM

Radar HRF: 5.8GHz, ISM band

Detecting angle: 360D wide coverage (adjustable)

Standby power consumption: -0.5W

Photo cell (Lux): 20 lit-up/50 turn-off

Delay timing: 5sec/30sec/1min/3min

Operating level: IP20

Mounting method: Ceiling or Wall; Vertical or Horizontal

Operating temp: 5F to 158F (-15C to +70C)

-Operating method: **SMART (default) or AUTO**

EE101WLS V10102018 us

Two Years Limited Warranty

EESGI guarantees this product to be free from defects in material & workmanship for (2) year. This warranty does not apply to damage from misuse or incorrect installation/ connection;

This warranty does not cover accessories, bulbs, batteries, accidents, alterations, unauthorized use or repair, neglect, misuse, abuse, damages or defects resulting from normal wear and tear (including chips, fading scratches, abrasions or discoloration due to usage or sun exposure); or failure to follow instructions for care and maintenance, fire, flood, and Acts of God;

This warranty does not include liability for incidental or consequential damages.

EESGI is not responsible for any damages in excess of the retail purchase price of the product under any circumstances. The consumer is responsible for the installation of, removal of, and reinstallation of the product.

Customer Support Services

Achieving 100% customer satisfaction is our goal. If you have any questions, please contact with us for troubleshooting service. We are more than happy to help.

Tel: (877)579-3889

Email: info@eesgi.com & support@eesgi.com

Work Hours: Mon - Fri, 10AM - 5PM PST

www.eleding.com

