


HomLux

INSTALLATION MANUAL

4 in. Centerset 2-Handle Bathroom Faucet

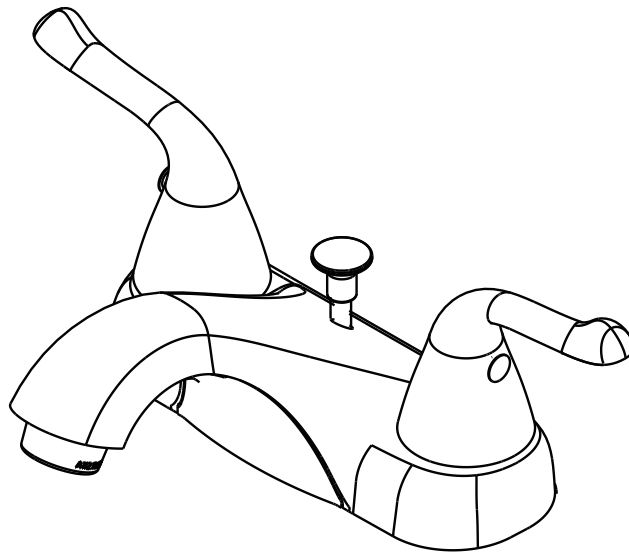

2E710043FA

Business Name: FDC Development LLC

Business Address:

6550 Jimmy Carter Blvd Suite B

Peachtree Corners GA 30071 US

Web: www.homluxproducts.com

Any query please feel free to email our service team:

help@homluxproducts.com

Thanks for choosing HomLux.

Please keep the box and packaging materials until your product is completely installed. If you have any questions, require technical assistance or have any problems with your product:

 ***DO NOT RETURN TO STORE***

***Please contact our Customer Service Team
help@homluxproducts.com***


Have the model number available and retain a copy of your receipt with purchase date for reference.

If for any reason this product does not meet your expectations, please be sure to repack this product in the original box and packaging material to avoid damage during transit.

Prior to Installation:

- Make sure you have all necessary parts by checking the diagram and parts list. If any part is missing or damaged, please contact HomLux Customer Service.
- Turn off the hot and cold water supply at the angle stops and turn on the old faucet to release any built up pressure. Remove existing faucet. Clean sink or countertop to remove any debris, plumber's putty, or silicone.
- Flush angle stops to release any debris prior to installation.
- Pre-drilled hole size requirement: 1-3/8" (min) – 1-1/2" (max)
- Max countertop thickness: 1- 1/2"

• You may need

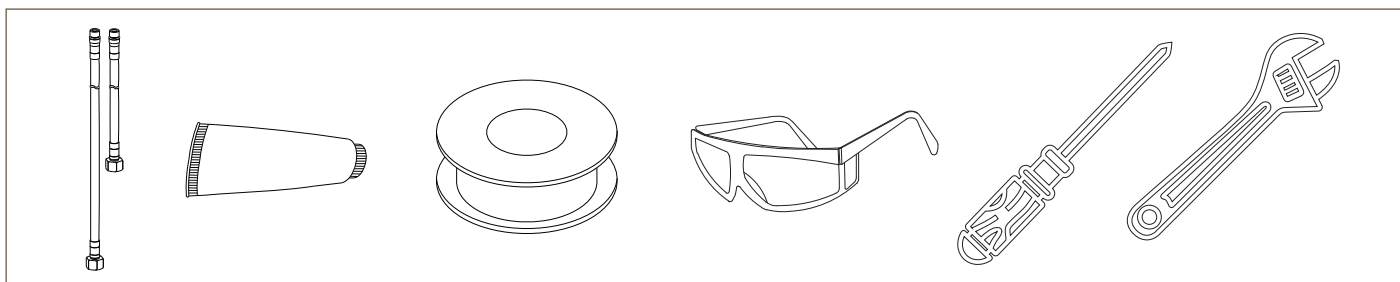

• Cleaning and Care

Care should be given to the cleaning of this product. Although its finish is extremely durable, it can be damaged by harsh abrasives or polish. To clean, simply wipe gently with a damp cloth and blot dry with a soft towel.

• Read all instructions prior to installation




CAUTION



Failure to read these instructions prior to installation may result in personal injury, property damage, or product failure. Manufacturer assumes no responsibility for product failure due to improper installation.

Installation Guide

Faucet Assembly

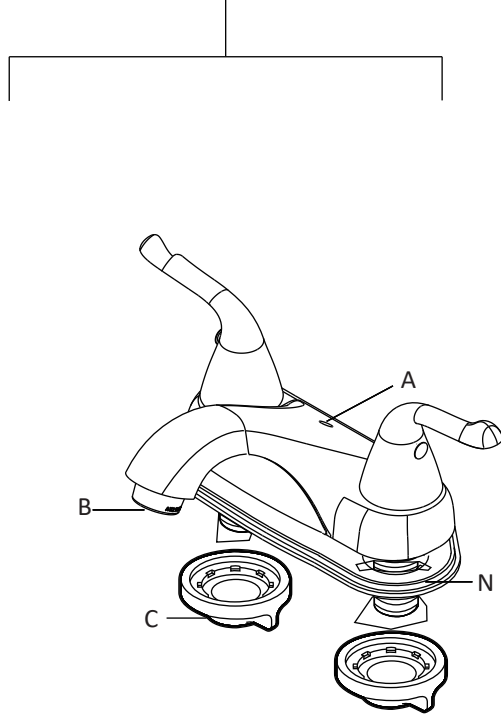


Drain Assembly

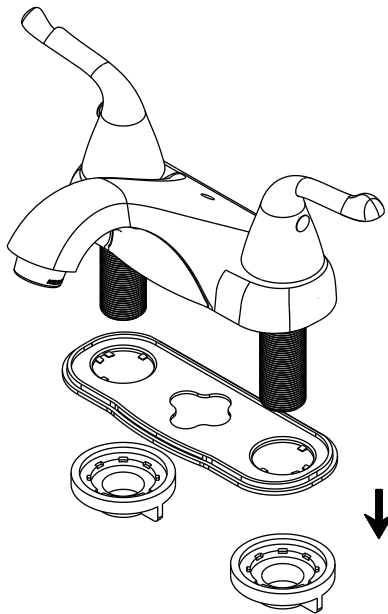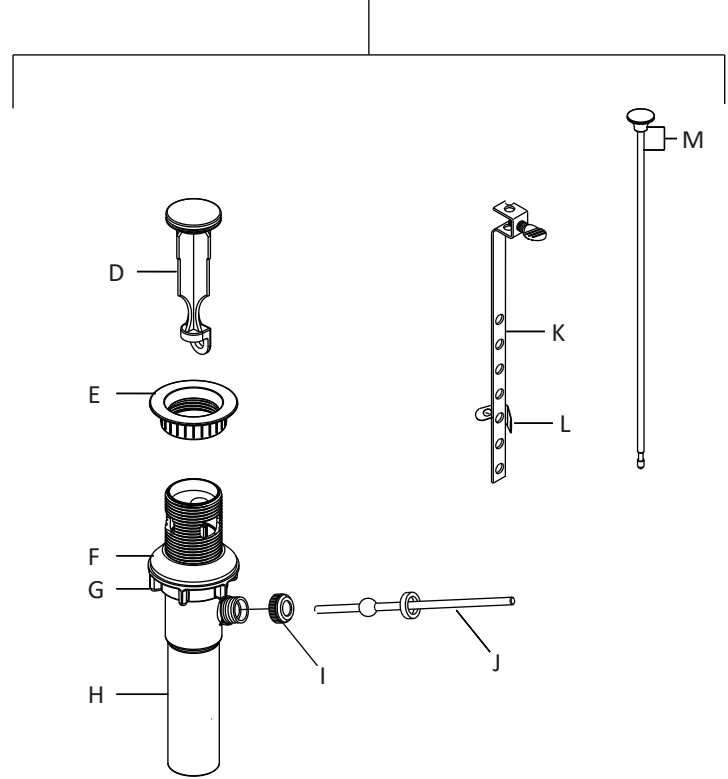

STEP 1: REMOVE MOUNTING SET

Remove bottom plate (N) and lock nut (C) from the shank of hybrid body (B).

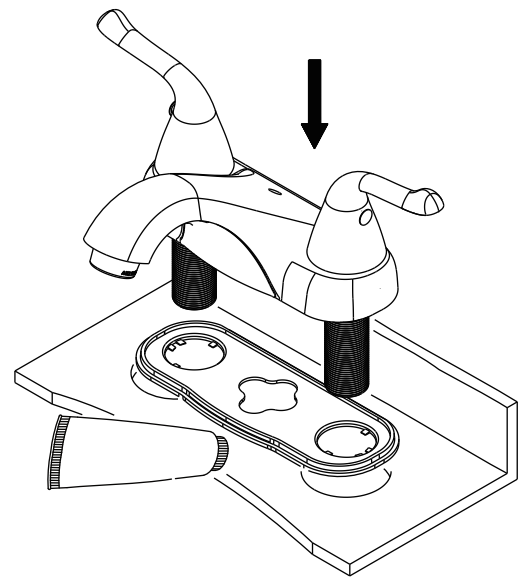


STEP 2: INSTALL FAUCET BODY

Place silicone sealant and install bottom plate on the countertop. Insert faucet body into hole on the countertop.


Pre-drilled hole size: 1-3/8" (min) – 1-1/2" (max)

Max countertop thickness: 1-1/2"

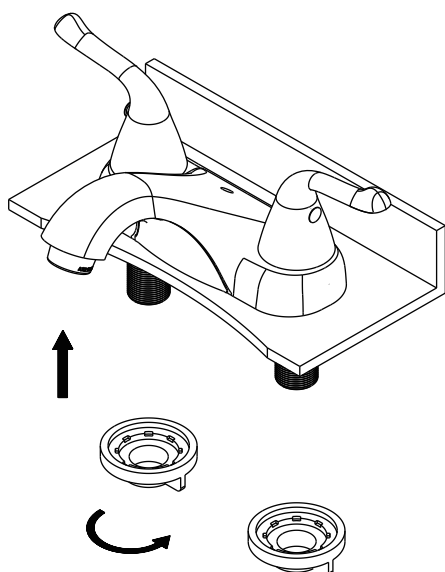

STEP 3: SECURE MOUNTING HARDWARE


Set faucet into place and screw lock nuts (C) onto threaded shanks of hybrid body and hand tighten underneath countertop. No wrench needed.

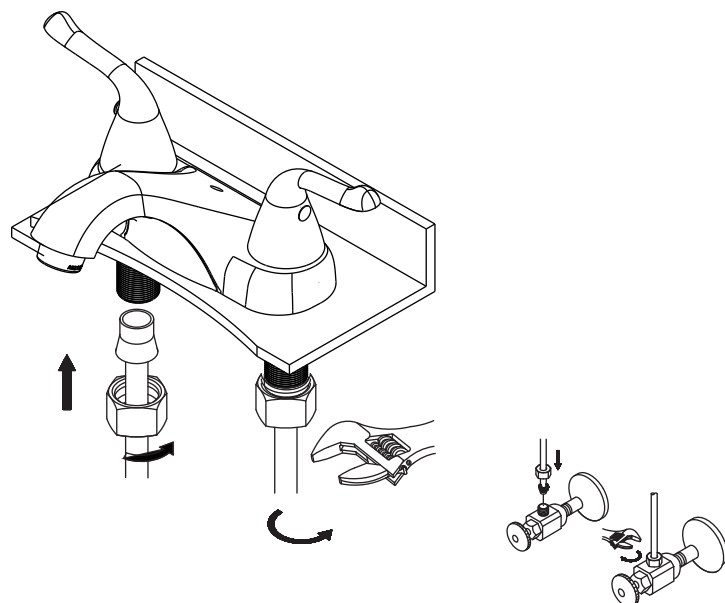

STEP 4: CONNECT SUPPLY LINES TO FAUCET (WATERLINES NOT INCLUDED)

Connect water supply lines to both hot and cold side of the faucet. Use water tape to avoid leakage and tighten with wrench until snug. Connect the other end of waterlines to angle stops. Turn on hot and cold angle stops and check for leaks.

STEP 5: INSTALL POP-UP DRAIN

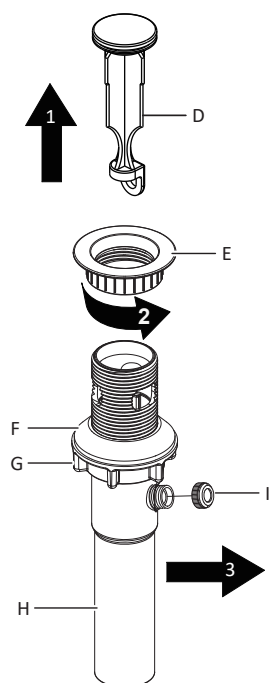


Preparing The Pop-up Assembly

a Remove the pop up stopper (D) and drain flange (E) from the drain body (H).

b Remove pivot nut (I).

c Screw the lock nut (G) all the way down, and push the rubber washer (F) down.

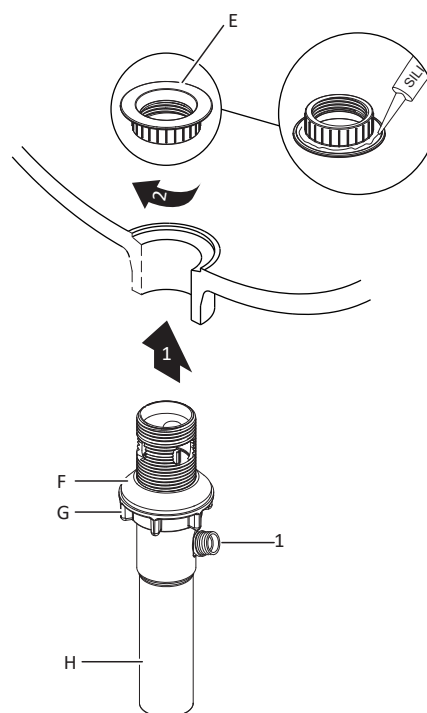


Installing The Drain Body

a Apply silicone sealant (not included) under the drain flange (E) and place the drain flange (E) over the drain hole in the sink.


b From underneath the sink, screw the drain body (H) onto the drain flange (E). Ensure that the opening (1) for the ball rod on the drain body (H) faces towards the rear of the sink.

c Tighten the rubber washer (F) and lock nut (G) on the drain body (H). Do not overtighten.

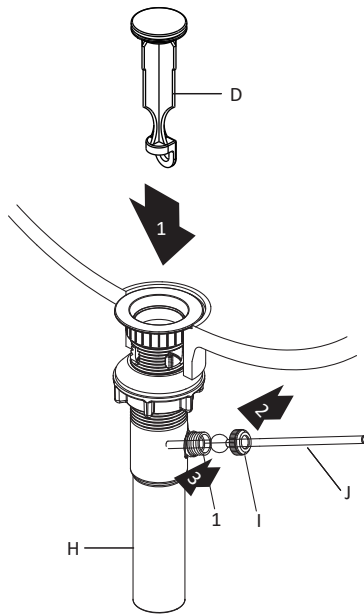


Installing The Stopper And Horizontal Rod

- a Insert the stopper (D) into the drain hole in the sink.
- b Insert the pivot nut (I) into the horizontal rod (J).
- c Insert the horizontal rod (J) into the drain body (H) and through the hole of the stopper (D).
- d Tighten the pivot nut (I).

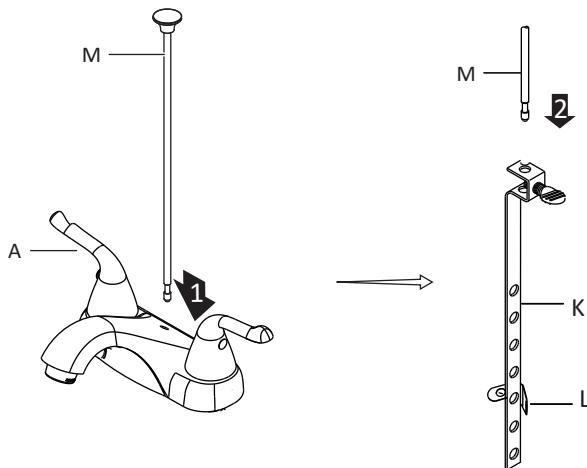


Installing The Lift Rod

- a Slide the lift rod (M) through the faucet (A).
- b Slide the lift rod (M) down into the lift rod strap (K).

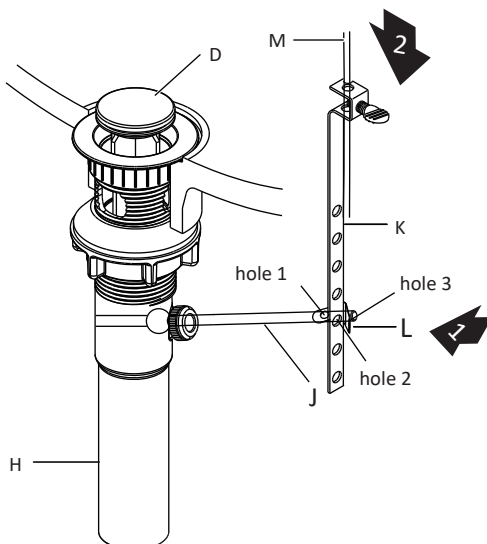


Attaching The Horizontal Rod And Strap

- a Press the rod (J) down to ensure the stopper (D) is in the maximum open position.
- b The horizontal rod (J) passes through hole 1 on clip (L), hole 2 on the lift rod strap (K) and hole 3 on clip (L) successively.
- c Move lift rod strap (K) up or down to choose an appropriate location.
- d Insert lift rod (M) into strap (K) and tighten screw, make necessary distance adjustment.

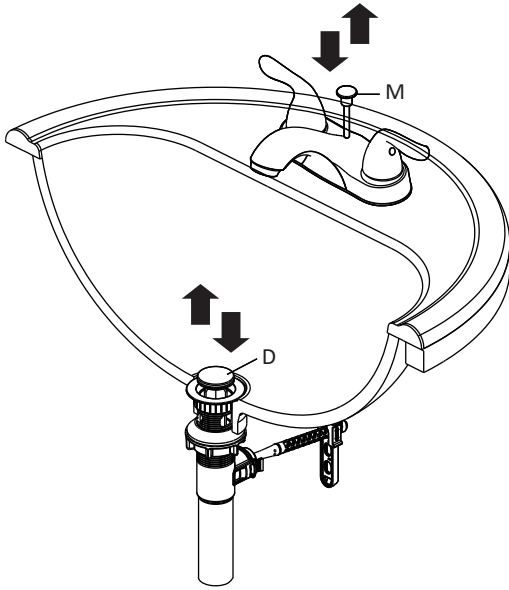

Checking The Operation Of The Pop Up

Operate the lift rod (M) up and down to verify that the stopper (D) opens and closes correctly.

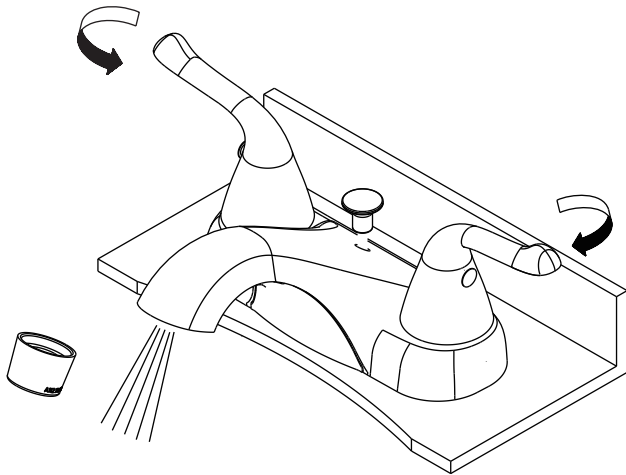

STEP 6: FLUSH SYSTEM/CHECK FOR LEAKS

Remove aerator set(18, 19) from spout. Turn faucet on and let the water run for 60 seconds to flush any debris.



CARE & MAINTENANCE:

*To keep the product clean & shining, follow the steps below:

1. Rinse with clean water & dry with a soft cloth
2. Do not clean with soaps, acid polish, abrasives, or harsh cleaners
3. Do not use cloth with a coarse surface
4. Unscrew the aerator and clean when necessary