




97110 Product Installation Instructions

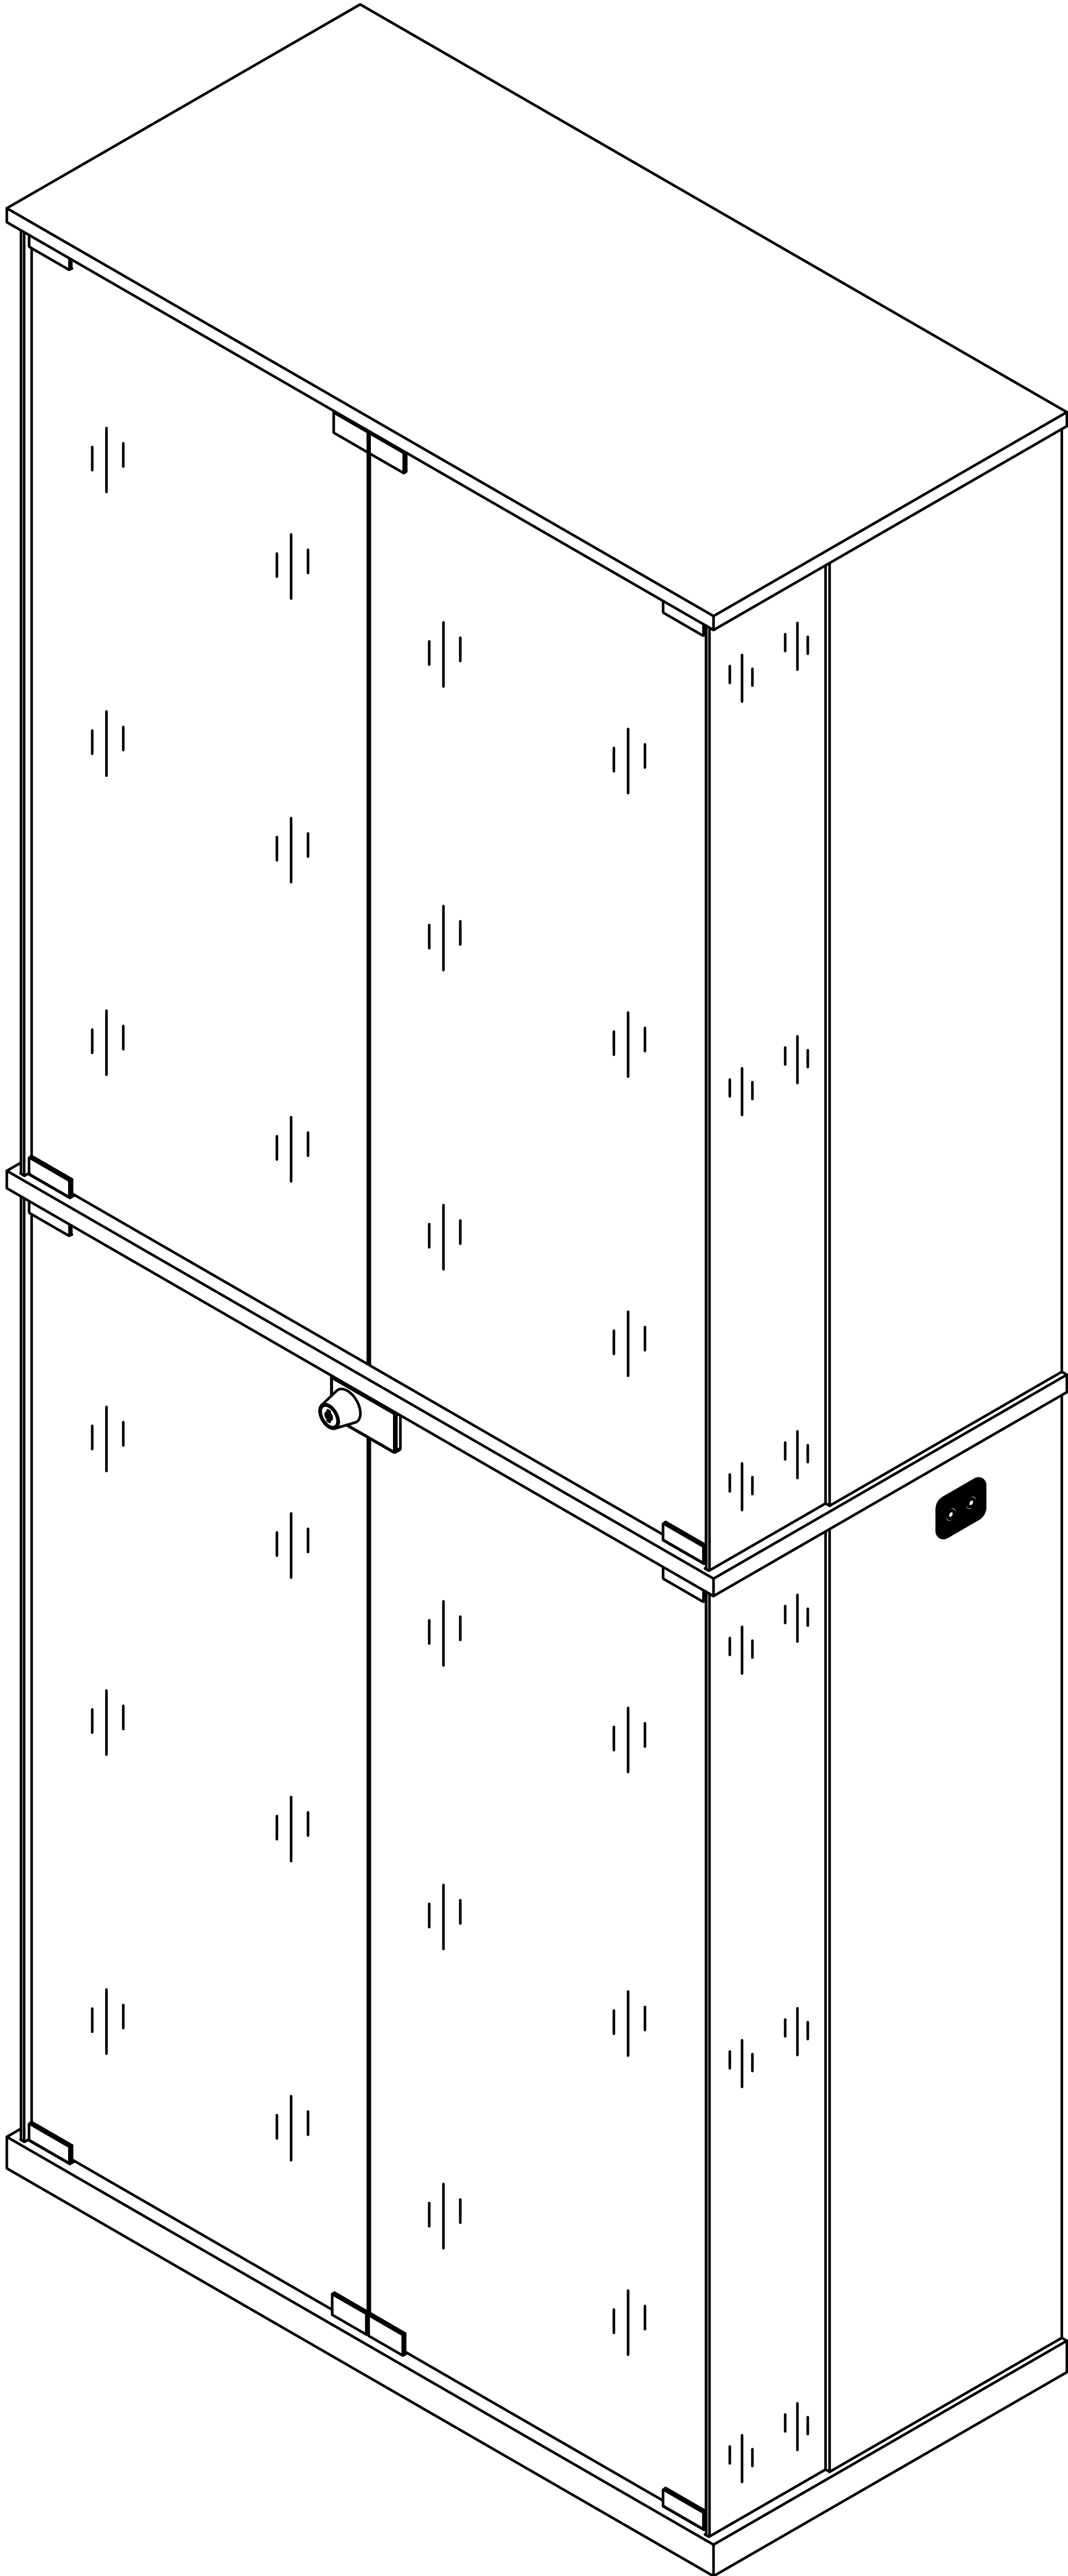


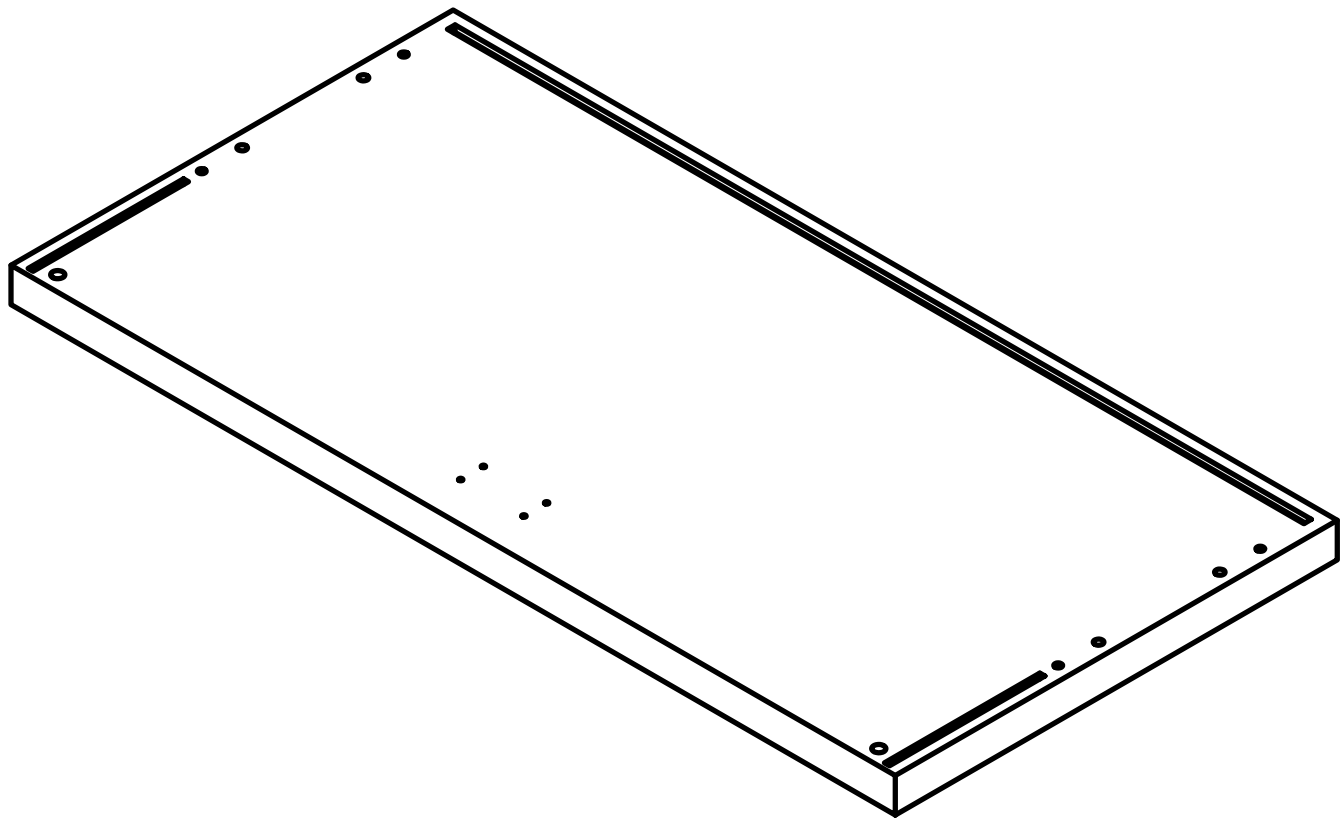


Ax1

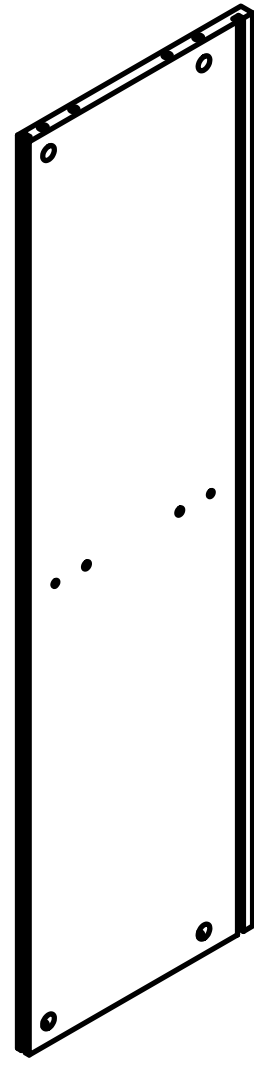


Bx1

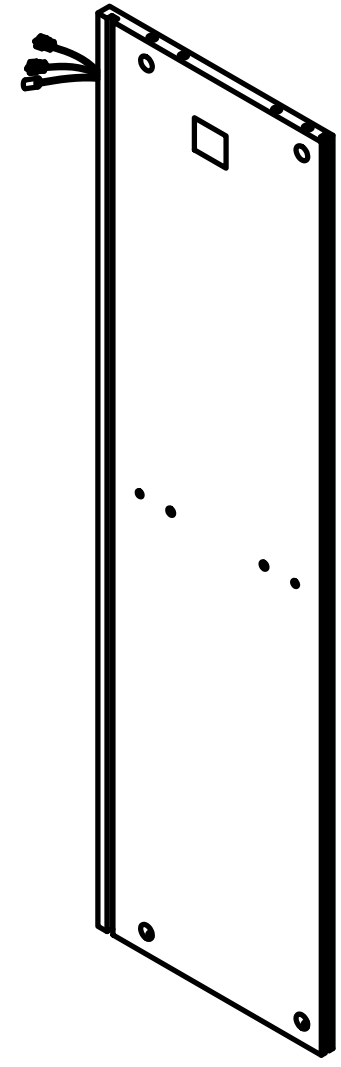


Cx1

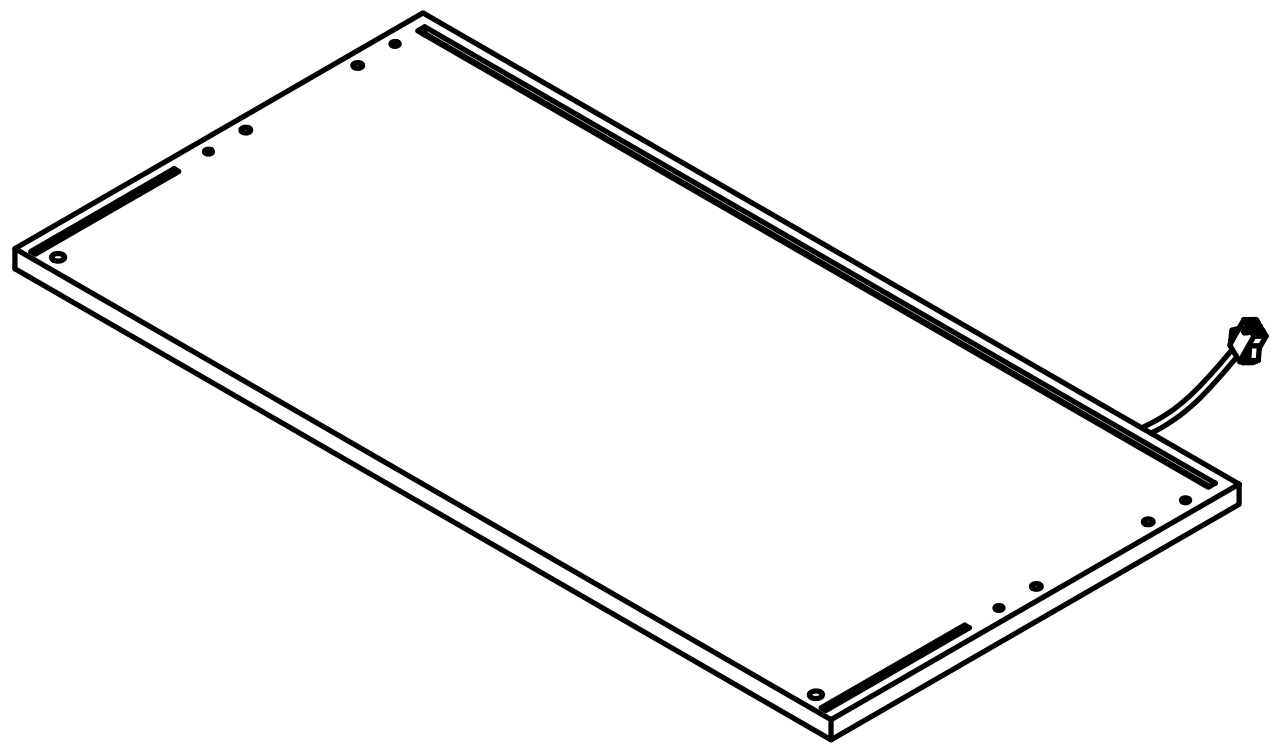


Dx1

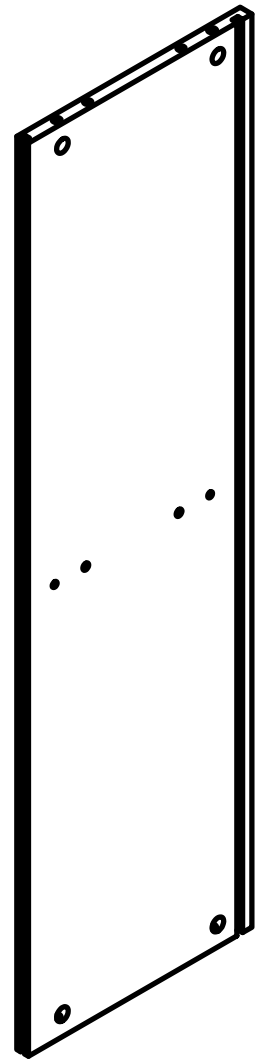


Ex2

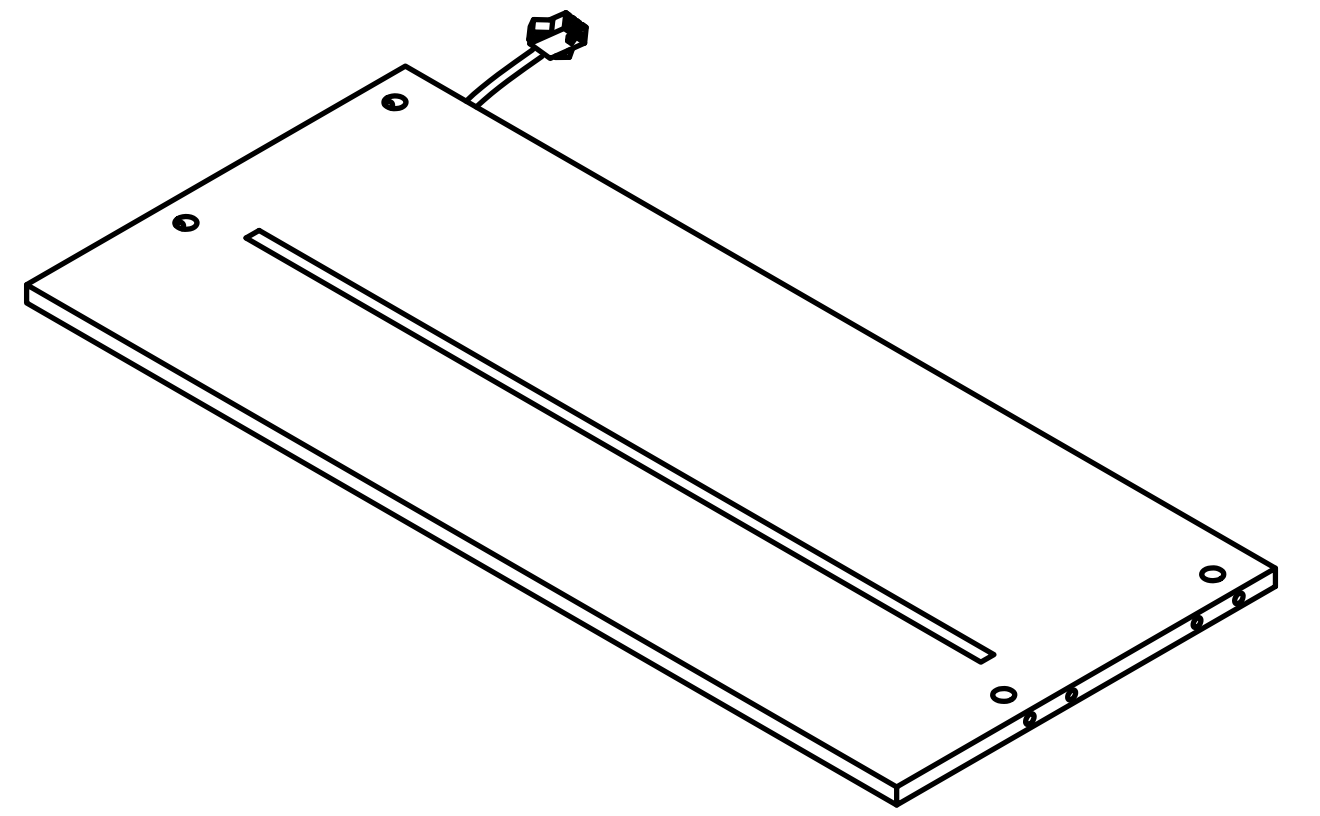


Fx2

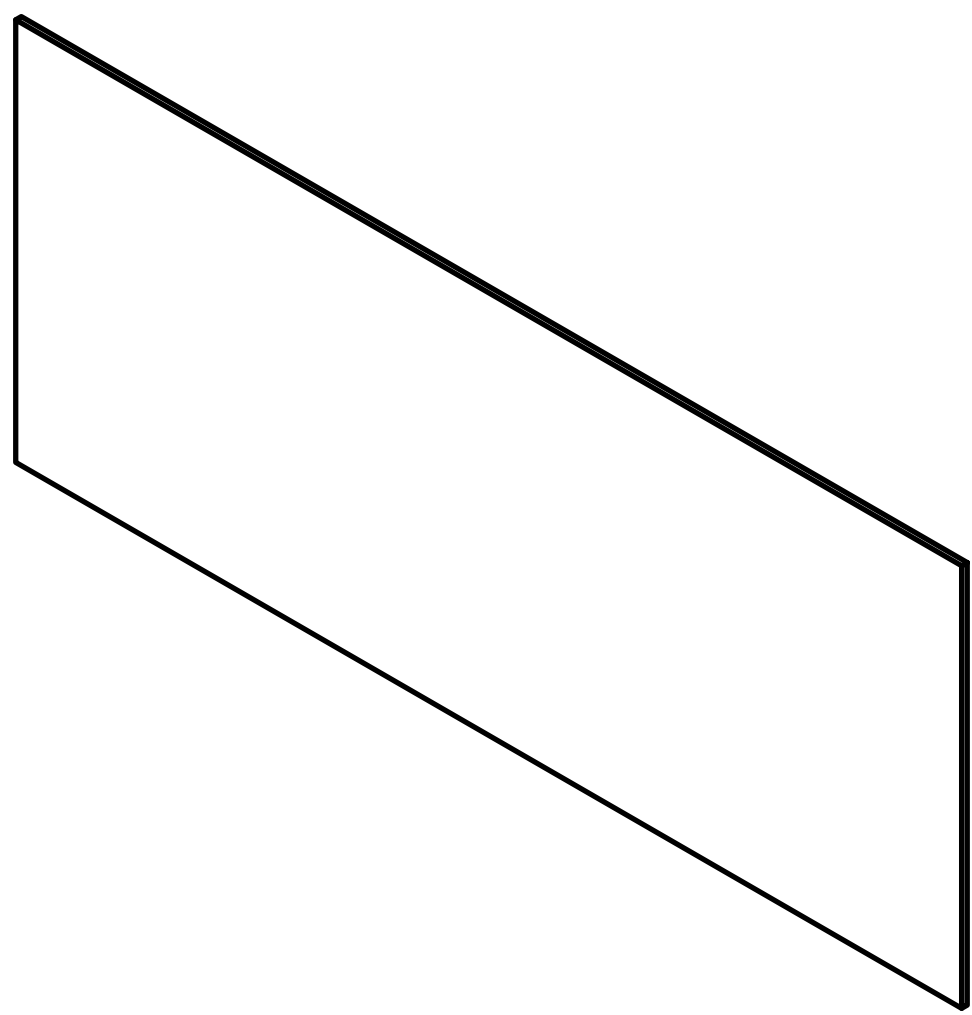


Gx4

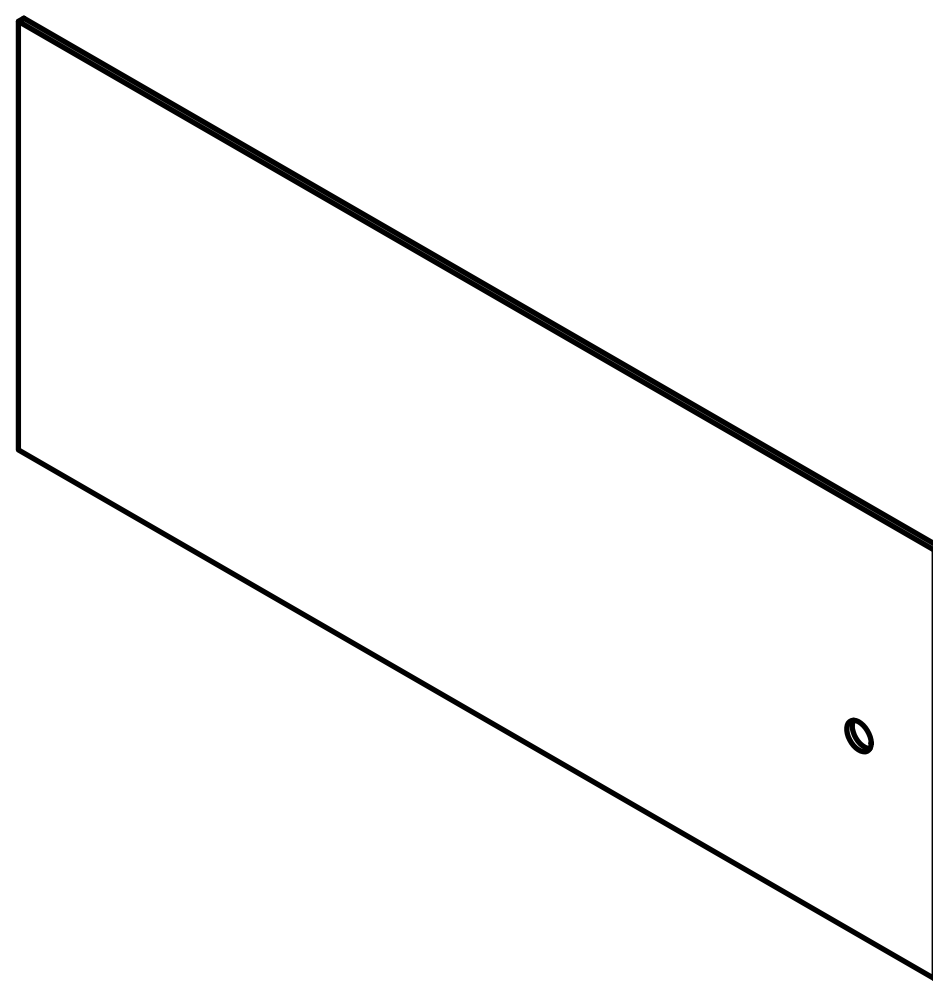


Hx2

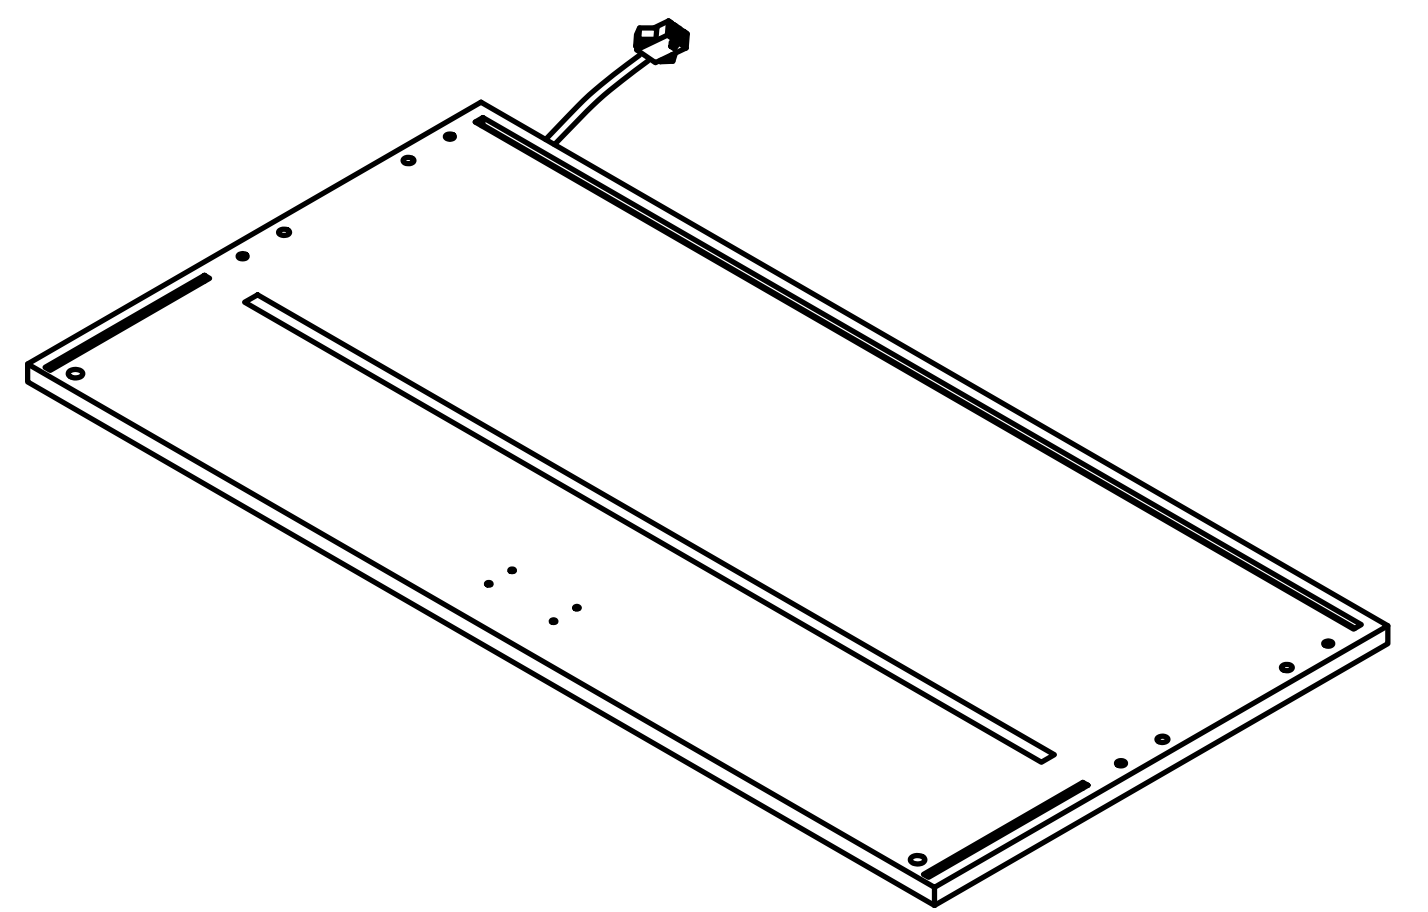

















Ix1

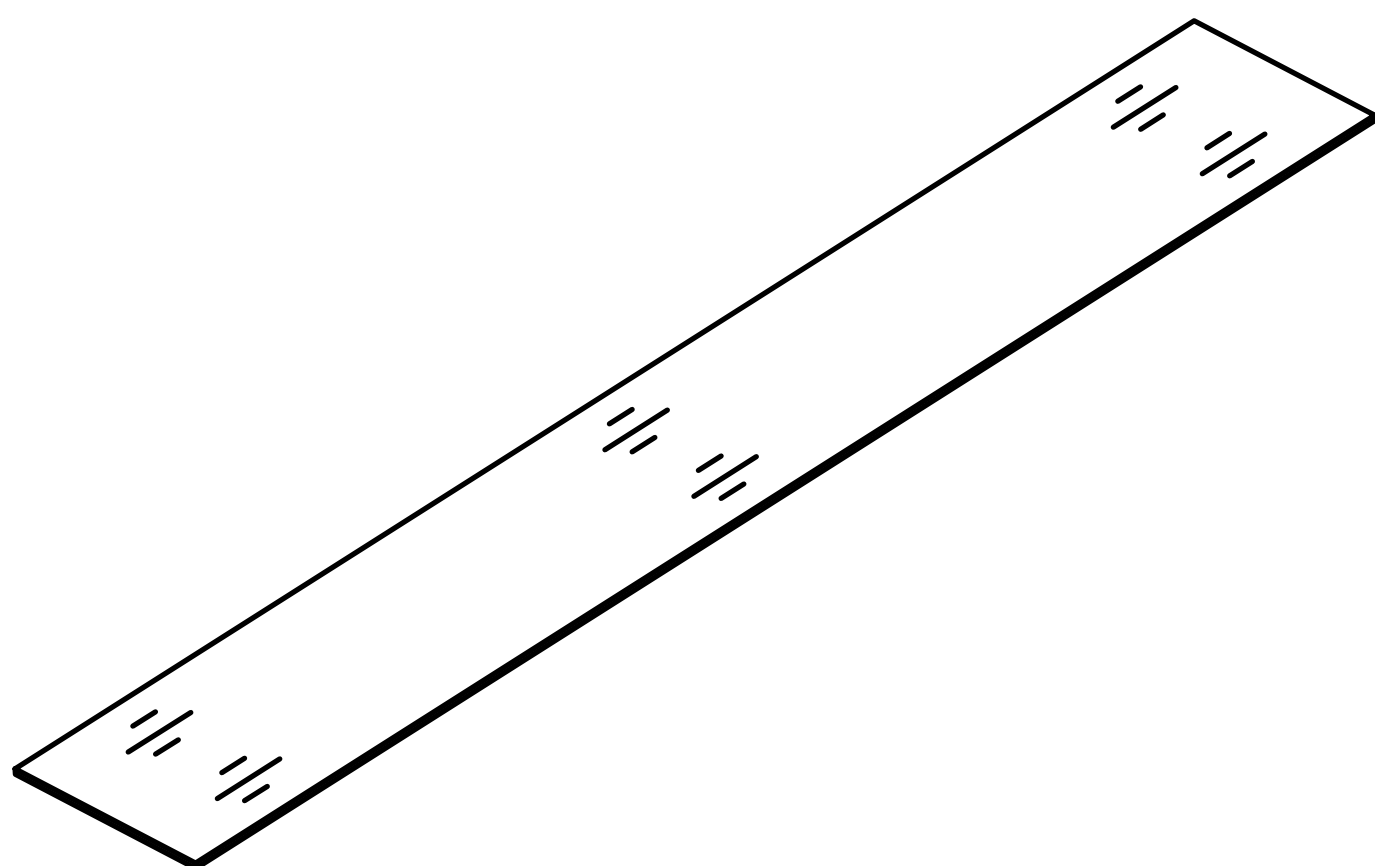


Jx4

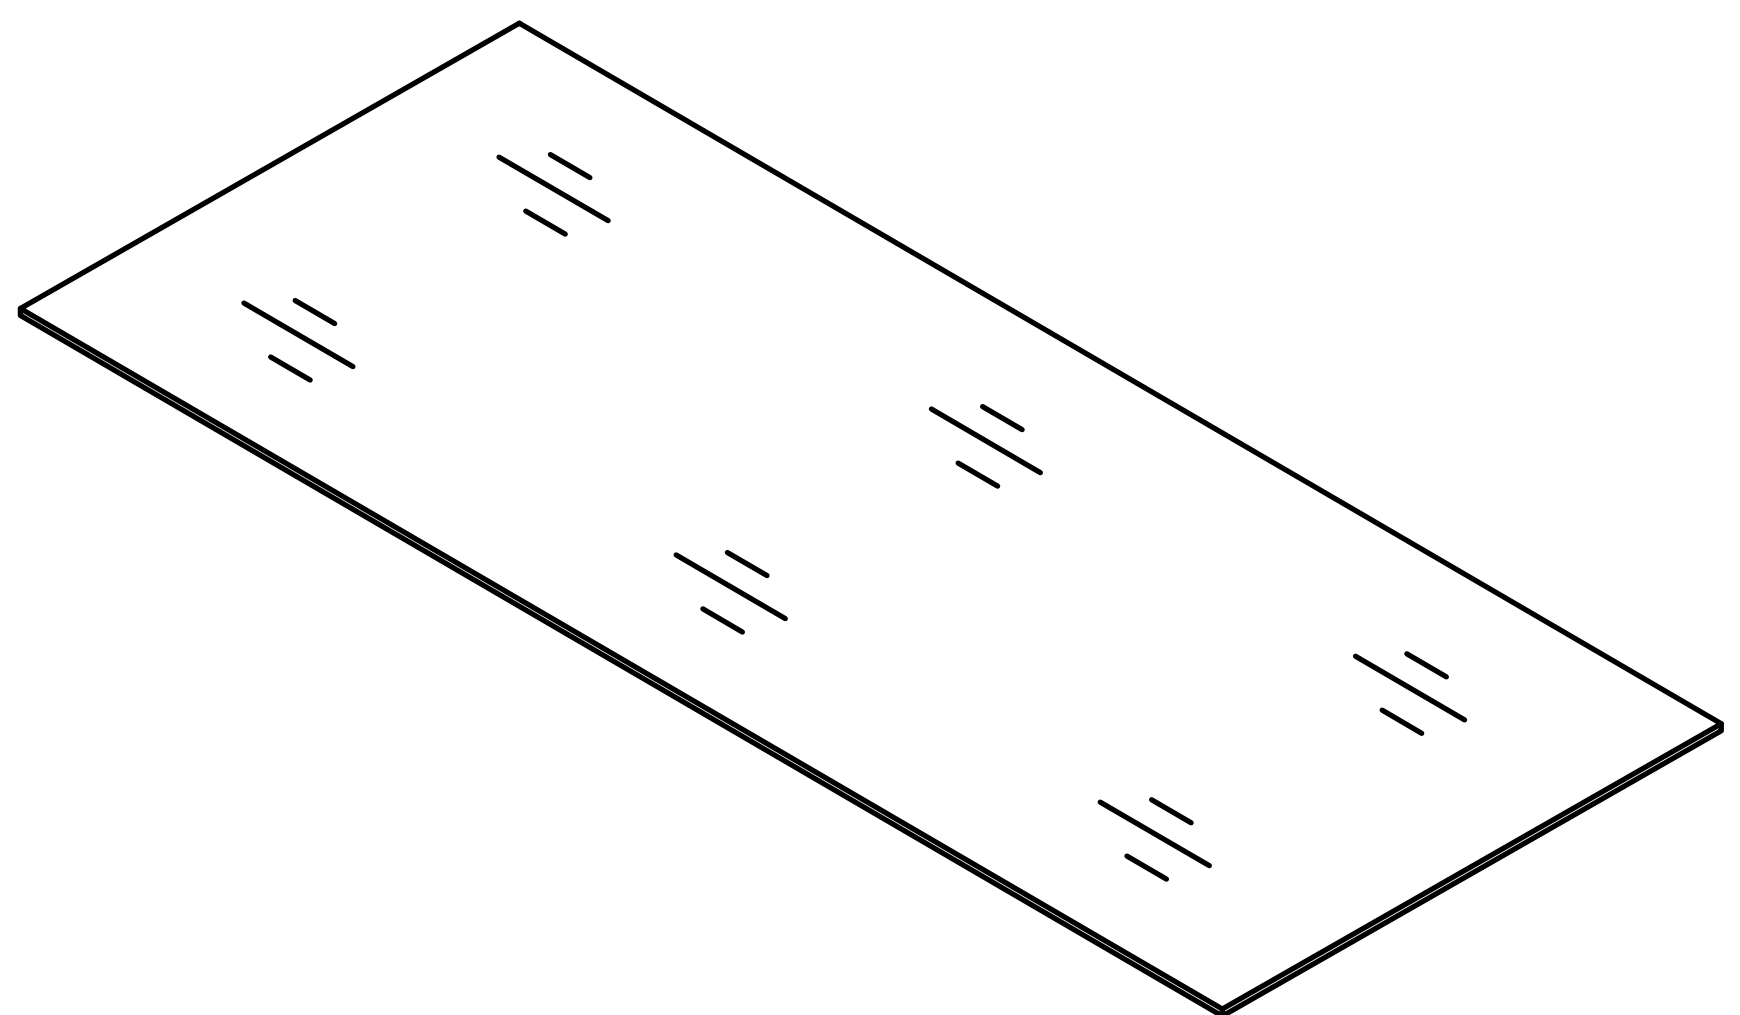

Kx4

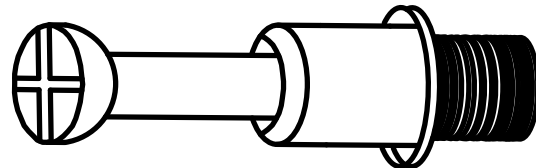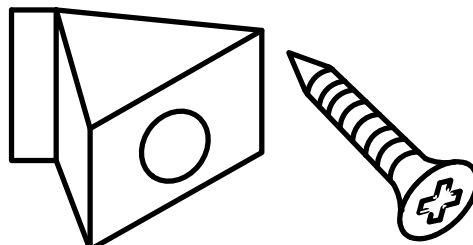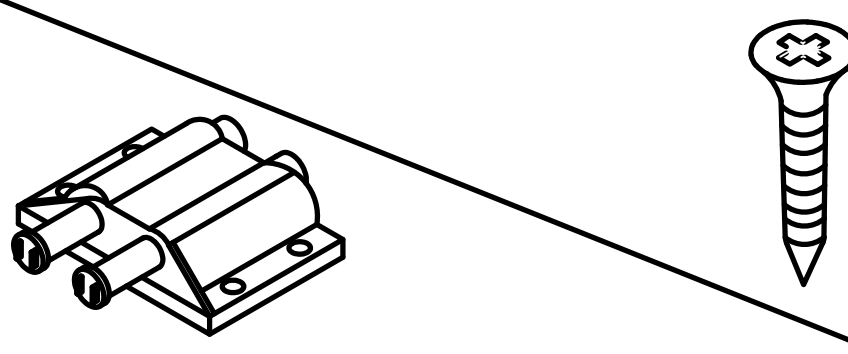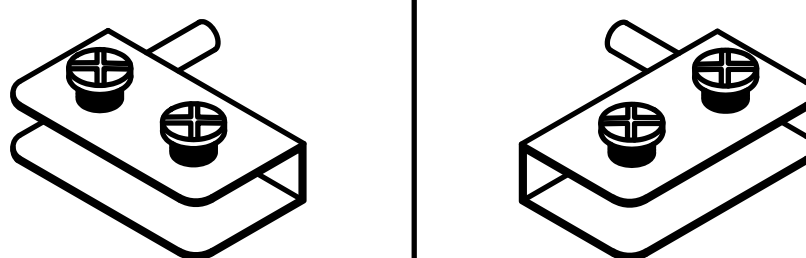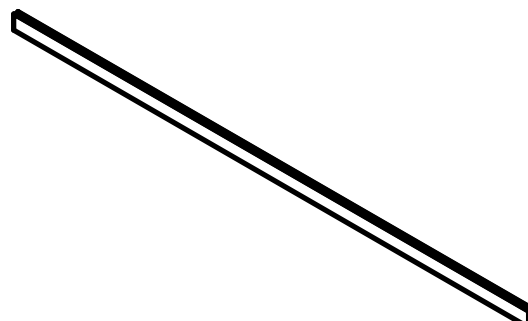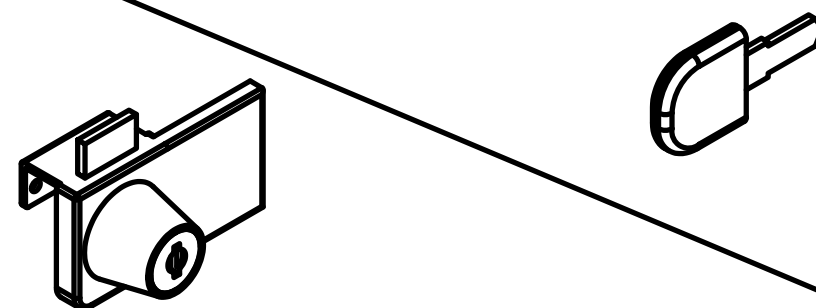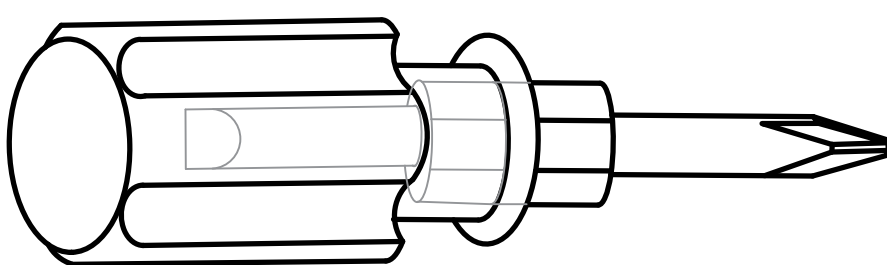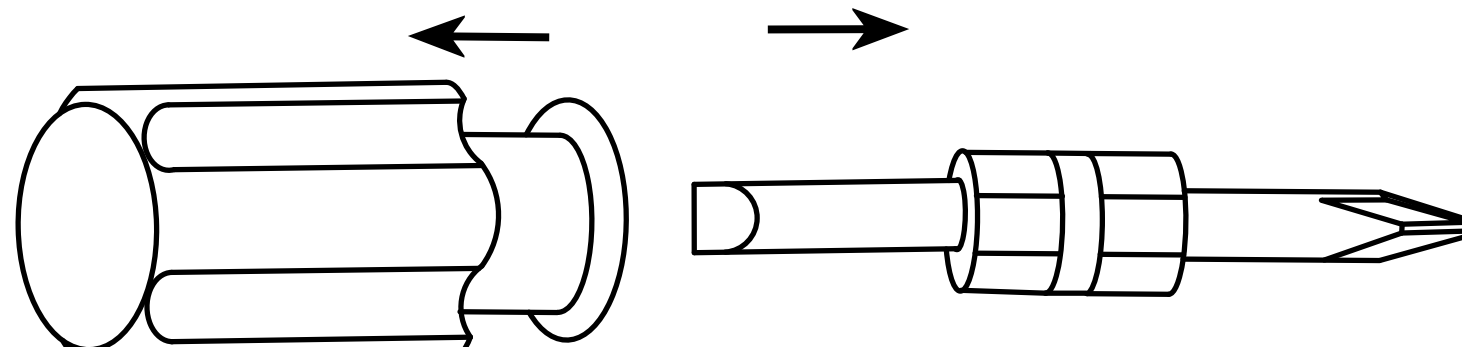
Accessories list				
①		Two in one screw (6x28mm)	24pcs +3pcs	
②		Two in one nut (10x12mm)	24pcs +3pcs	
③		Wood Chipping (6x30mm)	24pcs +4pcs	
④		Non-slip pads	4pcs +2pcs	
⑤		Fixing clip & screw (3x16mm)	24pcs +3pcs	
⑥		Wire clamp	5pcs +2pcs	
⑦		Forked line	2pcs	
⑧		Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs	
		Iron sheet	4pcs	
		Rubber ring	8pcs	
		Hinge	4pcs	4pcs
⑨		Backboard card strip	4pcs	
⑩		Double door glass lock Key	2pcs 1pcs	
		AC/DC Adapter (12V=3.0A)	1pcs	
⑪	Anti Fall Hardware  x2  x2  x4  x2 (3.5x14mm)  x2 (4x45mm)	Double-head screwdriver, use as required  1pcs 		
			2	

Product structure decomposition

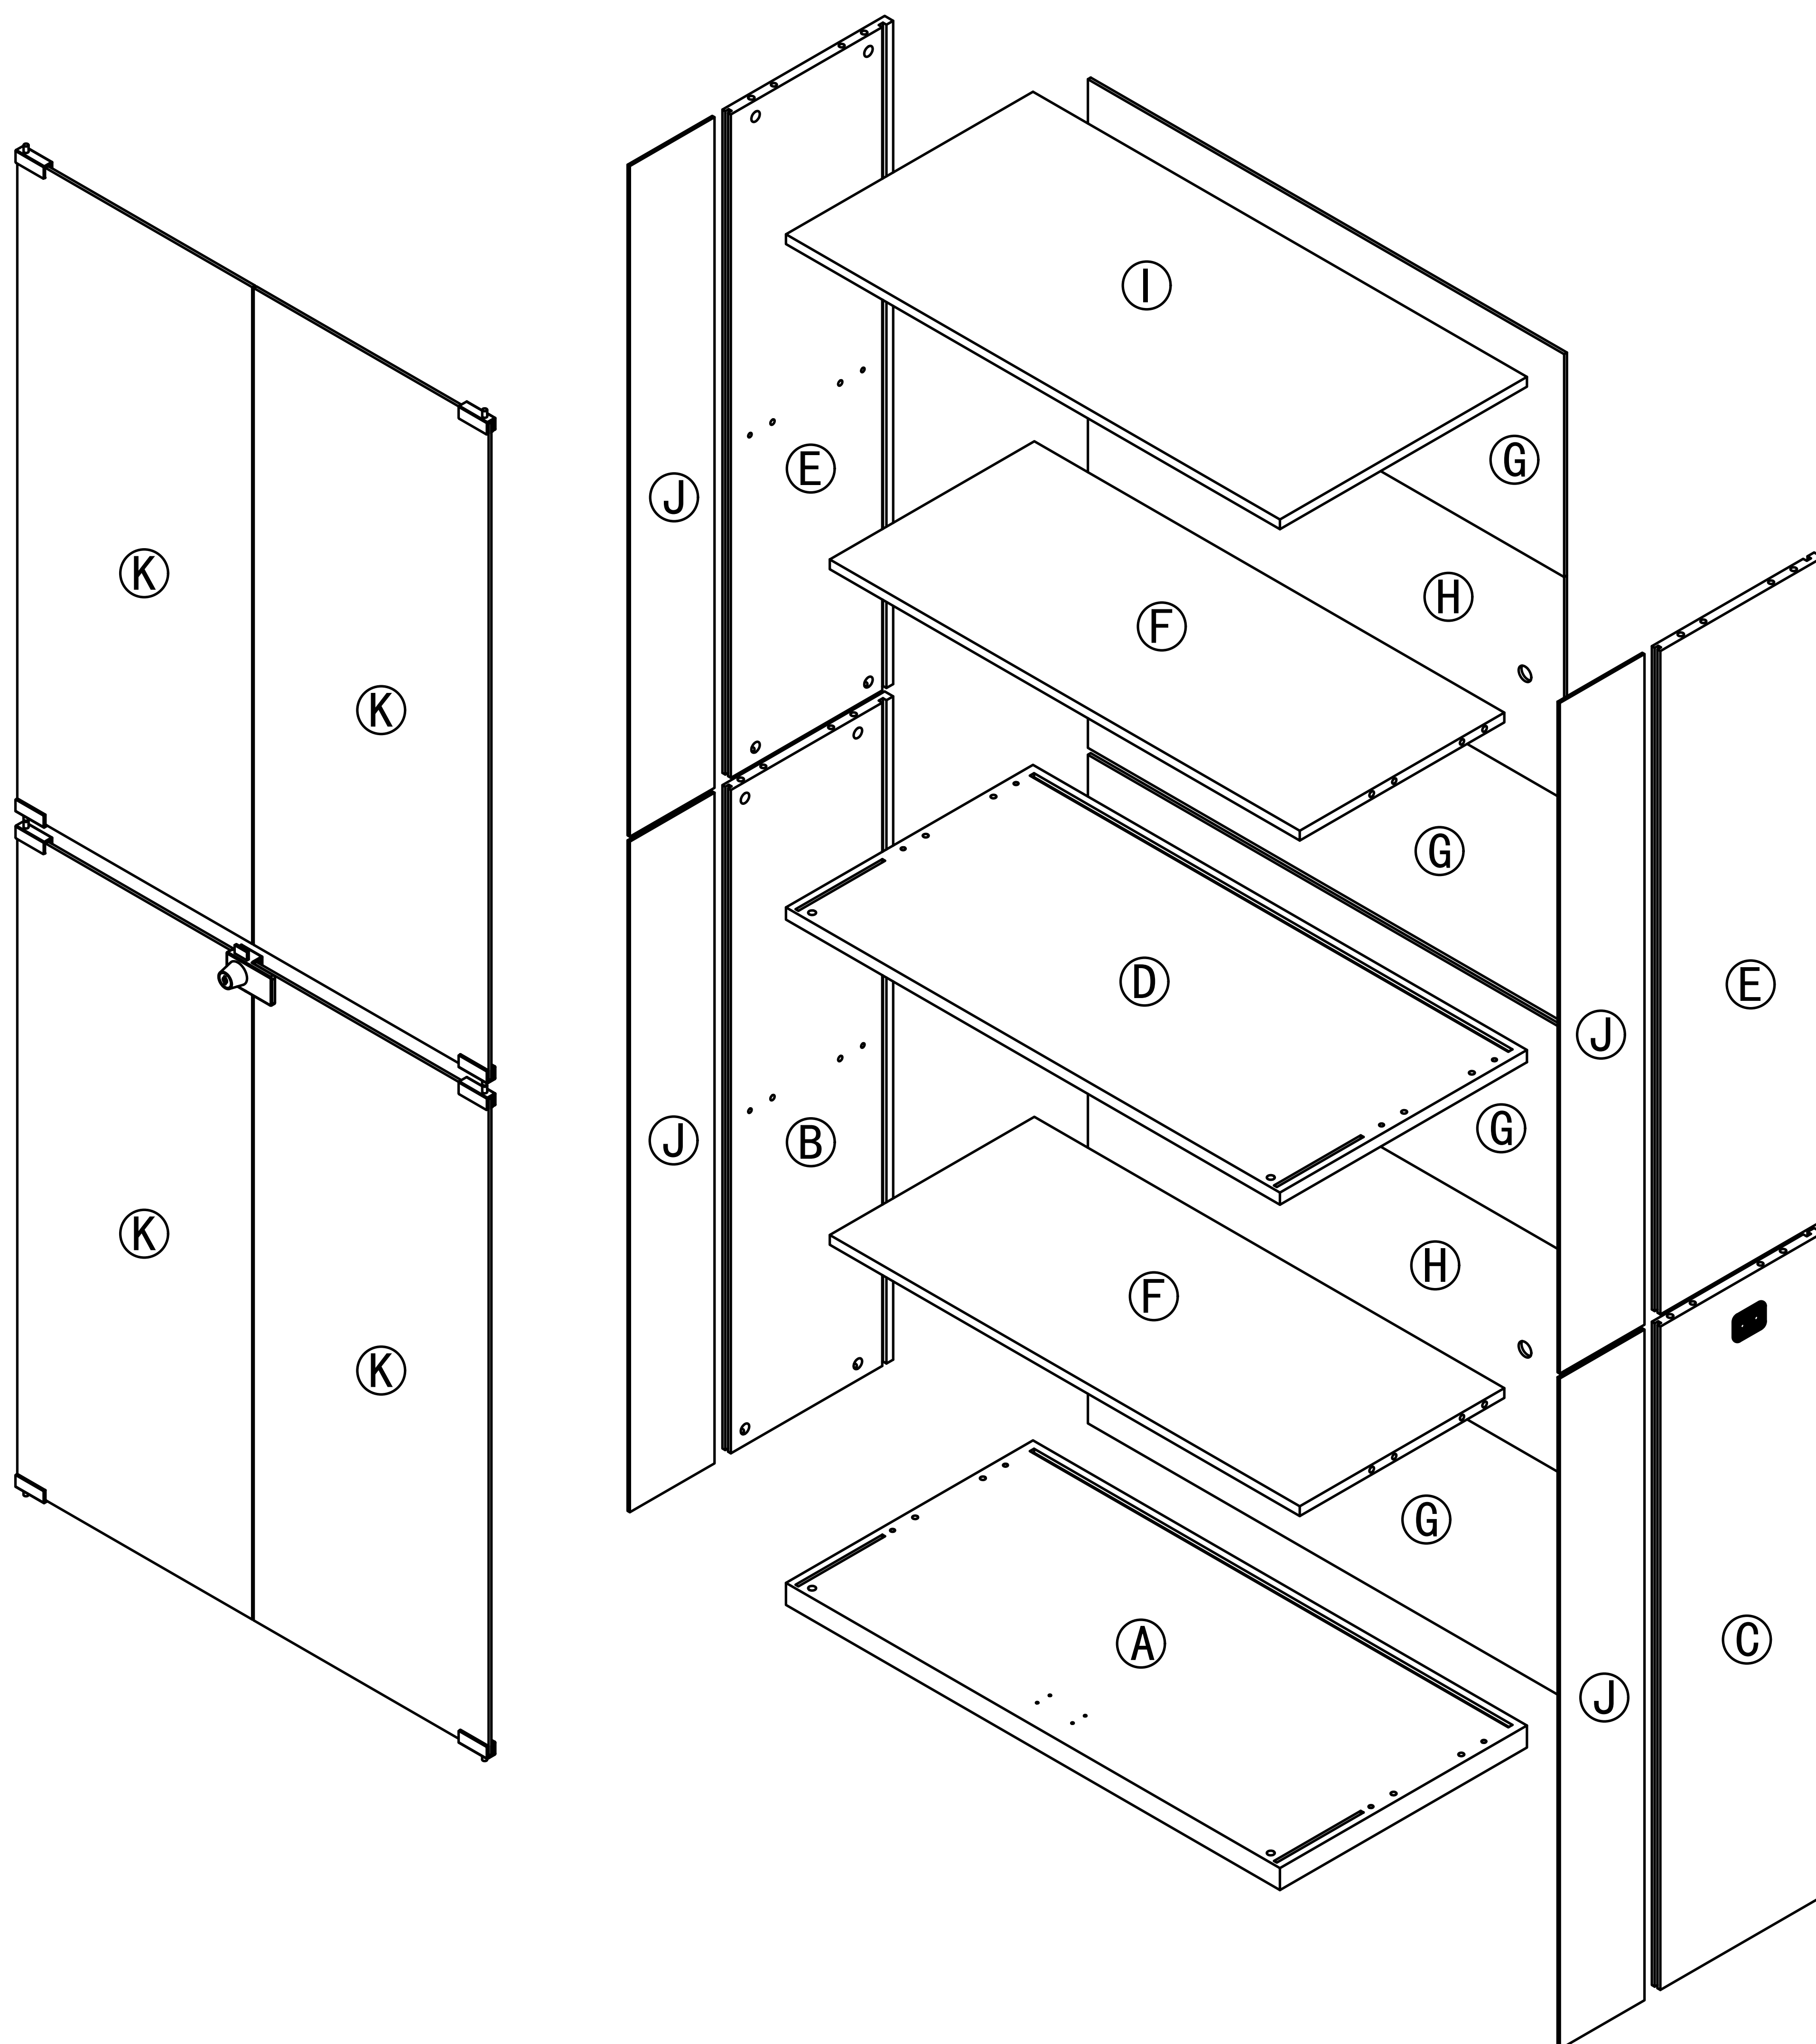


Use parts ① and ②




Step1

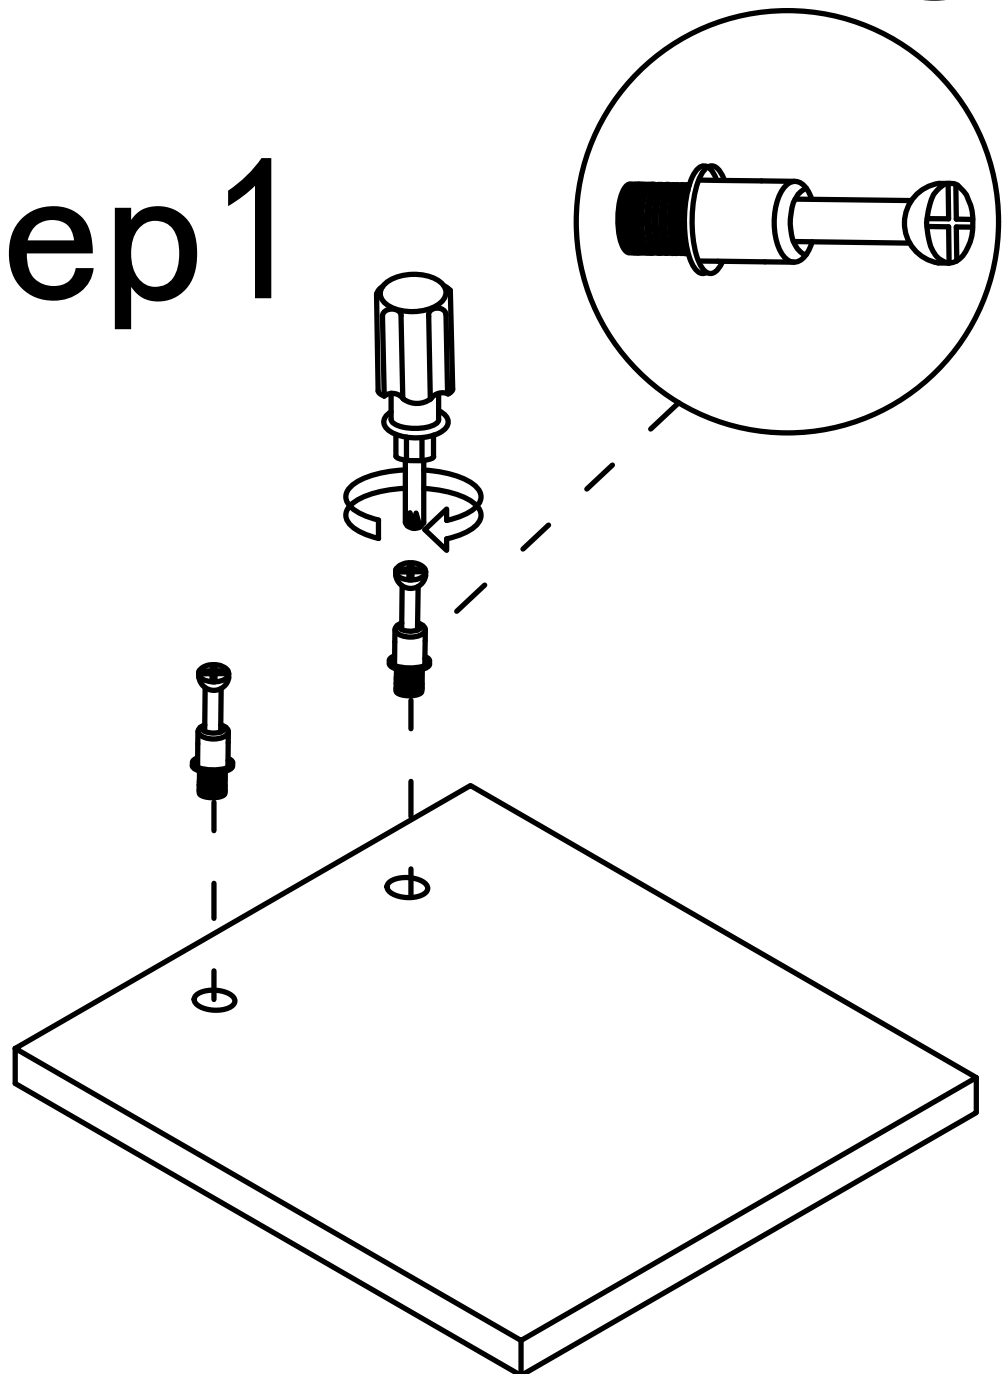

Step2

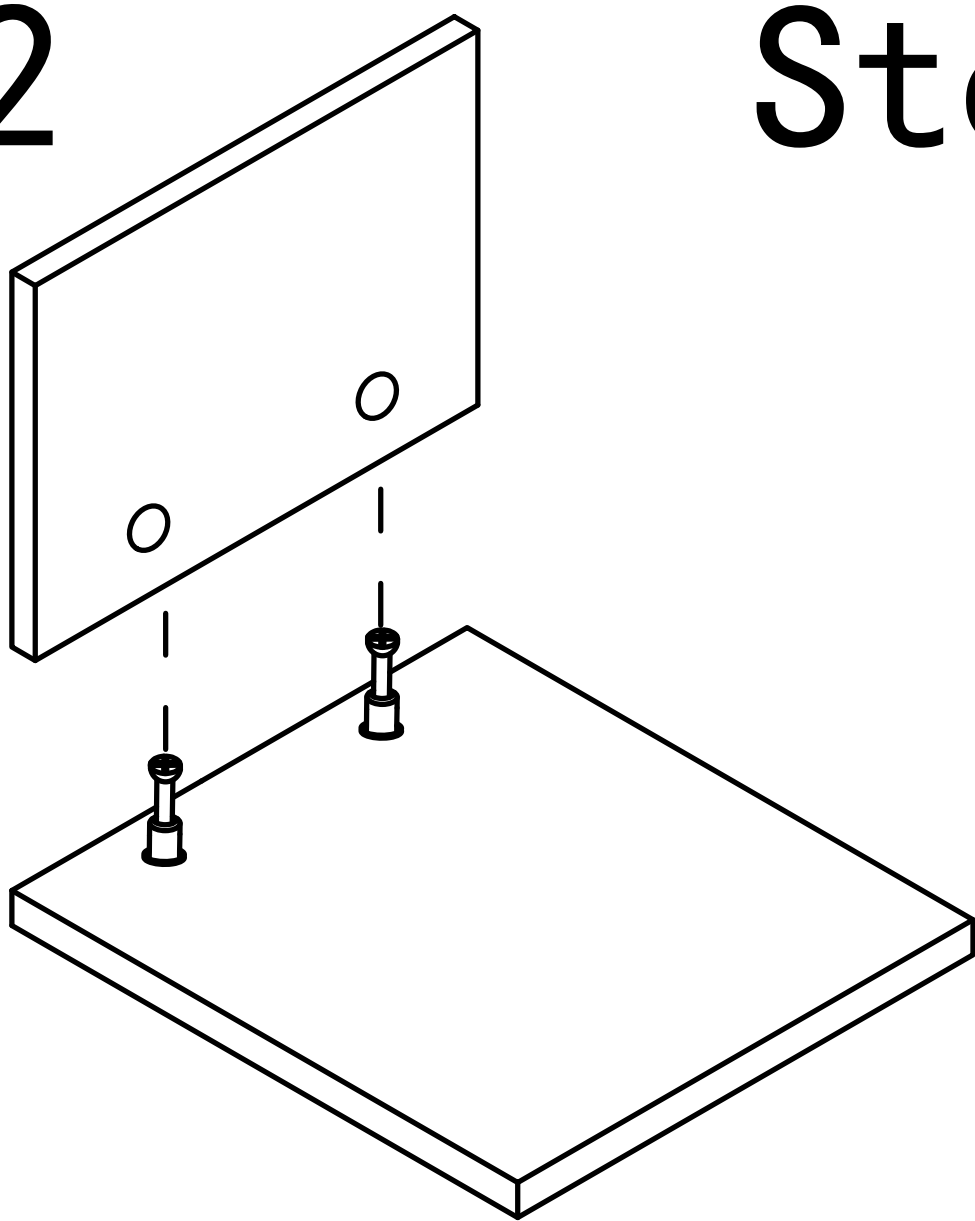


Step3

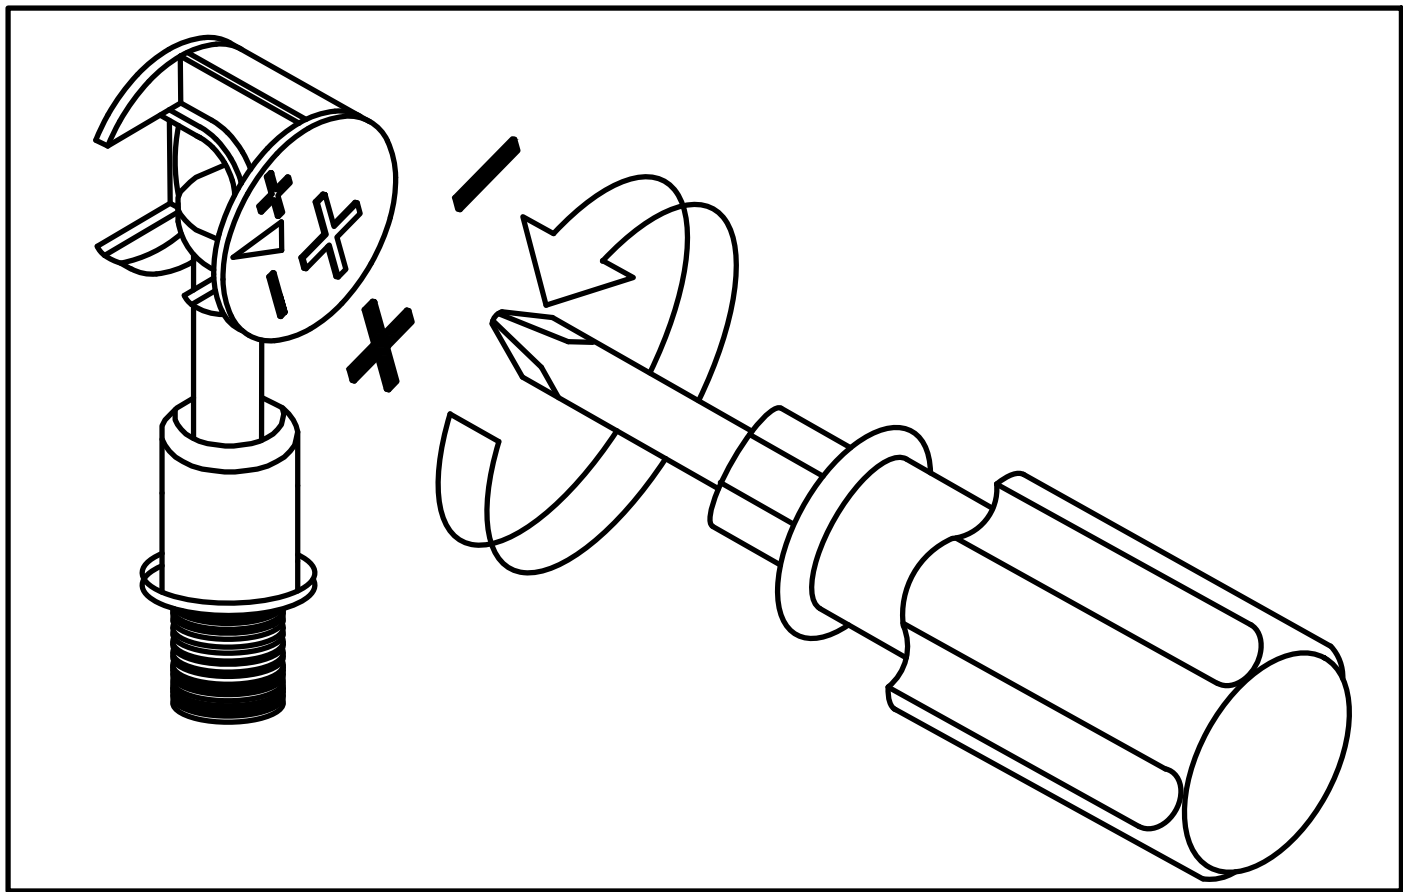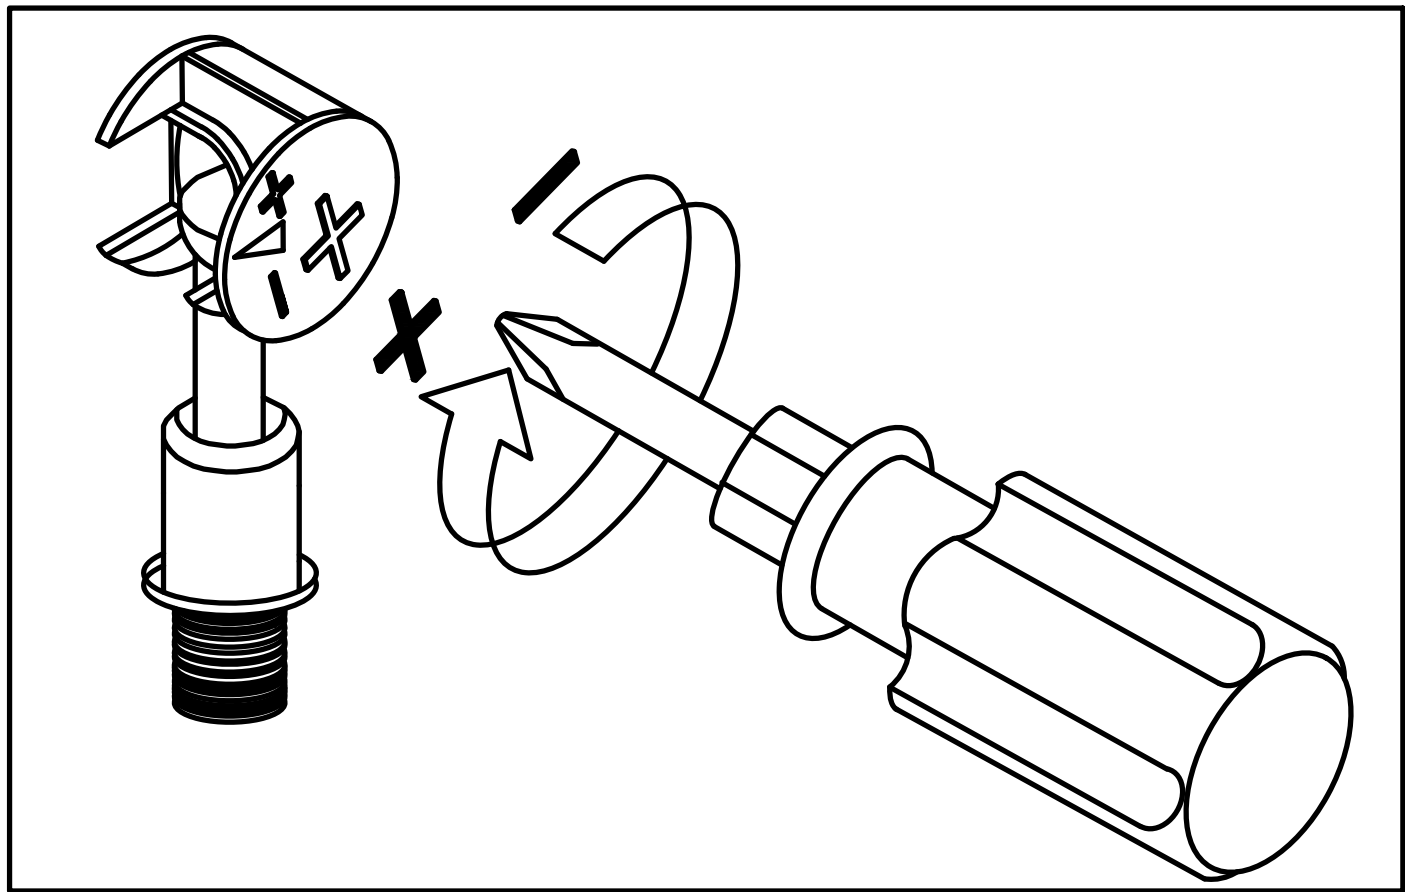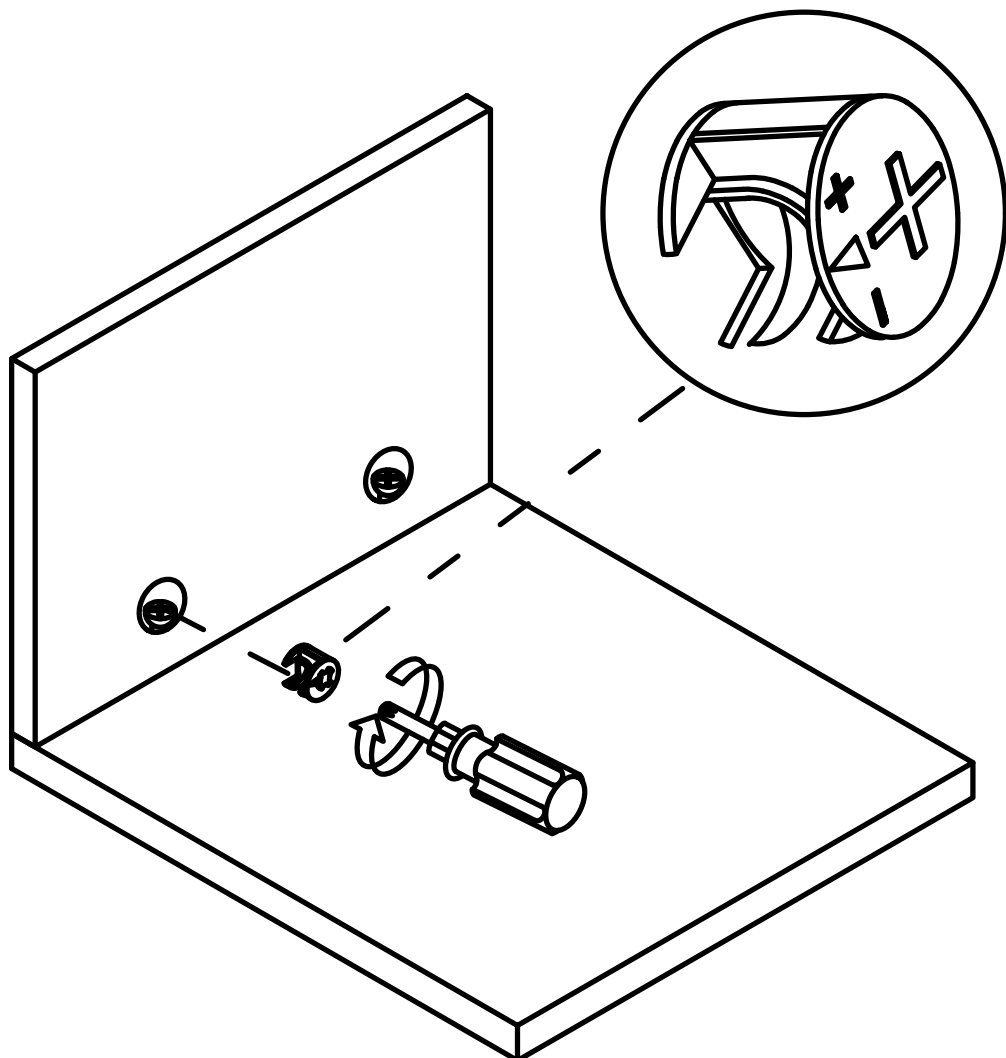


Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign

Step 1

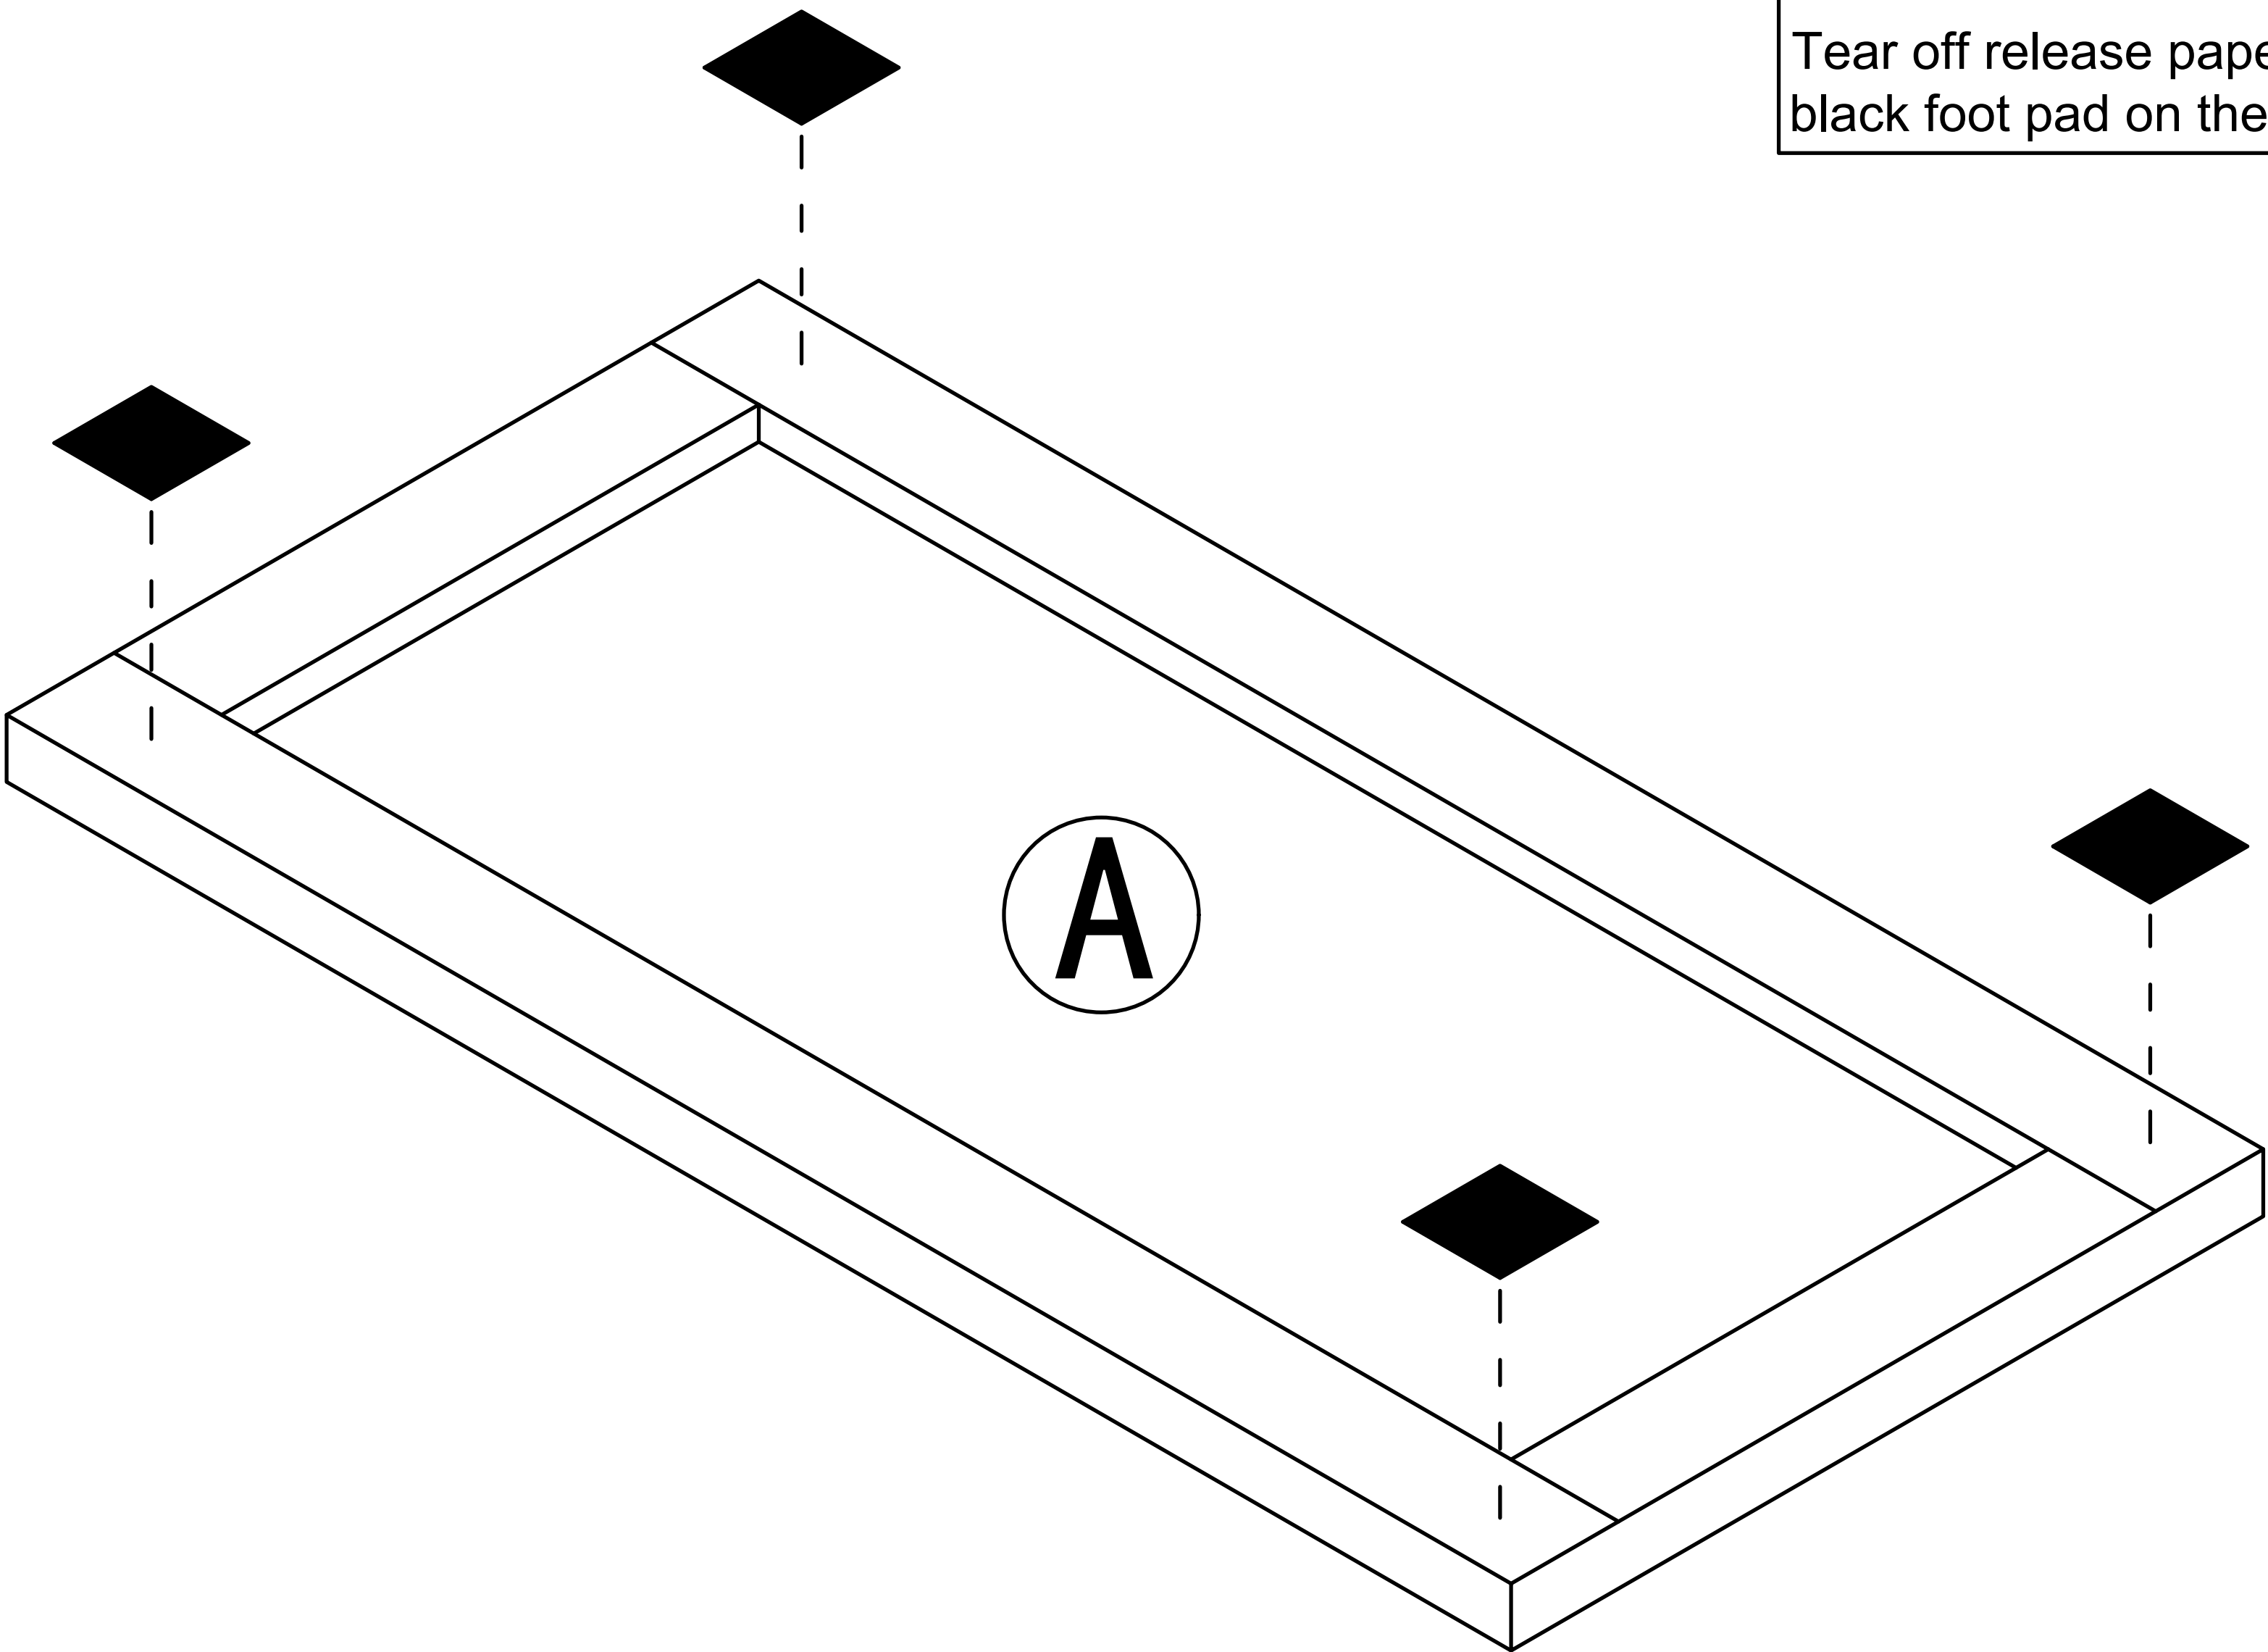

4

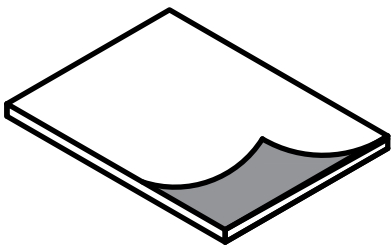




x4

Tear off release paper and stick the black foot pad on the board


4


Step 2

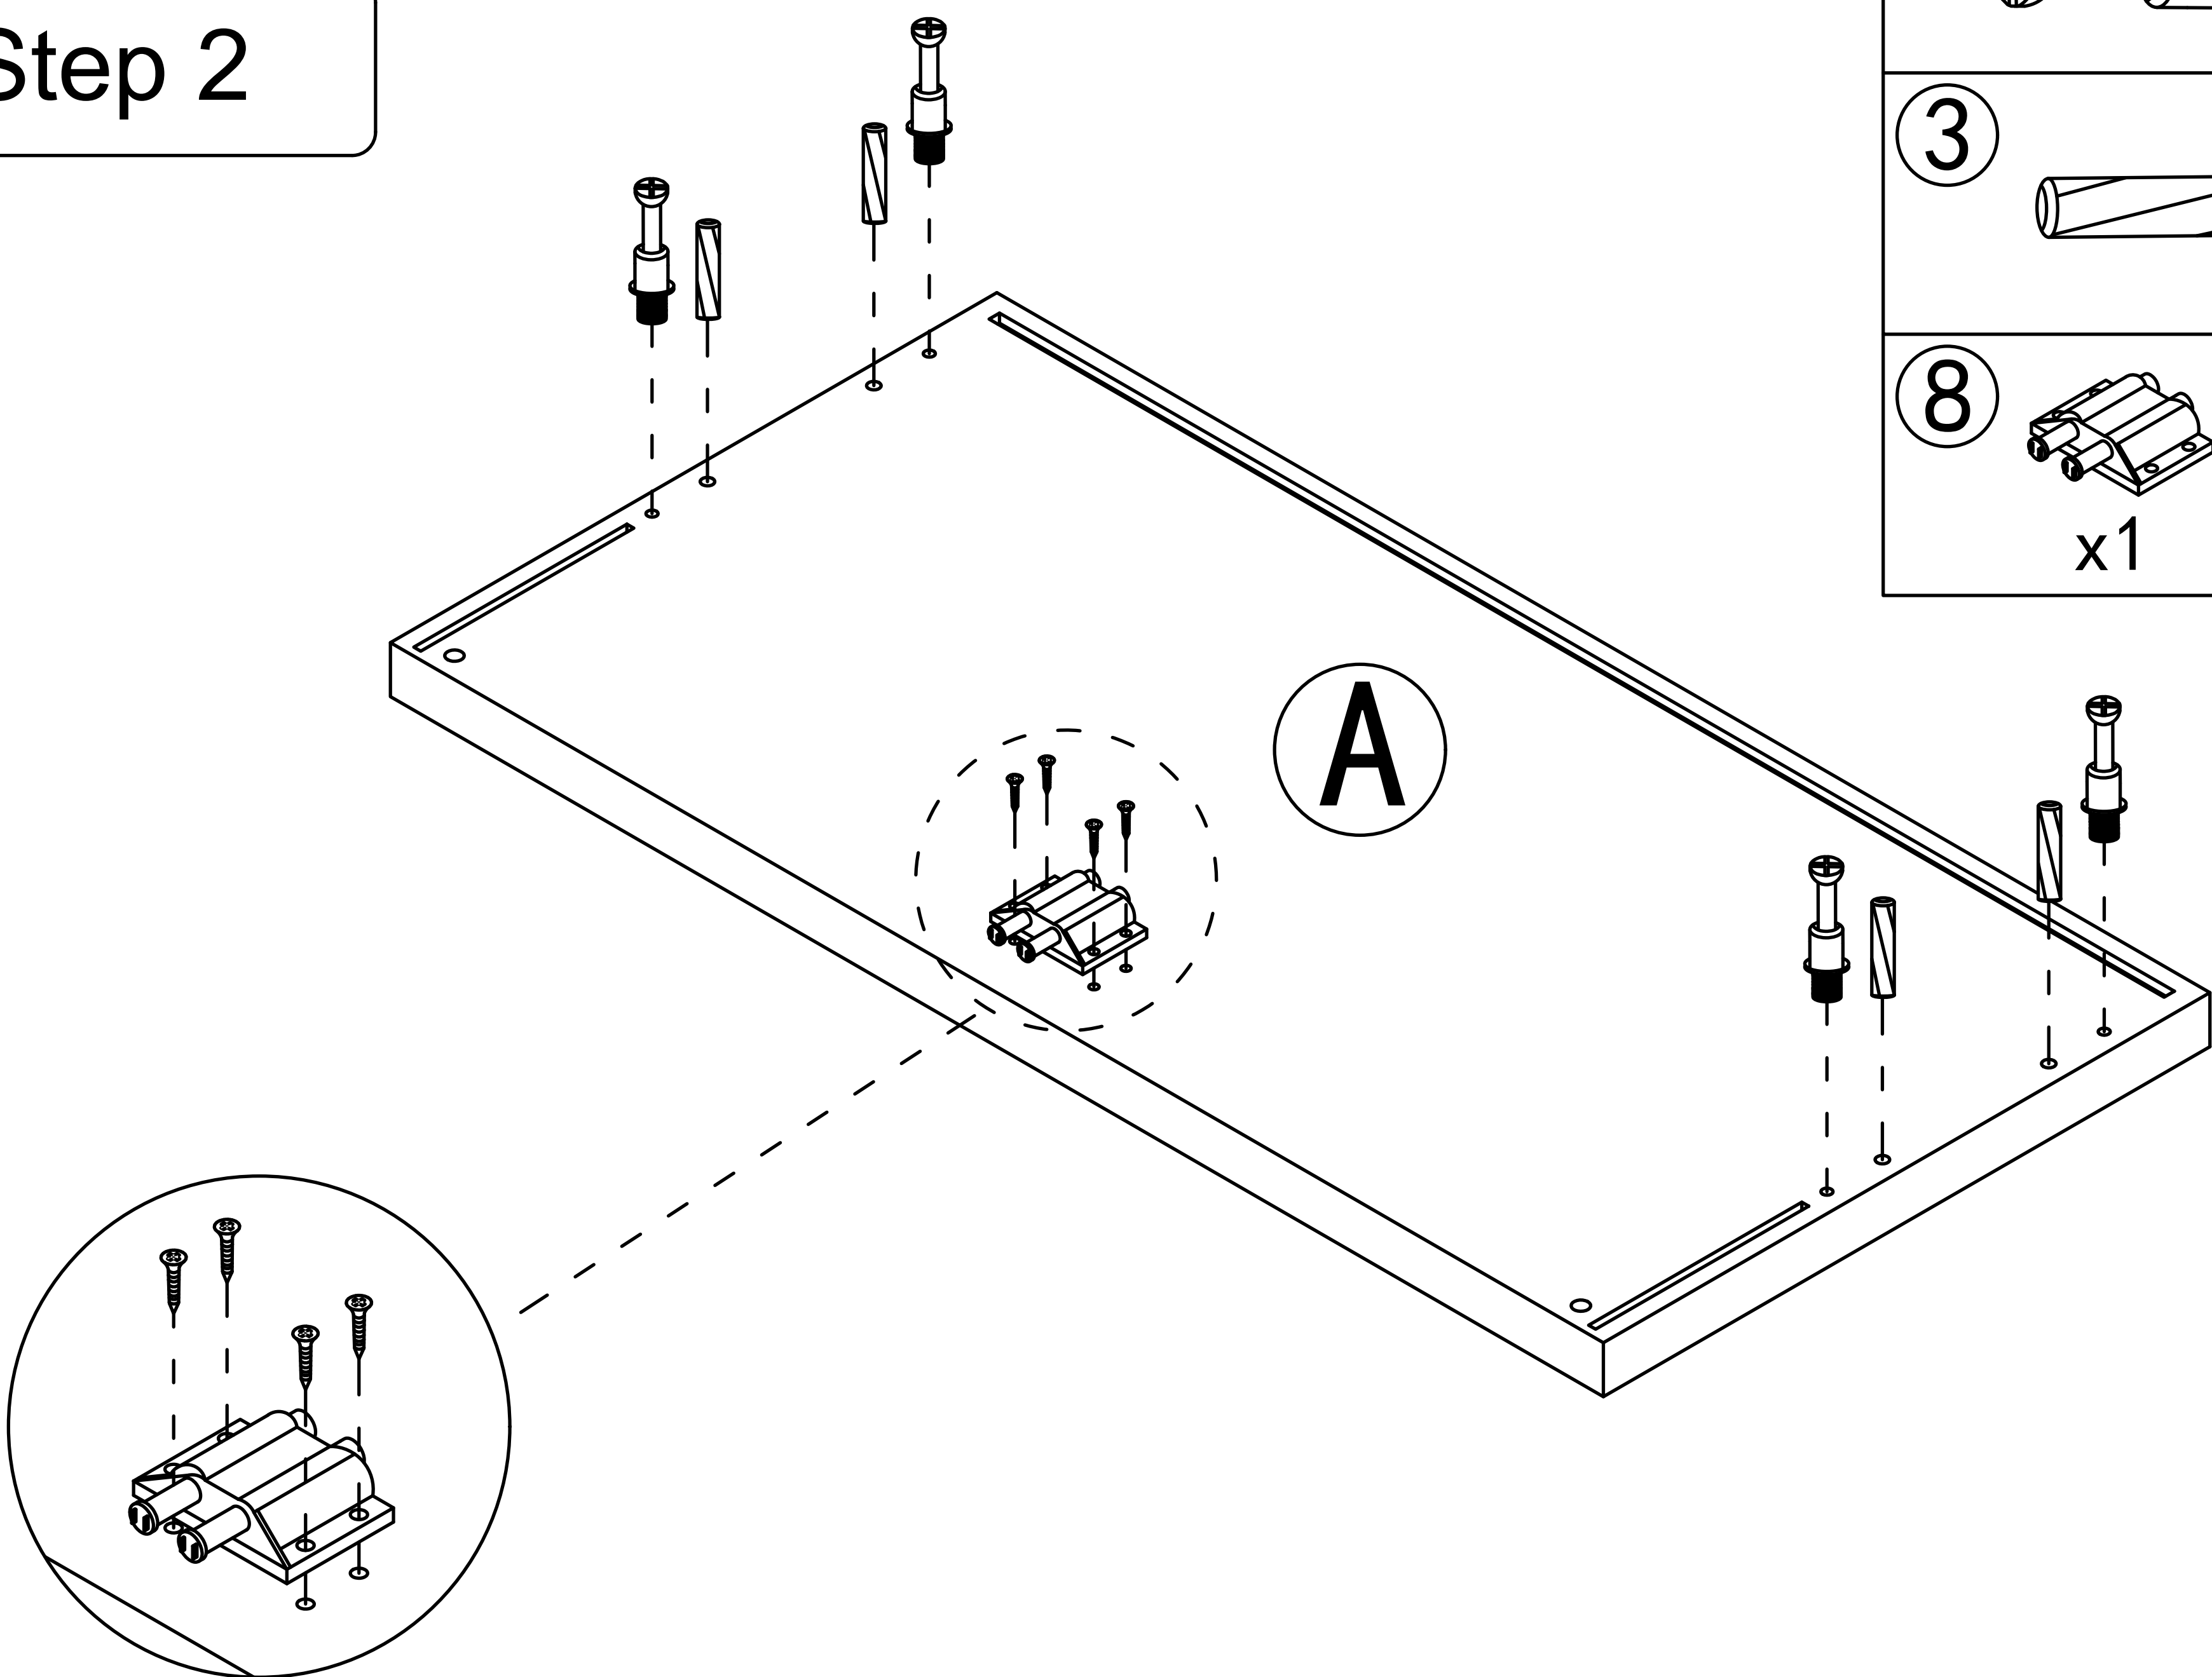

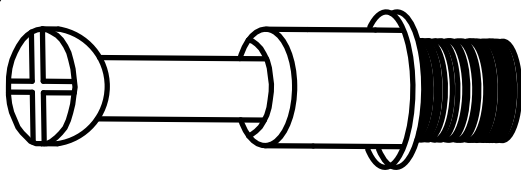

- ①  x4
- ③  x4
- ⑧  x1  x4

Step 3


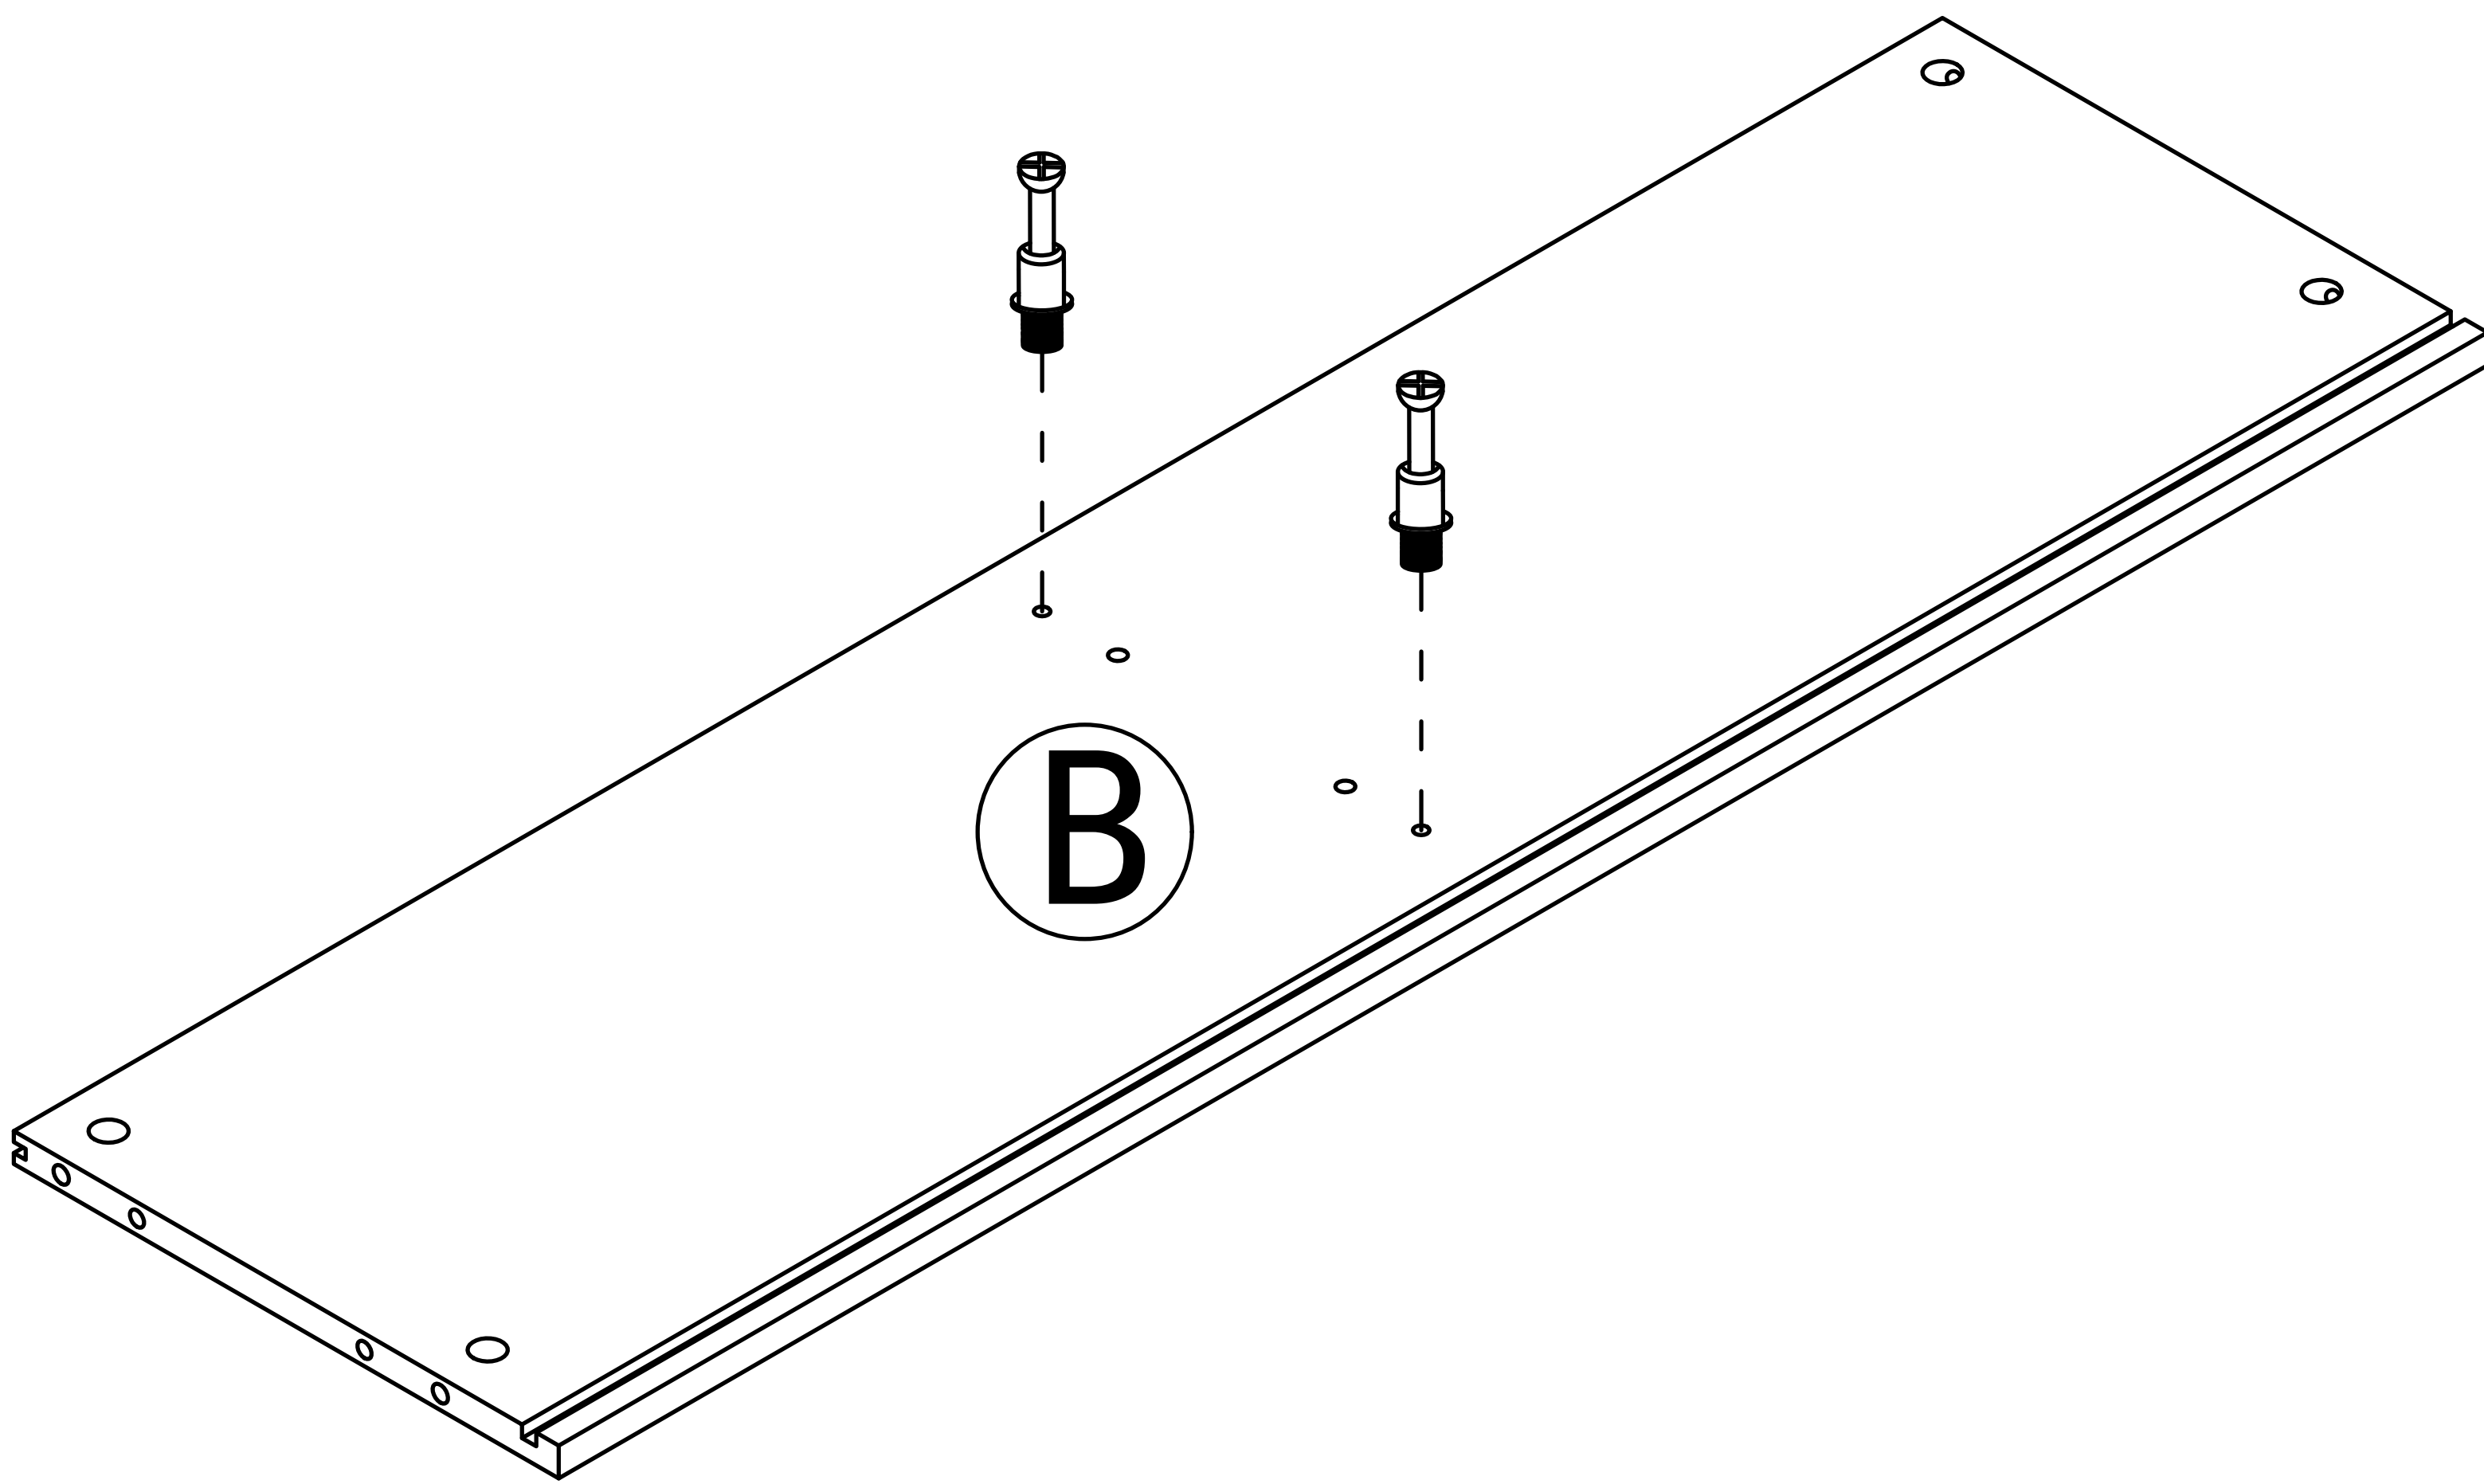


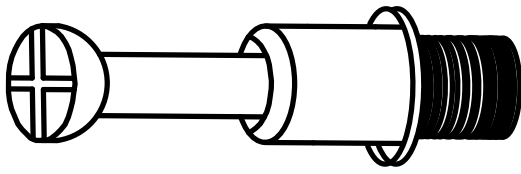- ①  x2

Step 4

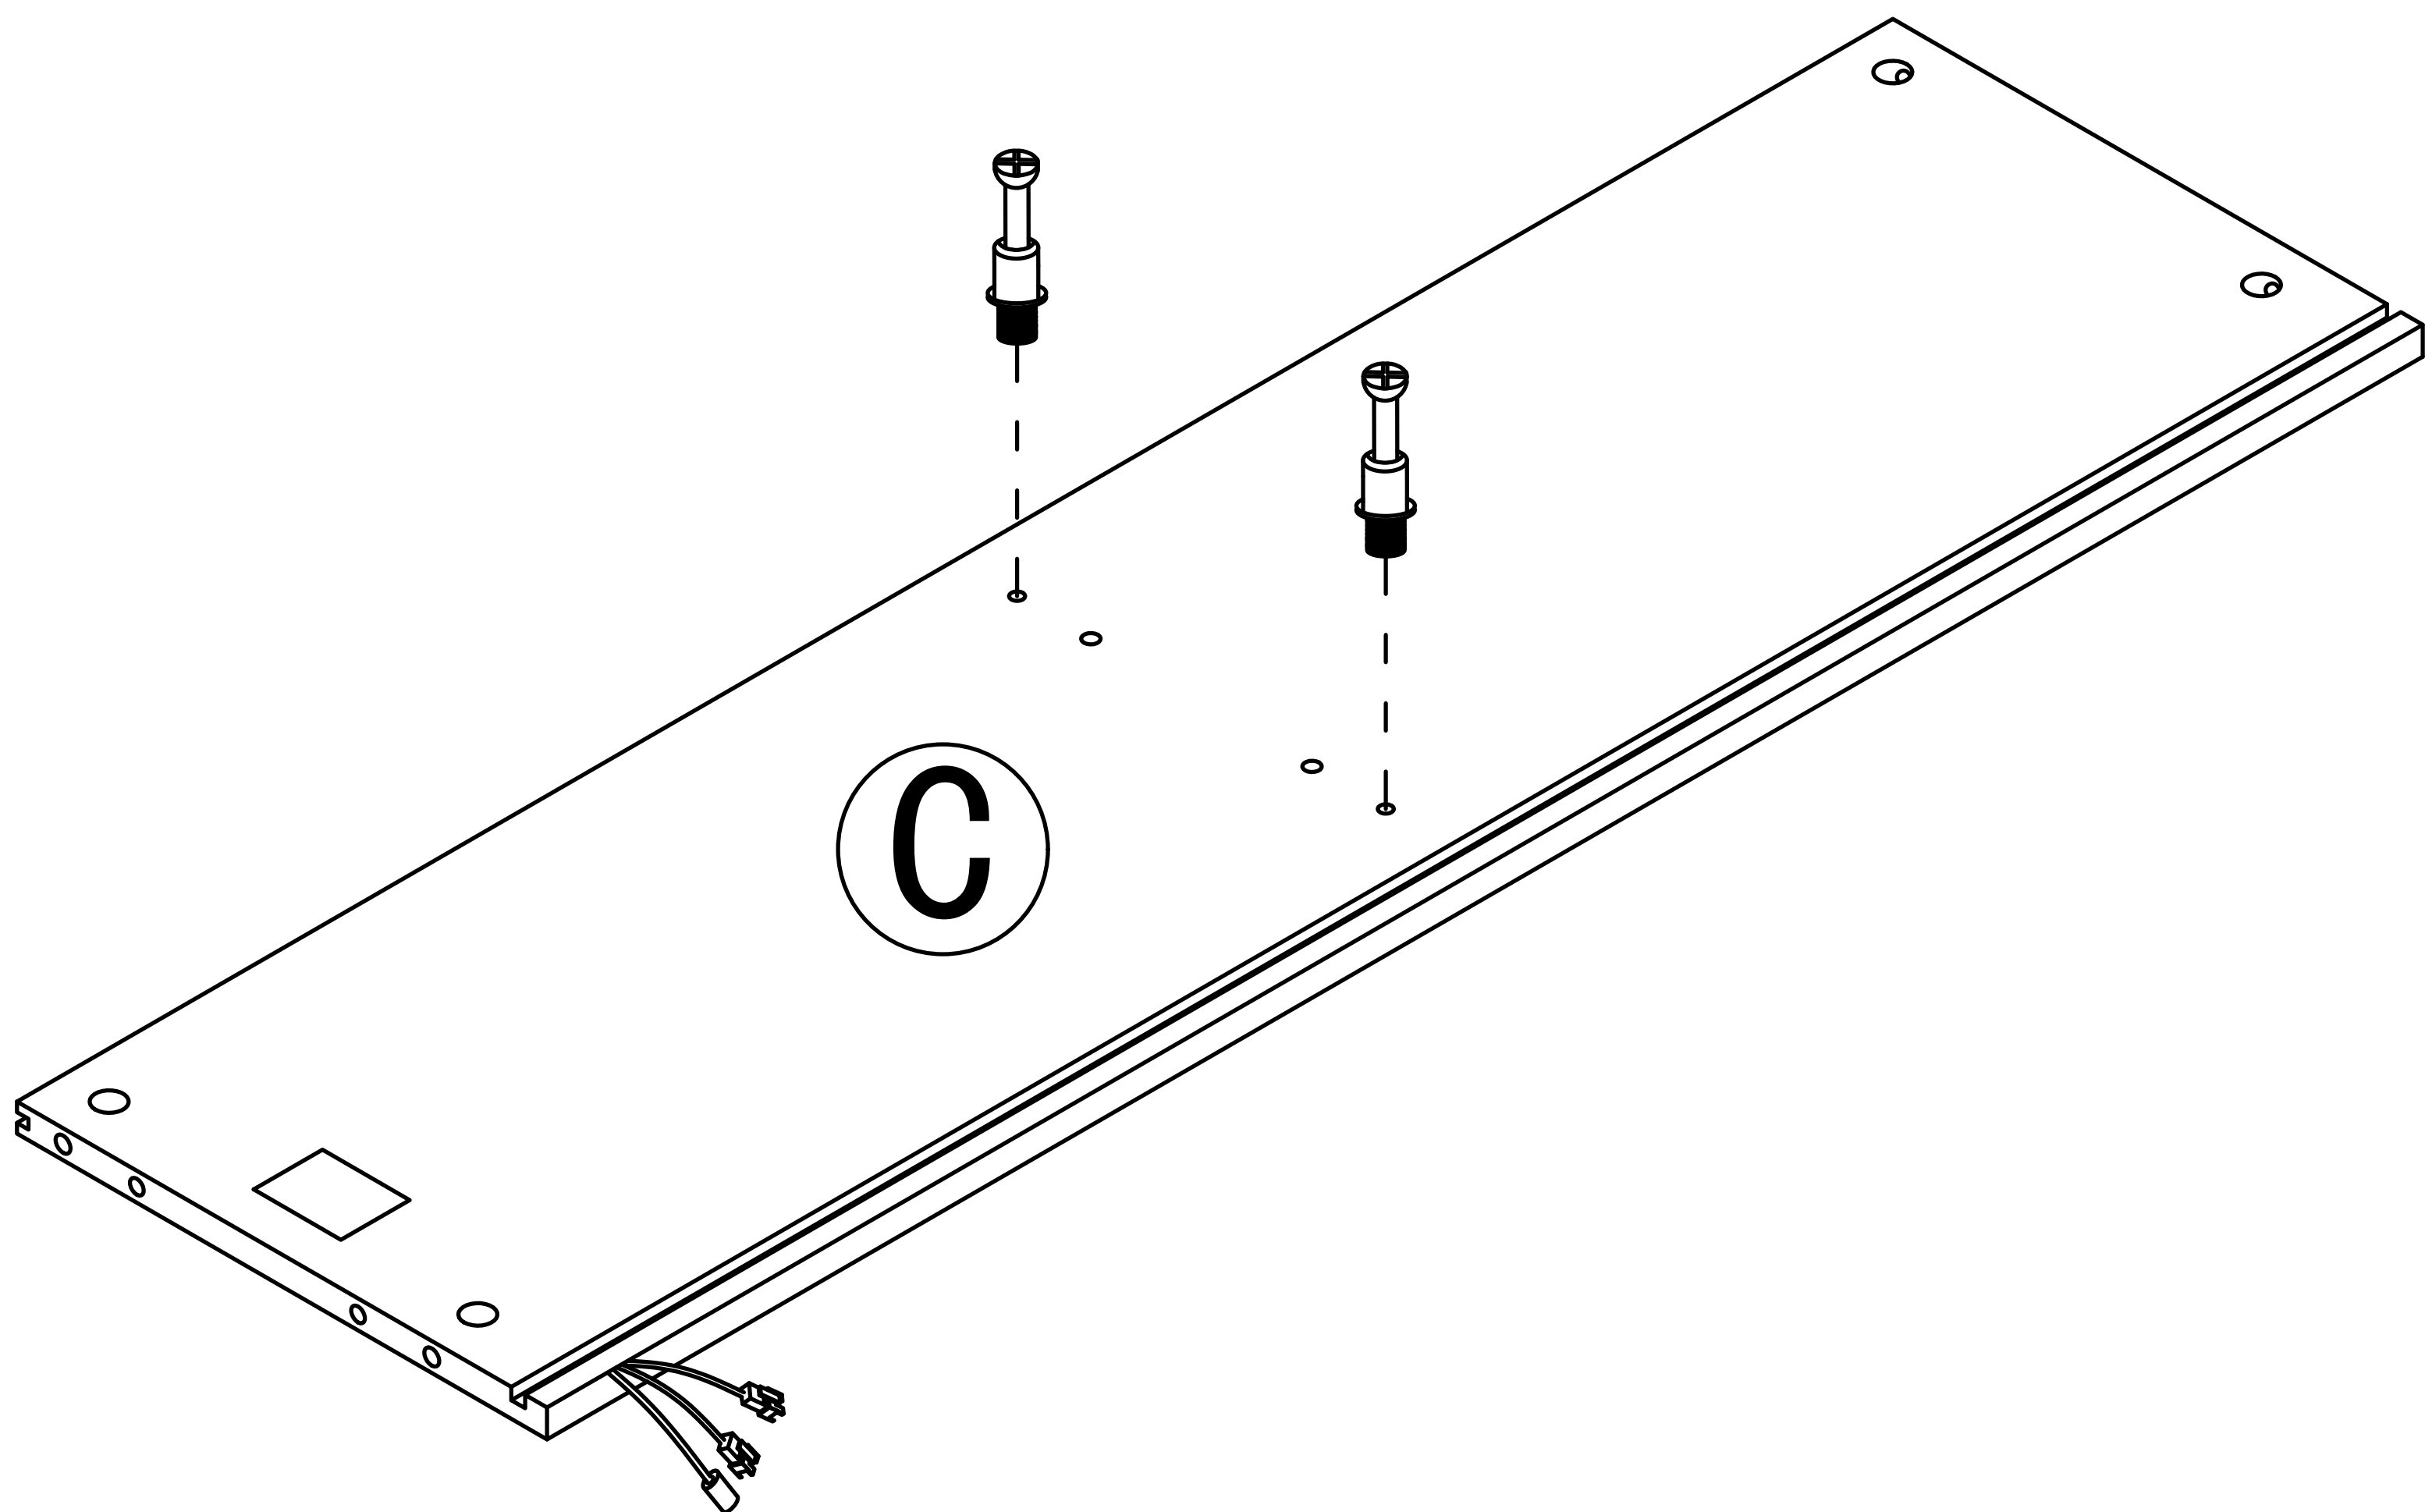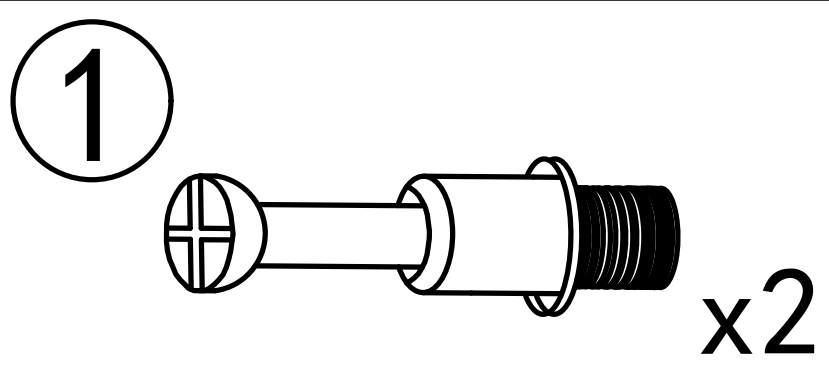


Step 5

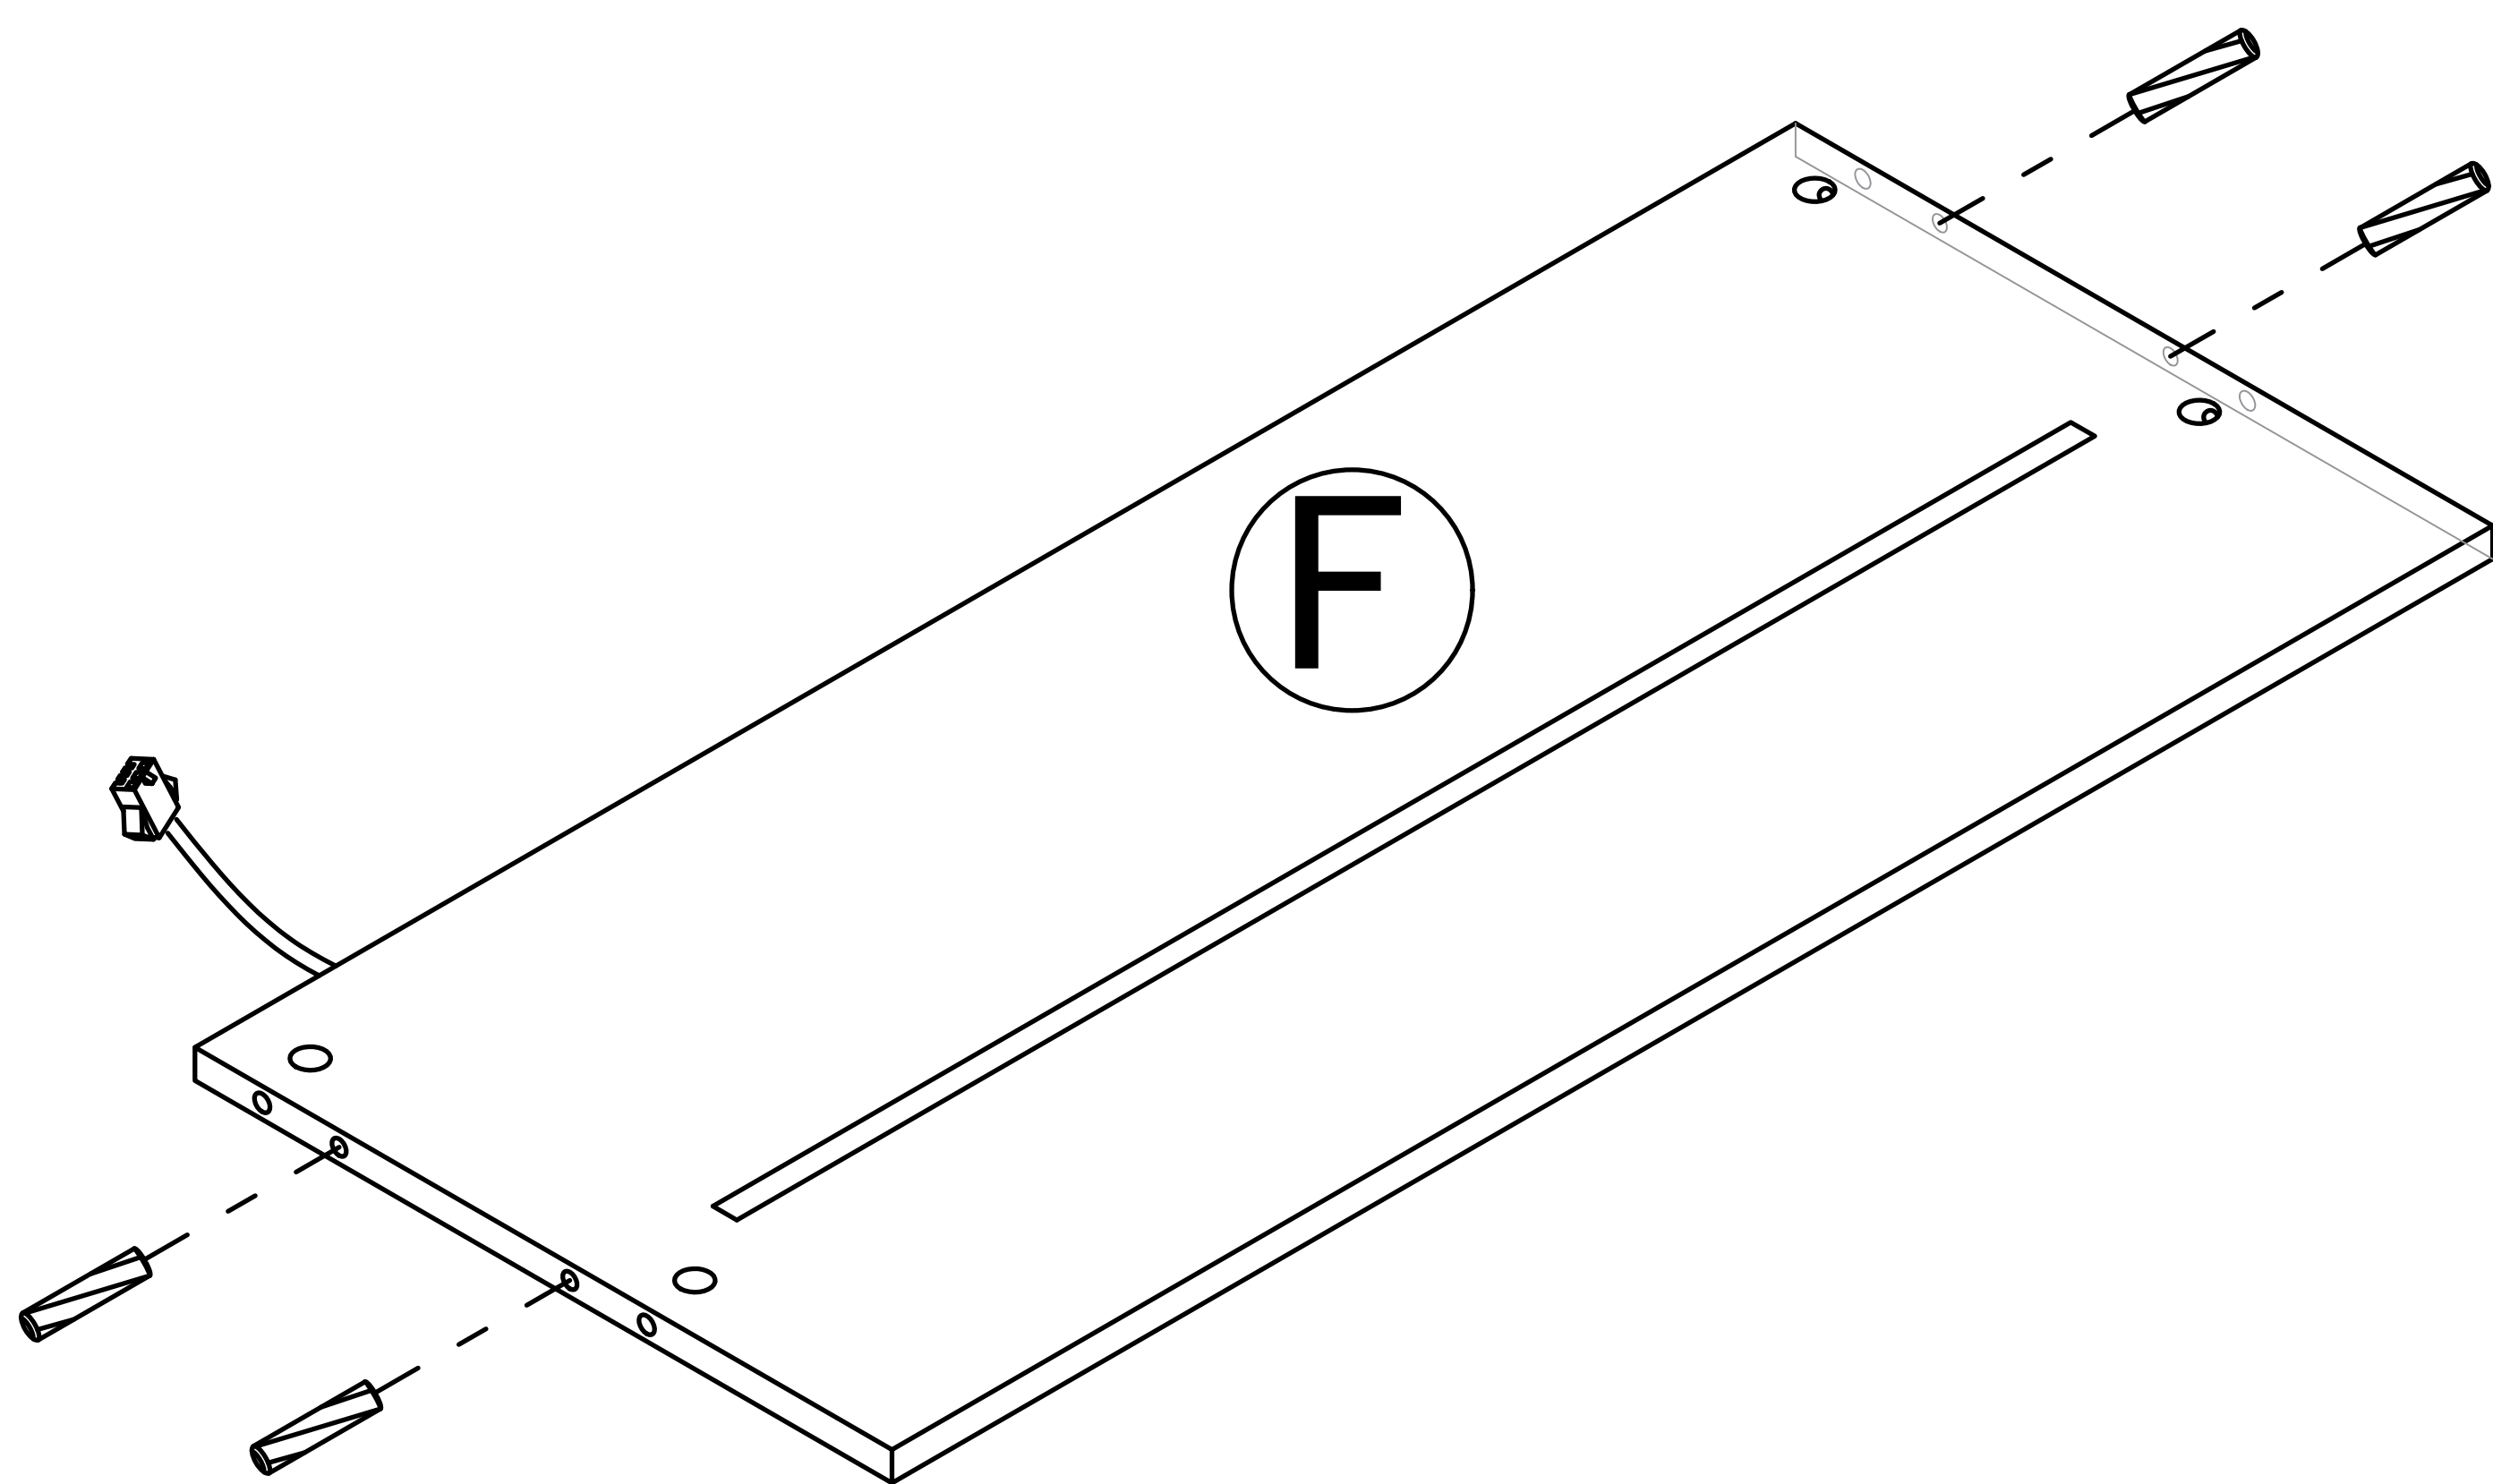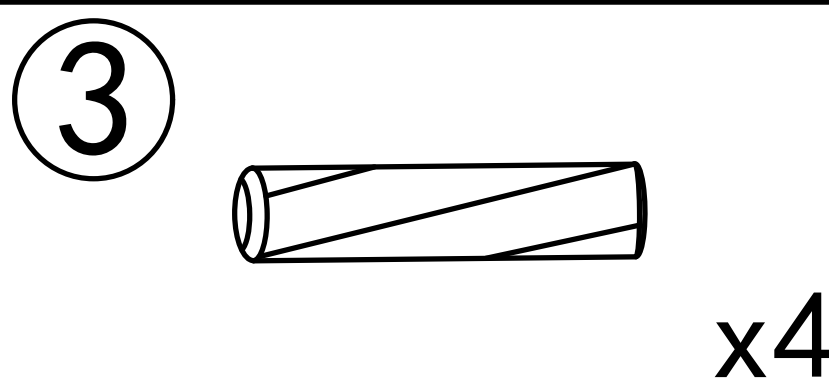


Step 6

2




x2

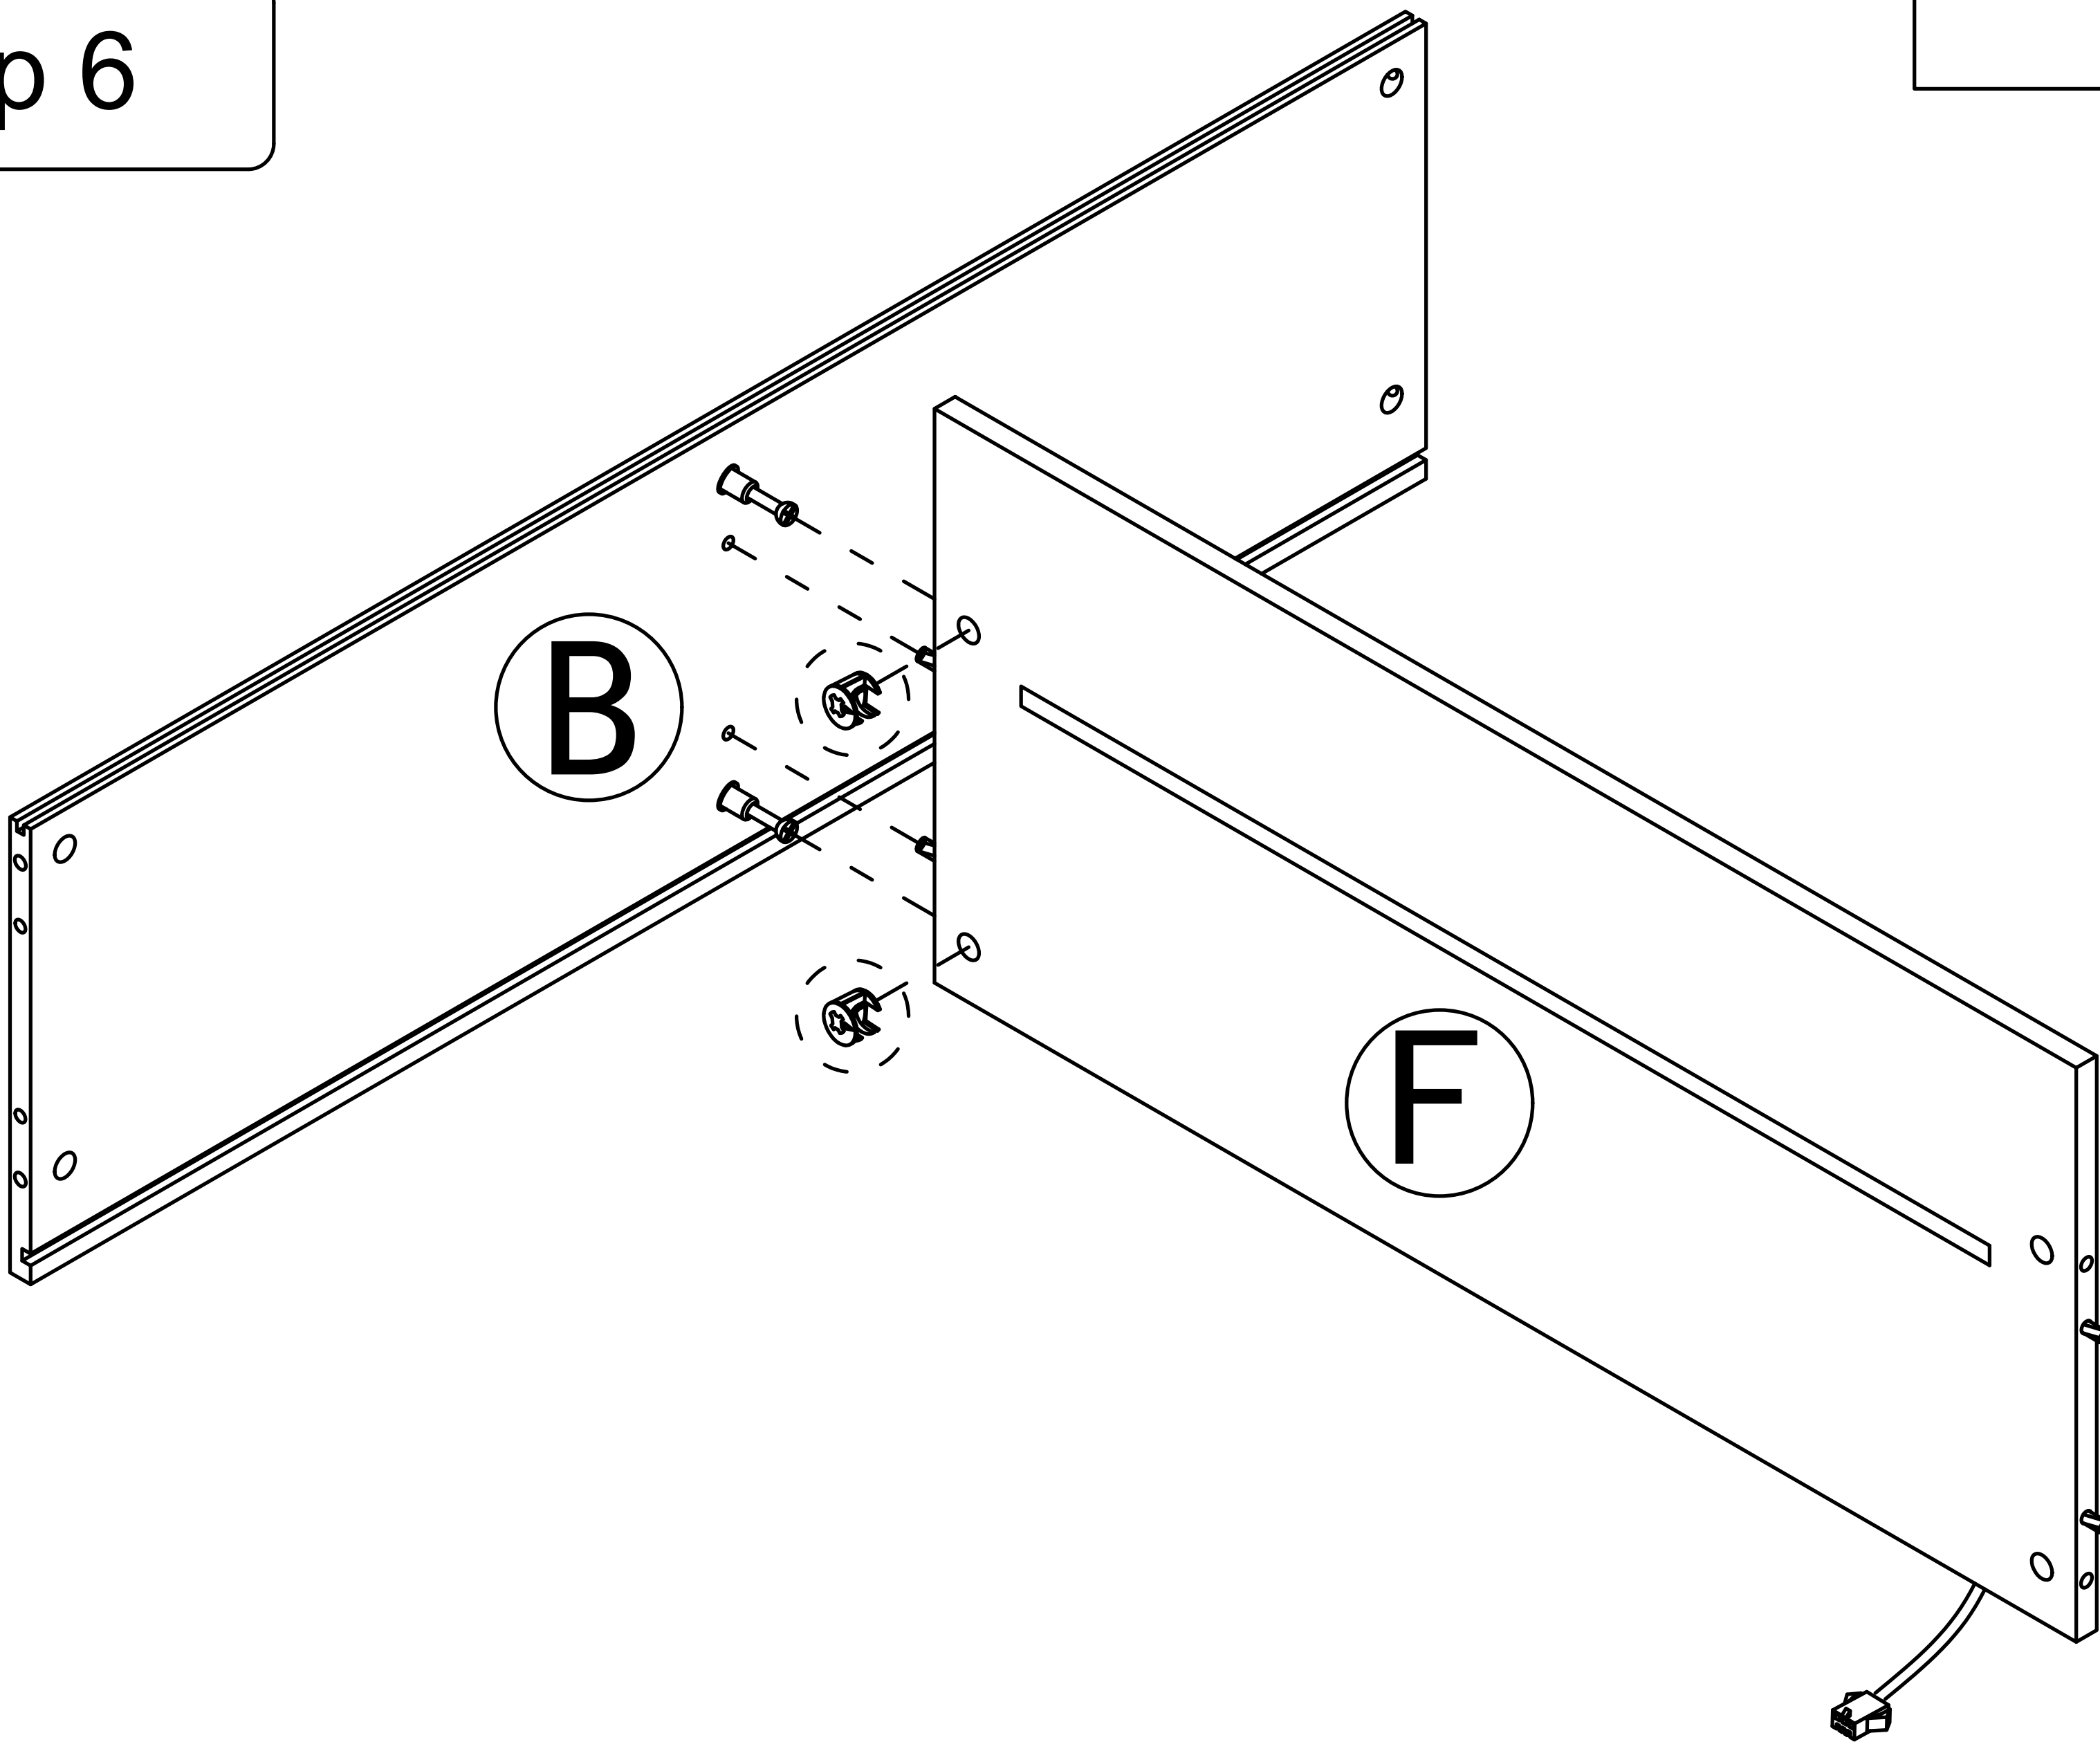


Step 7

2




x2

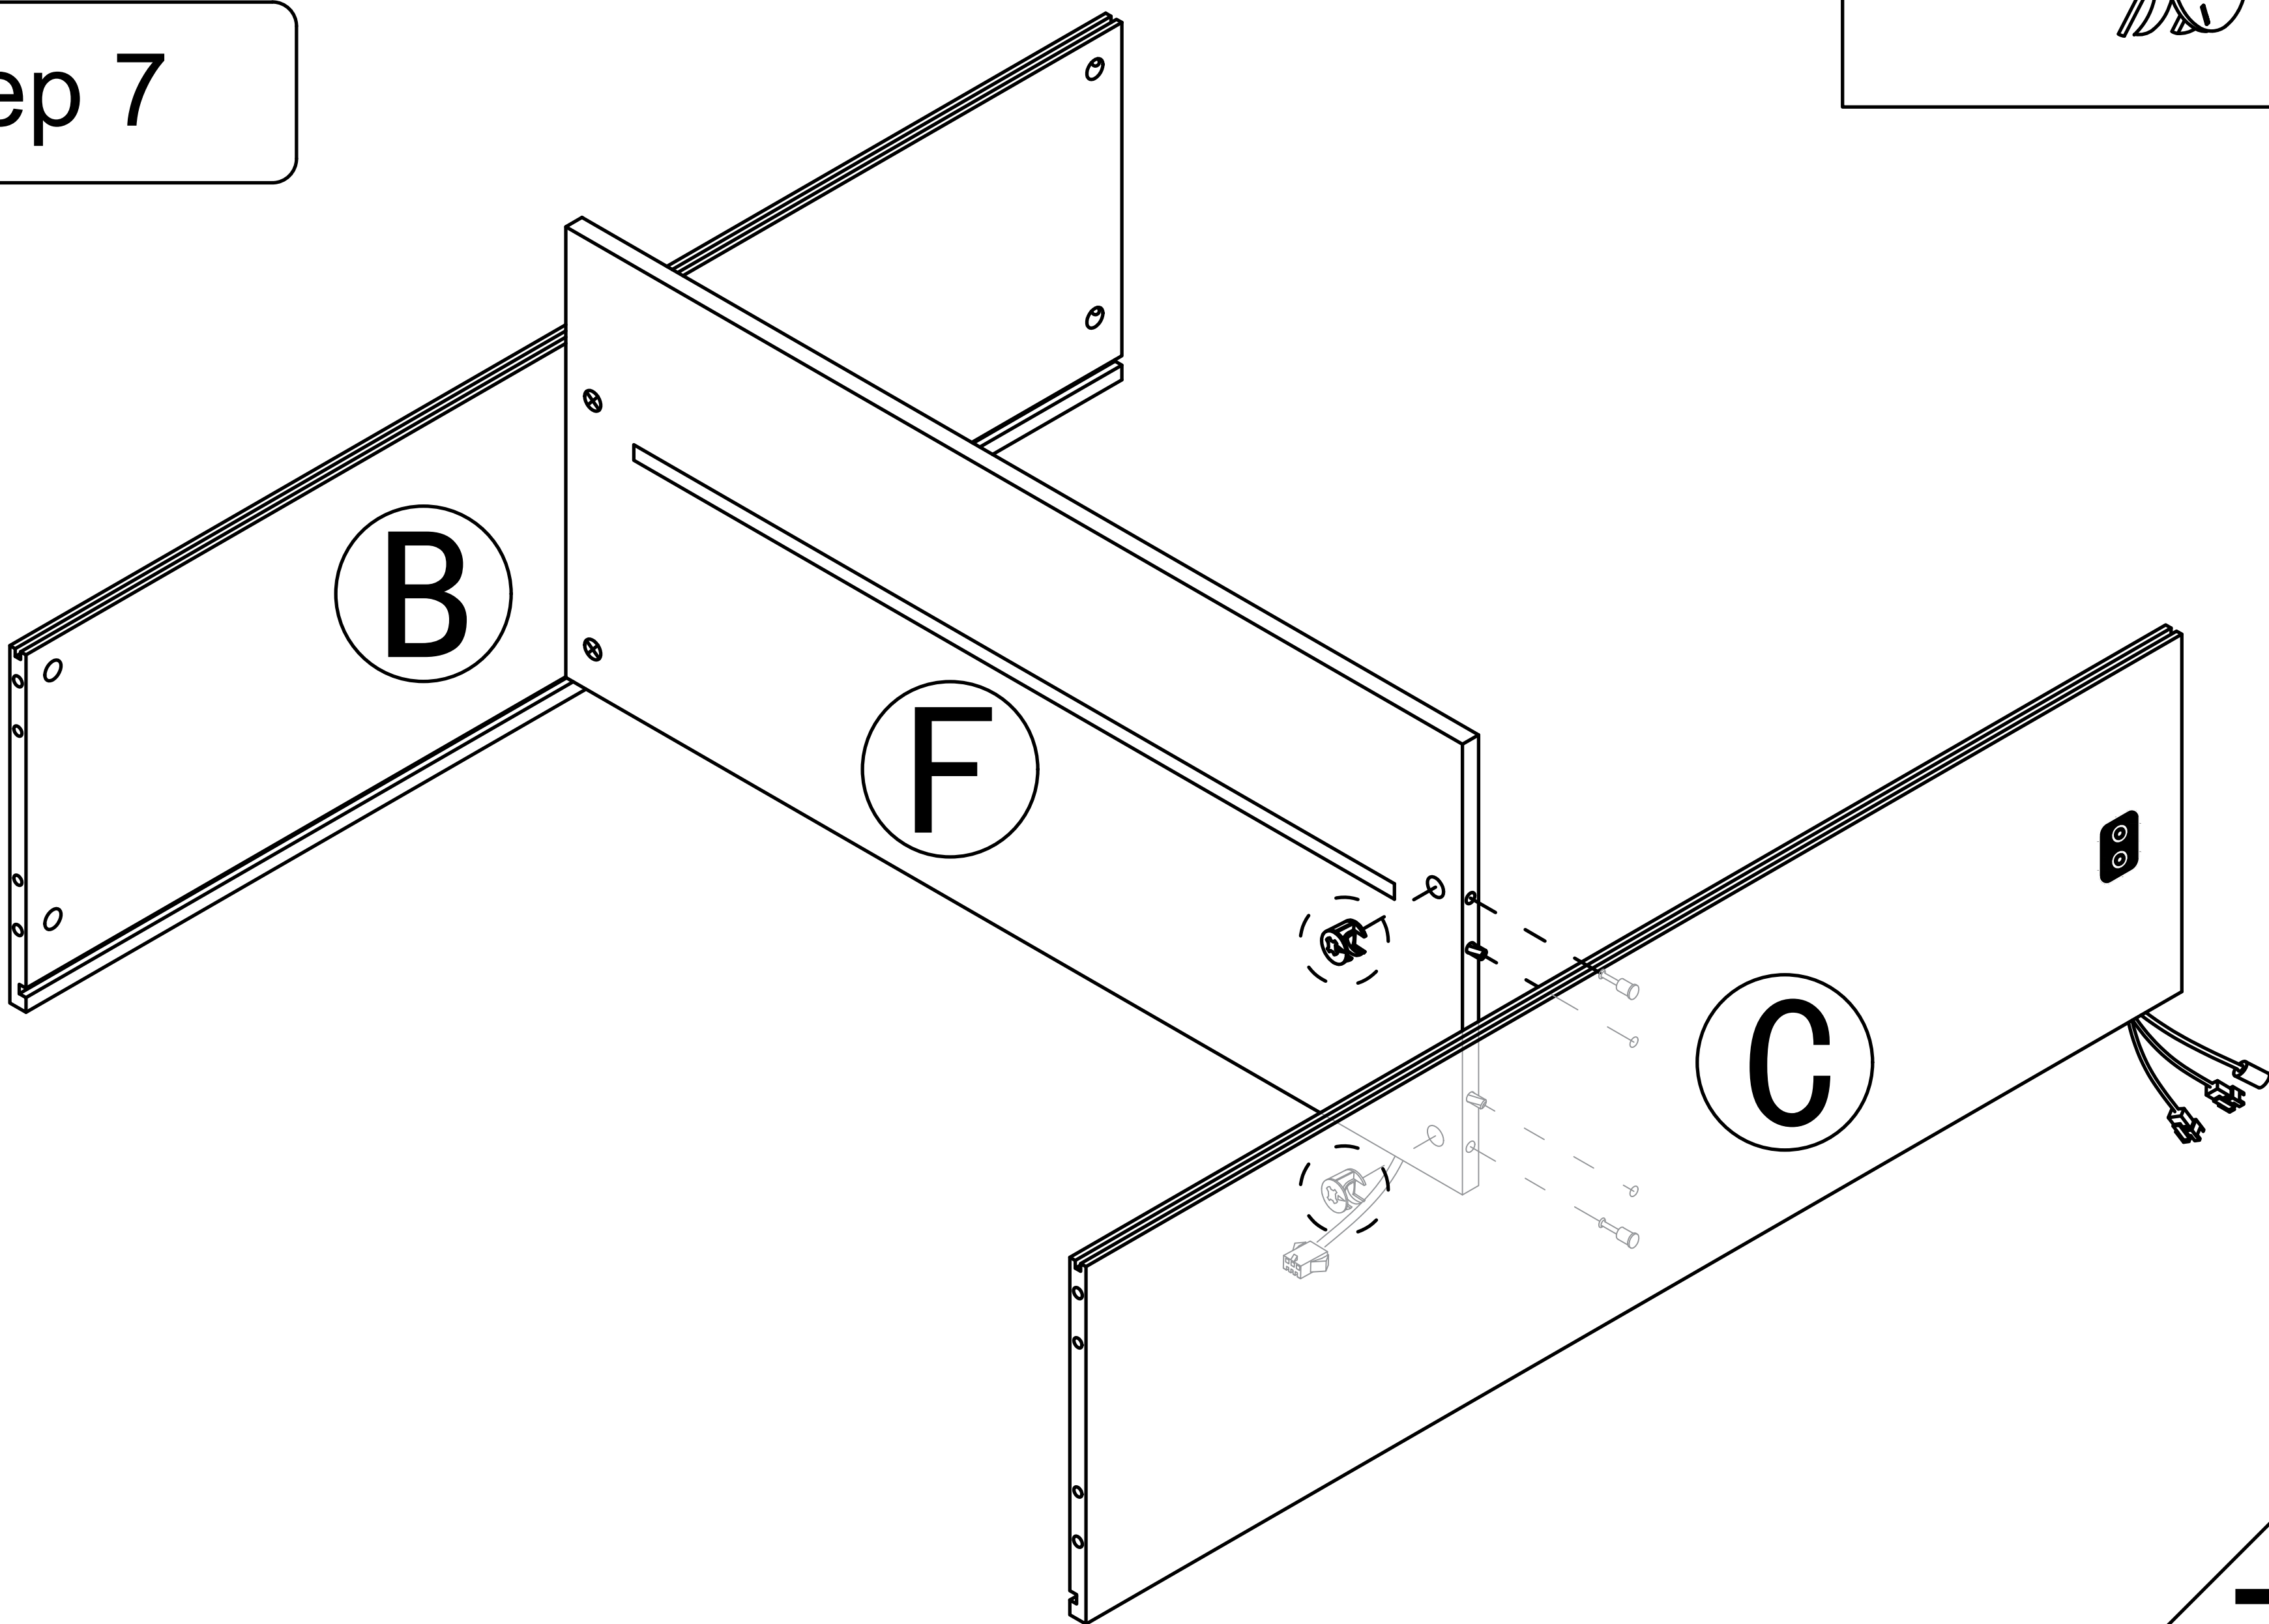


7

Step 8

2




x4

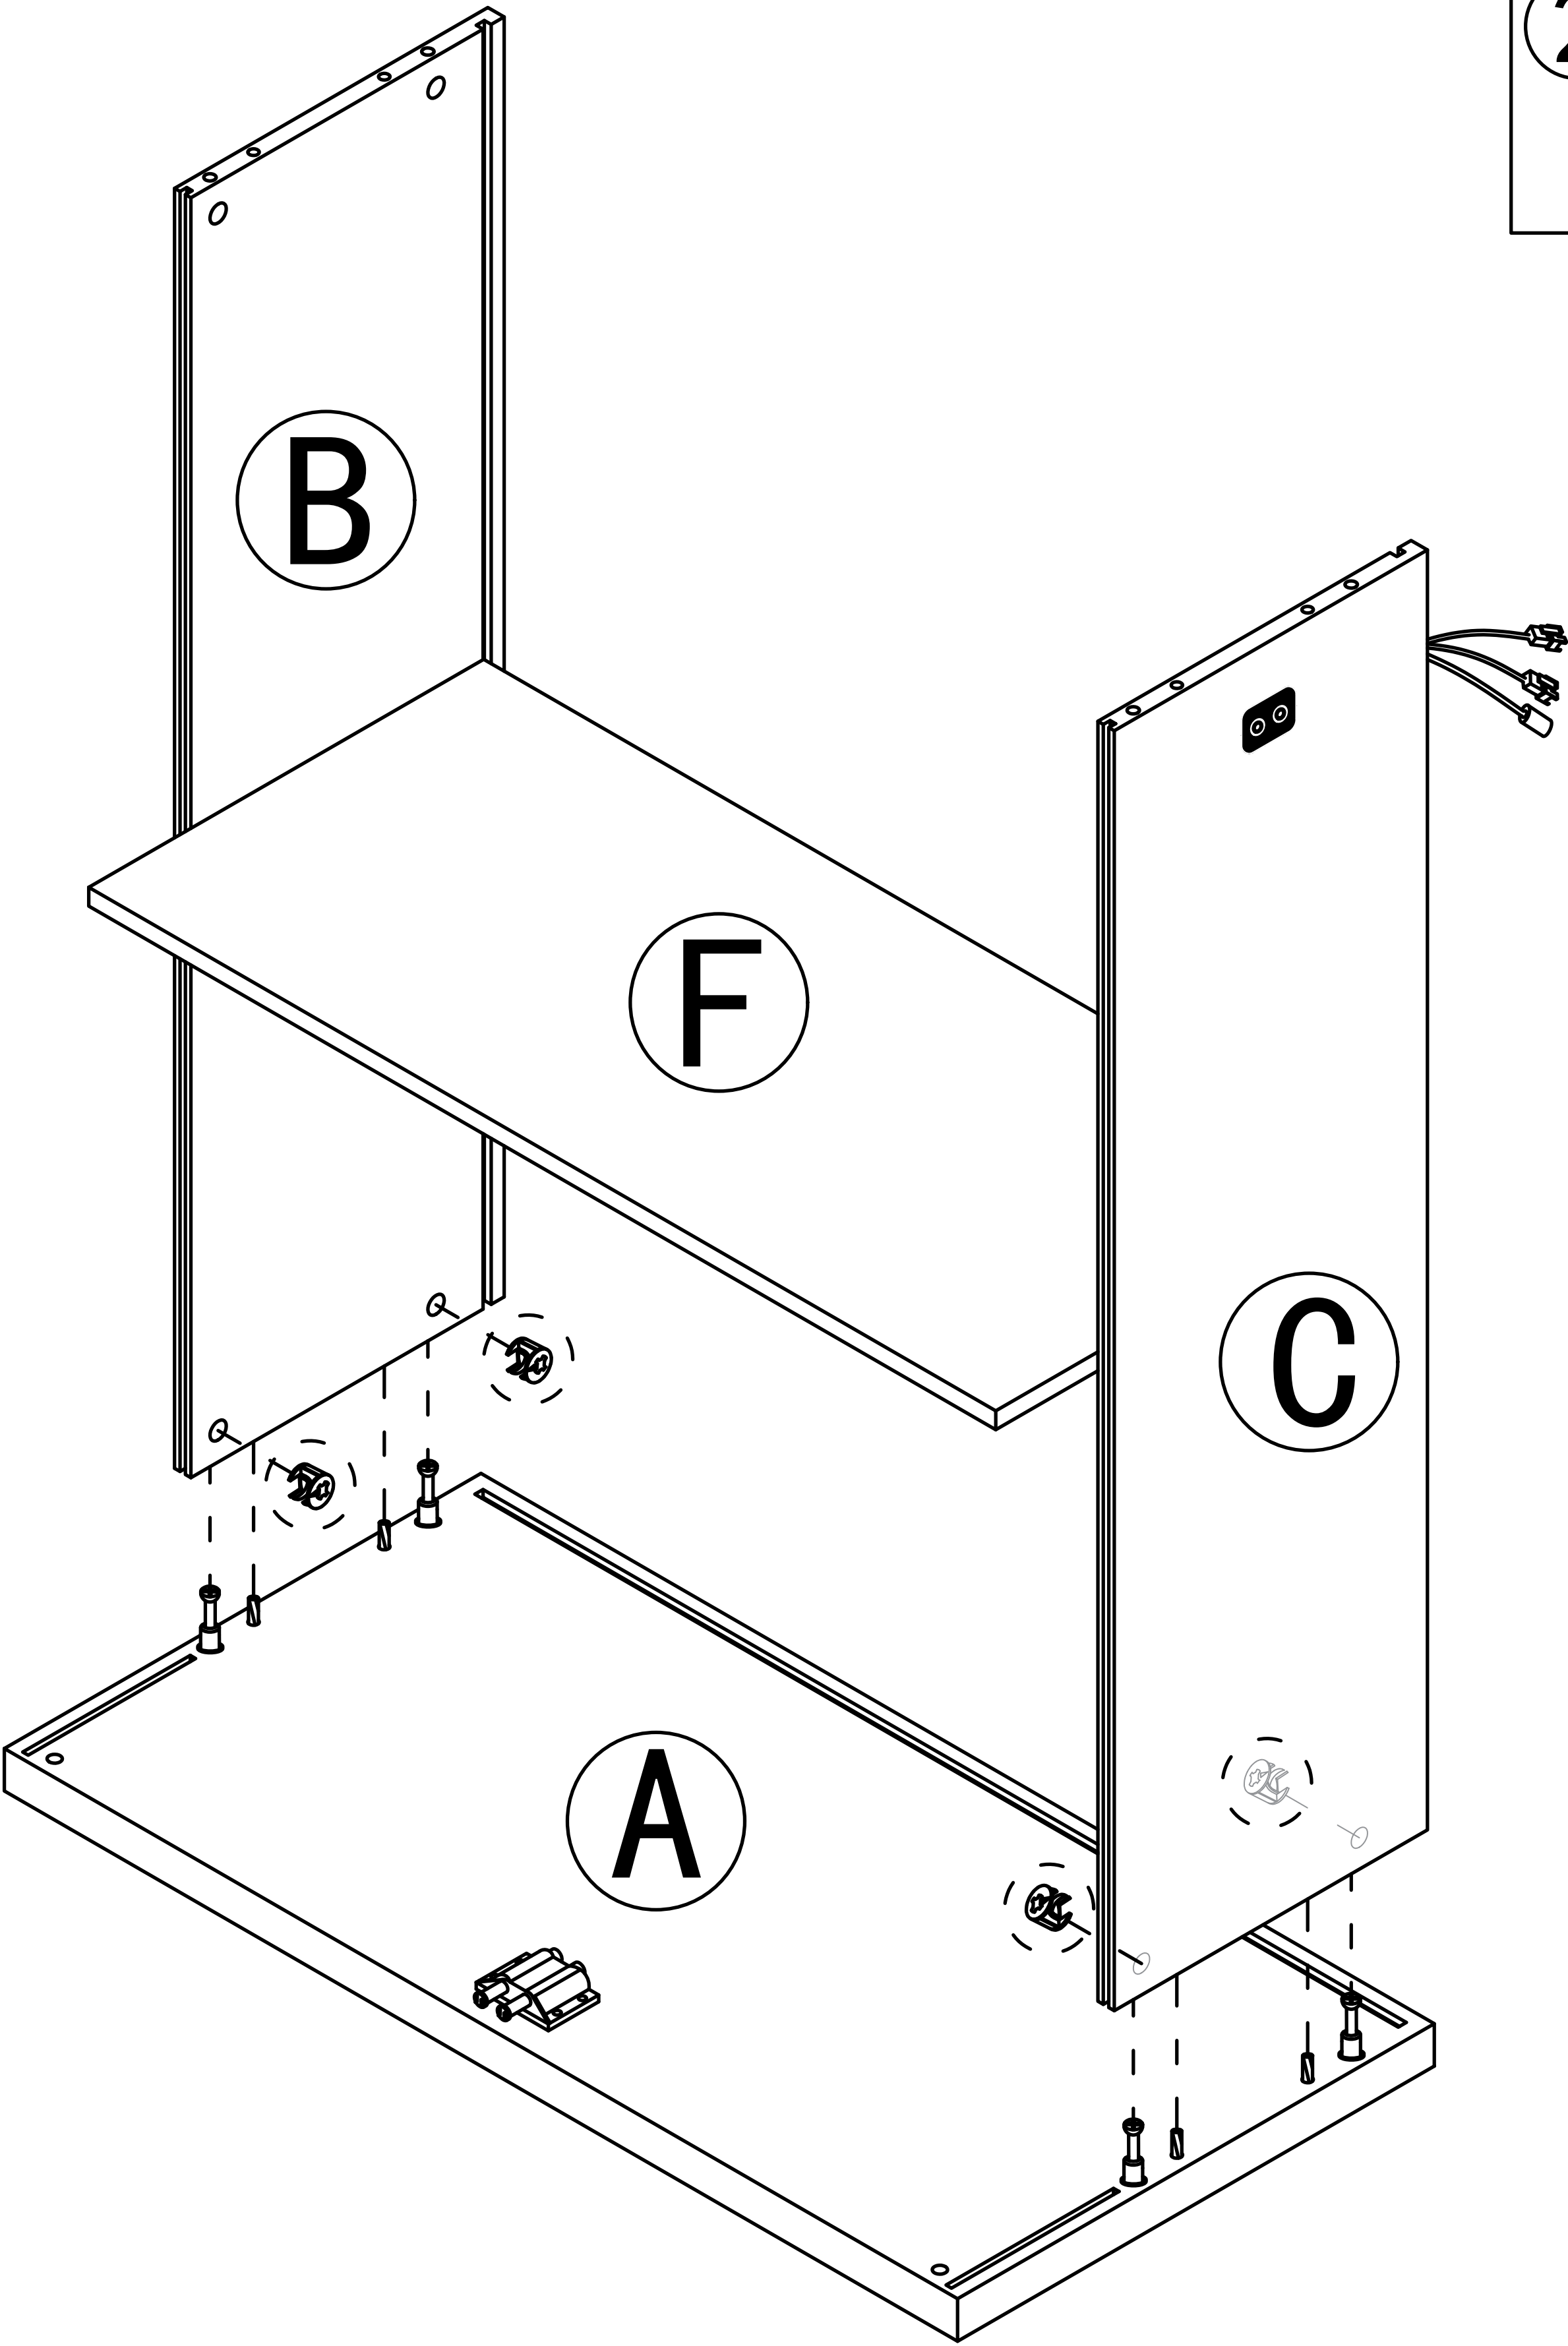


Step 9

1

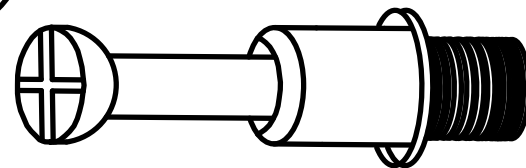

x4

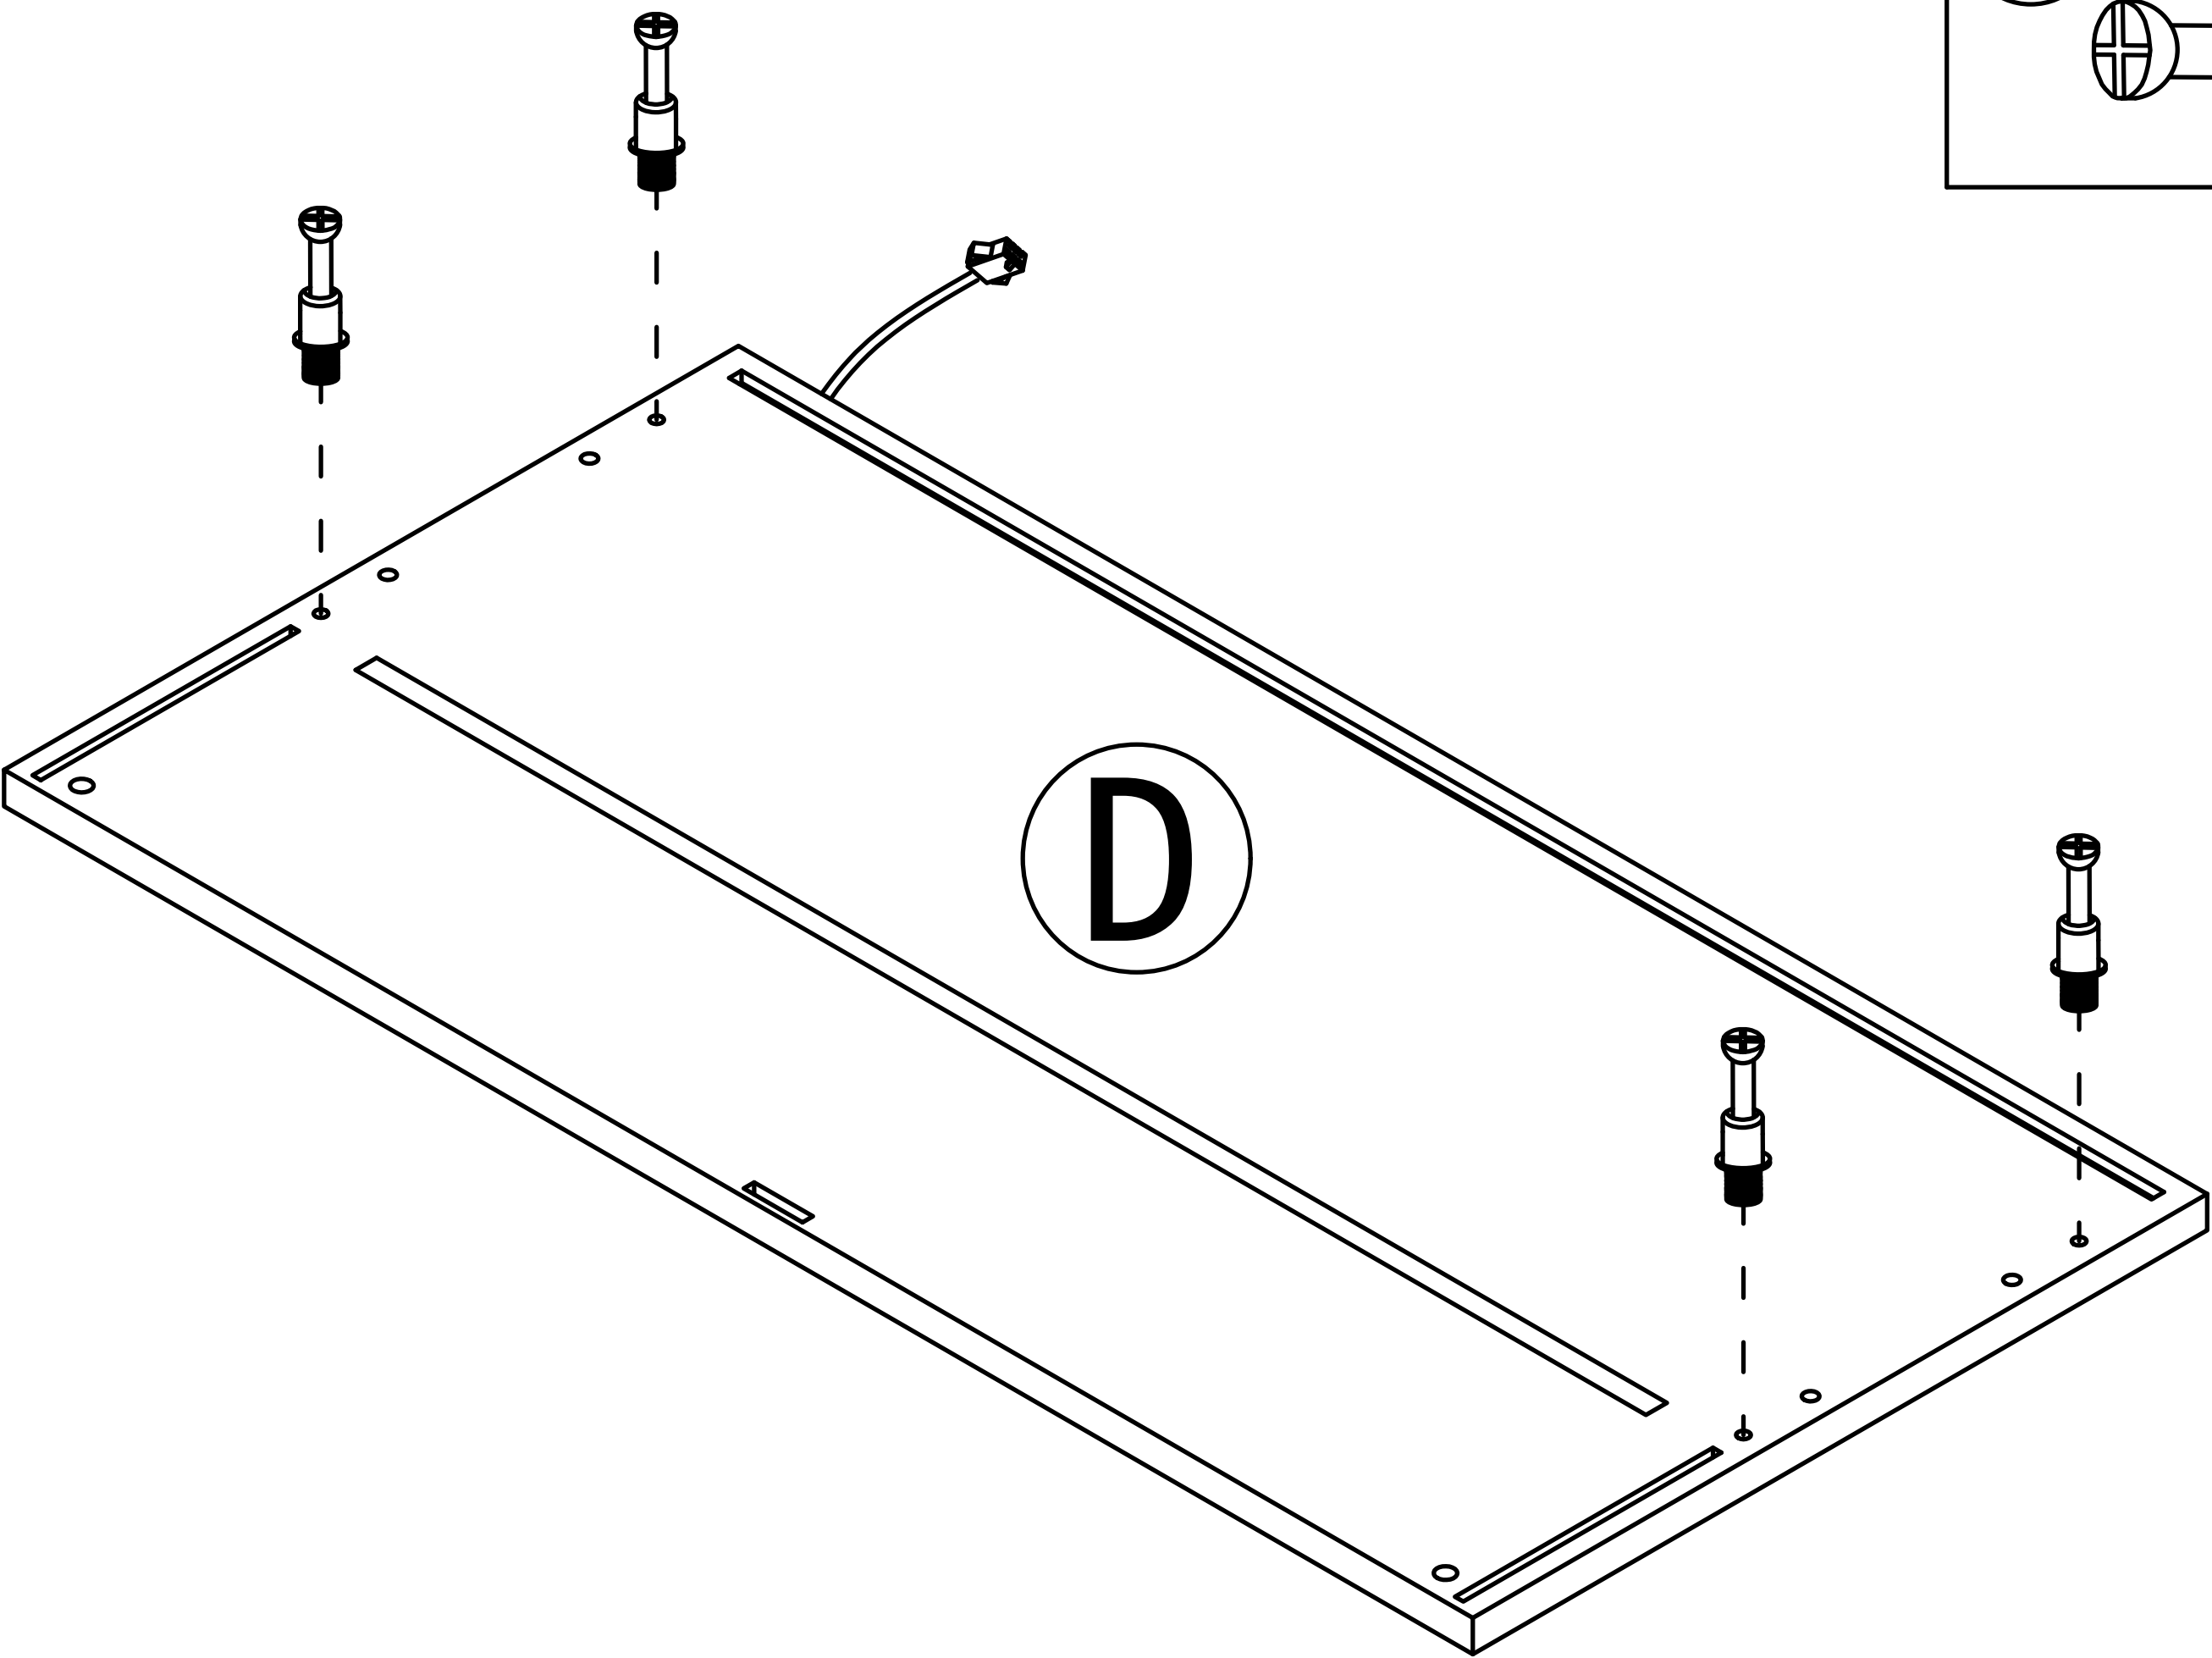

8


Step 10

Place the "G" board, Backboard card strip, and "H" board in order




- 3




x4
- 9

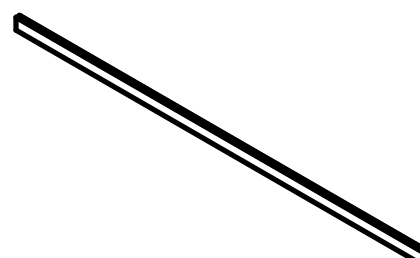

x2

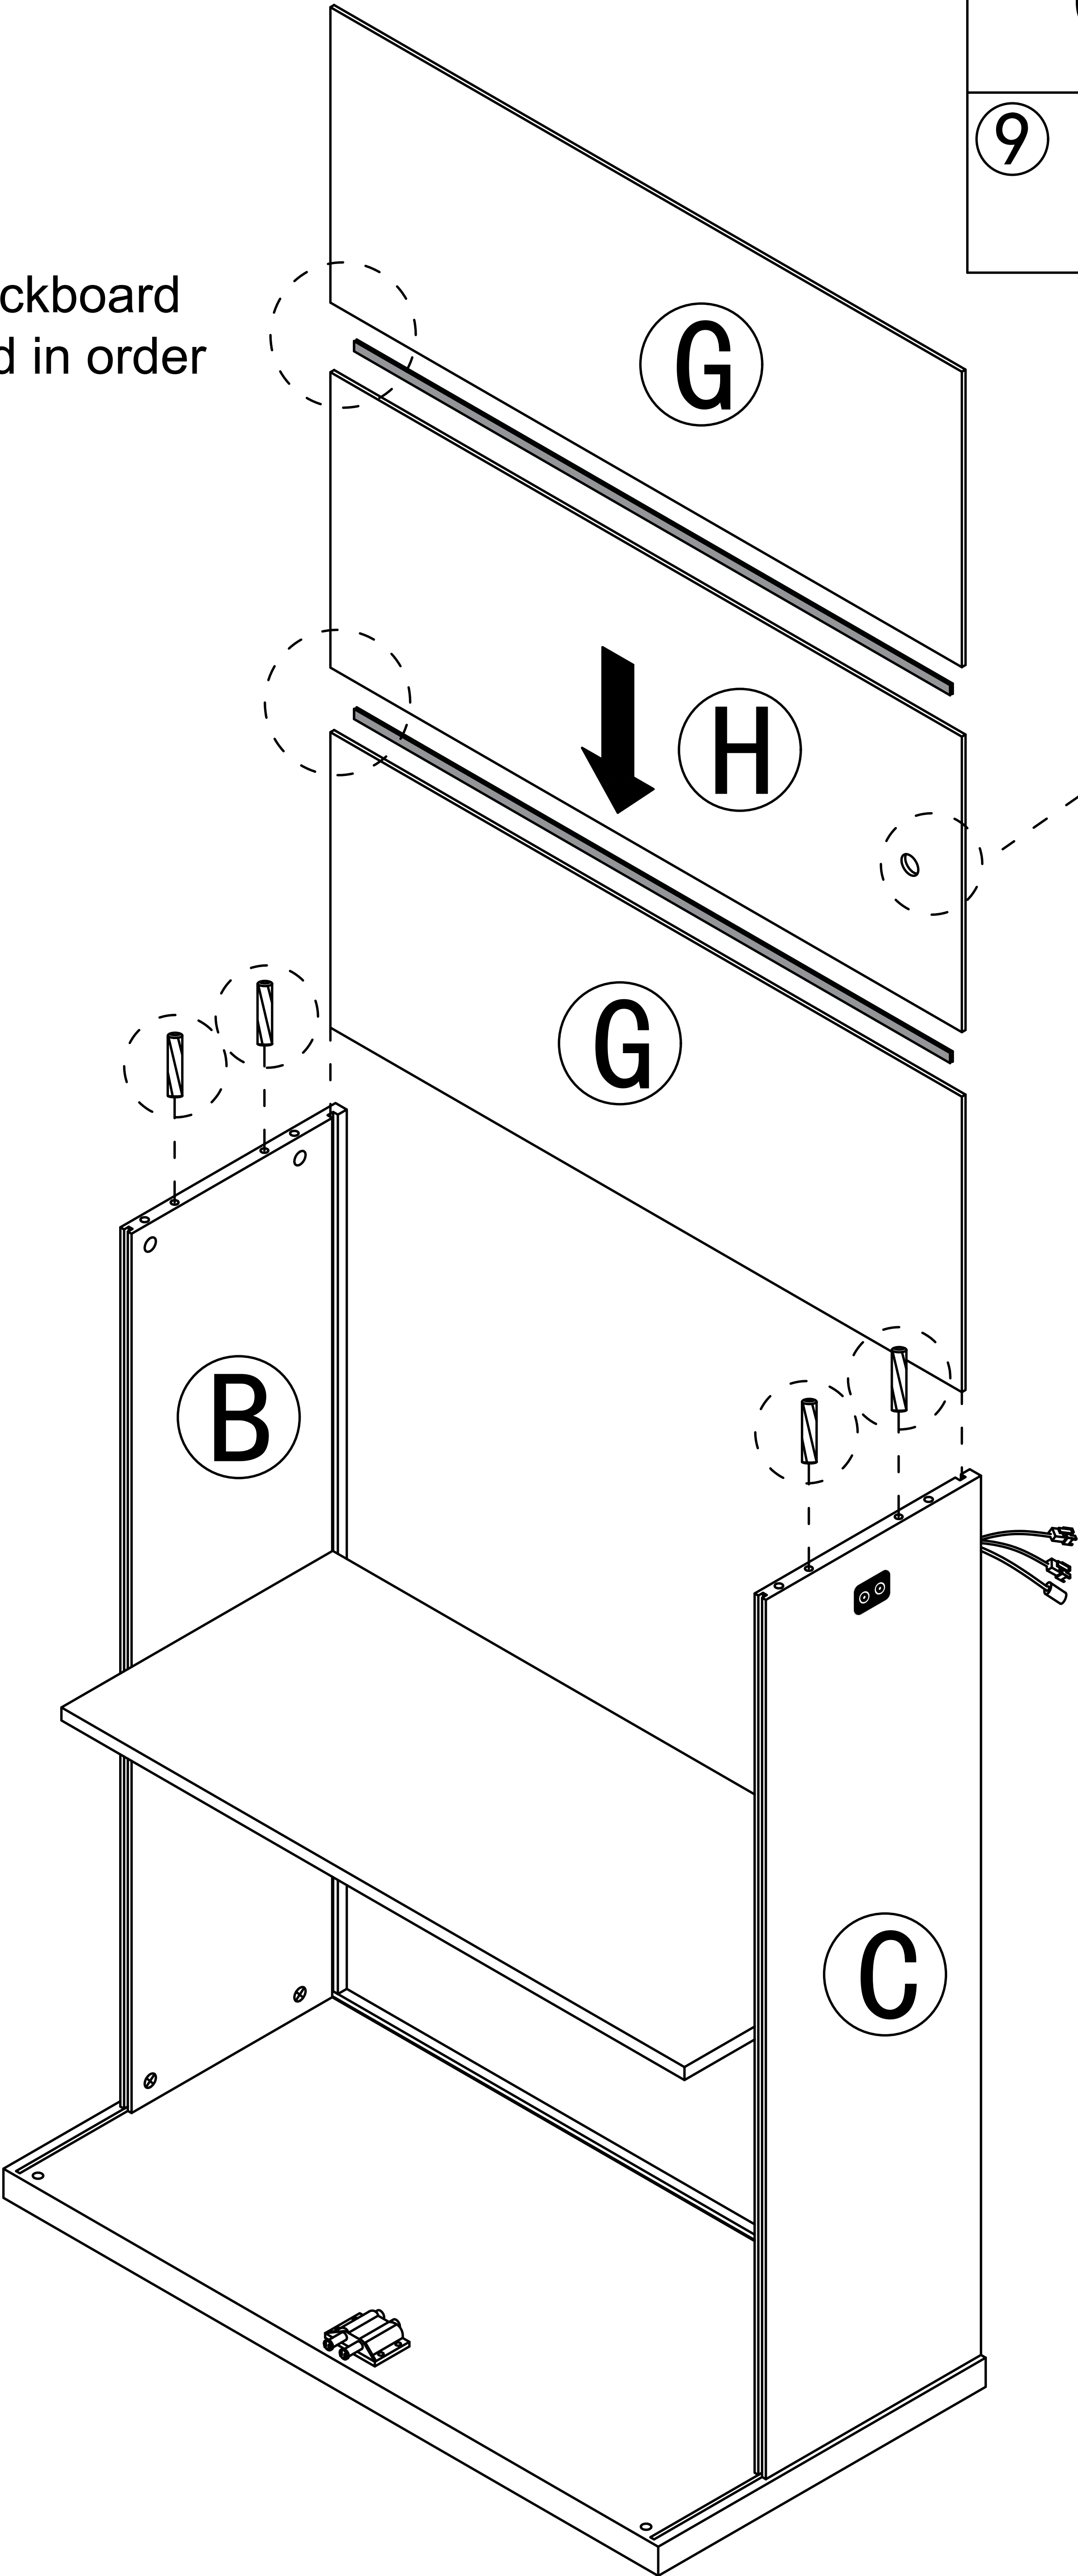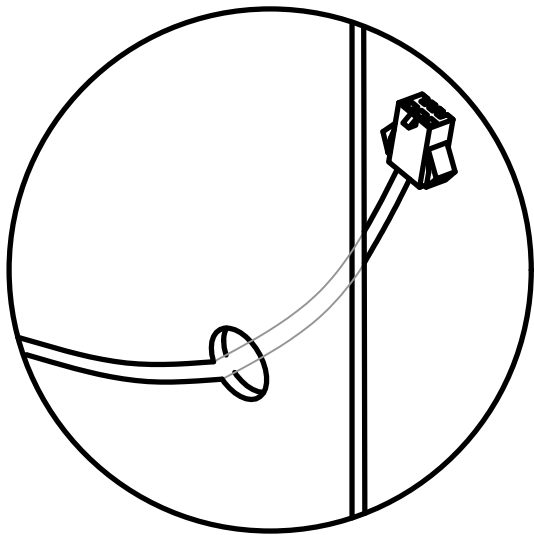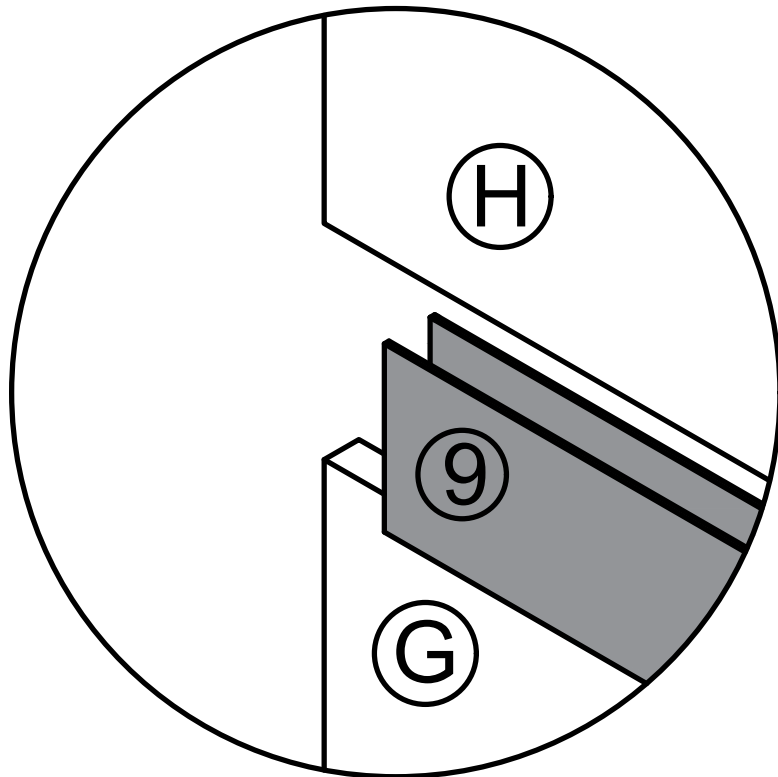


Step 11

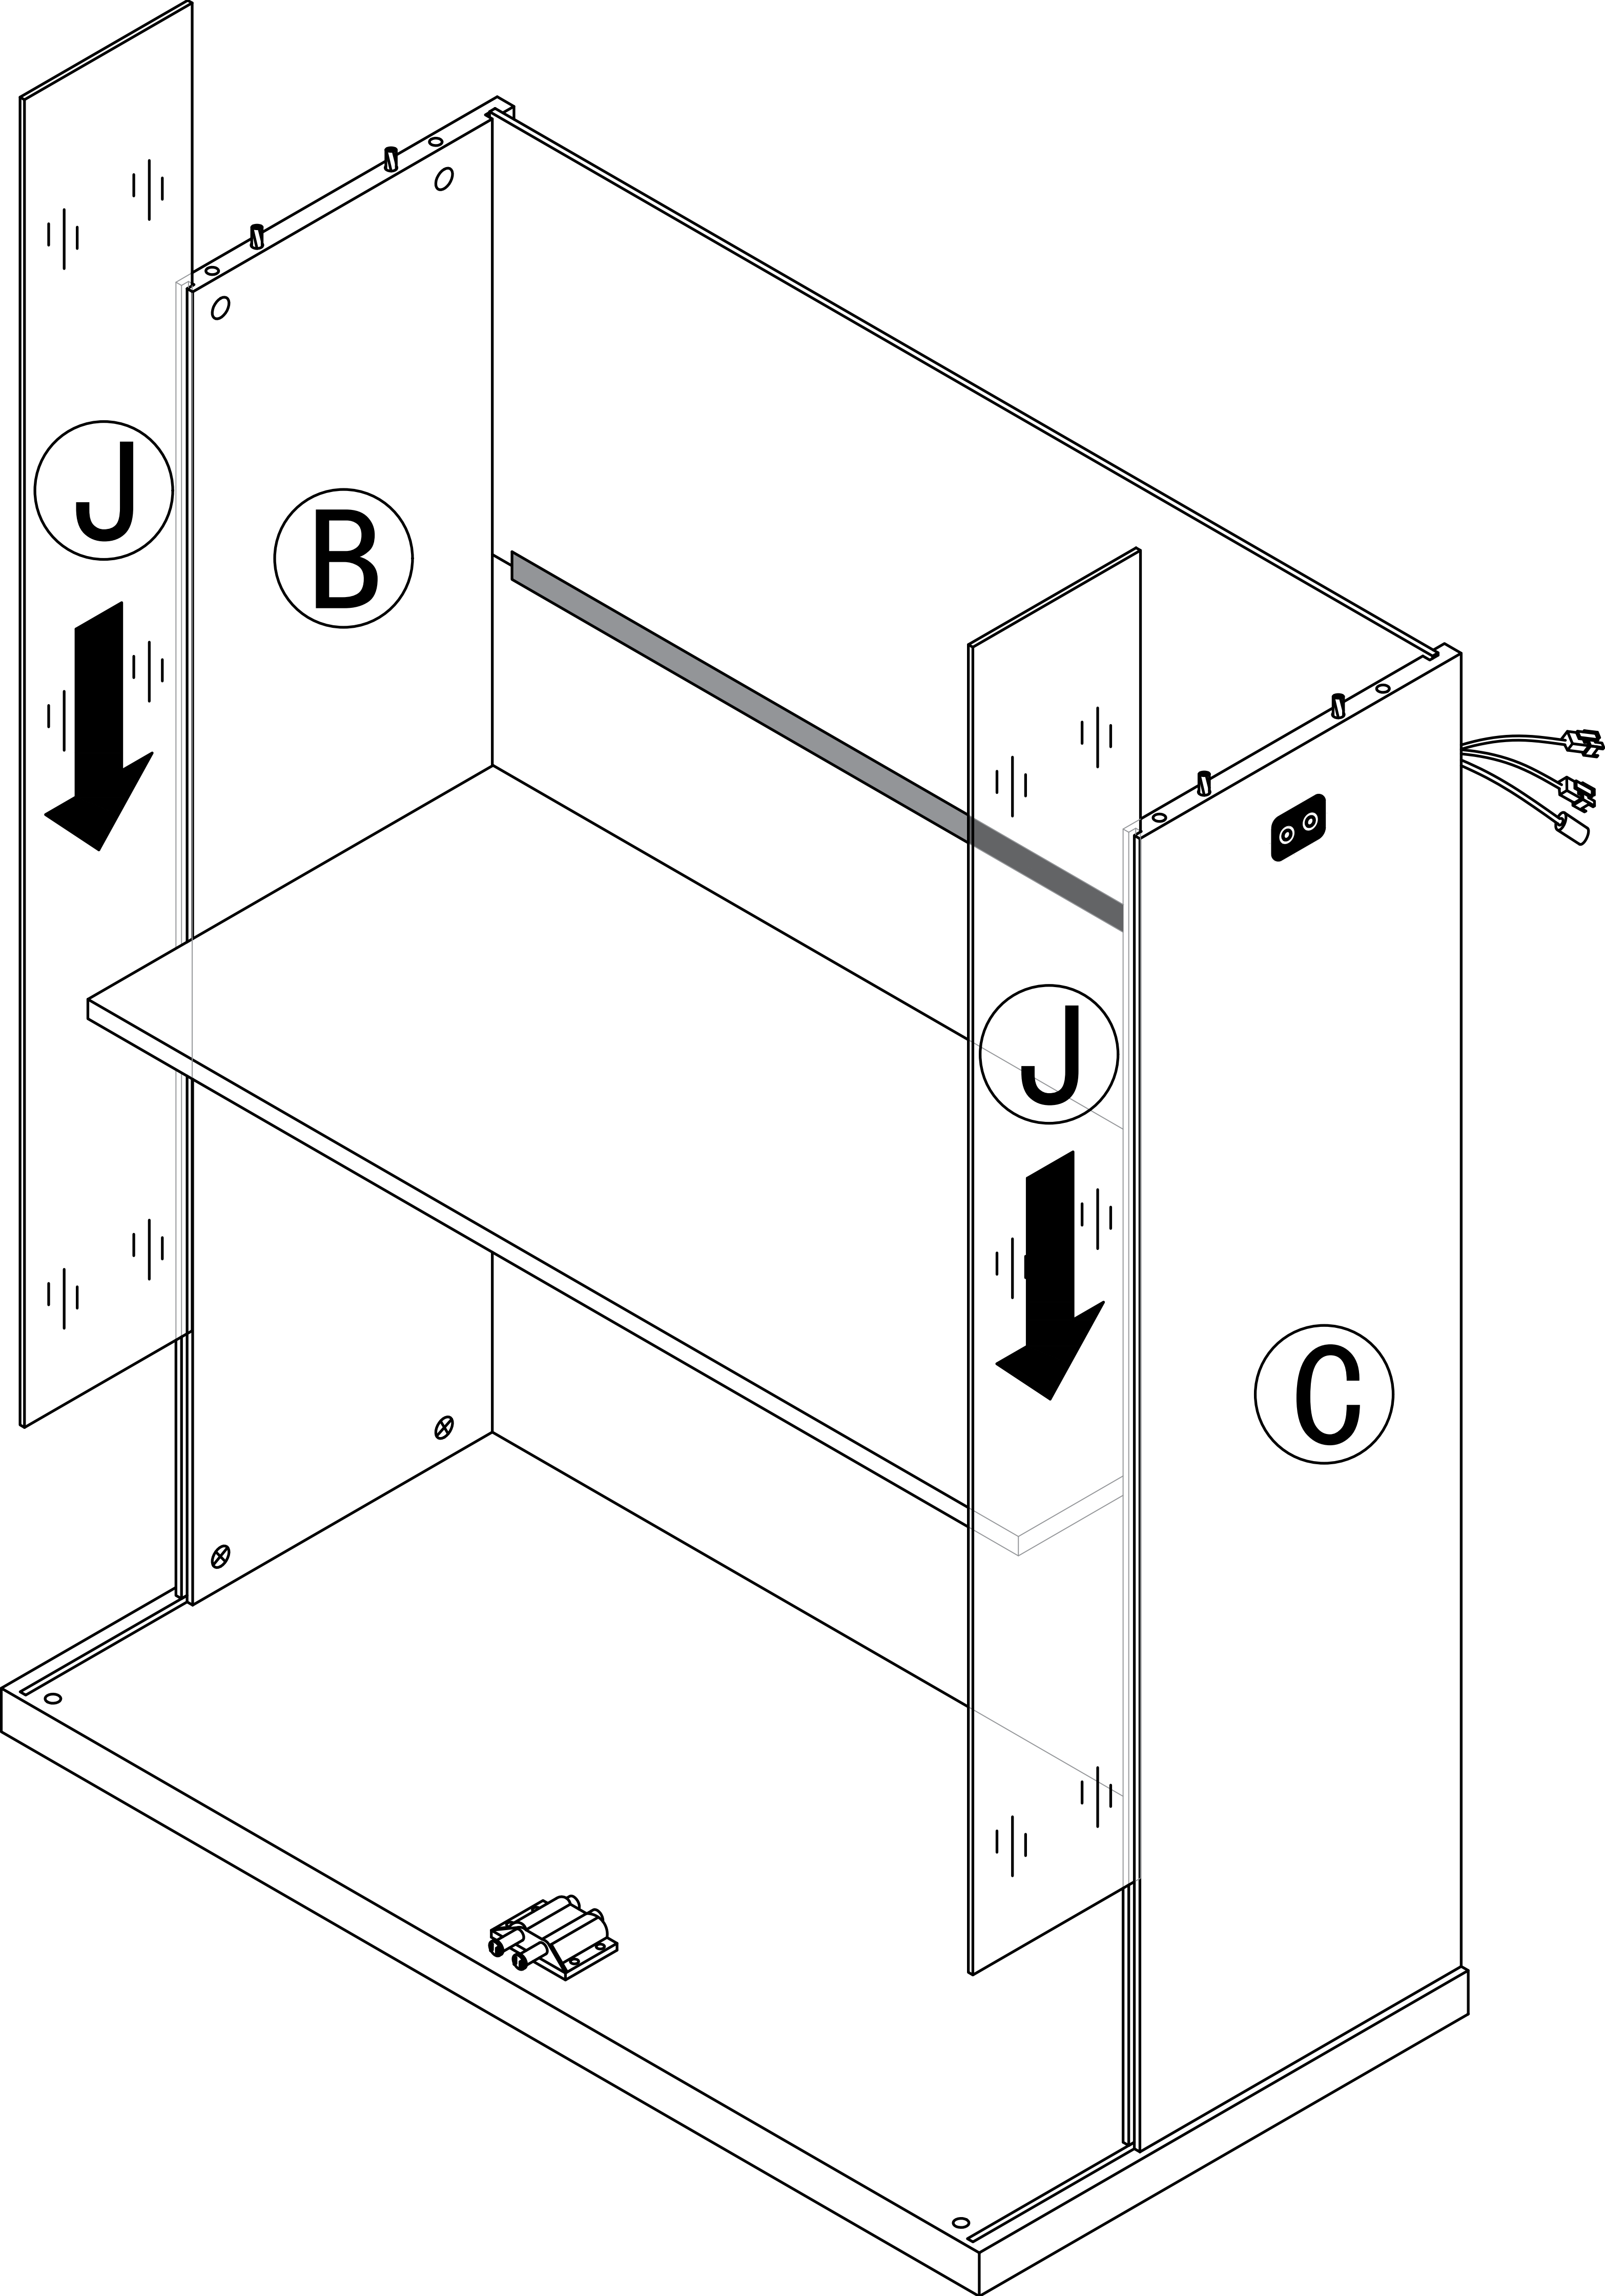


Step 12



2



x4


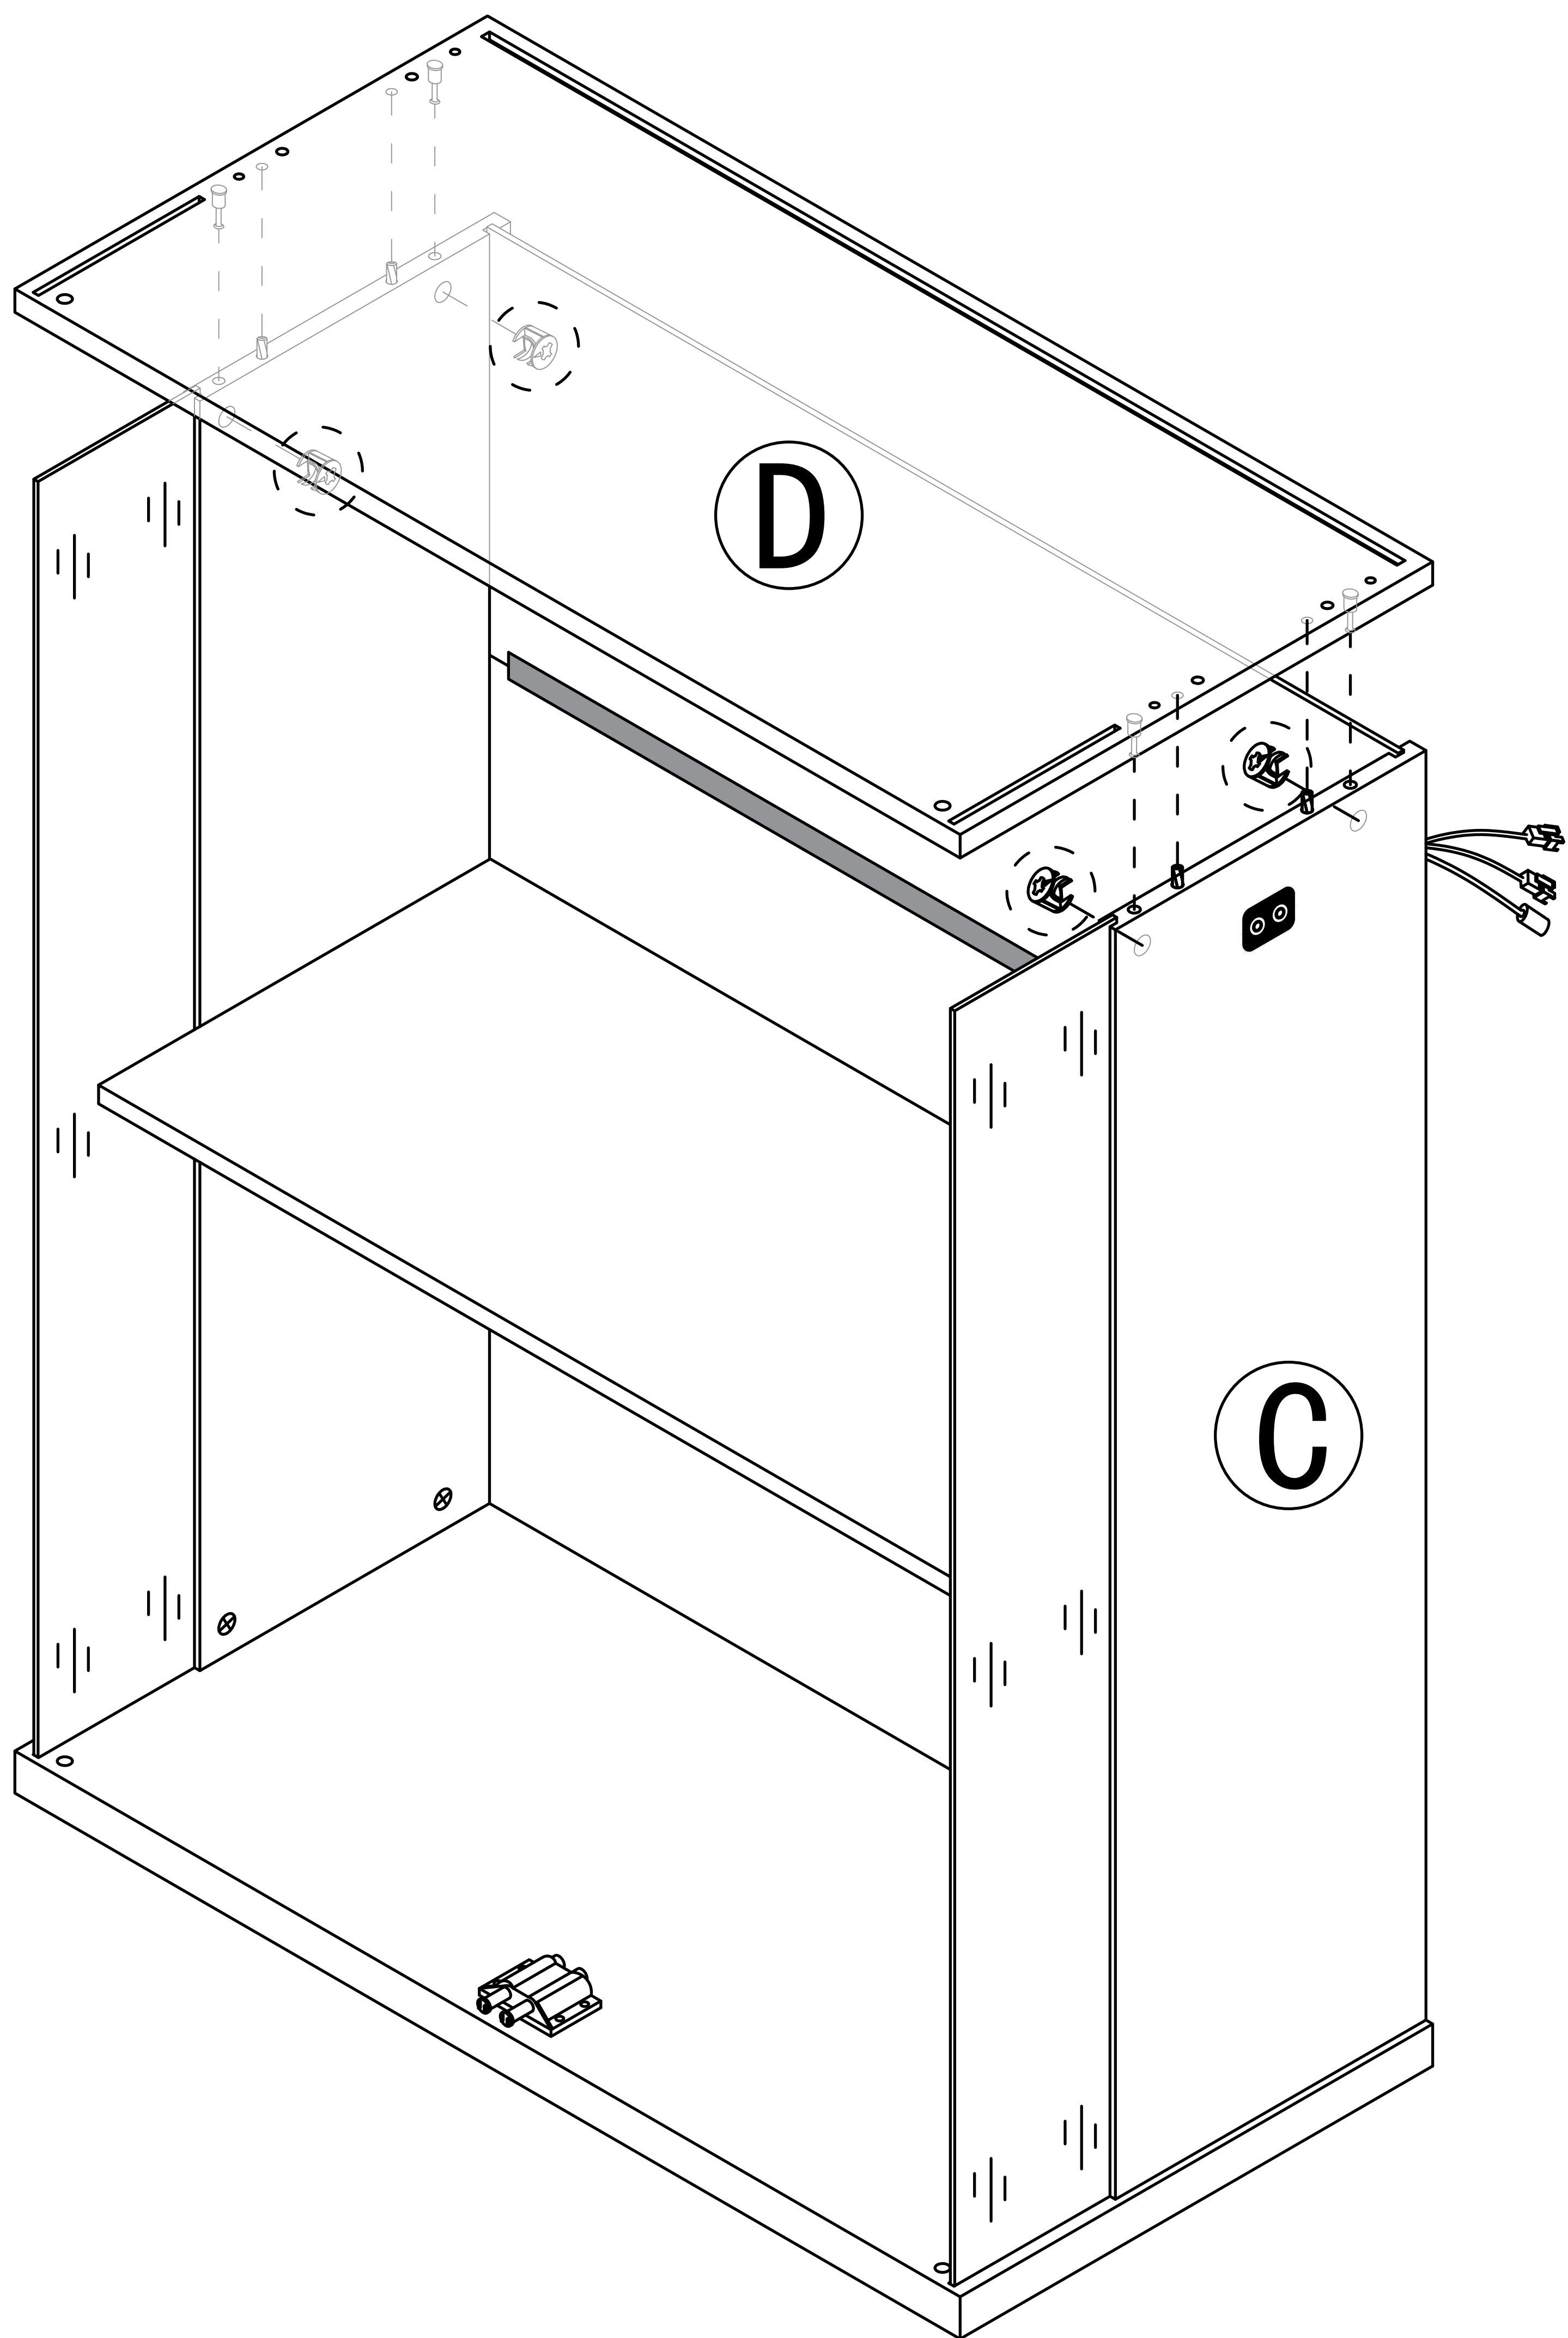


Step 13

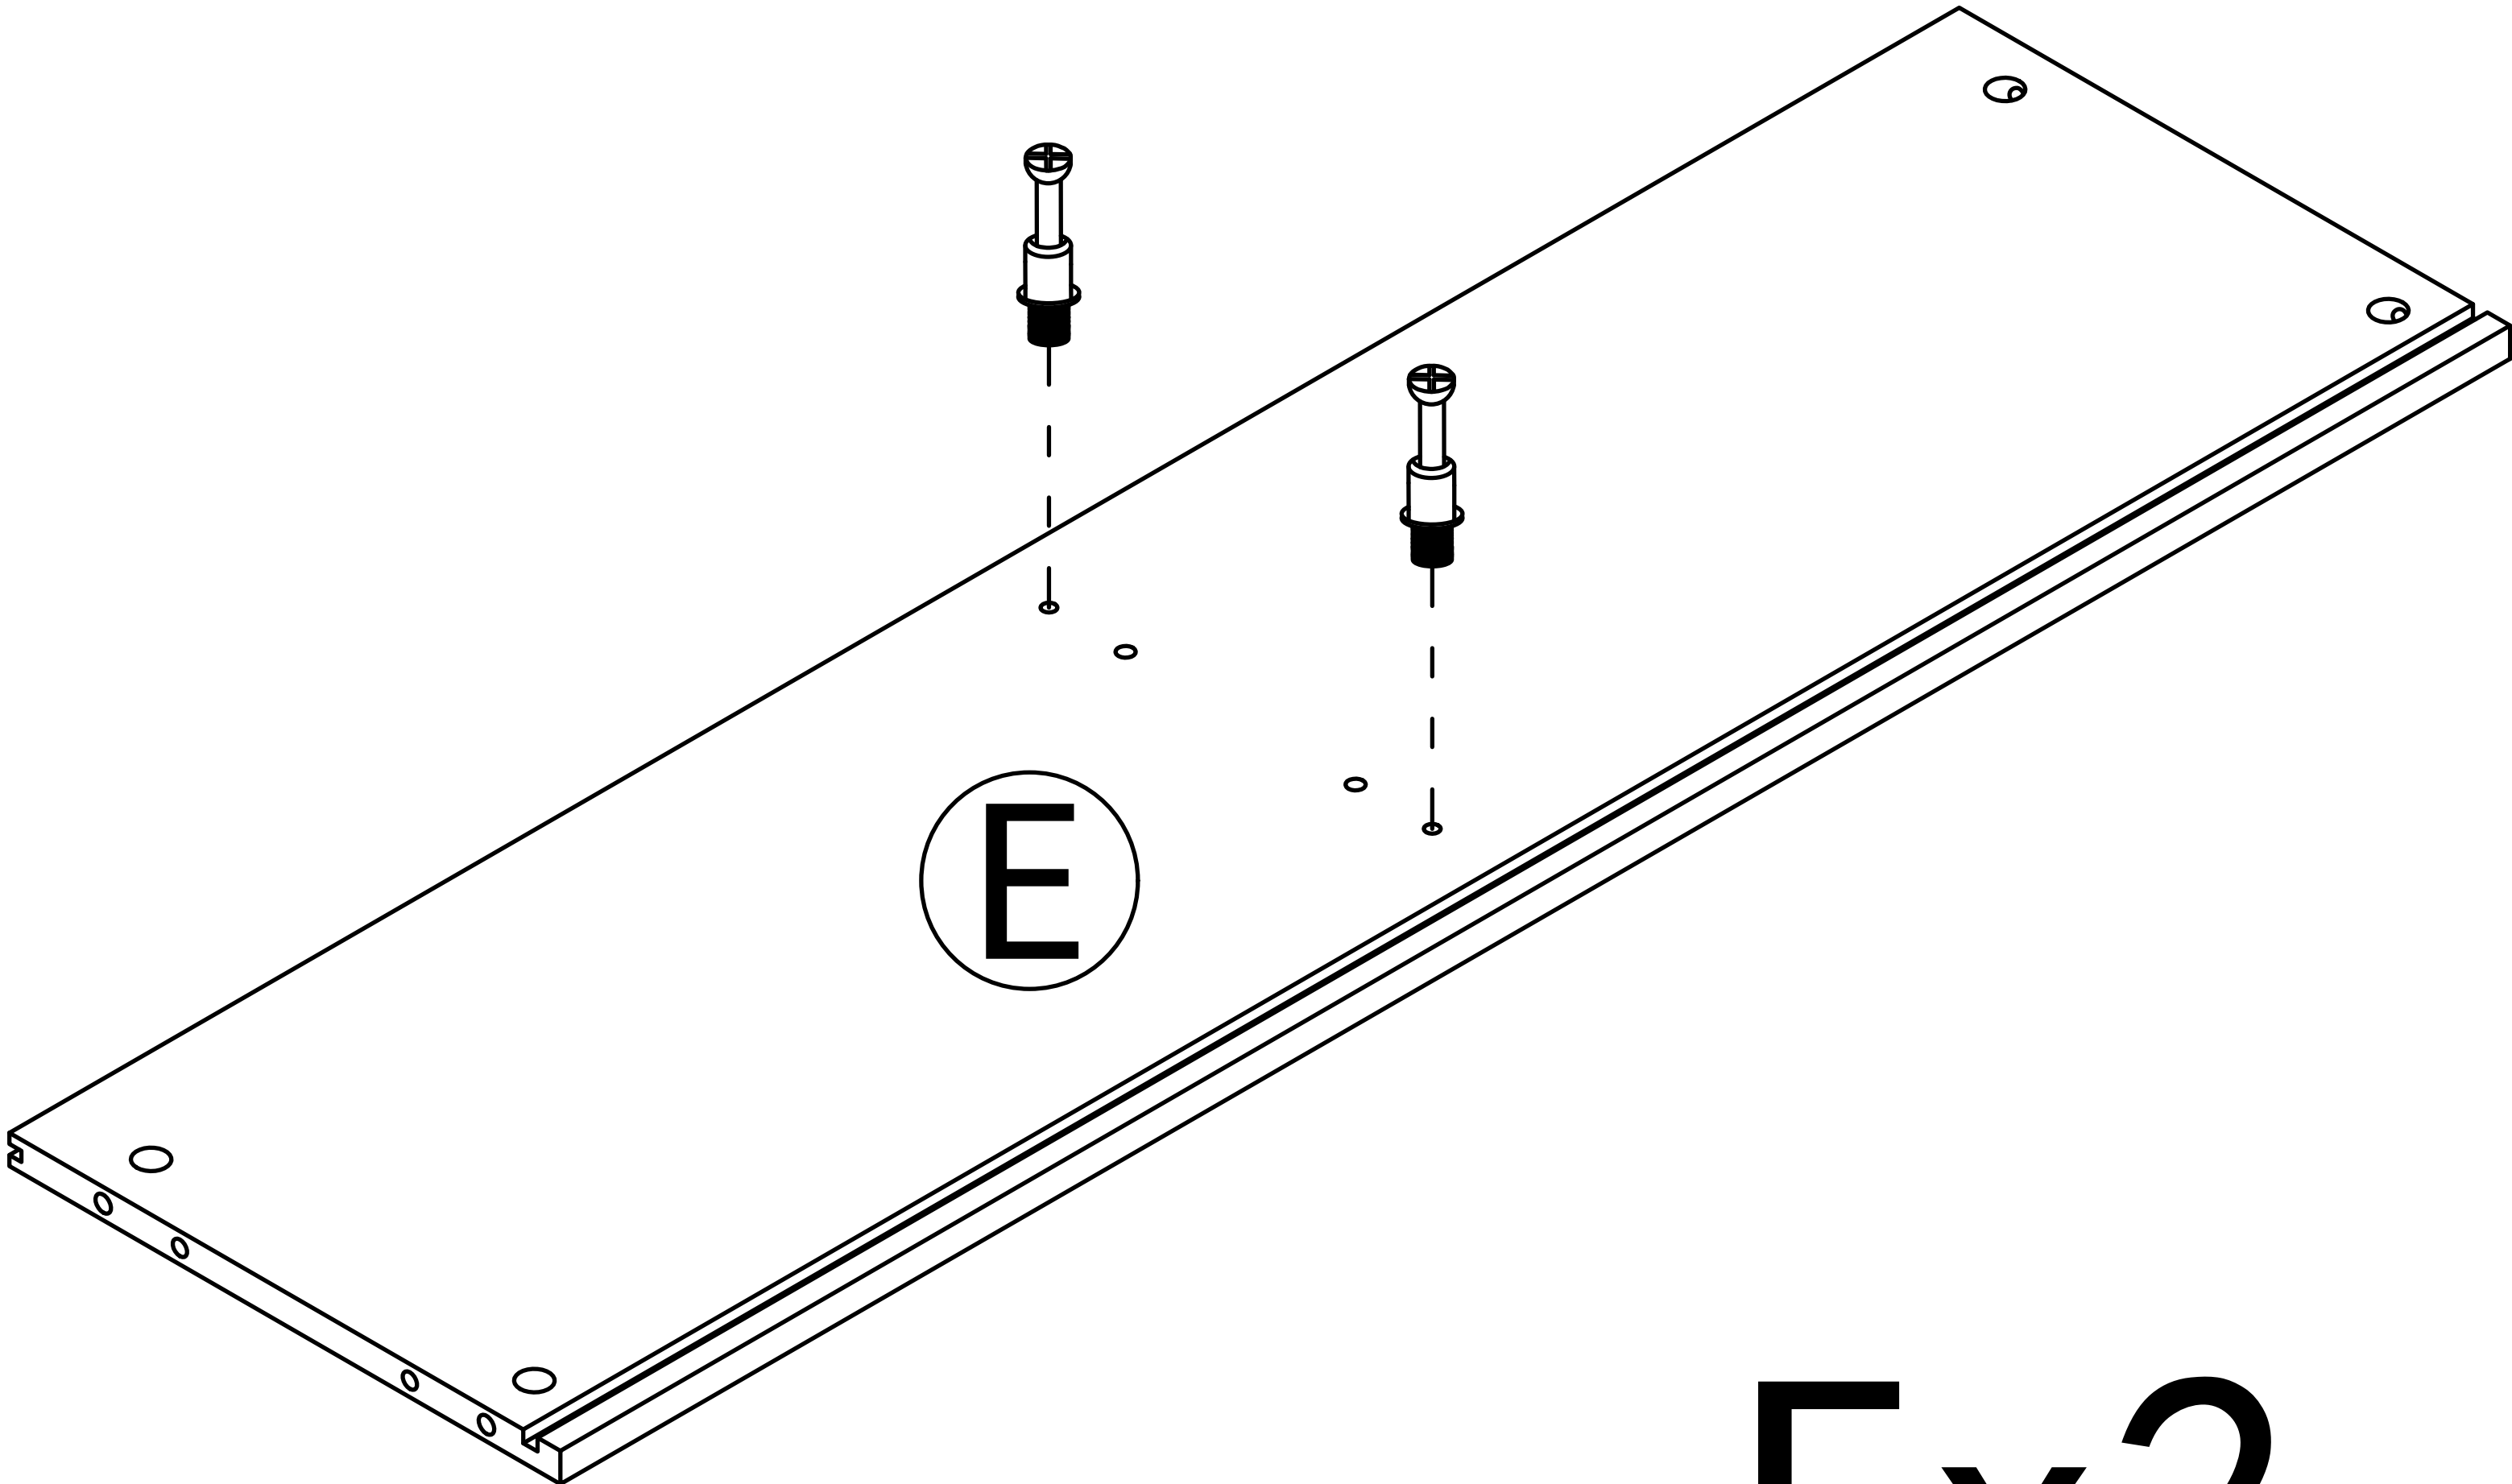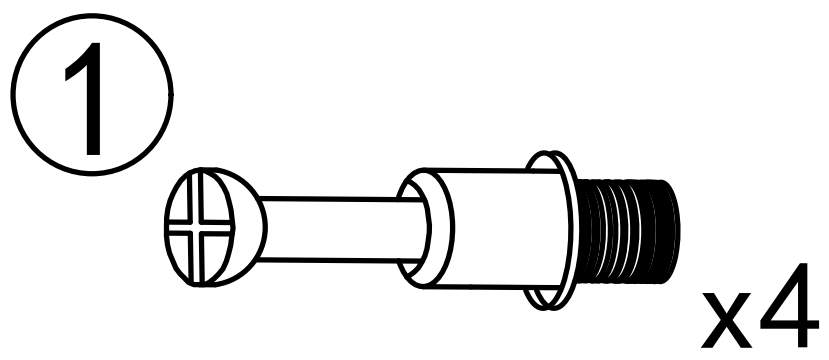


Ex2

Step 14

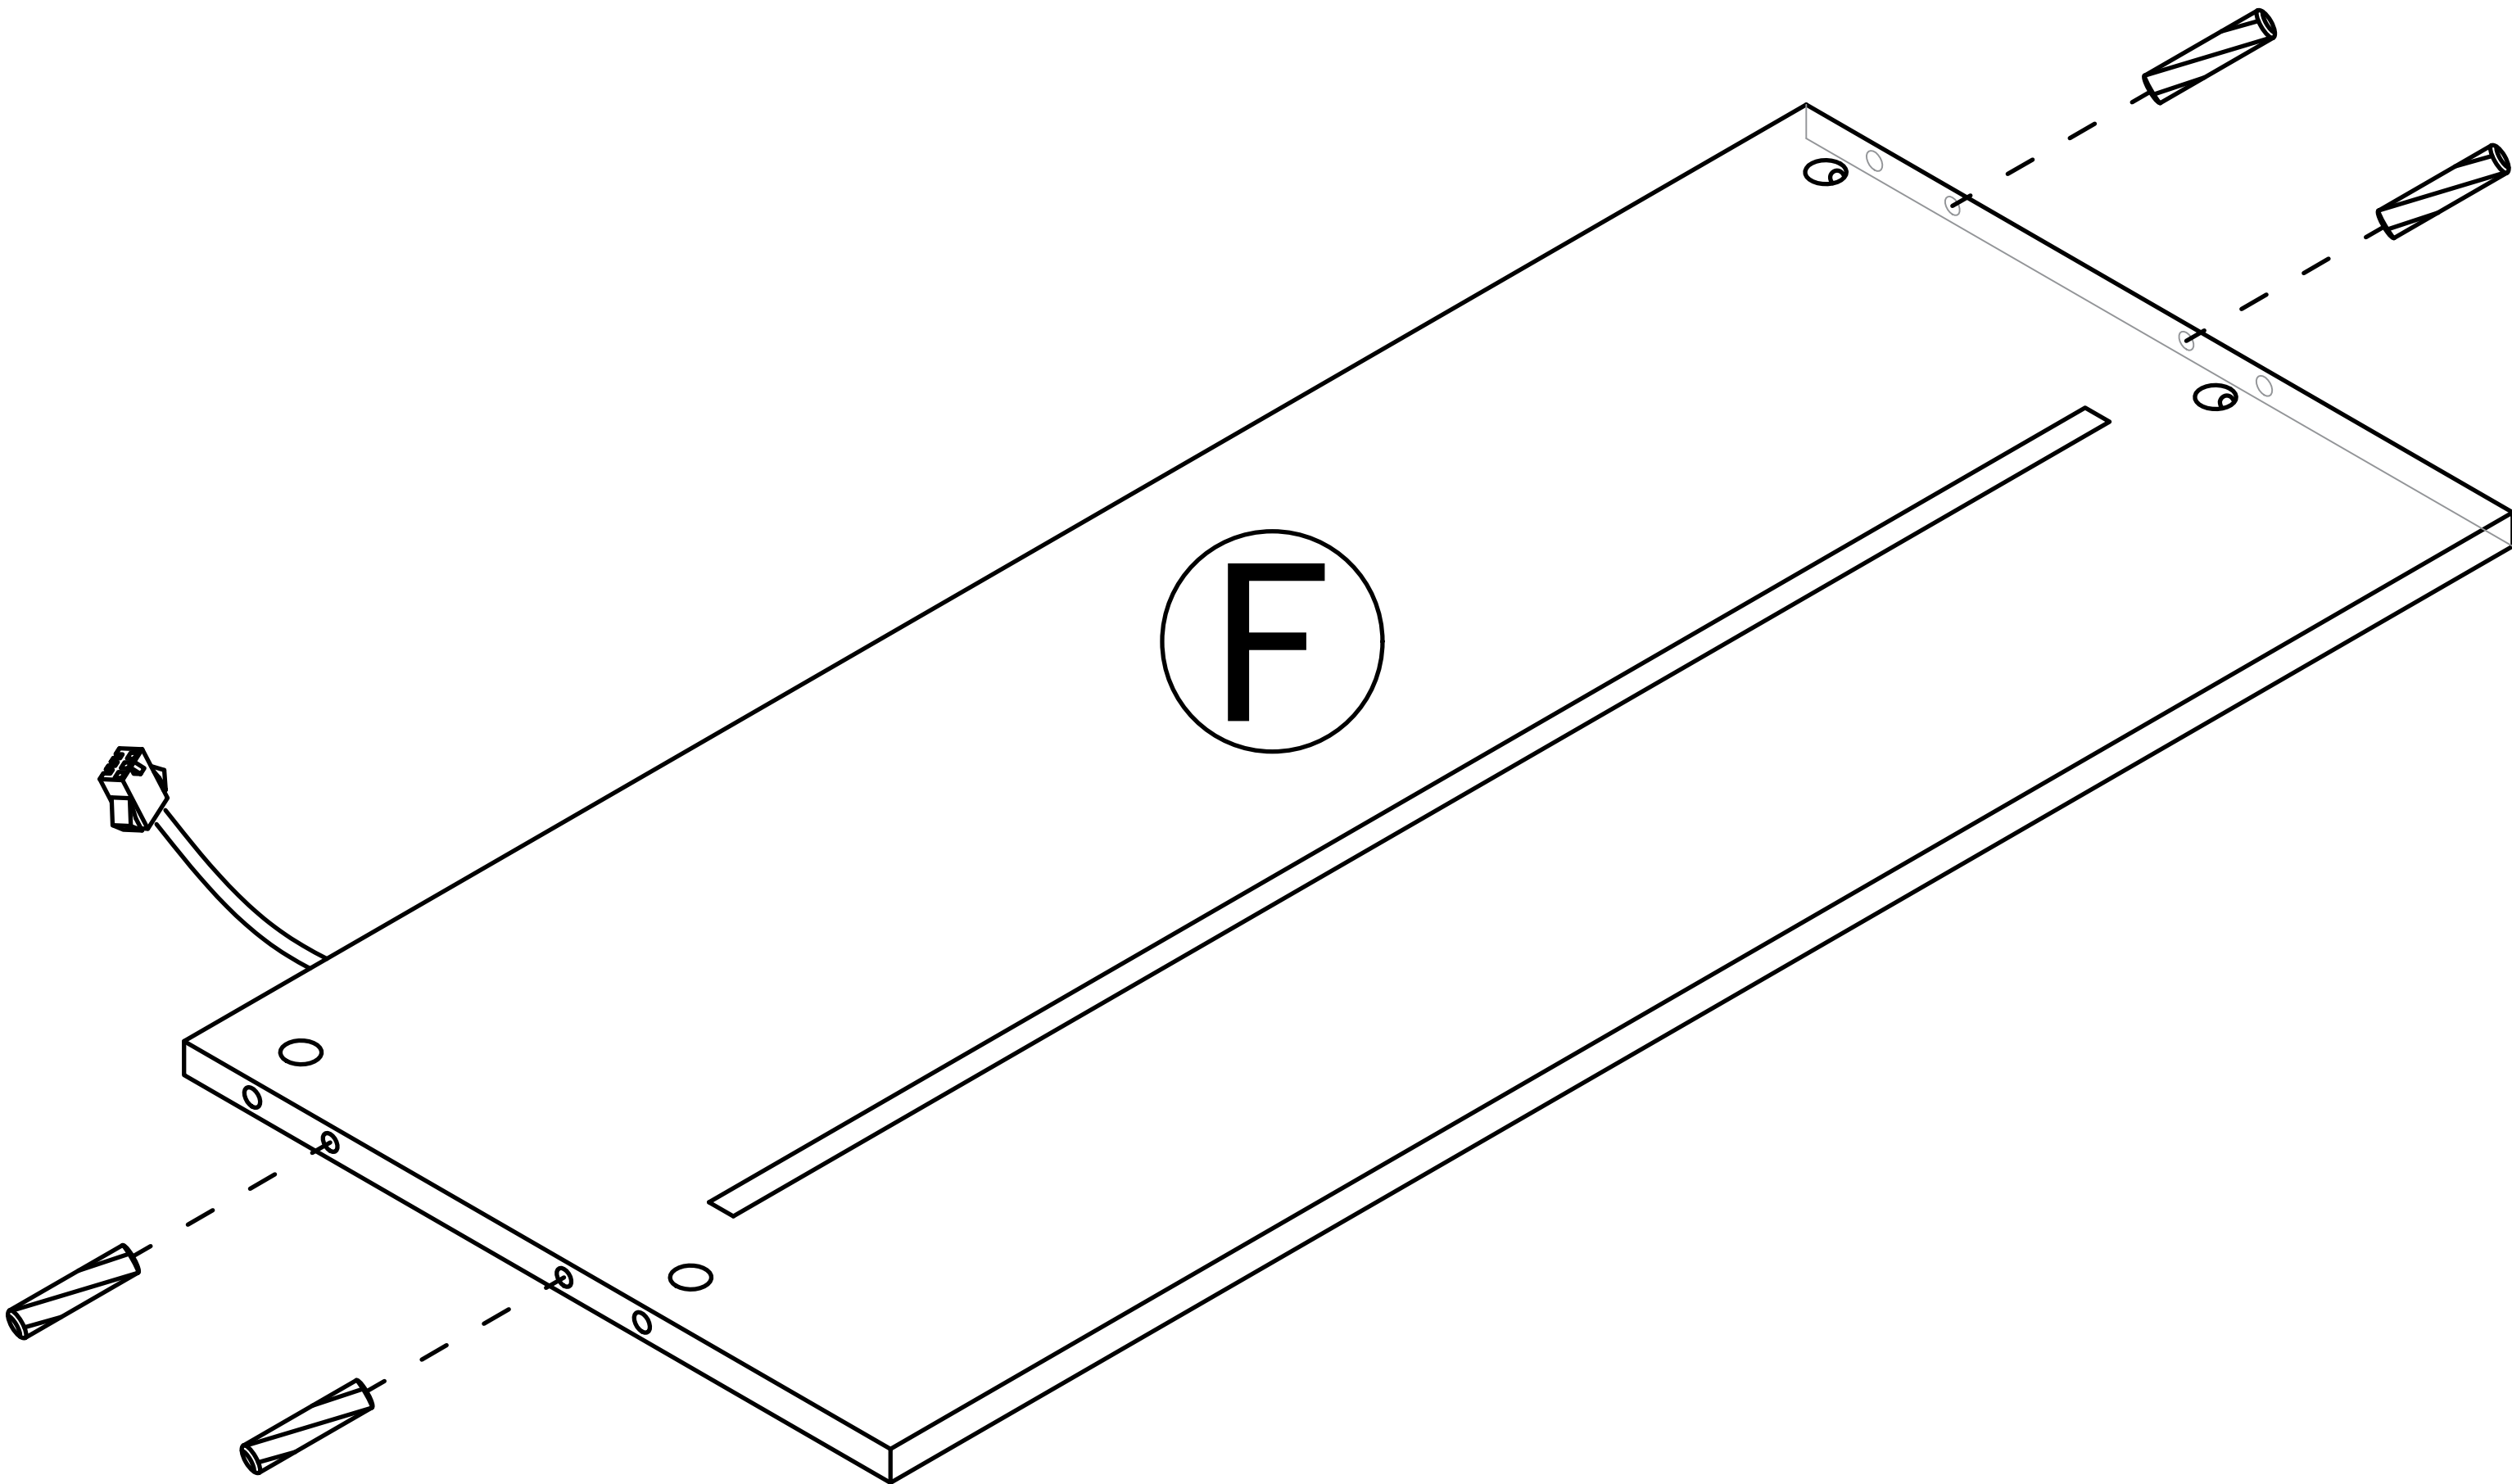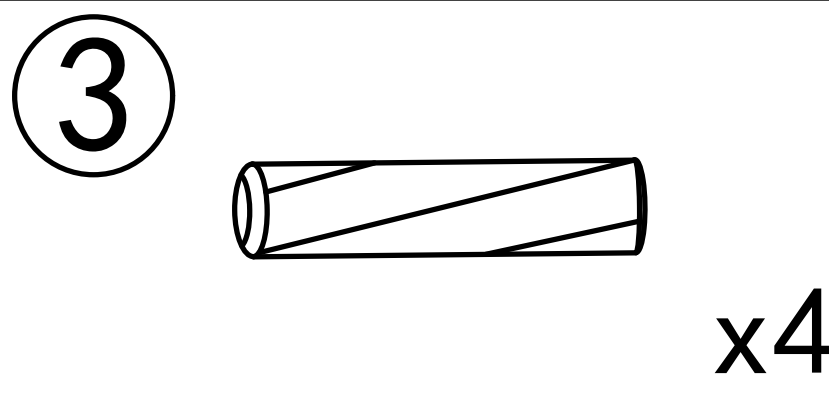


Step 15

2




x2

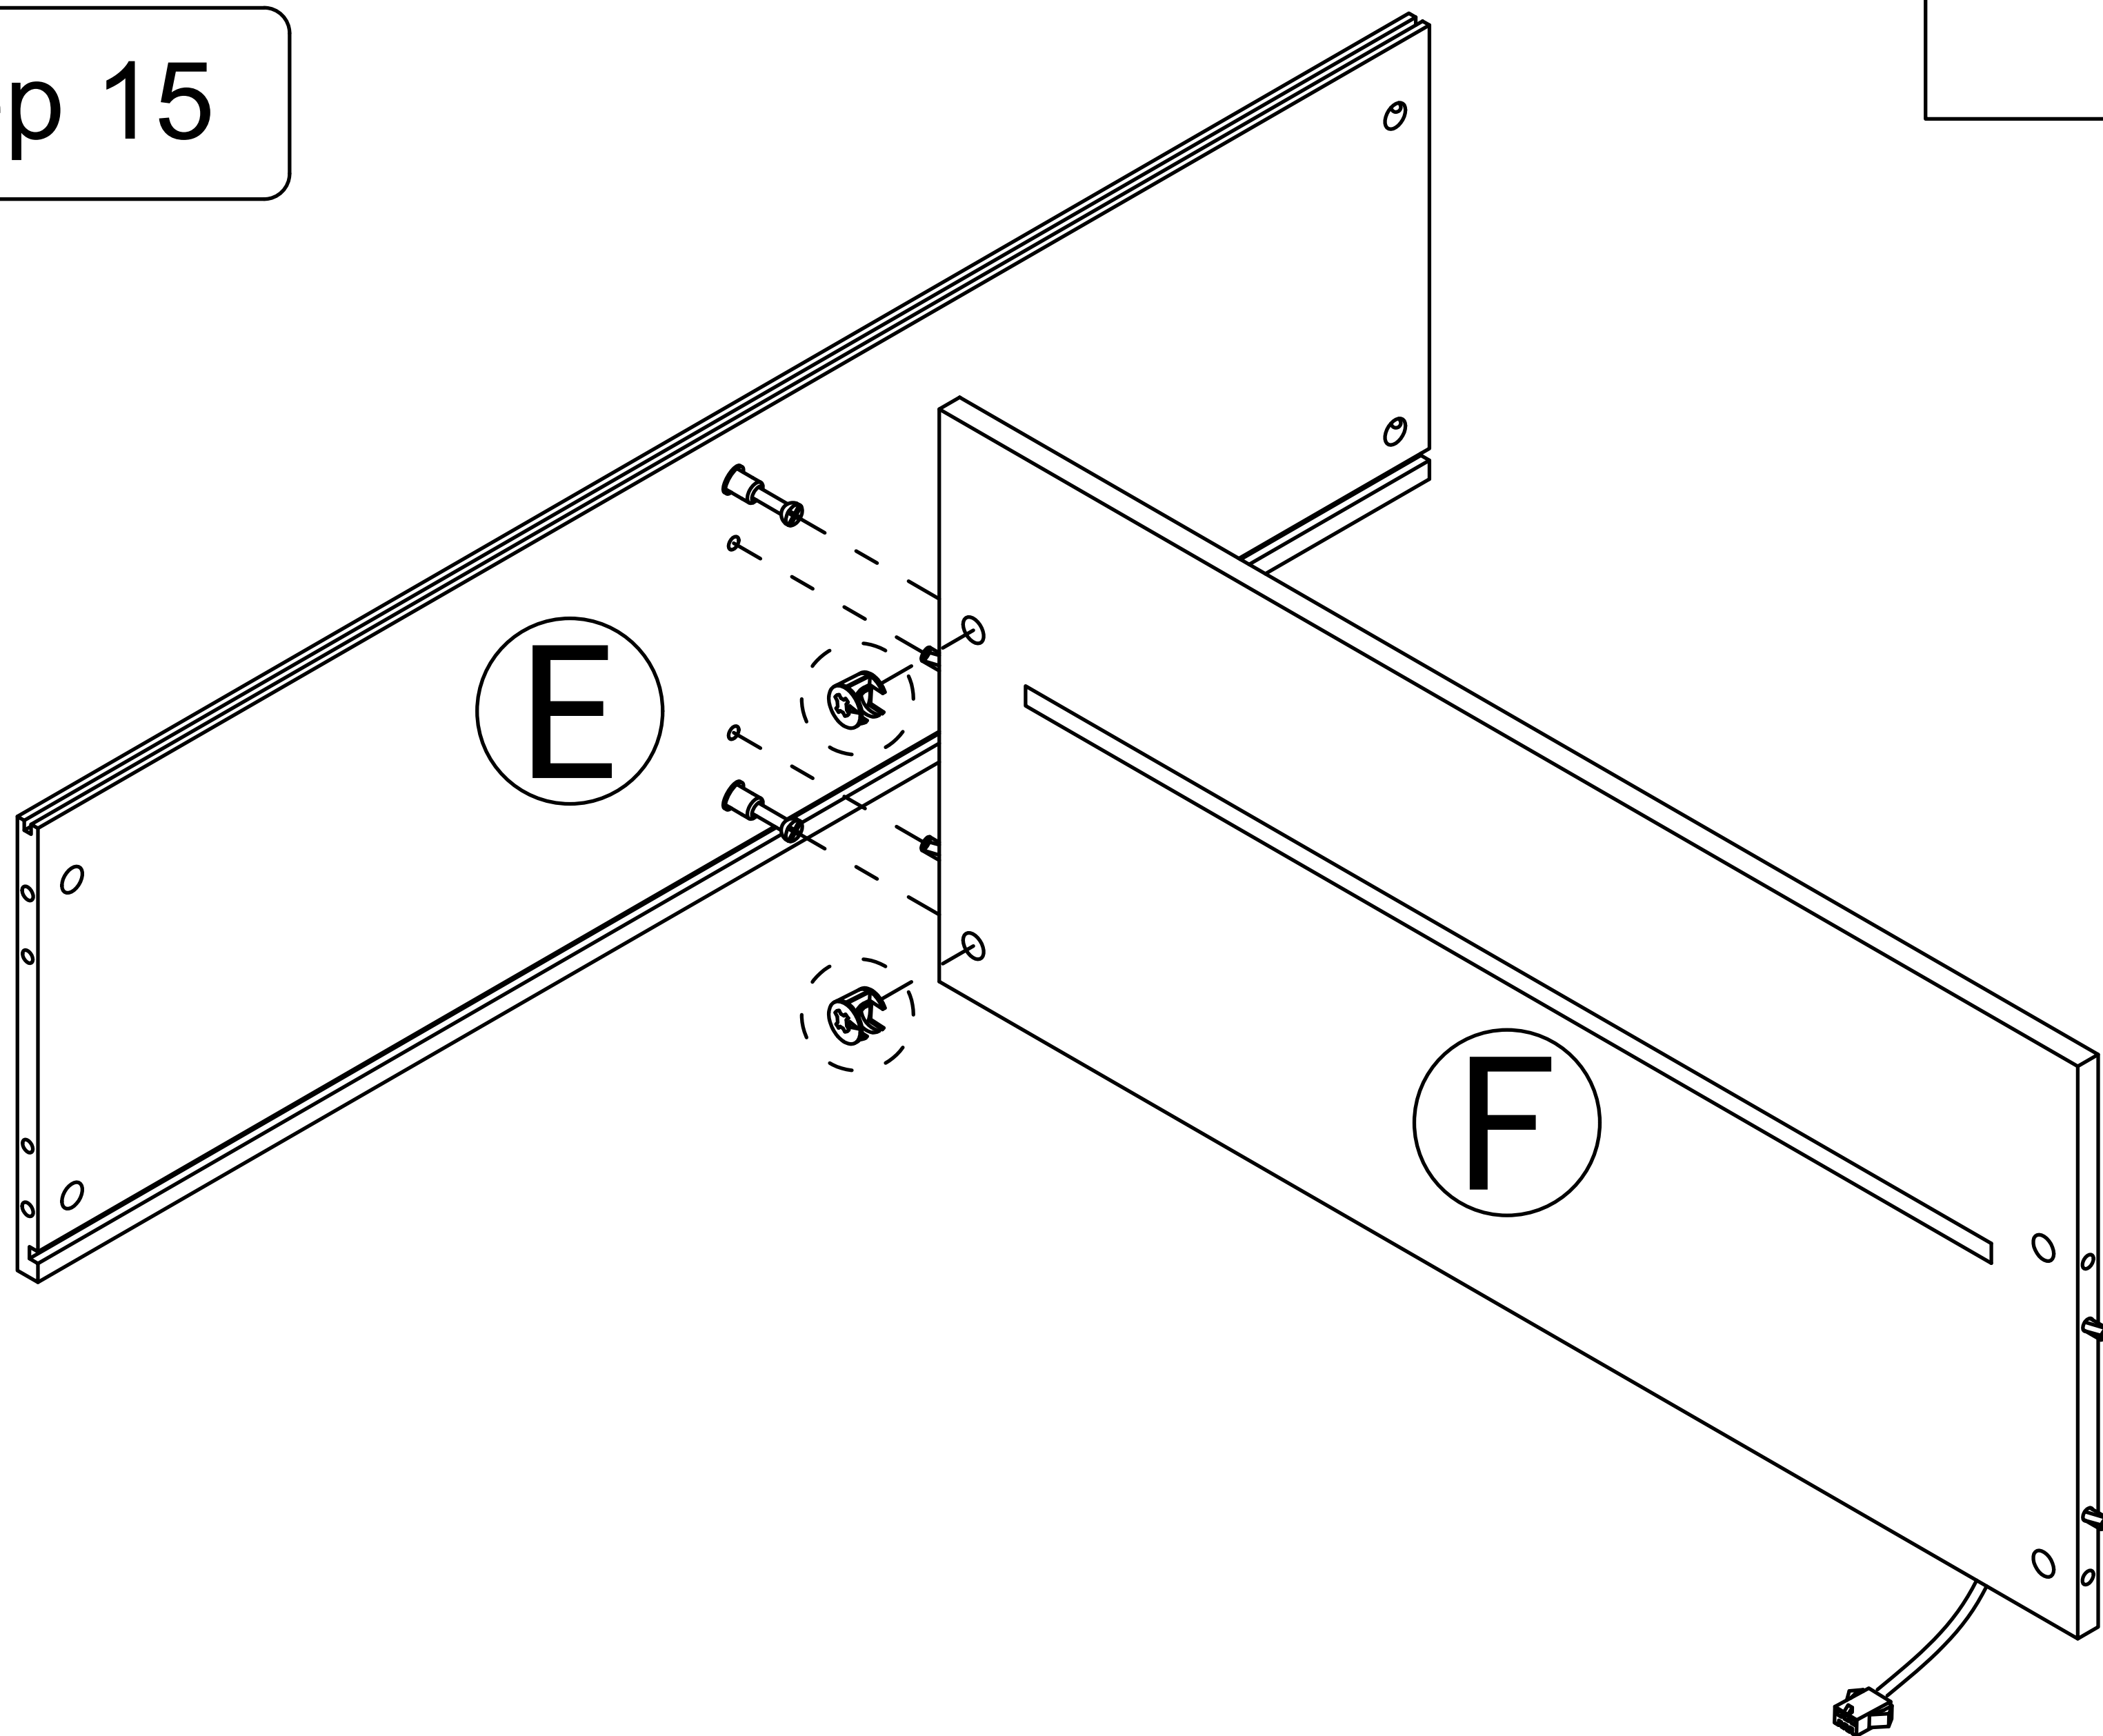


Step 16


2



x2

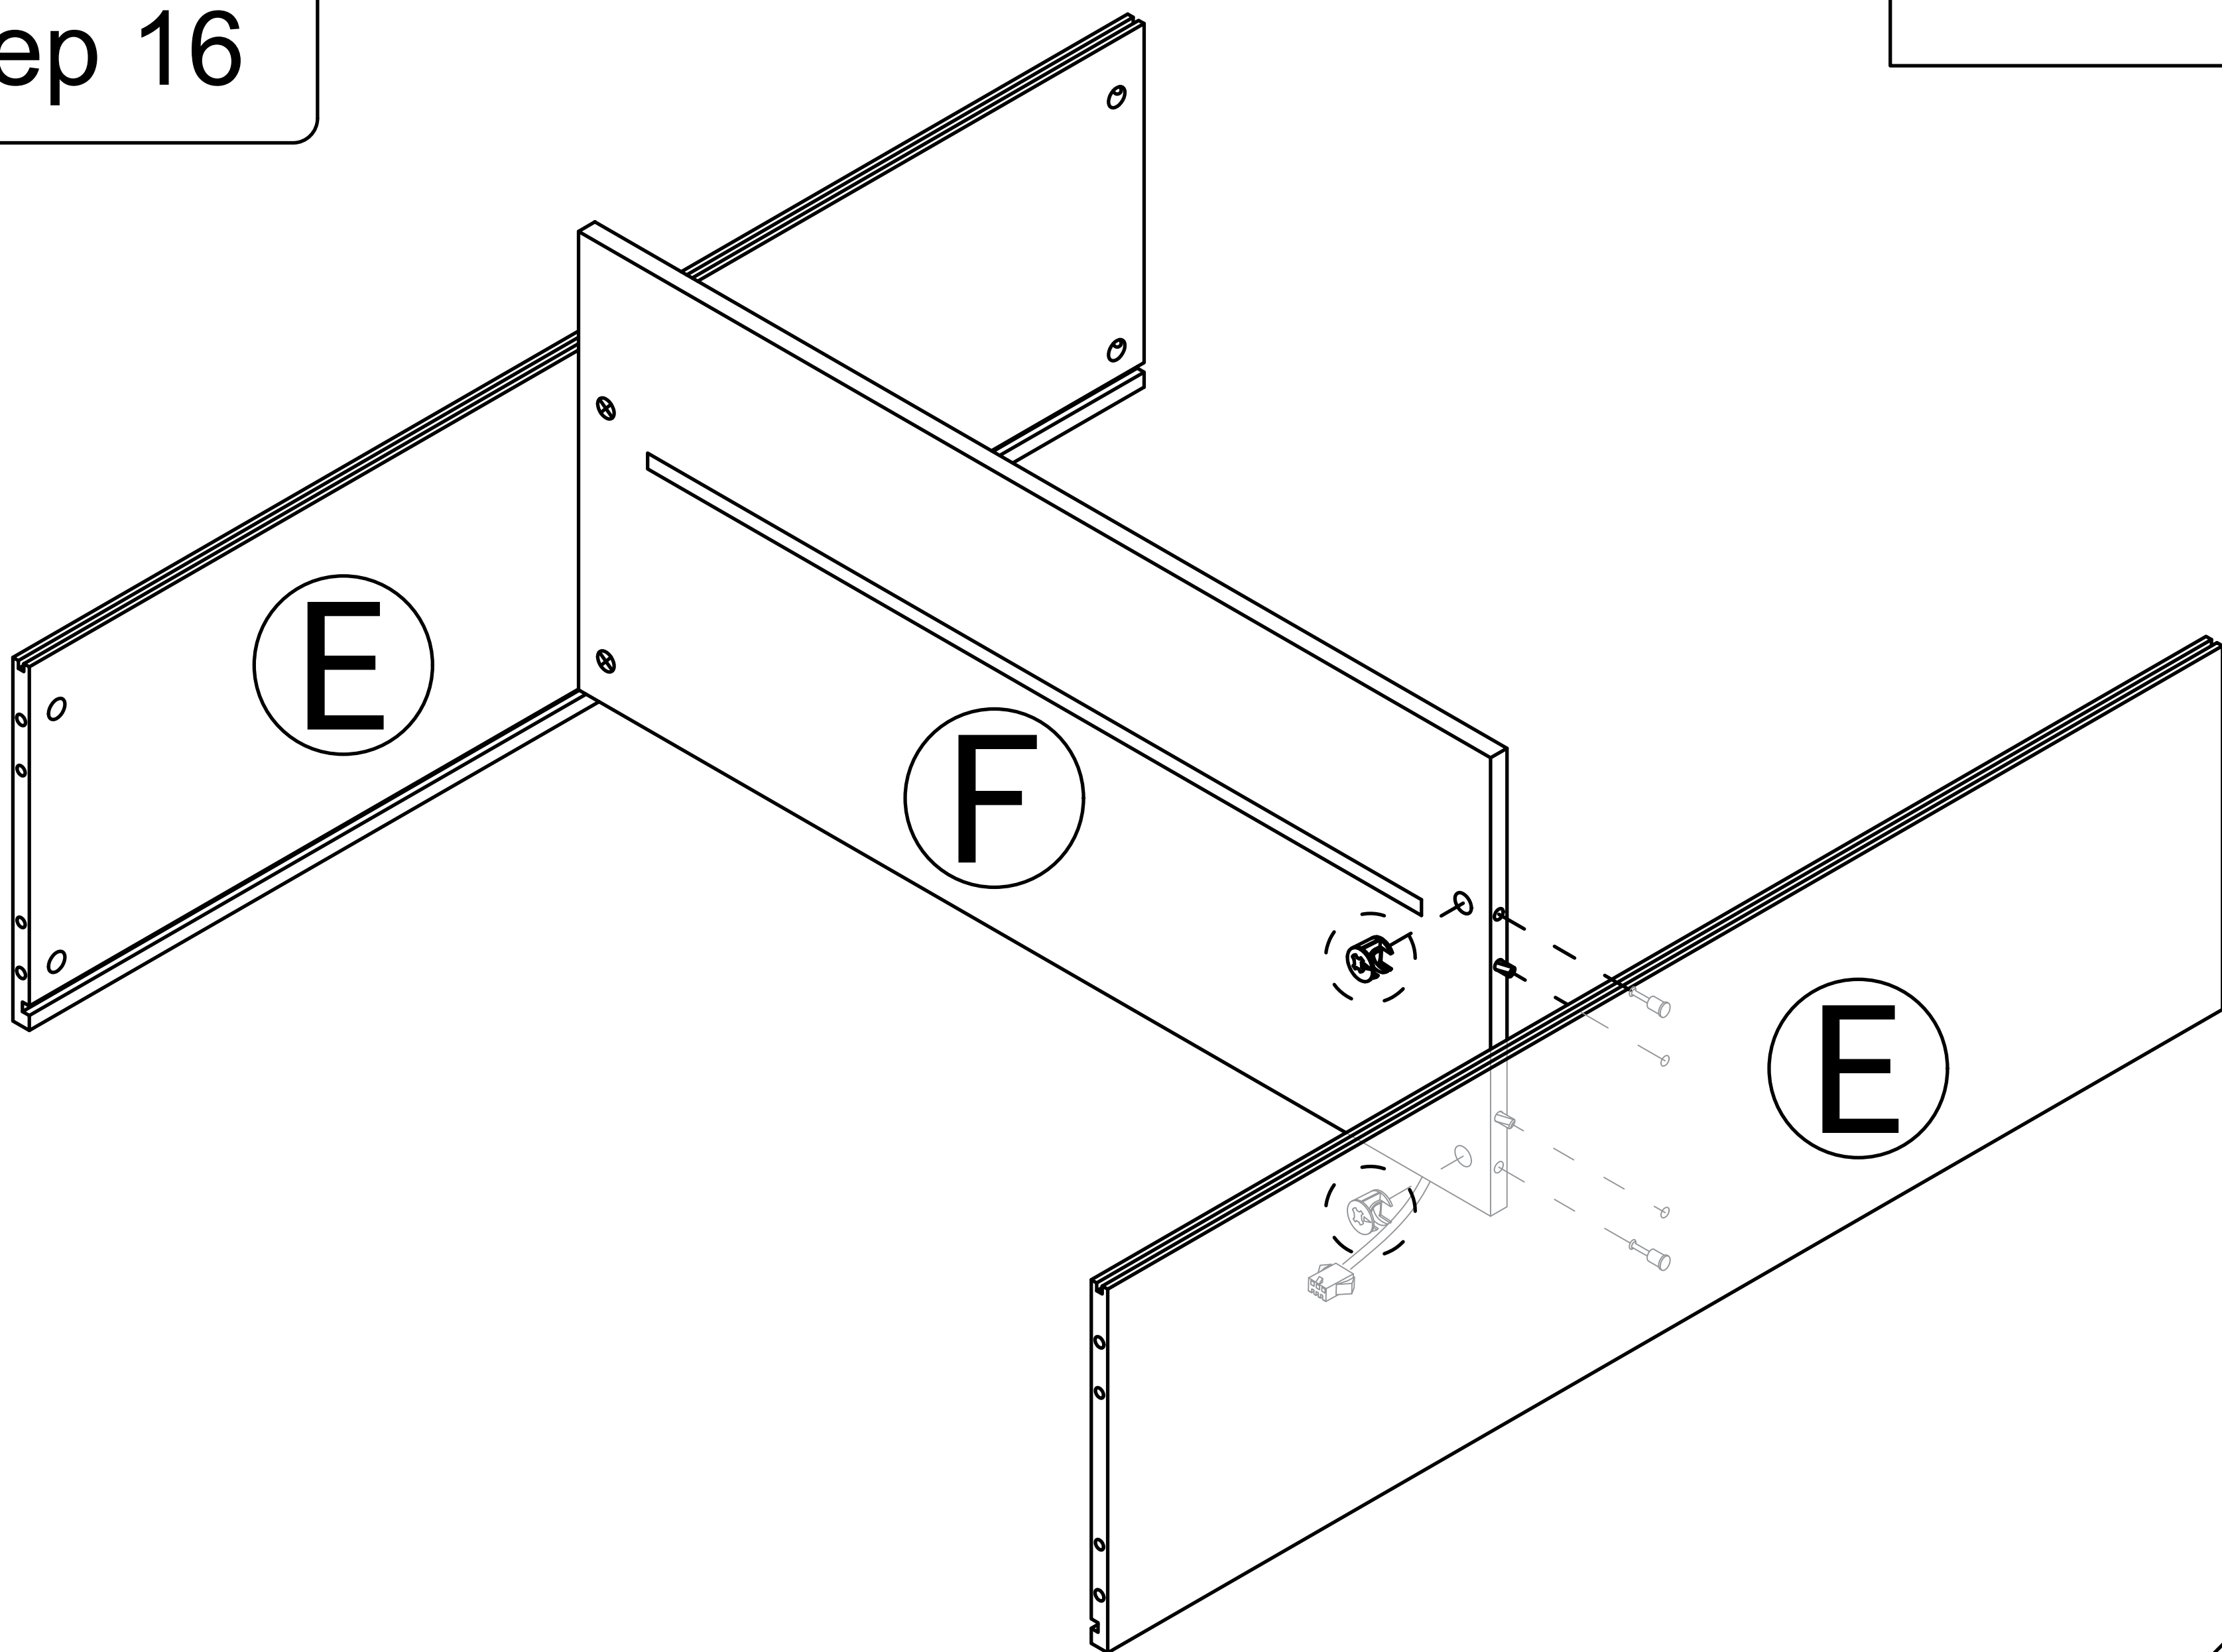


Step 17

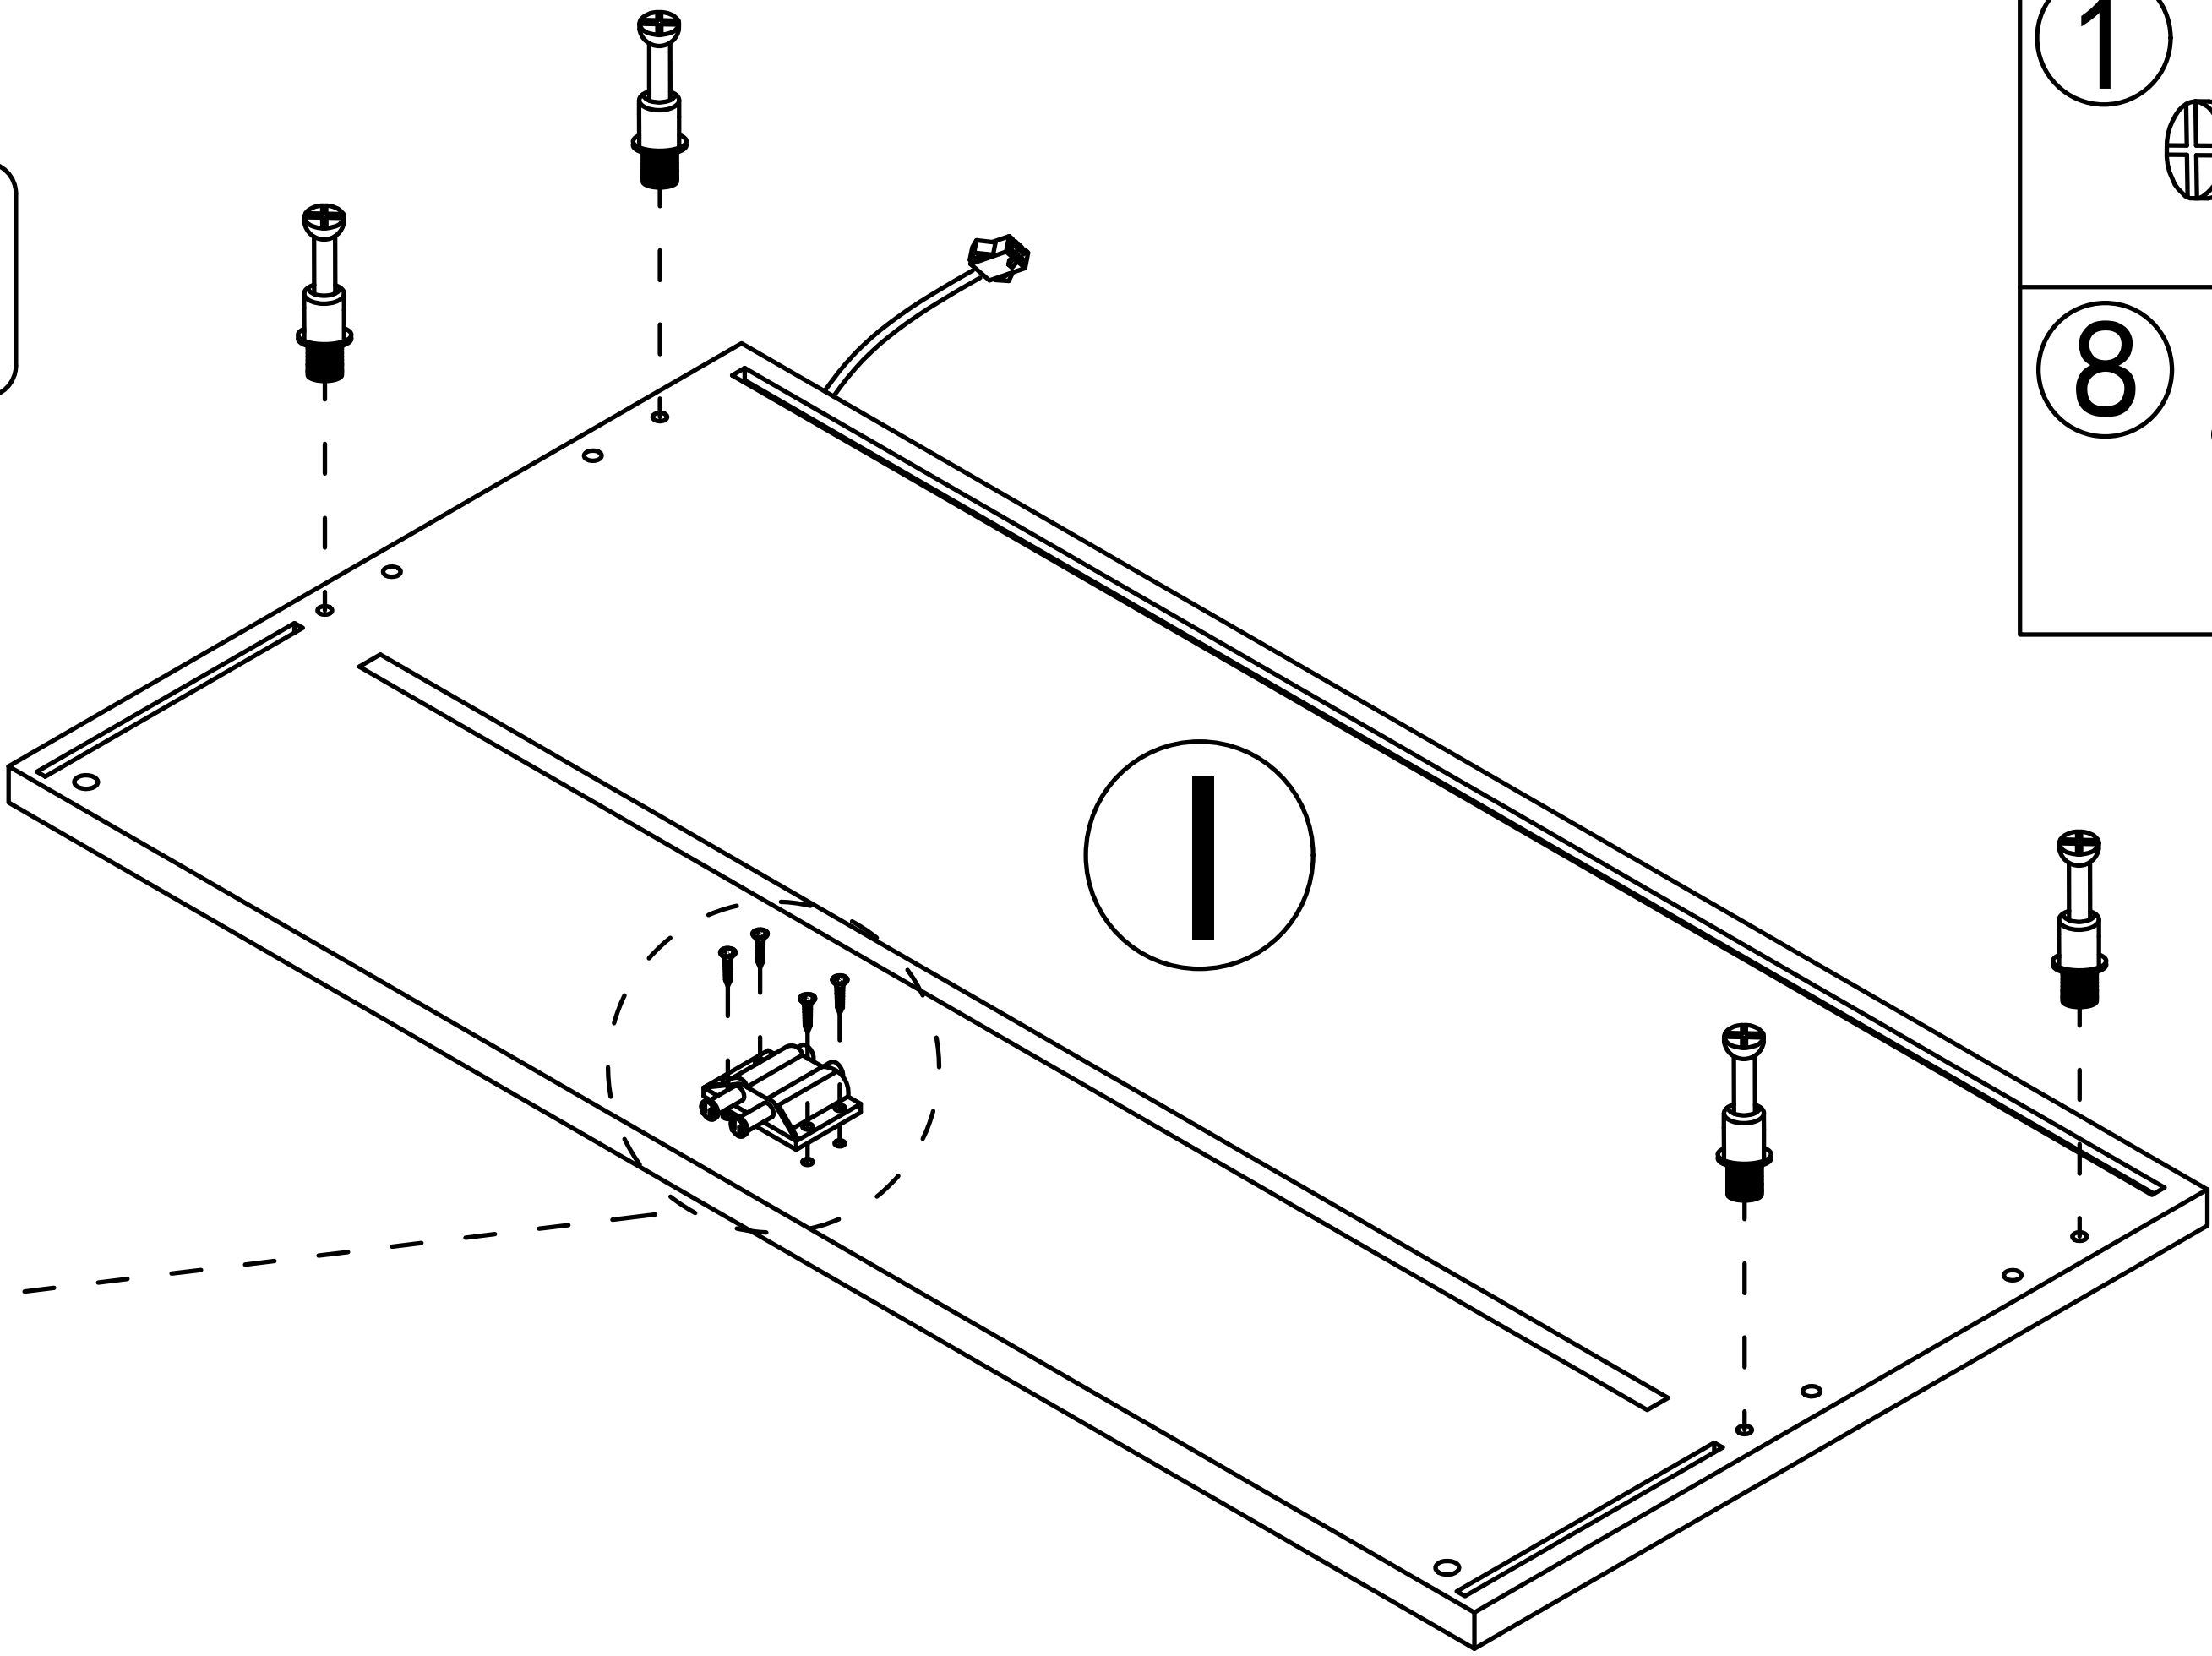

- 1 x4
- 8 x1 x4


Step 18

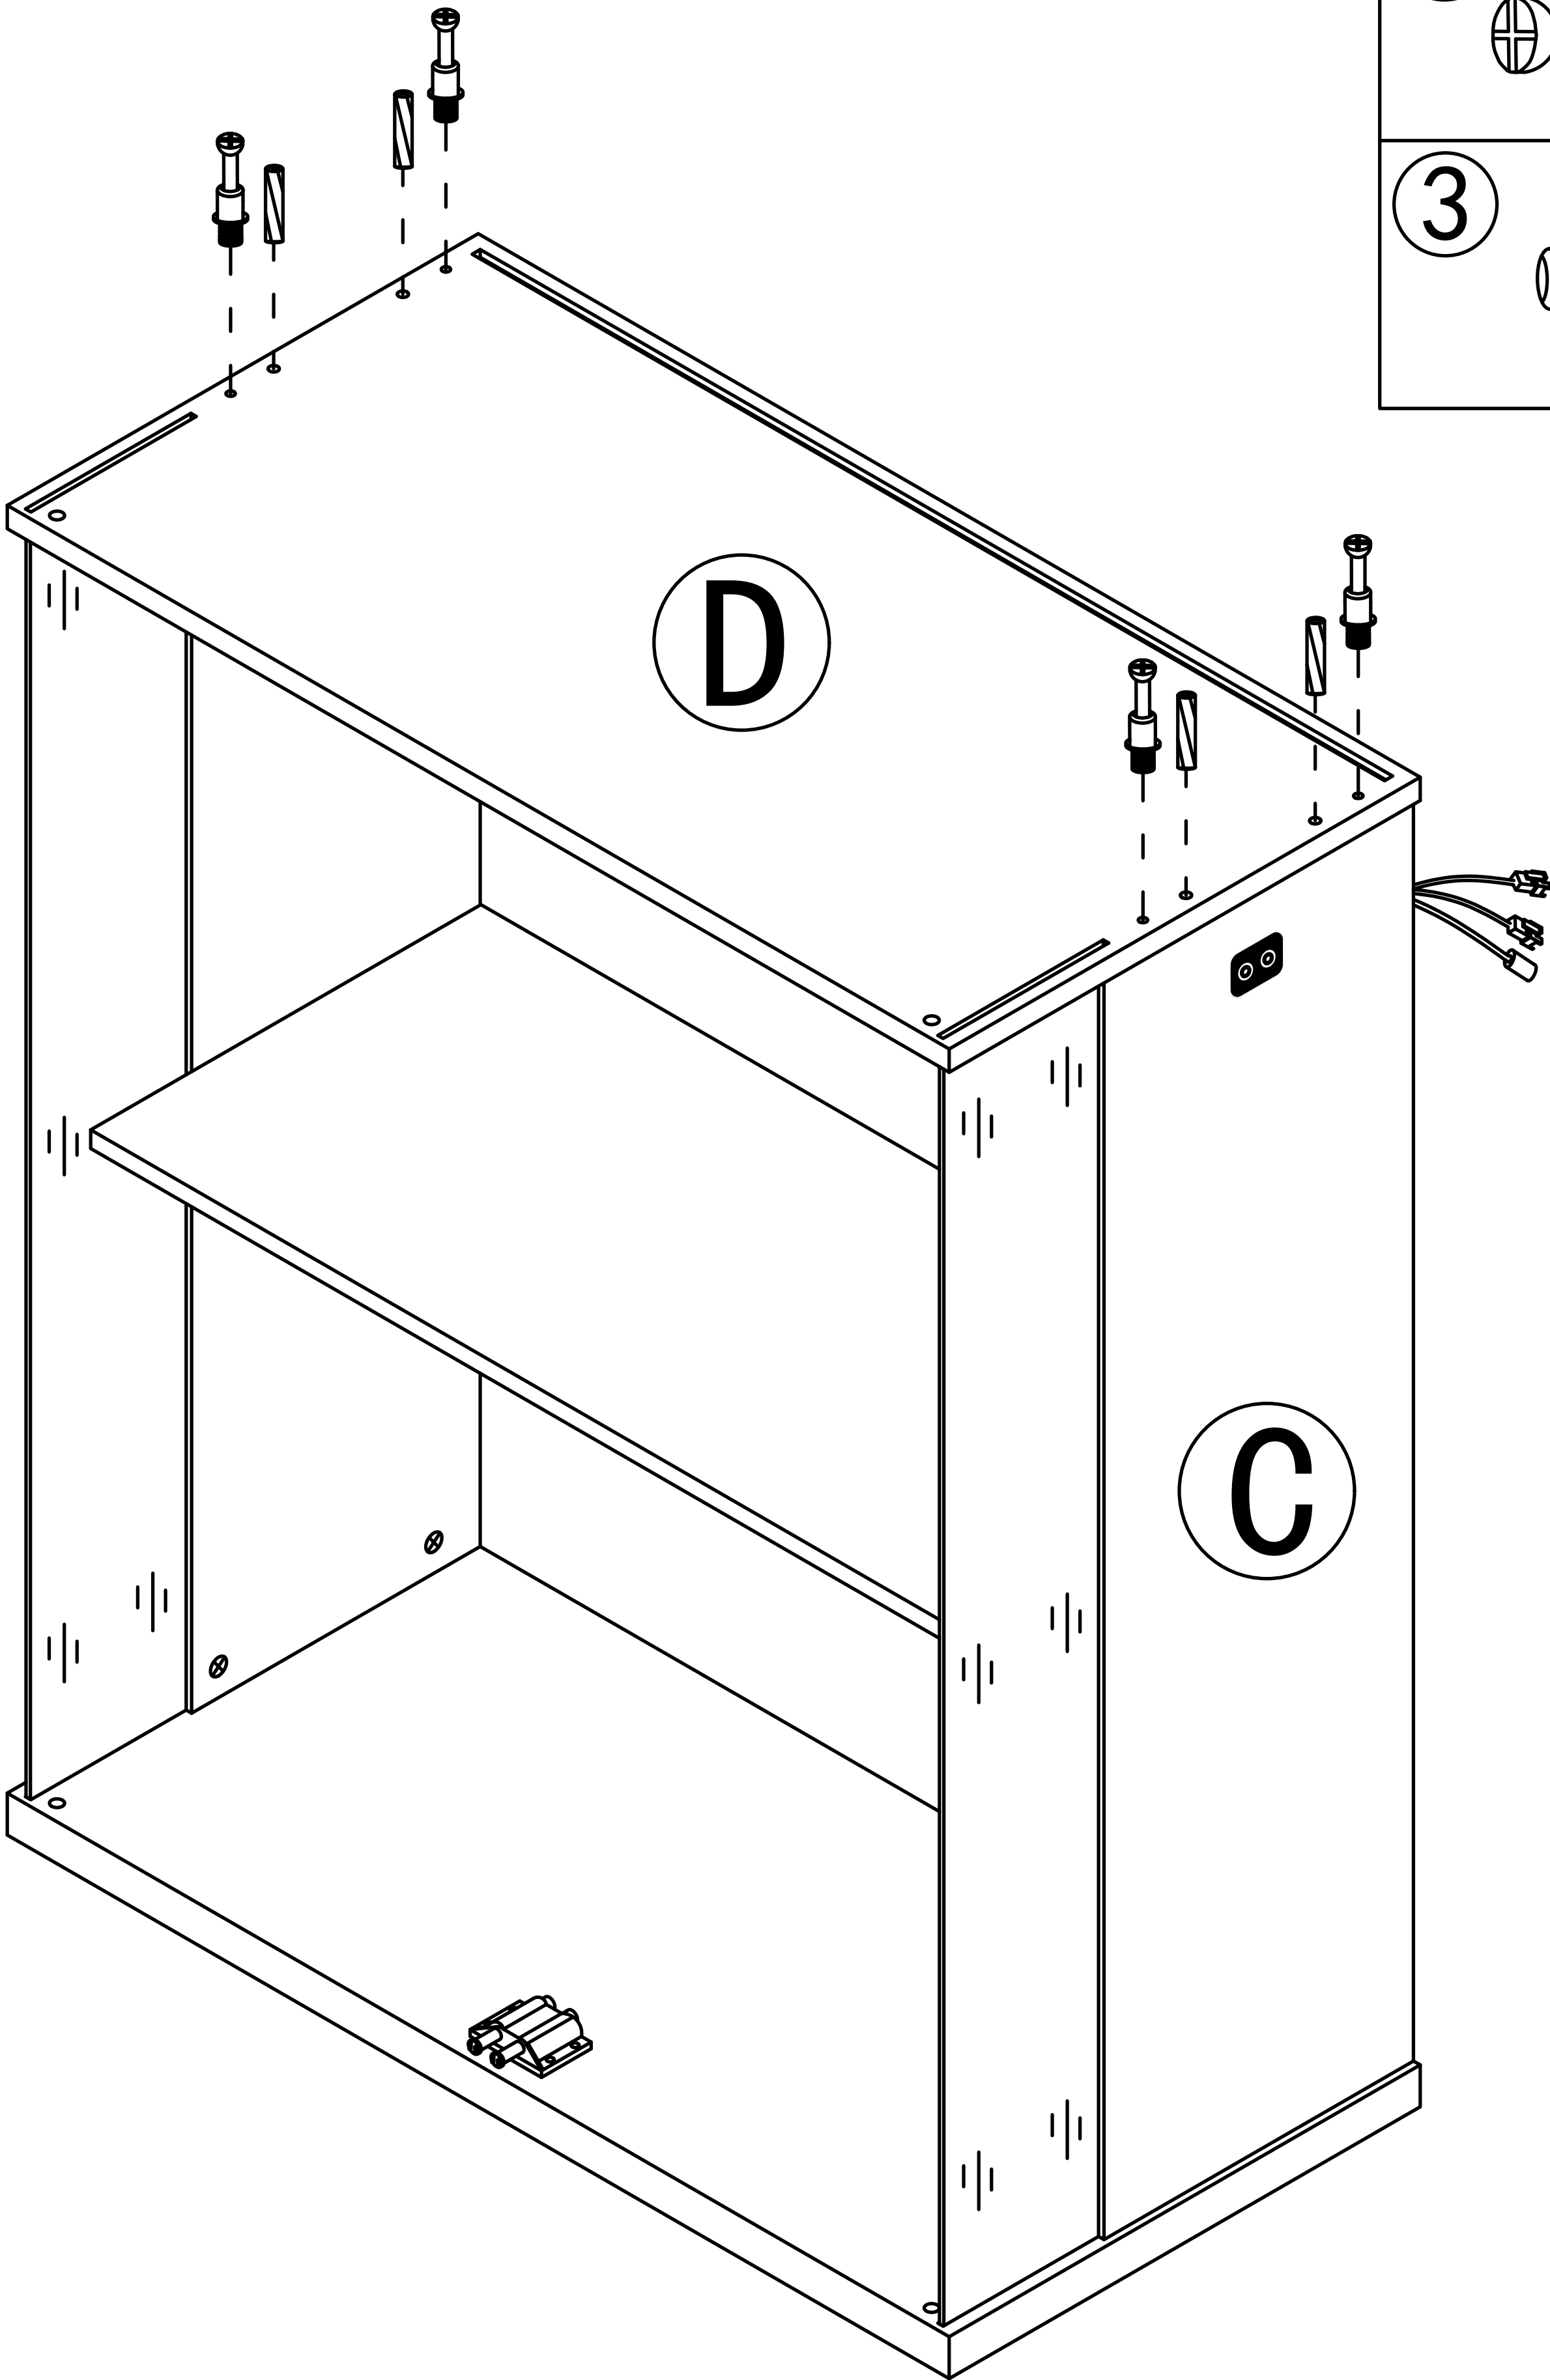


- 1 x4
- 3 x4

Step 19

2






x4

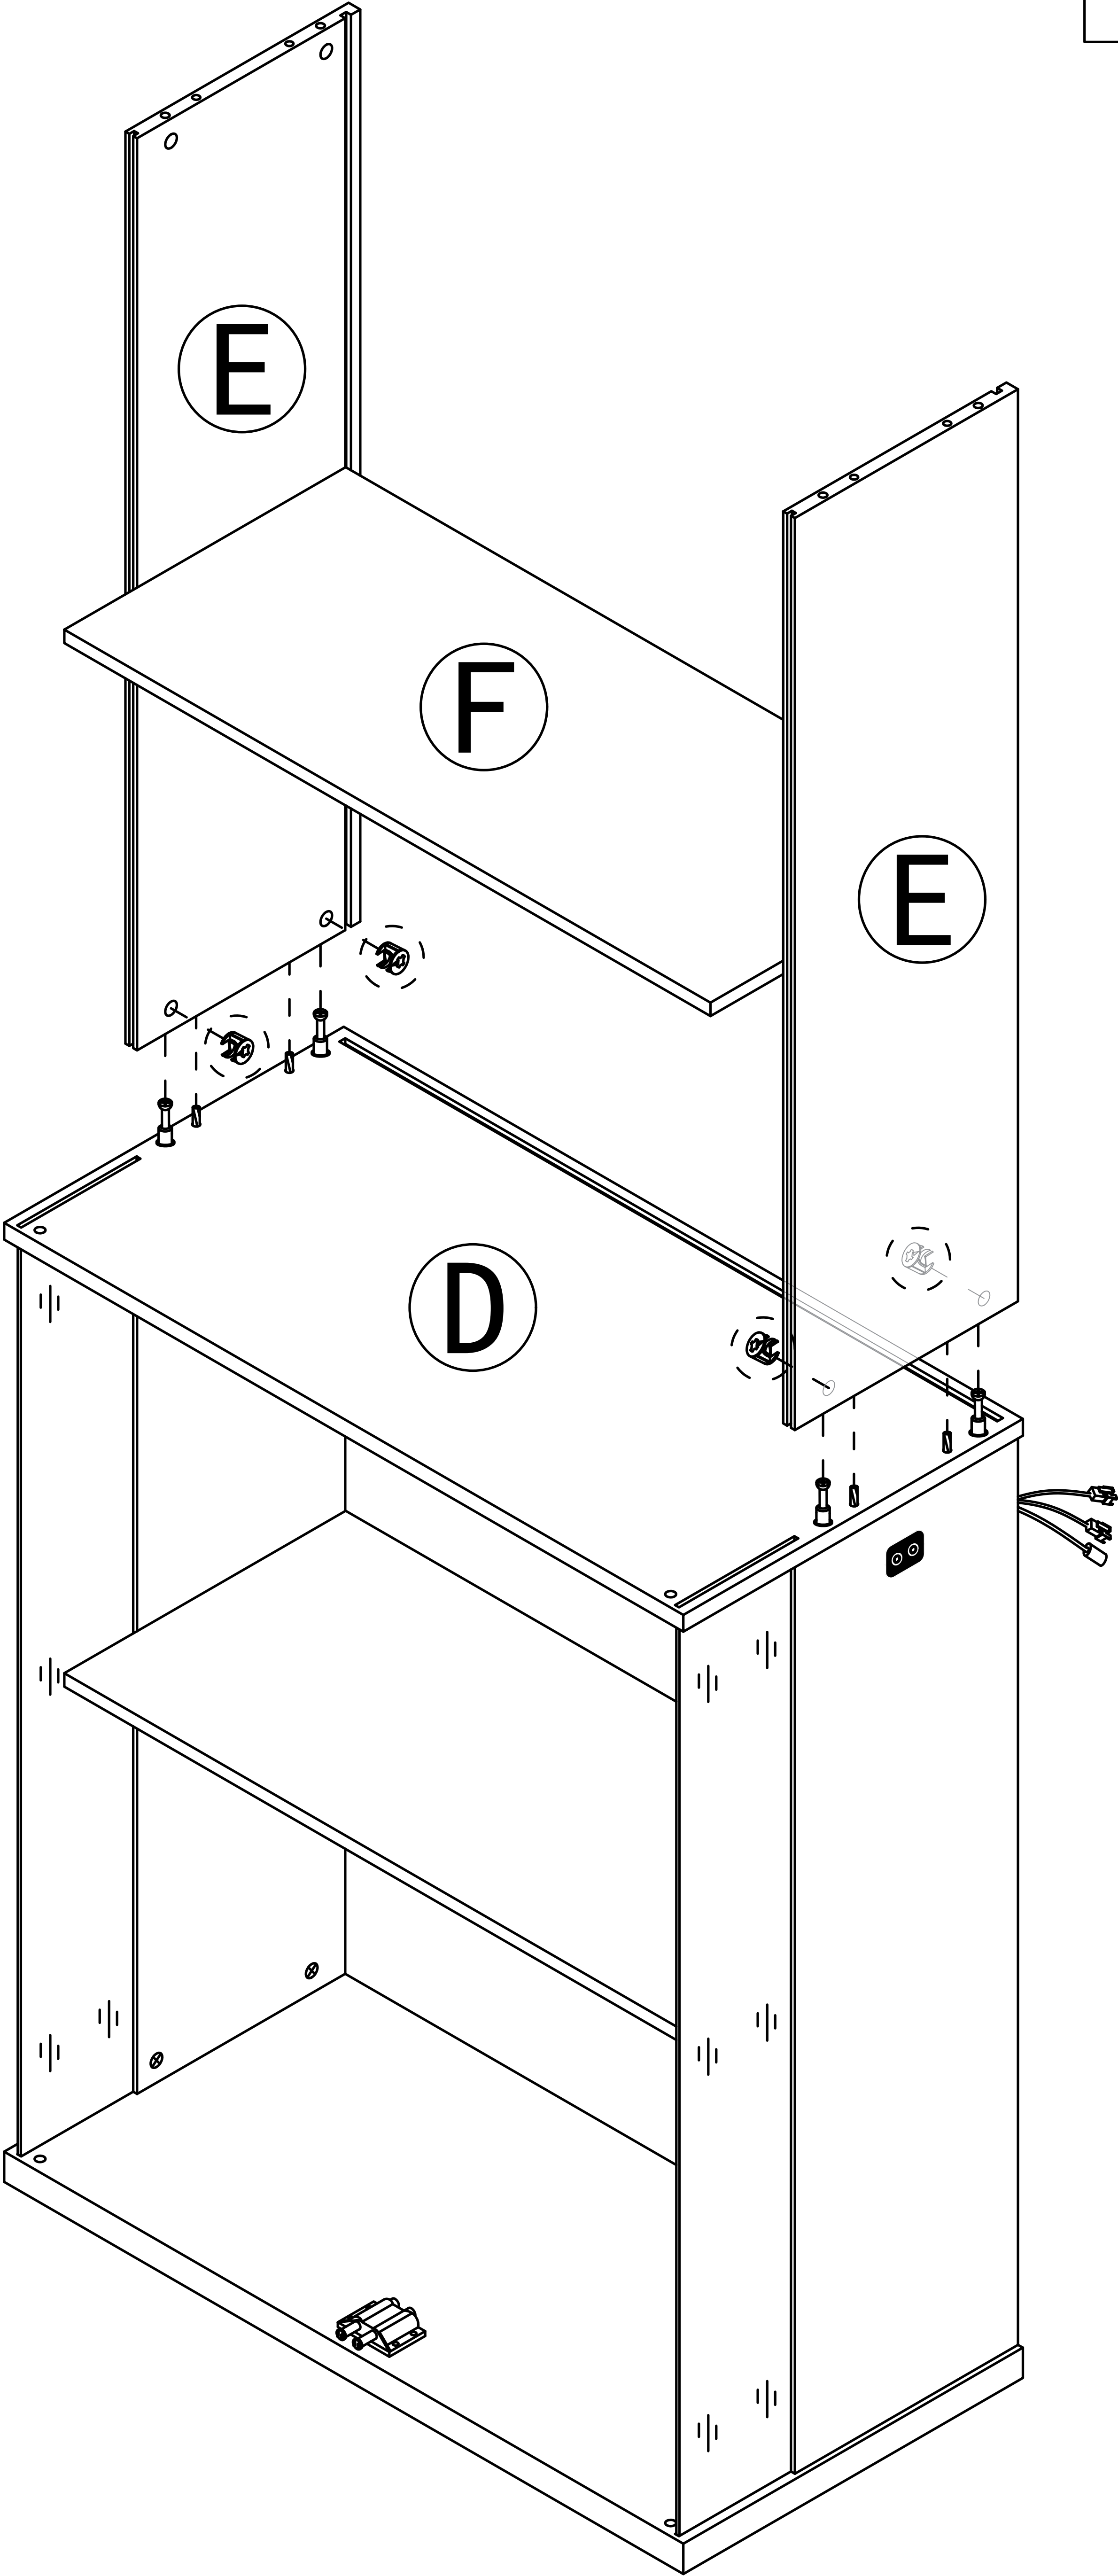


Step 20


Place the "G" board, Backboard card strip, and "H" board in order

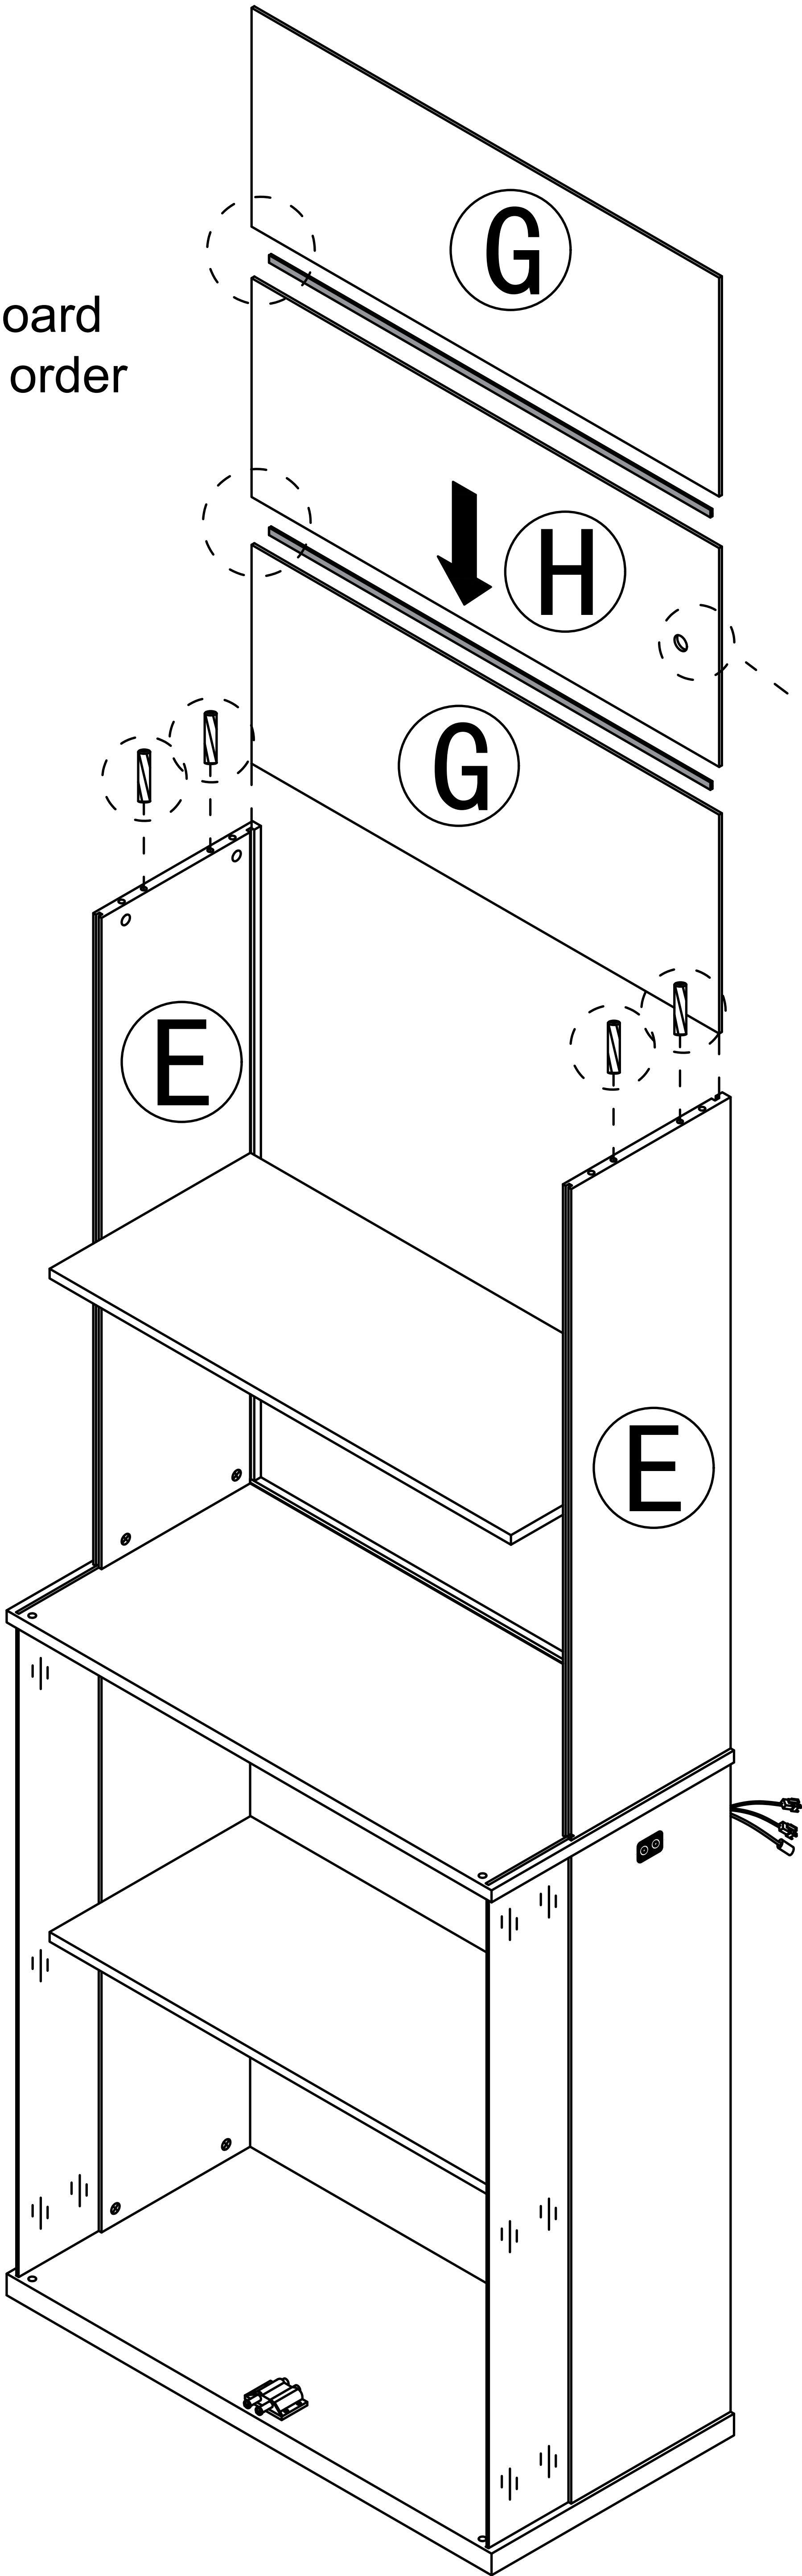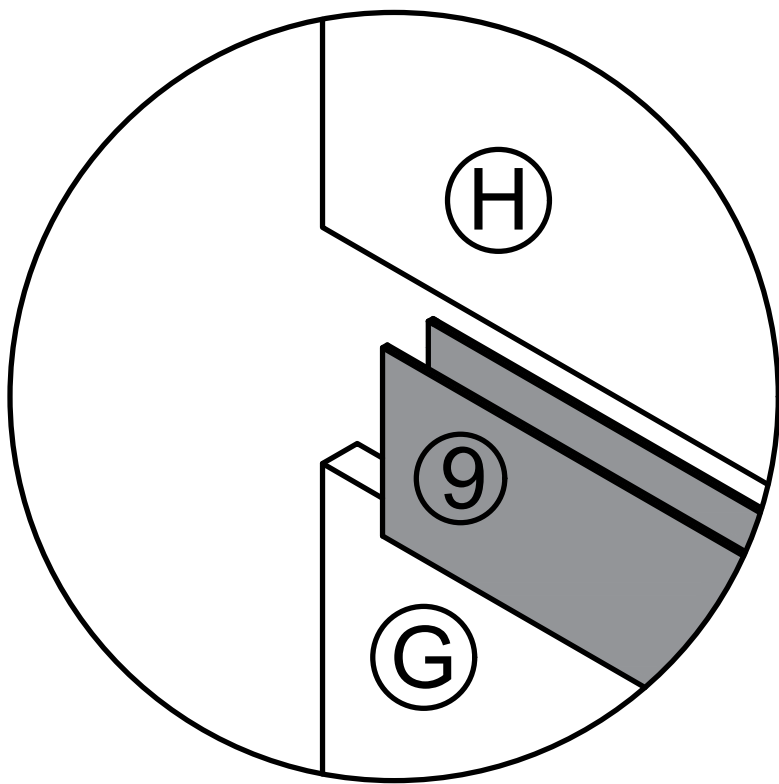

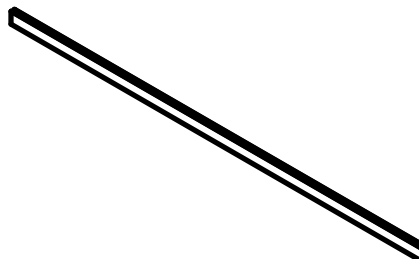- | | | |
|---|---|----|
| 3 |  | x4 |
| 9 |  | x2 |

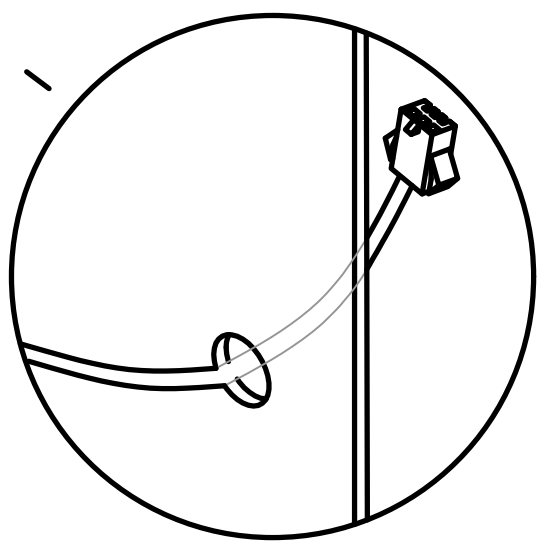


Step 21

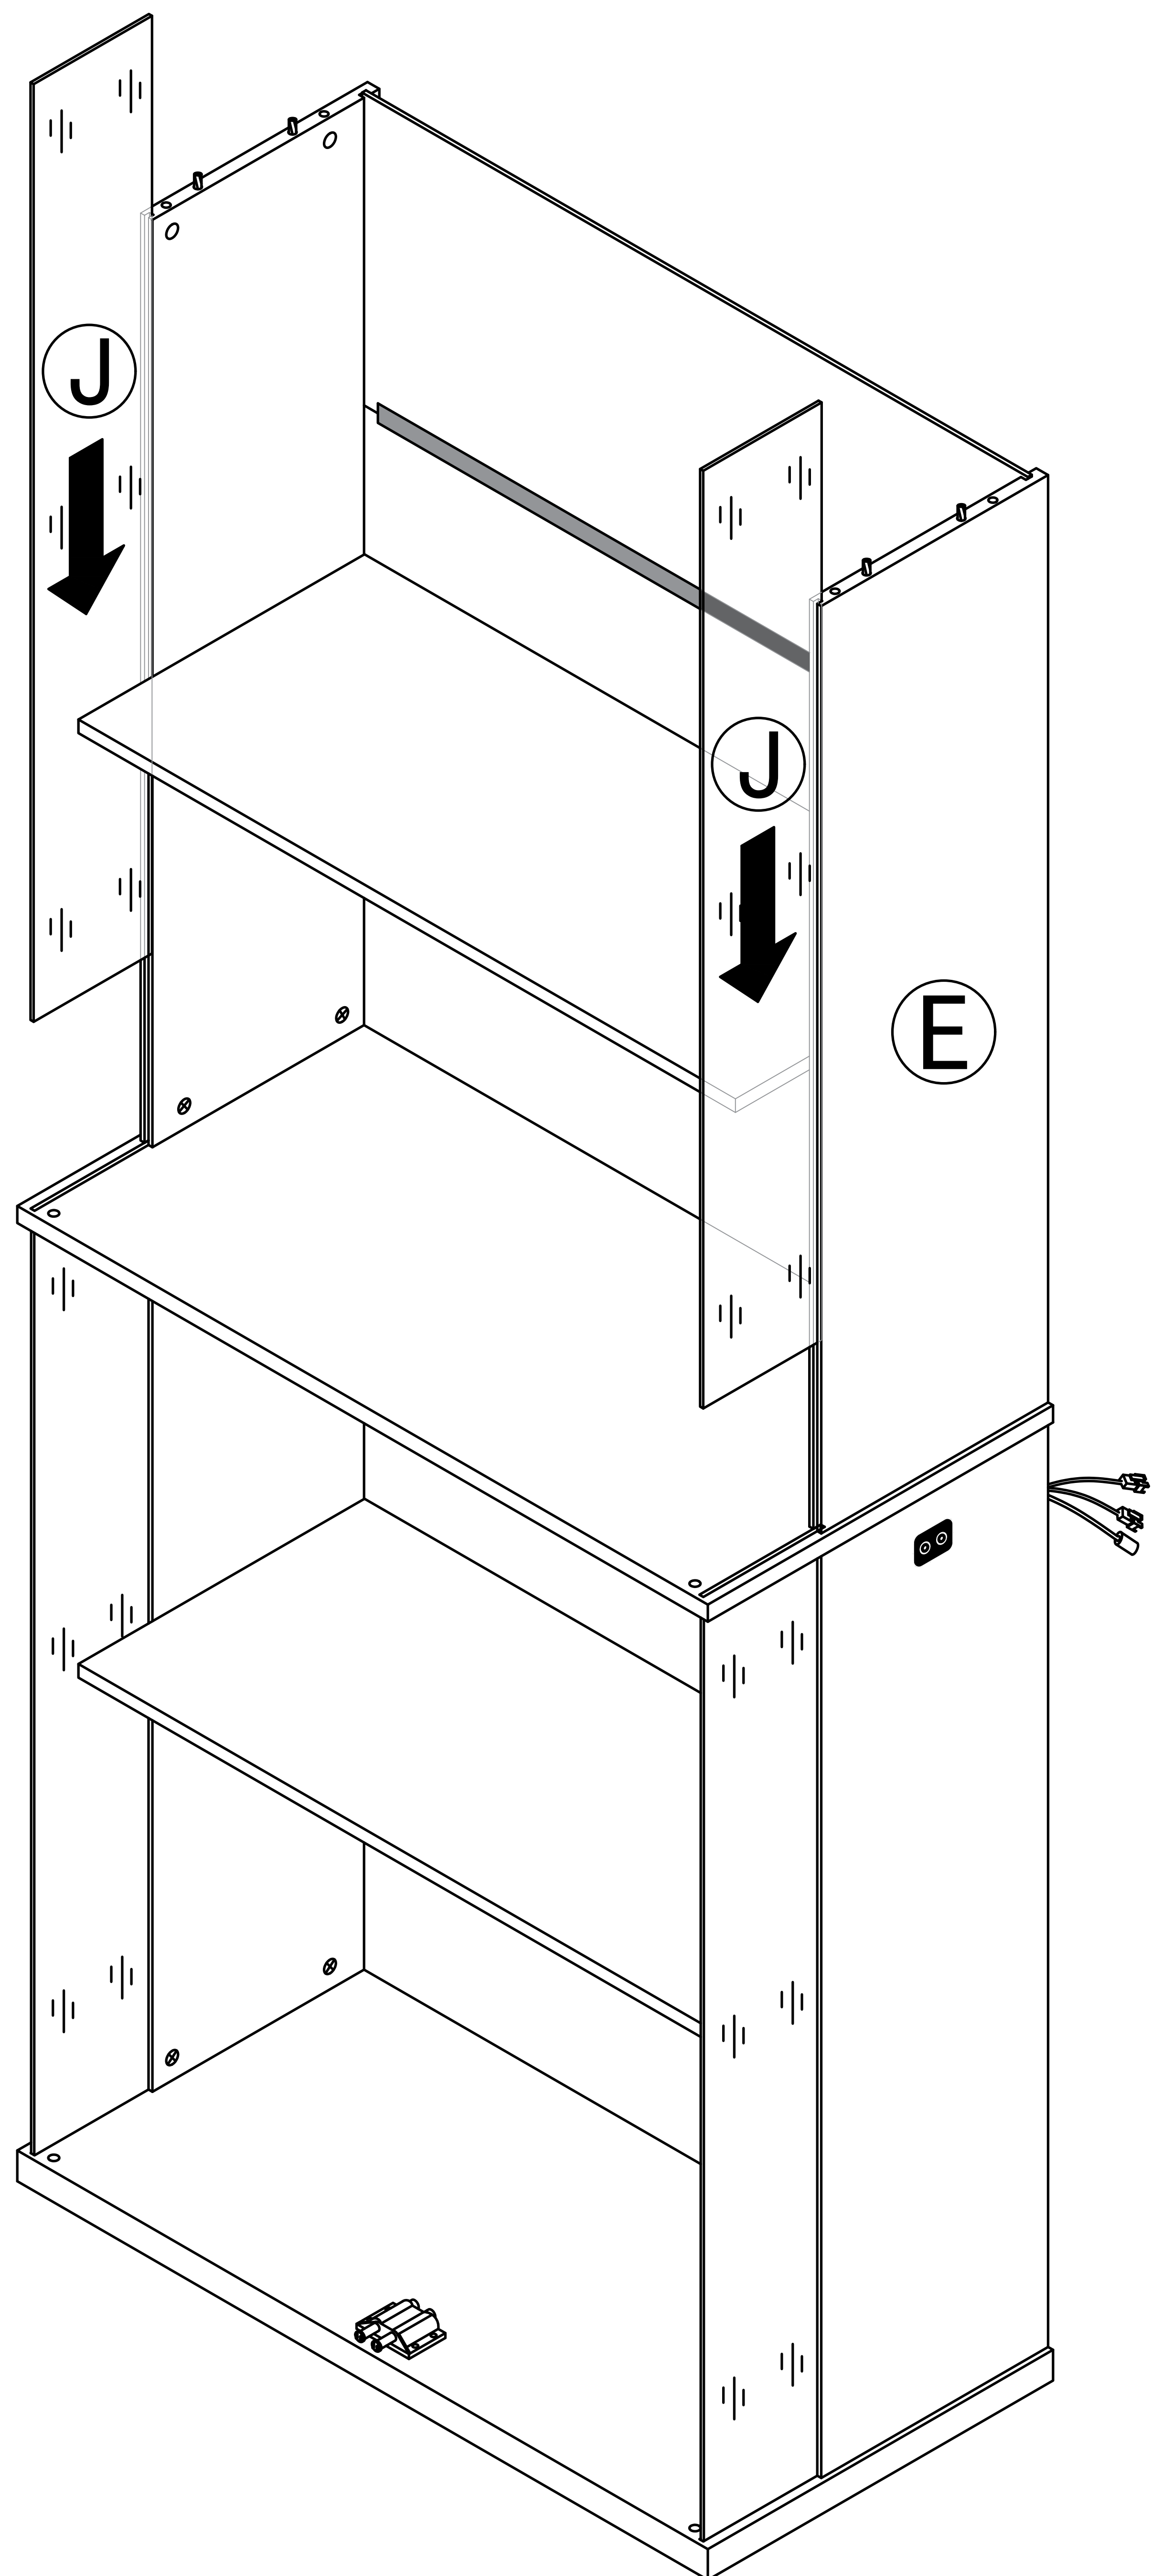


Step 22

2




x4

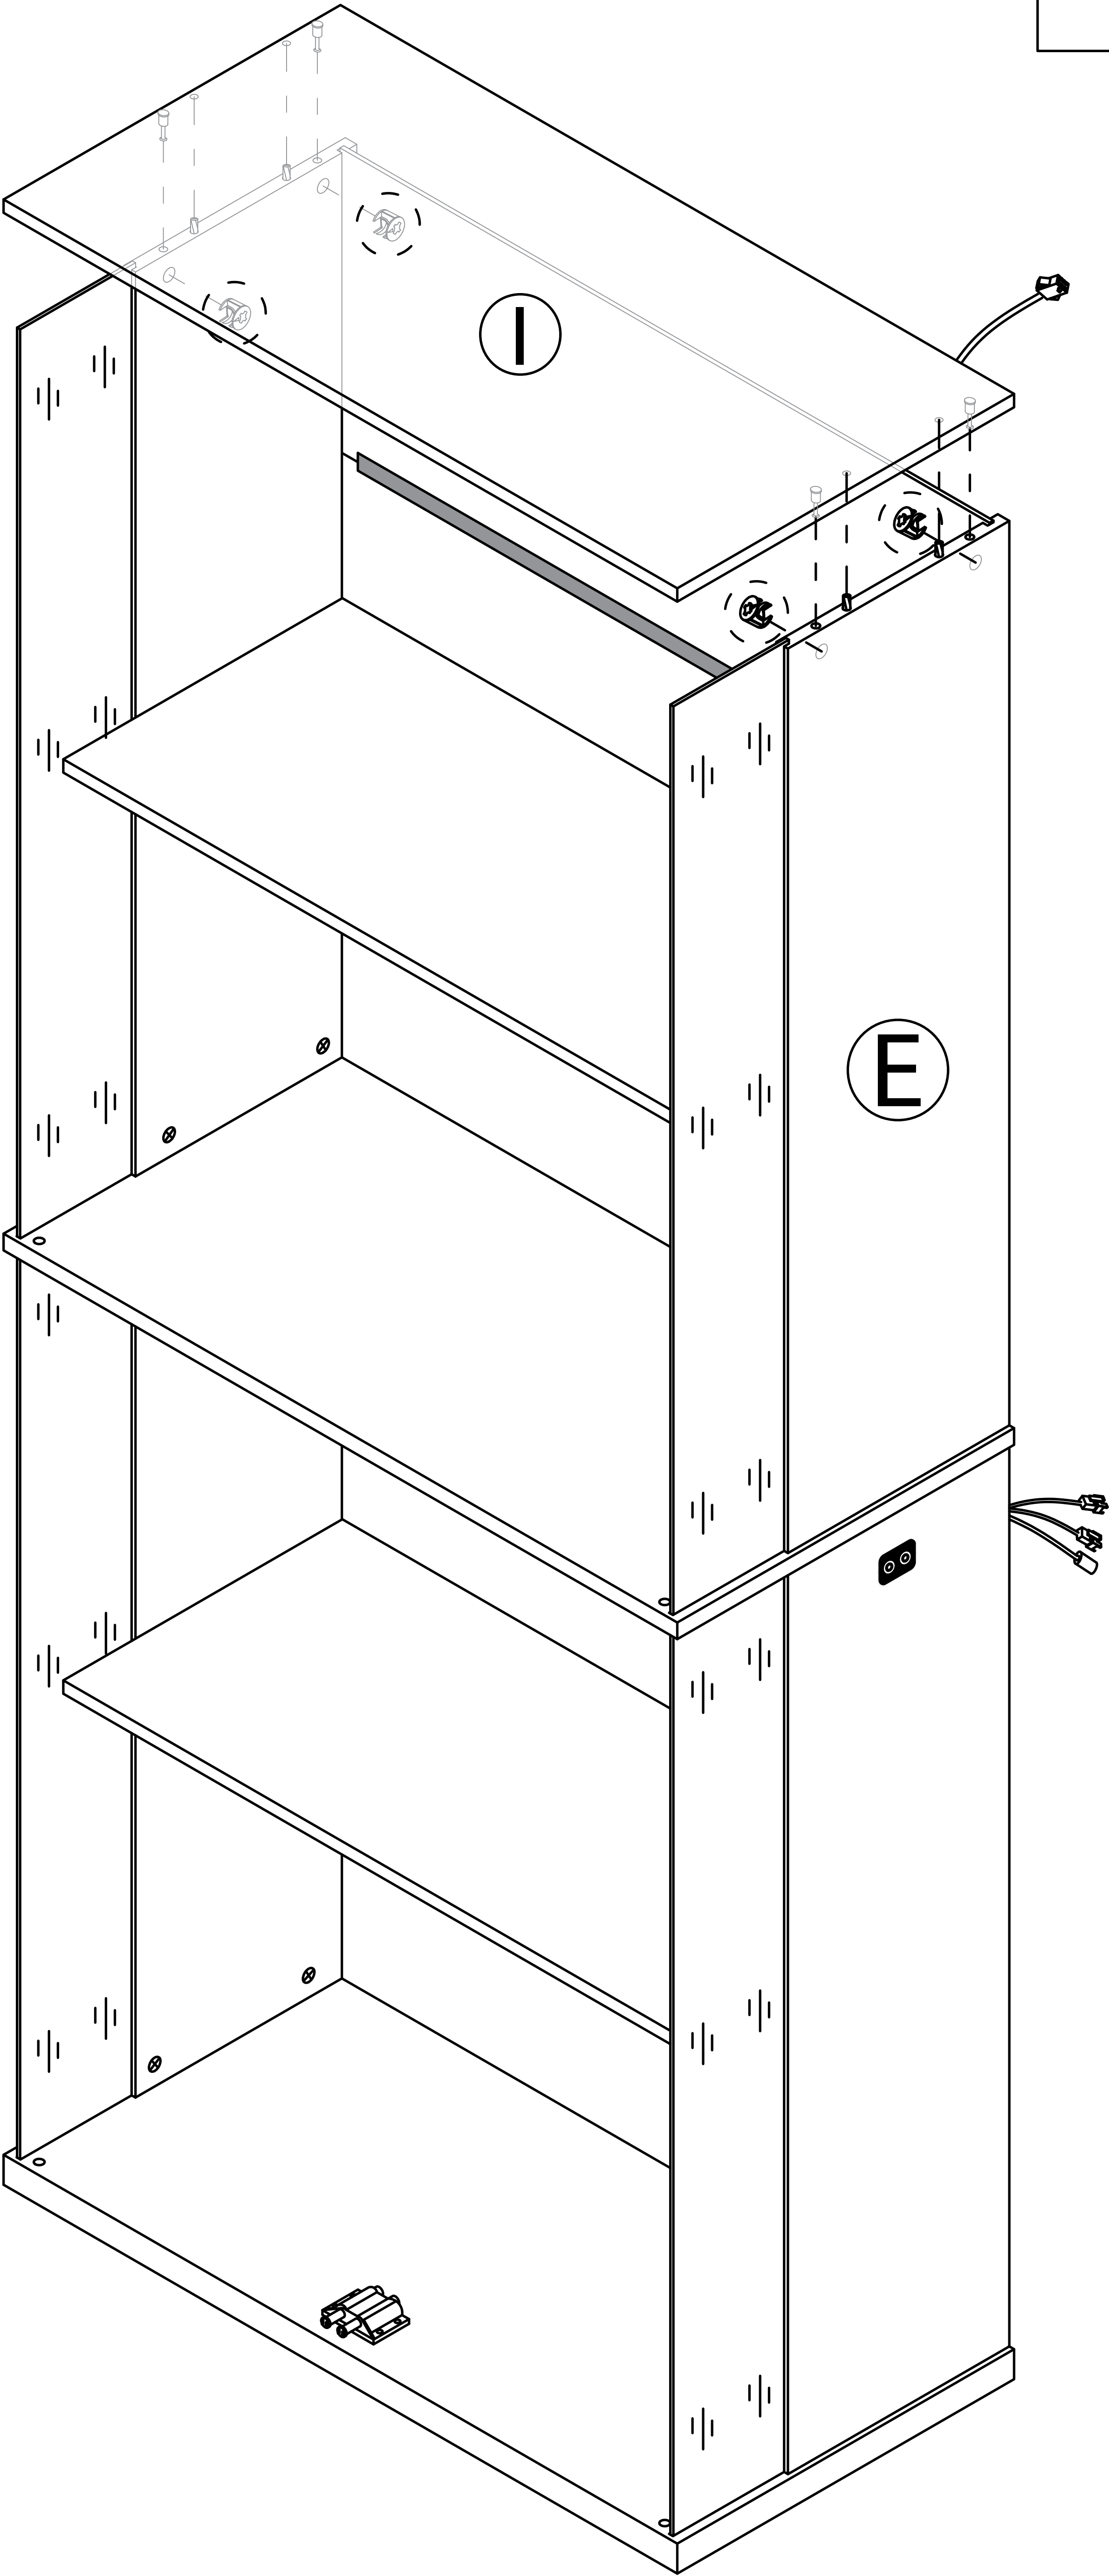


Step 23





First, loosen
the screws.

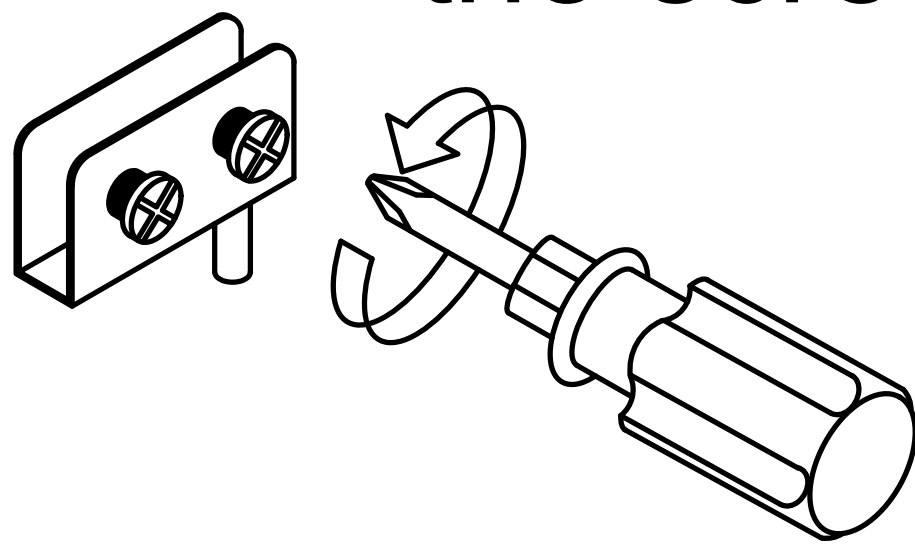

8

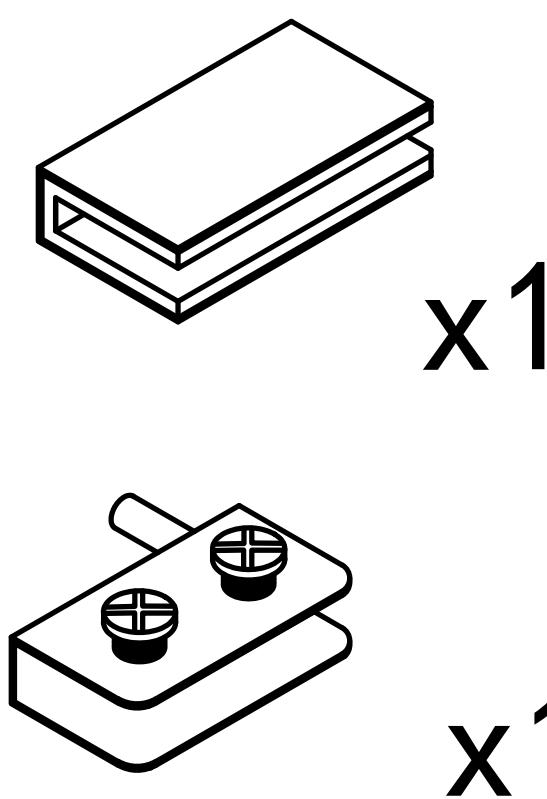


1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

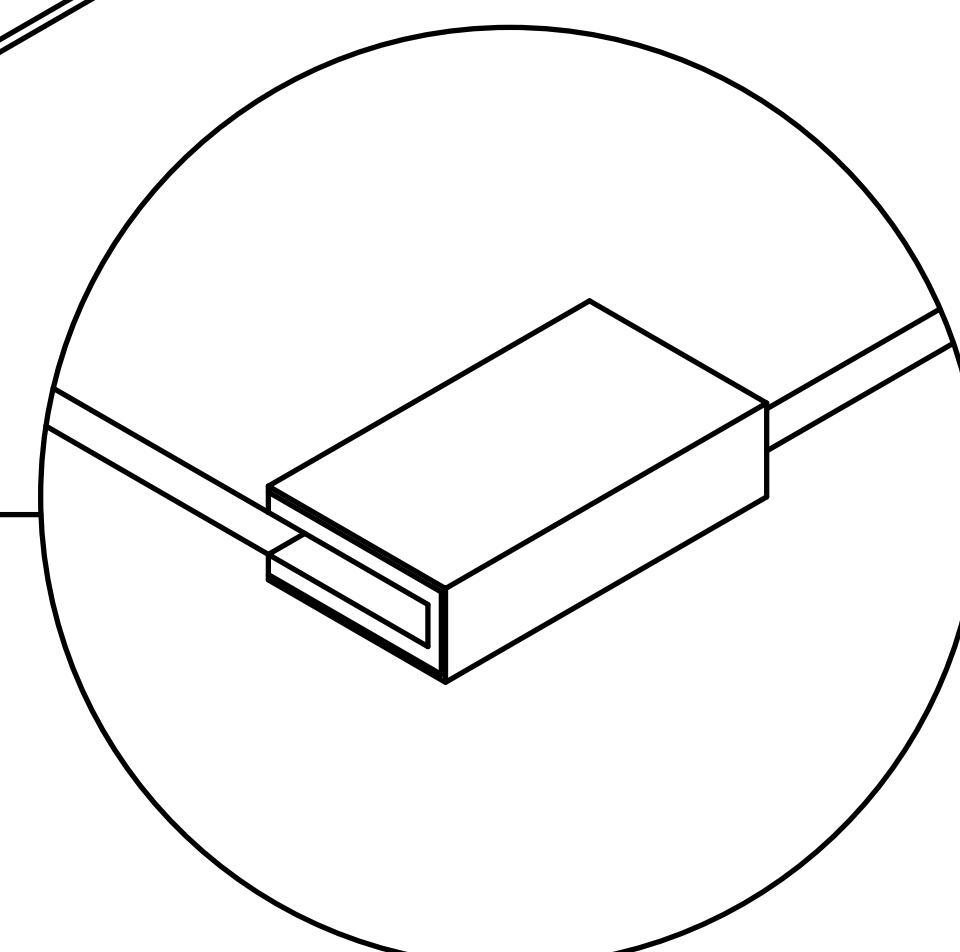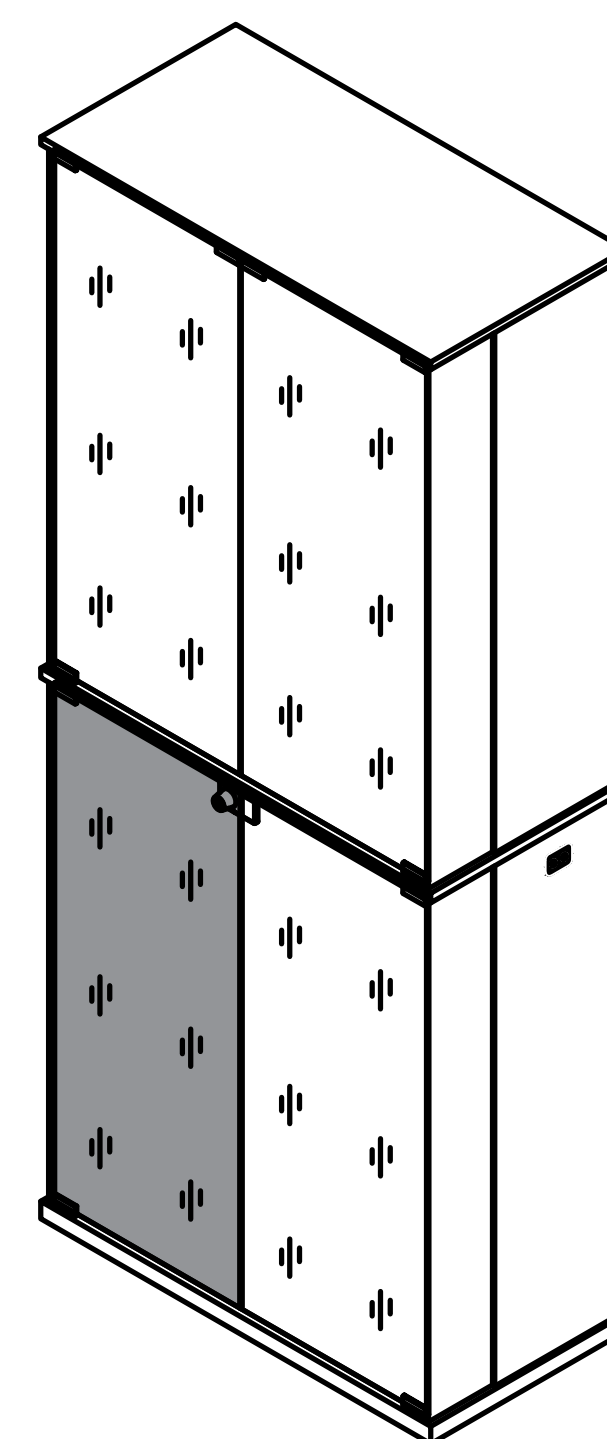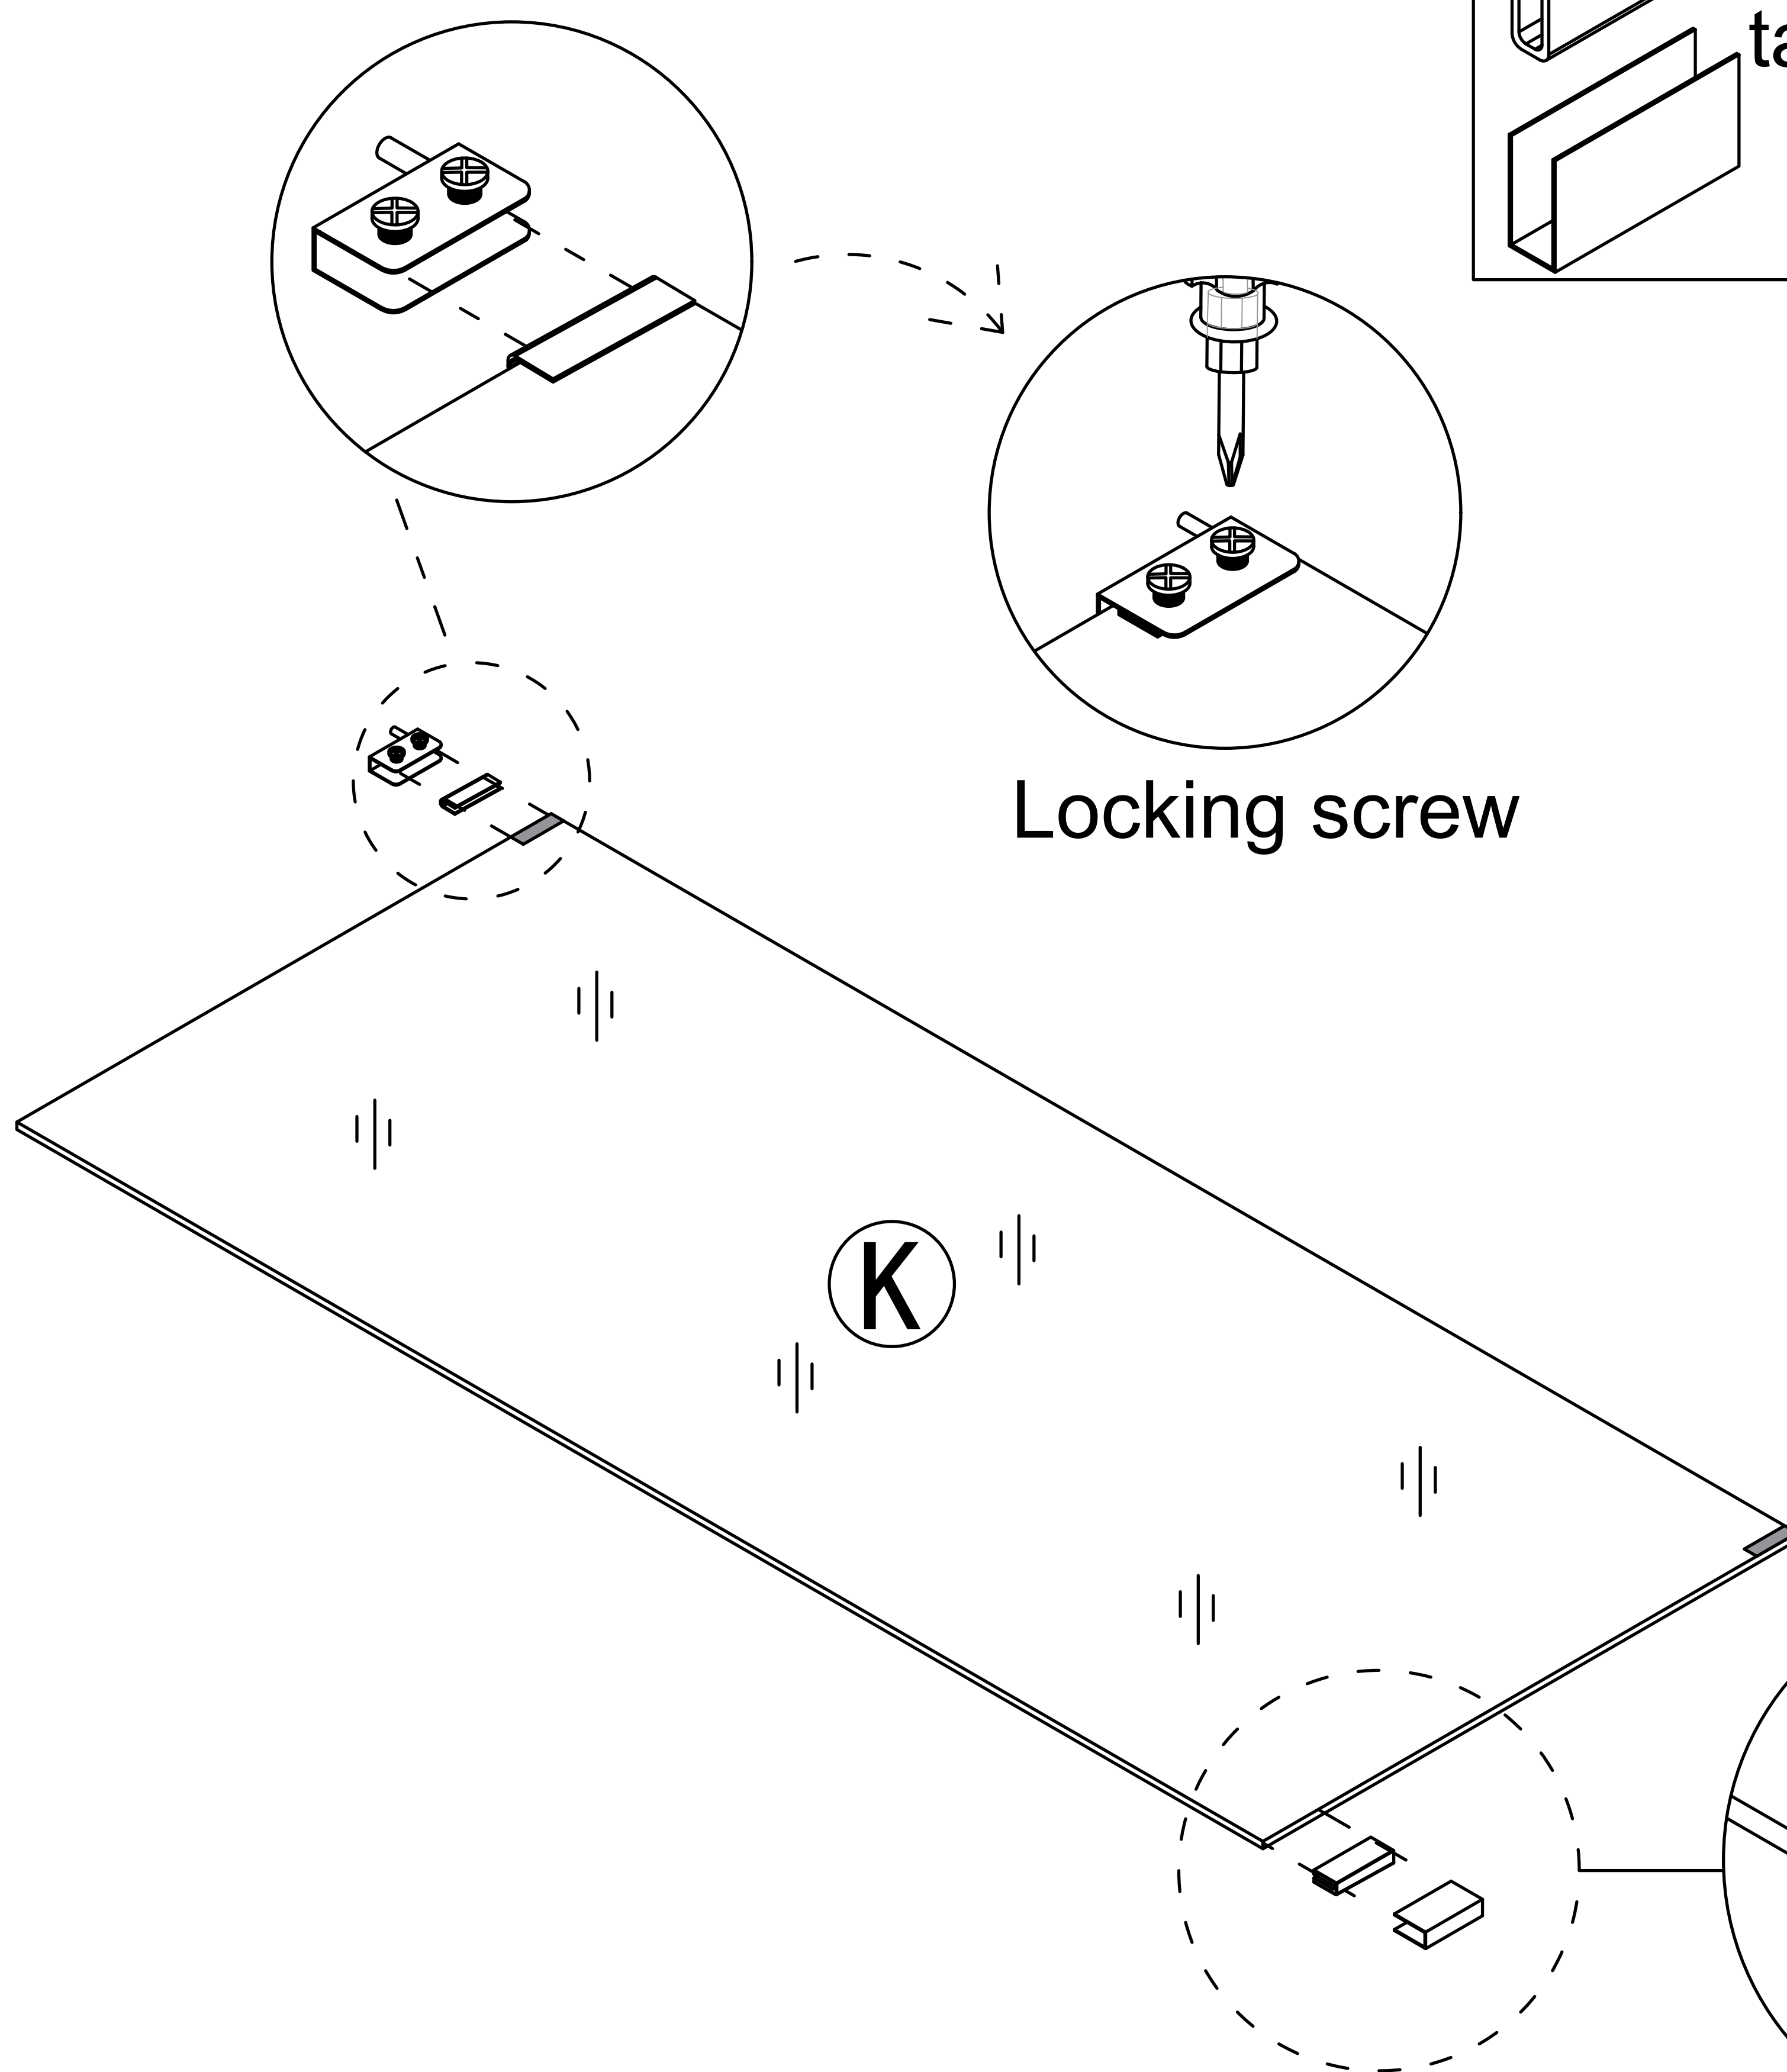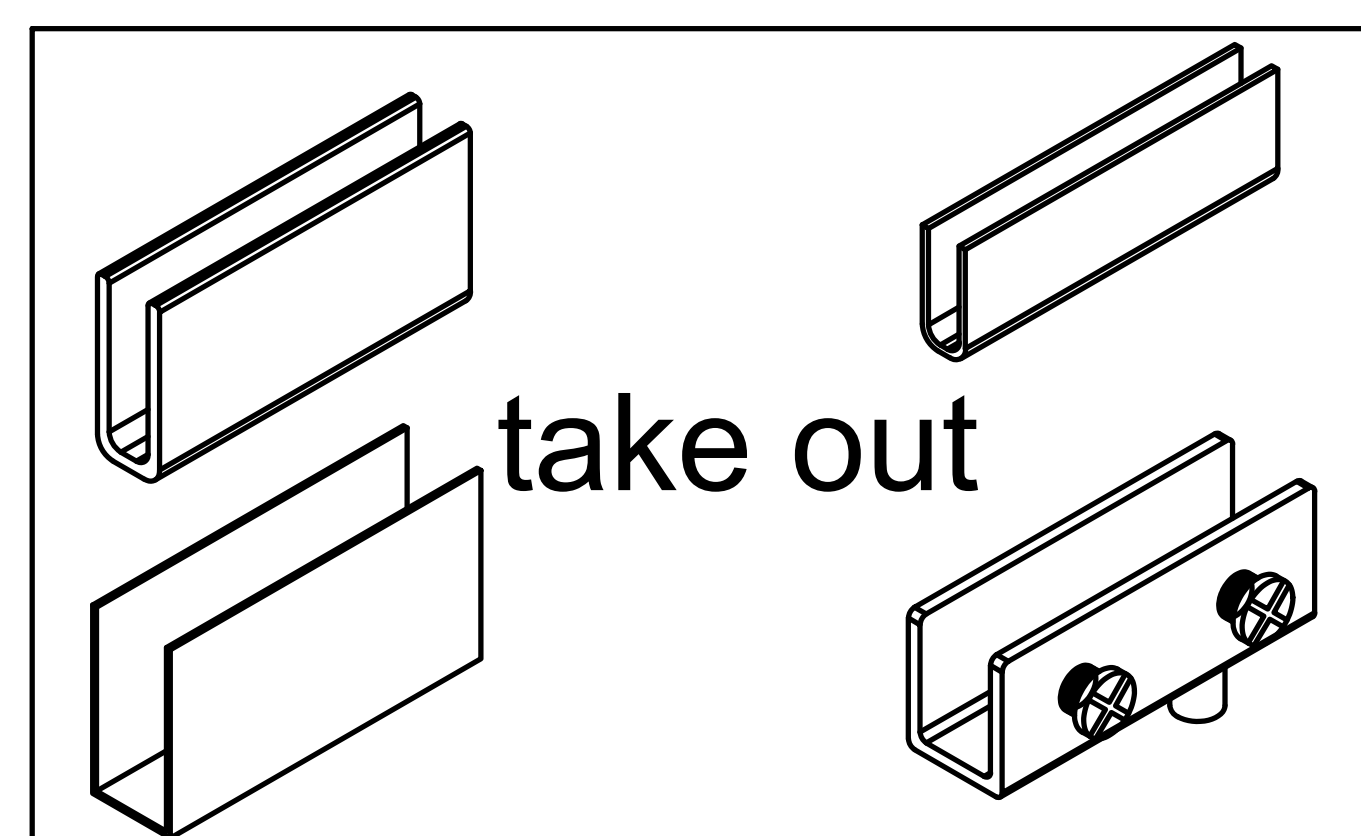


Step 24


First, loosen
the screws.

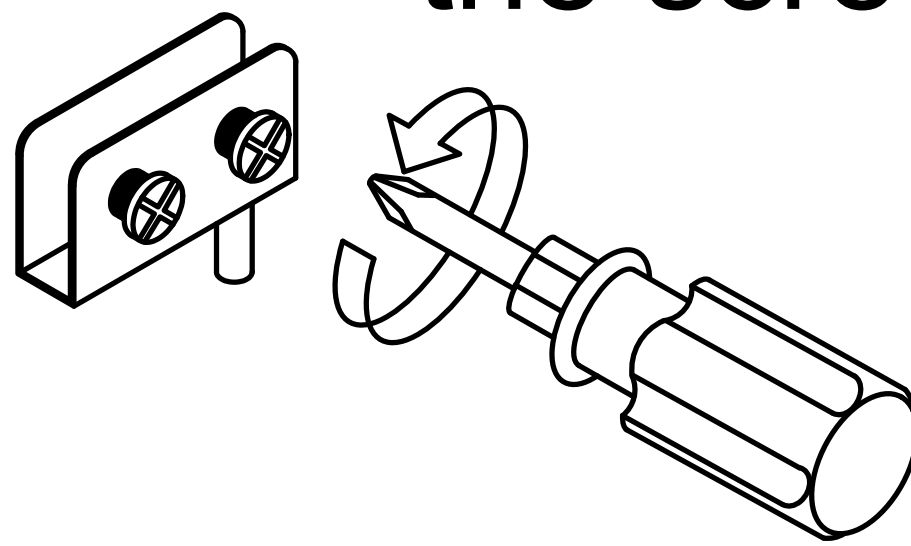

8


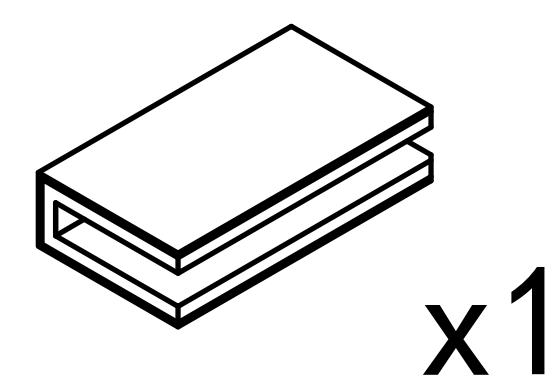


x1



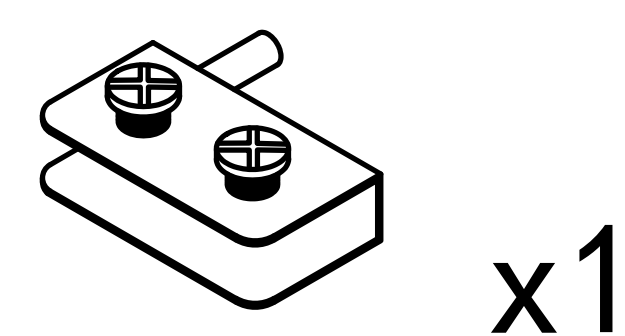


x1


1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

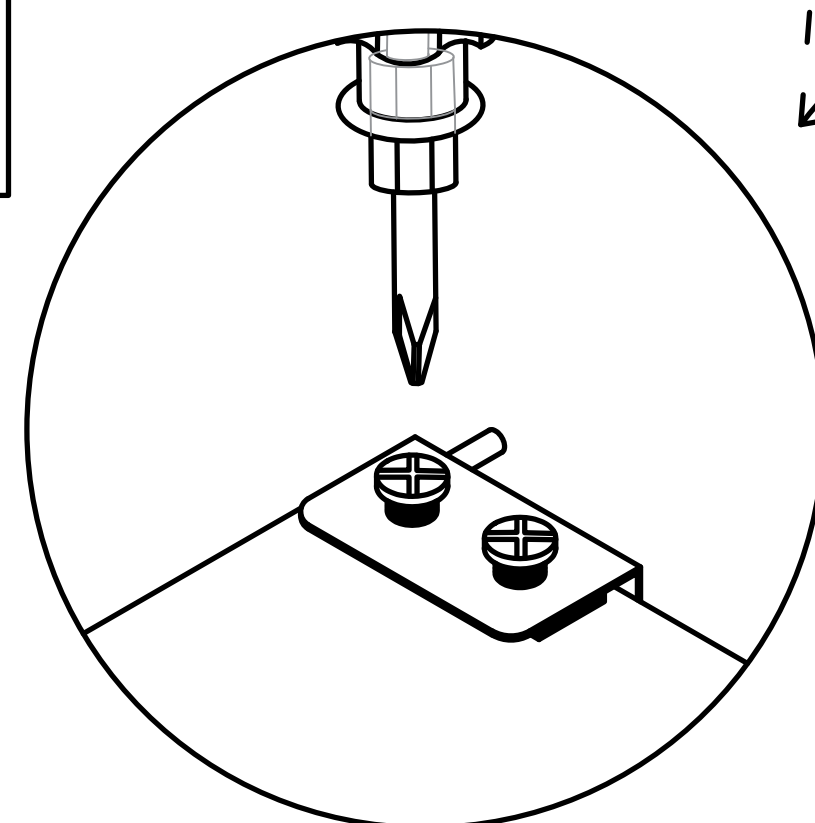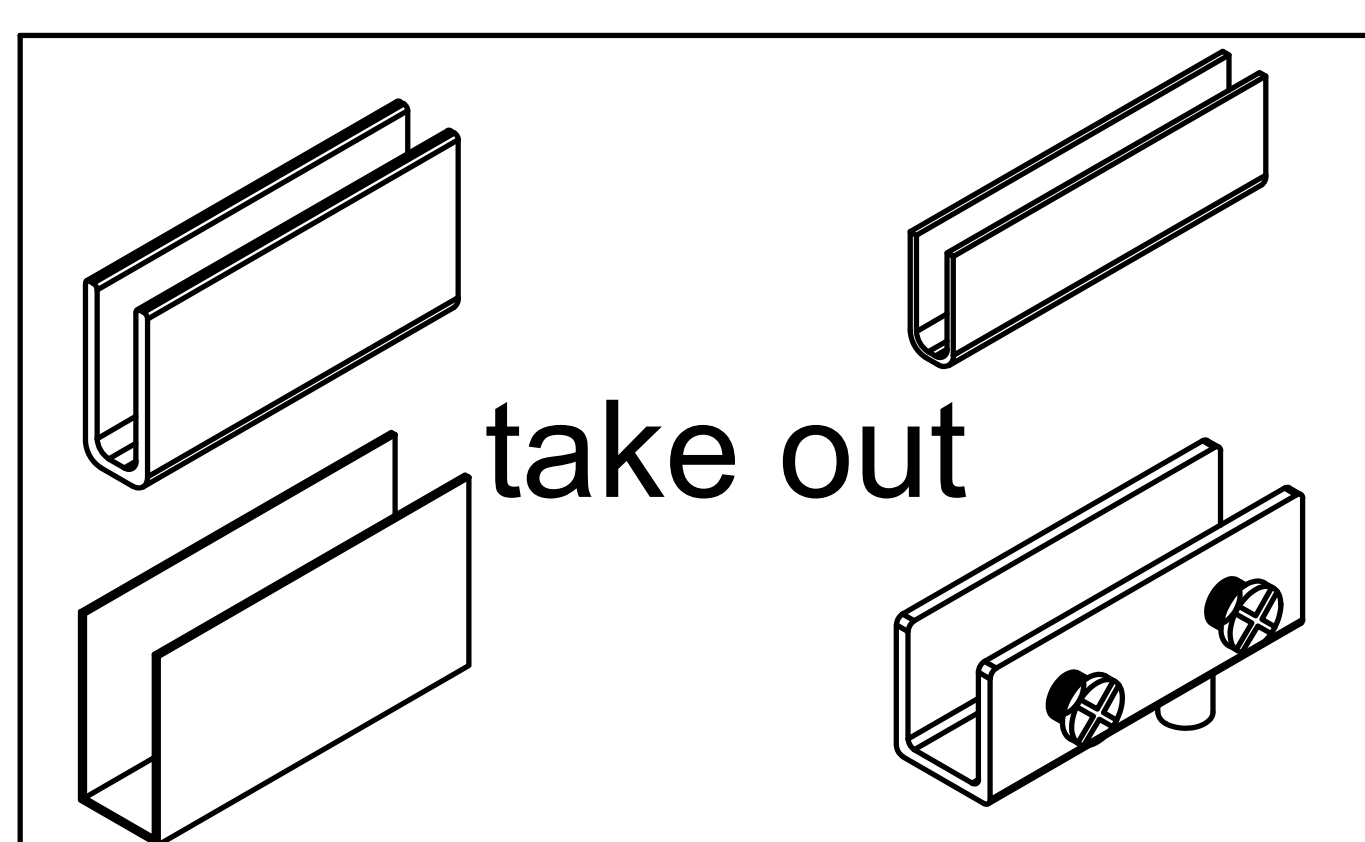

Locking screw

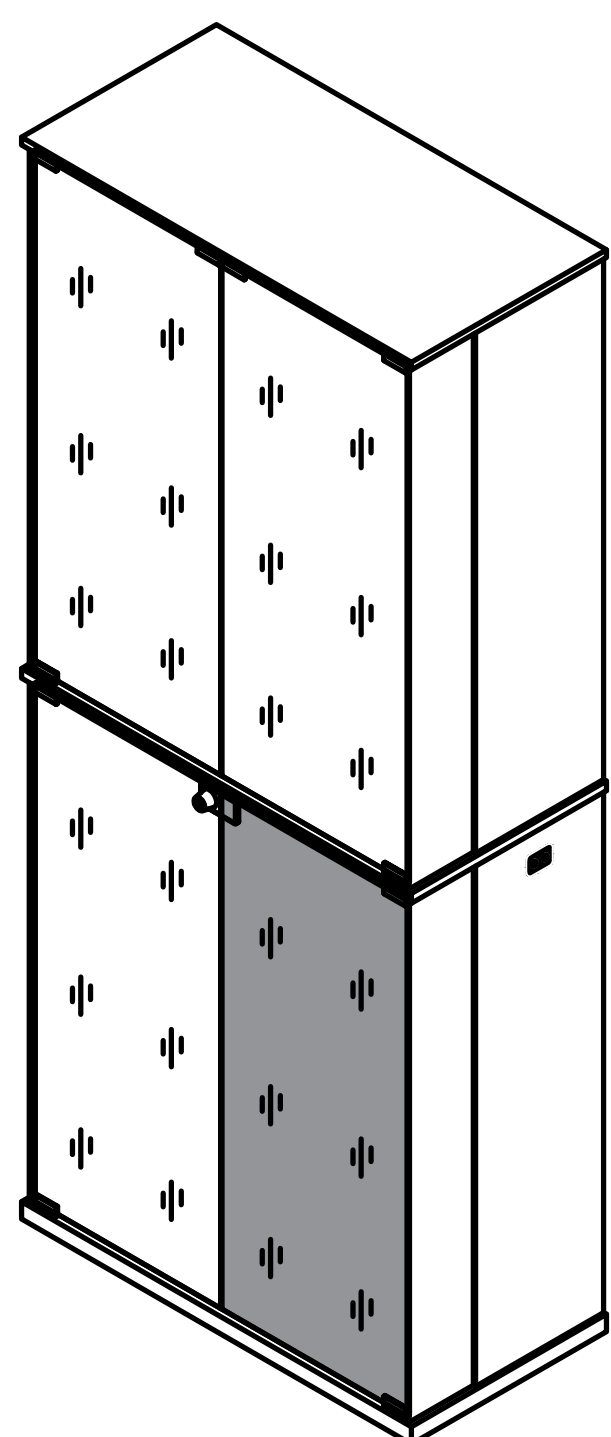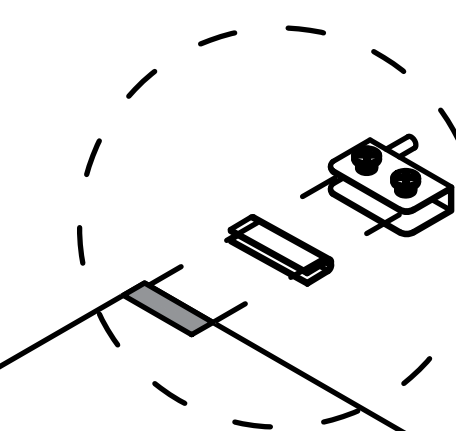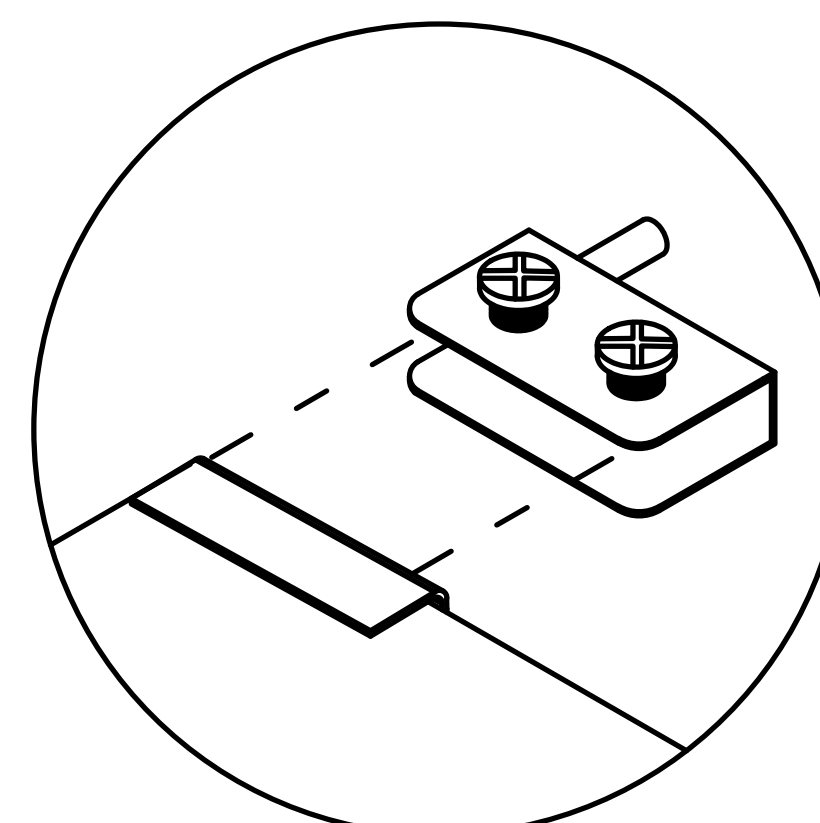



K

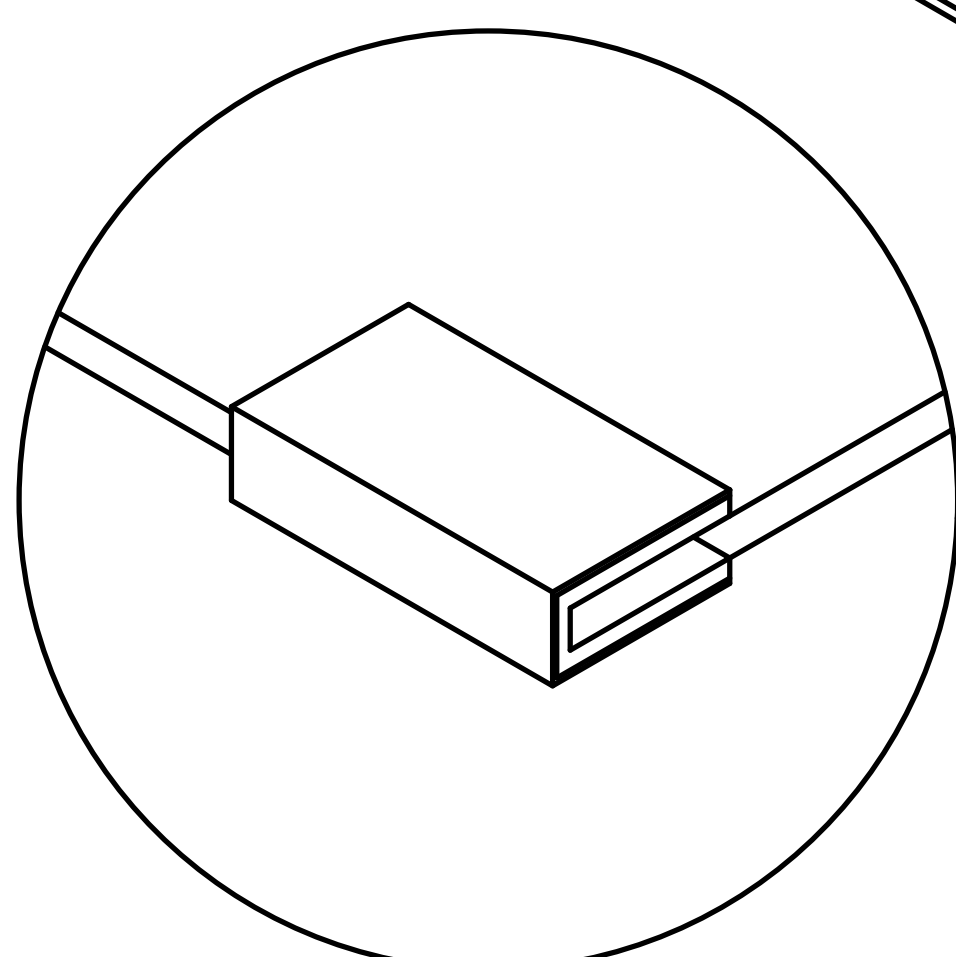


Step 25




- 8

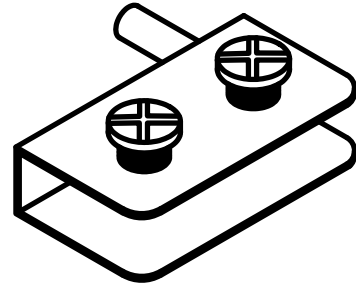

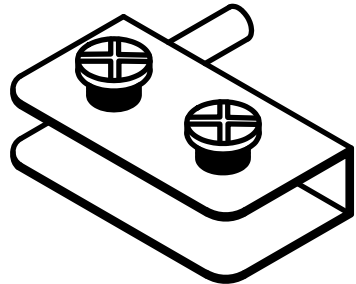x1
- 

x1
- 


x2

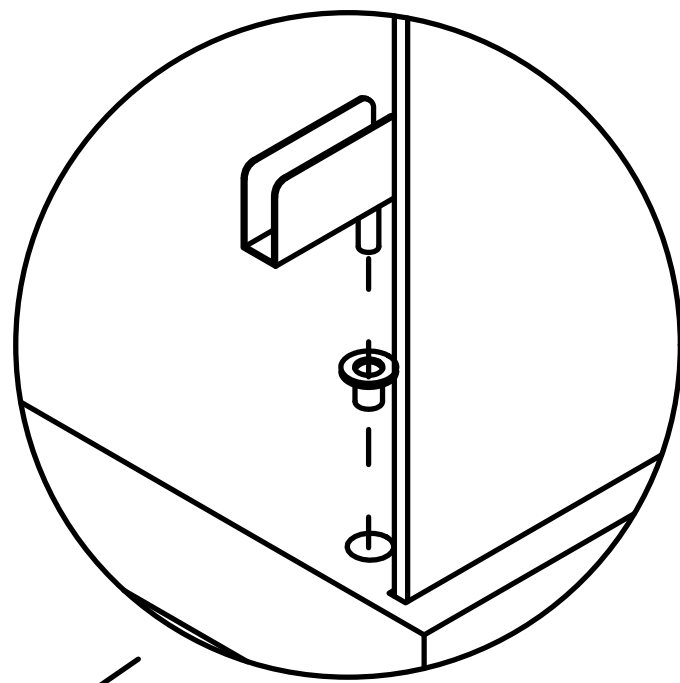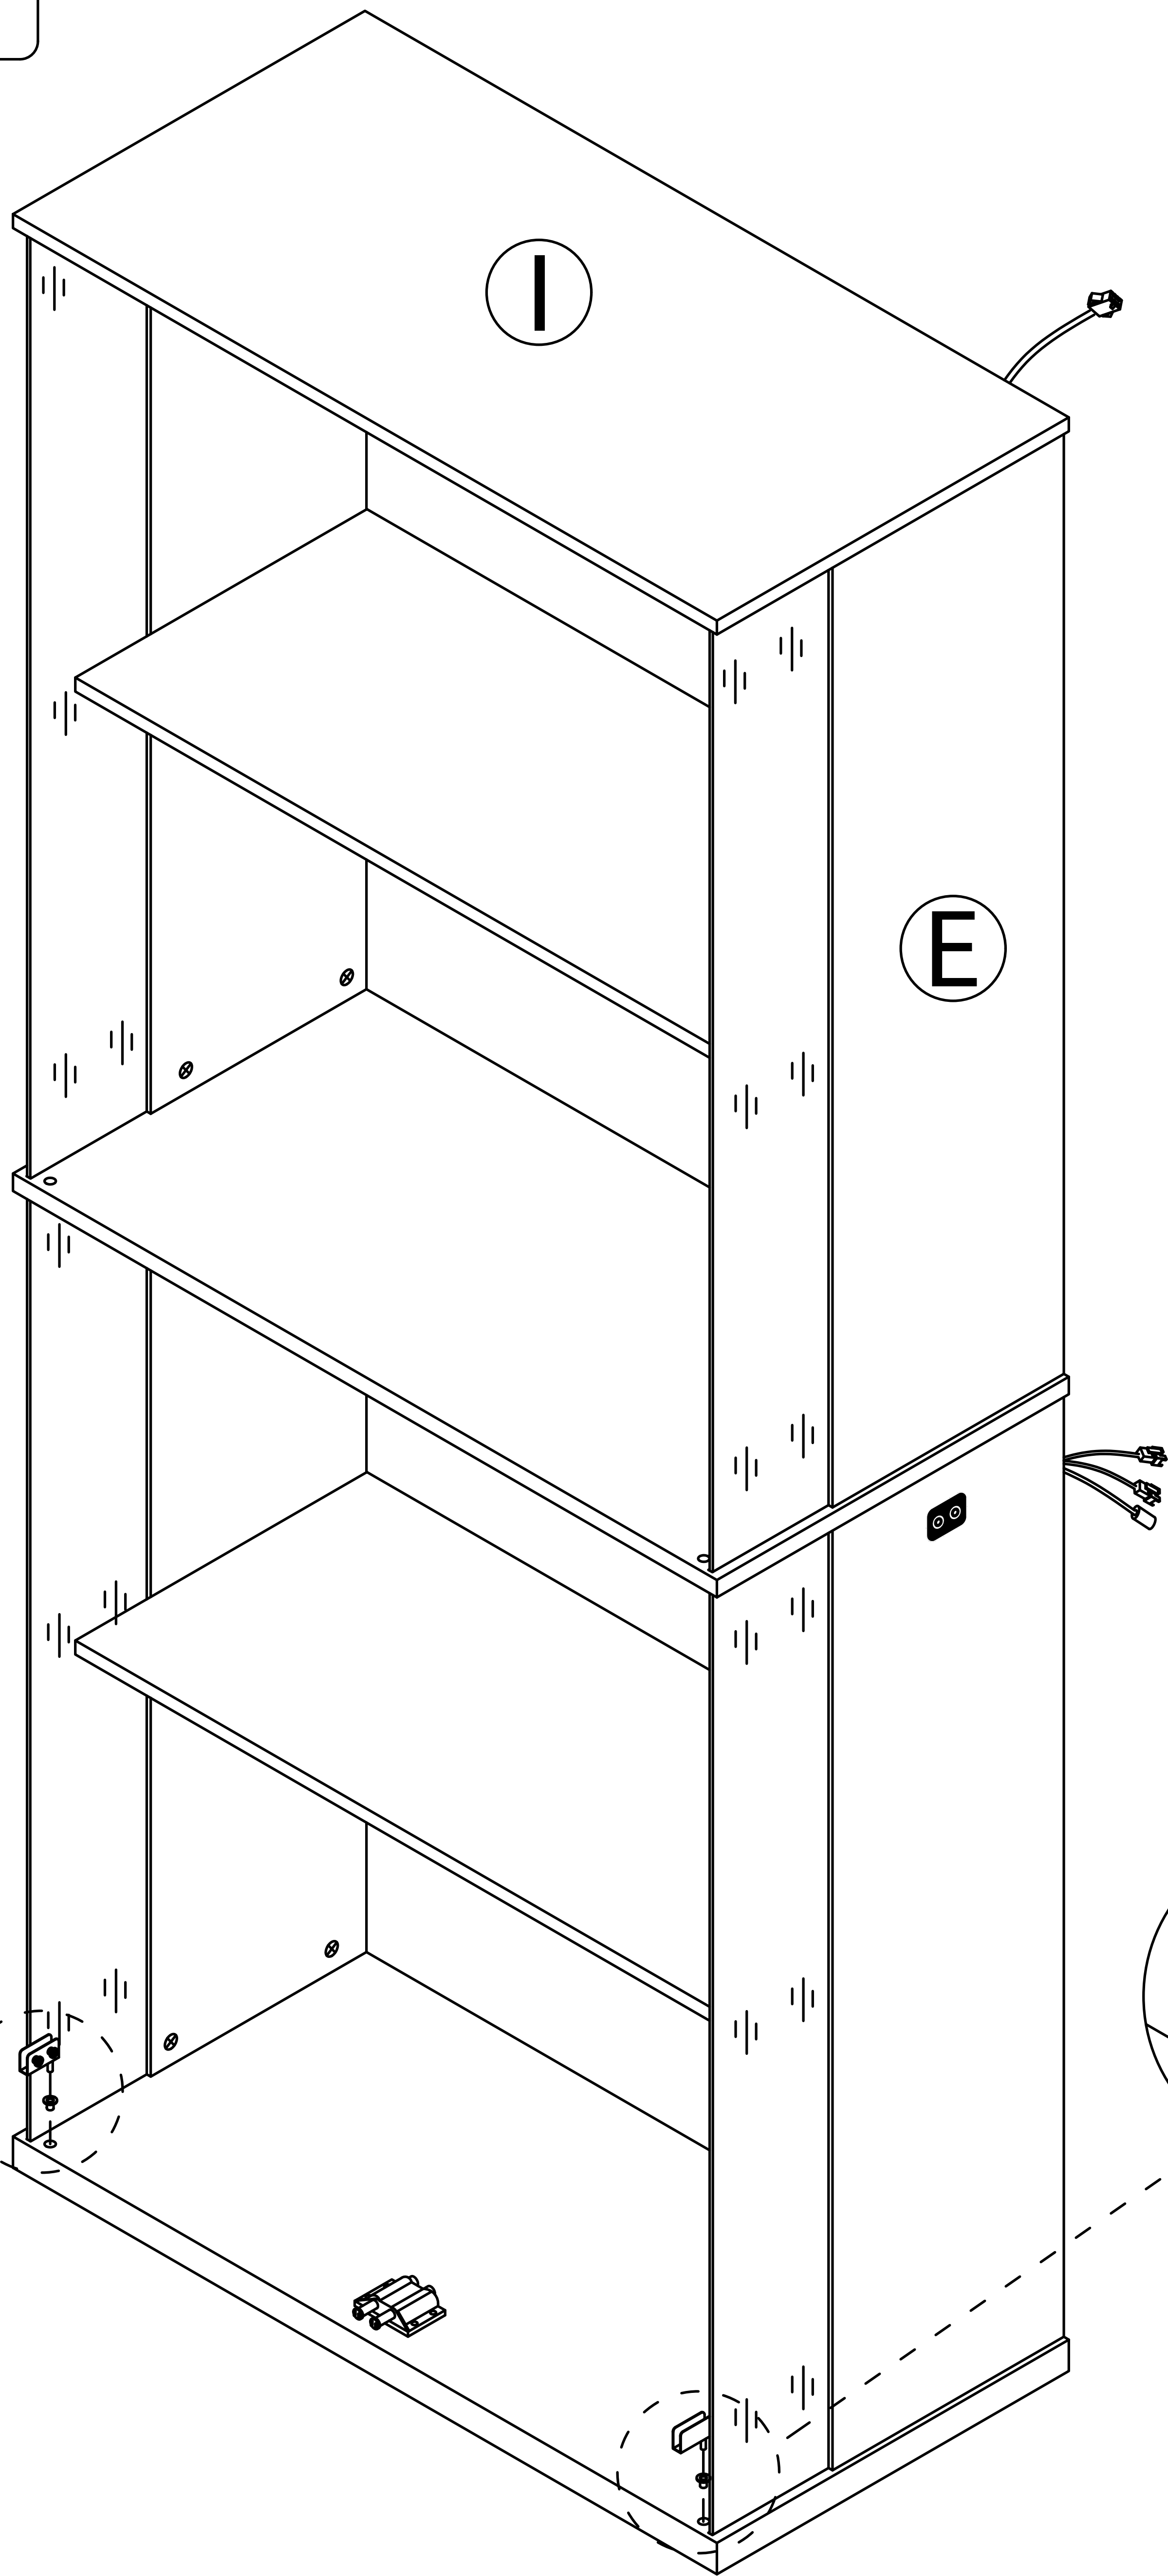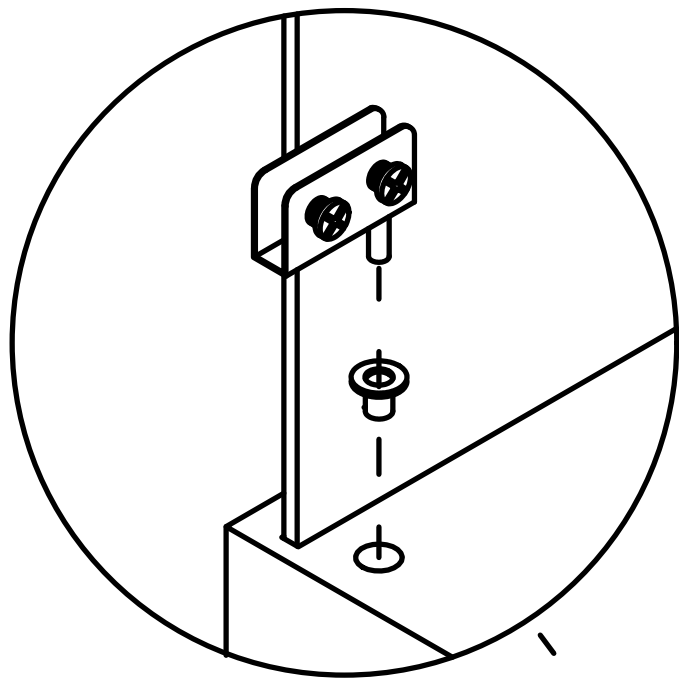

Step 26


Pay attention to the direction of the door hinge during installation

8





x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

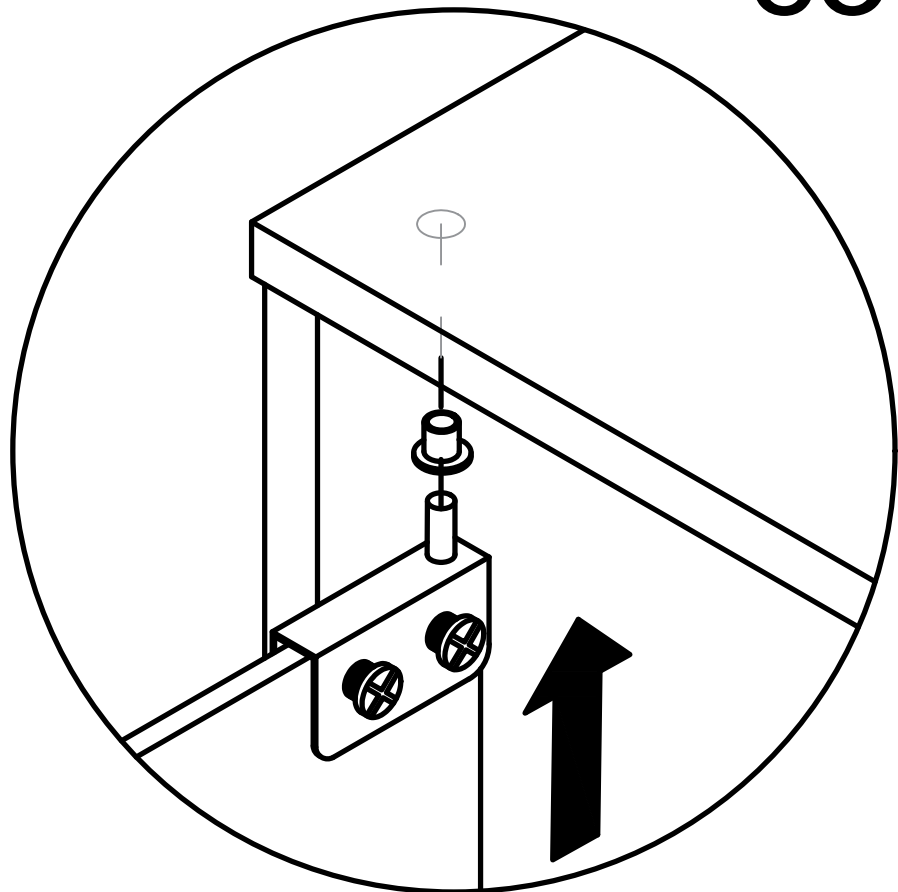


first

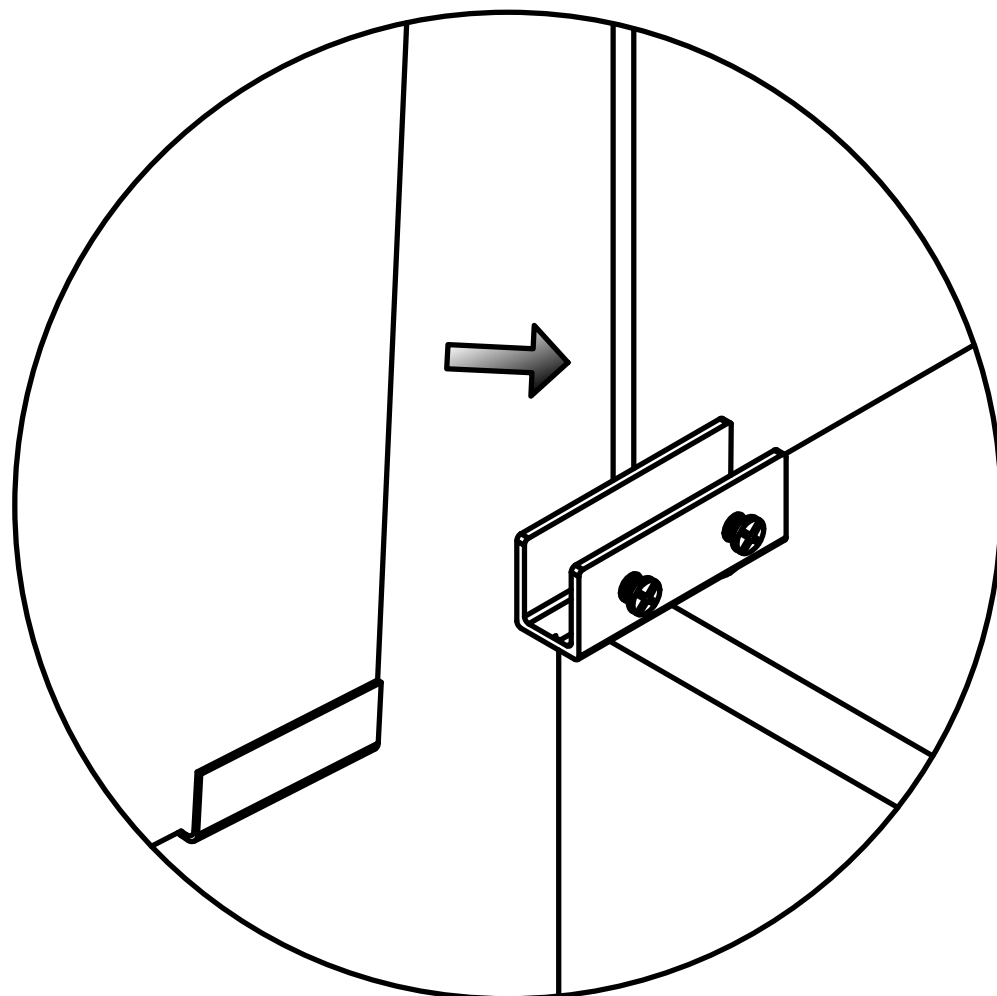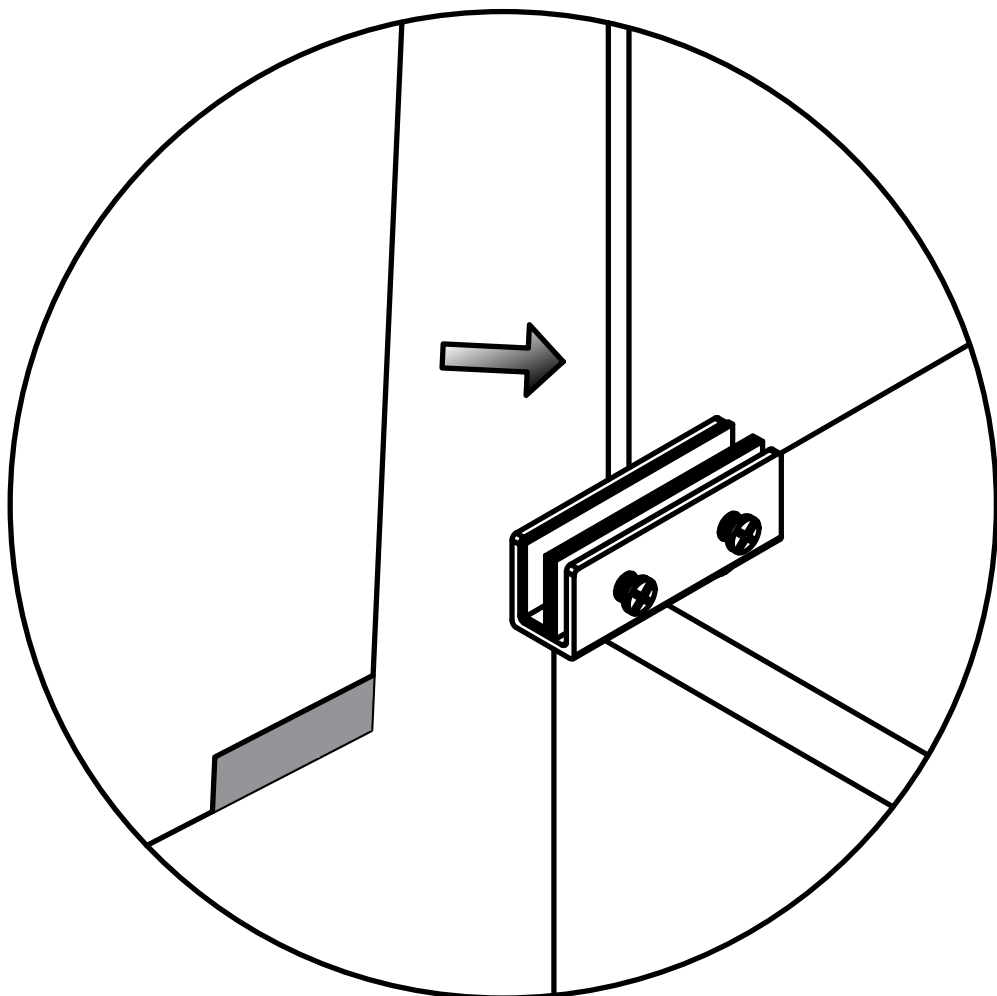


second

Insert the glass into the door hinge's slot.

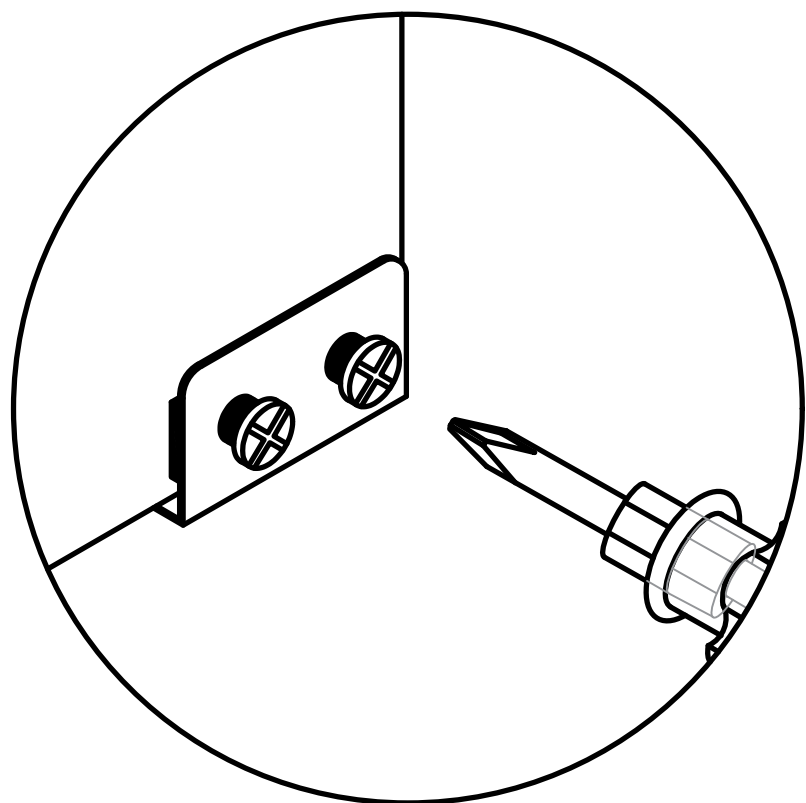


third


Locking screw

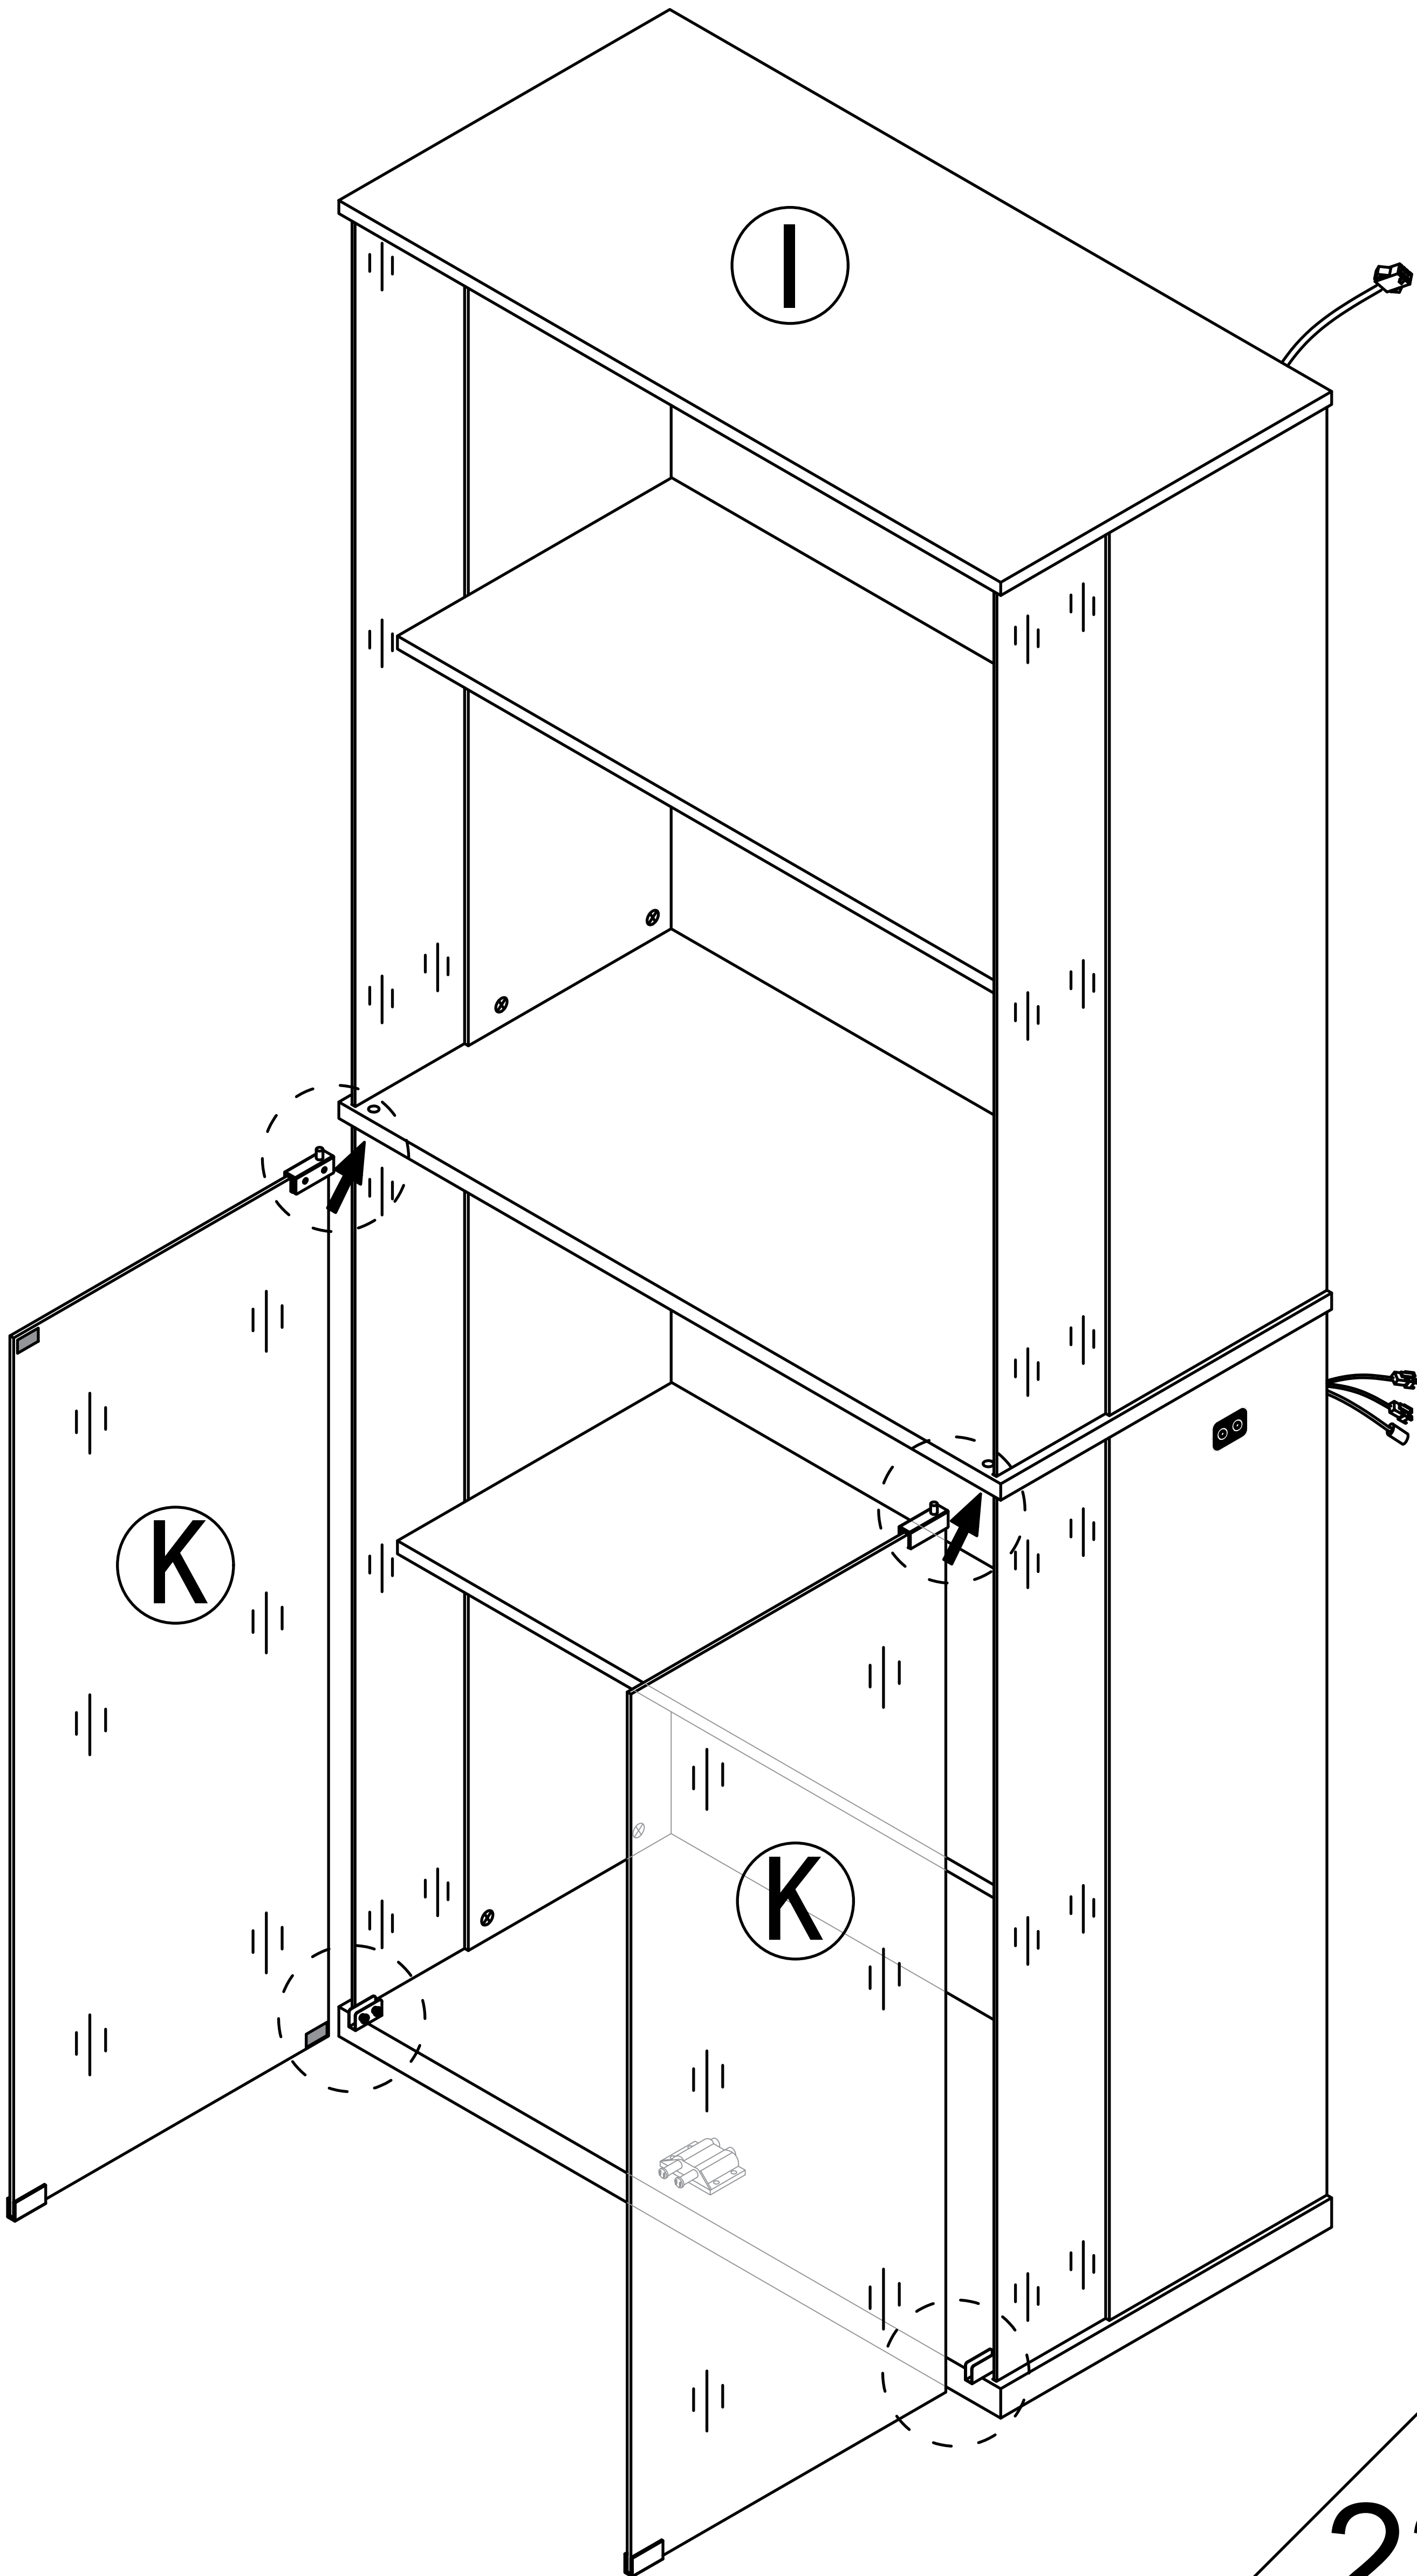

Tip: Turning the door lock to the right will close it

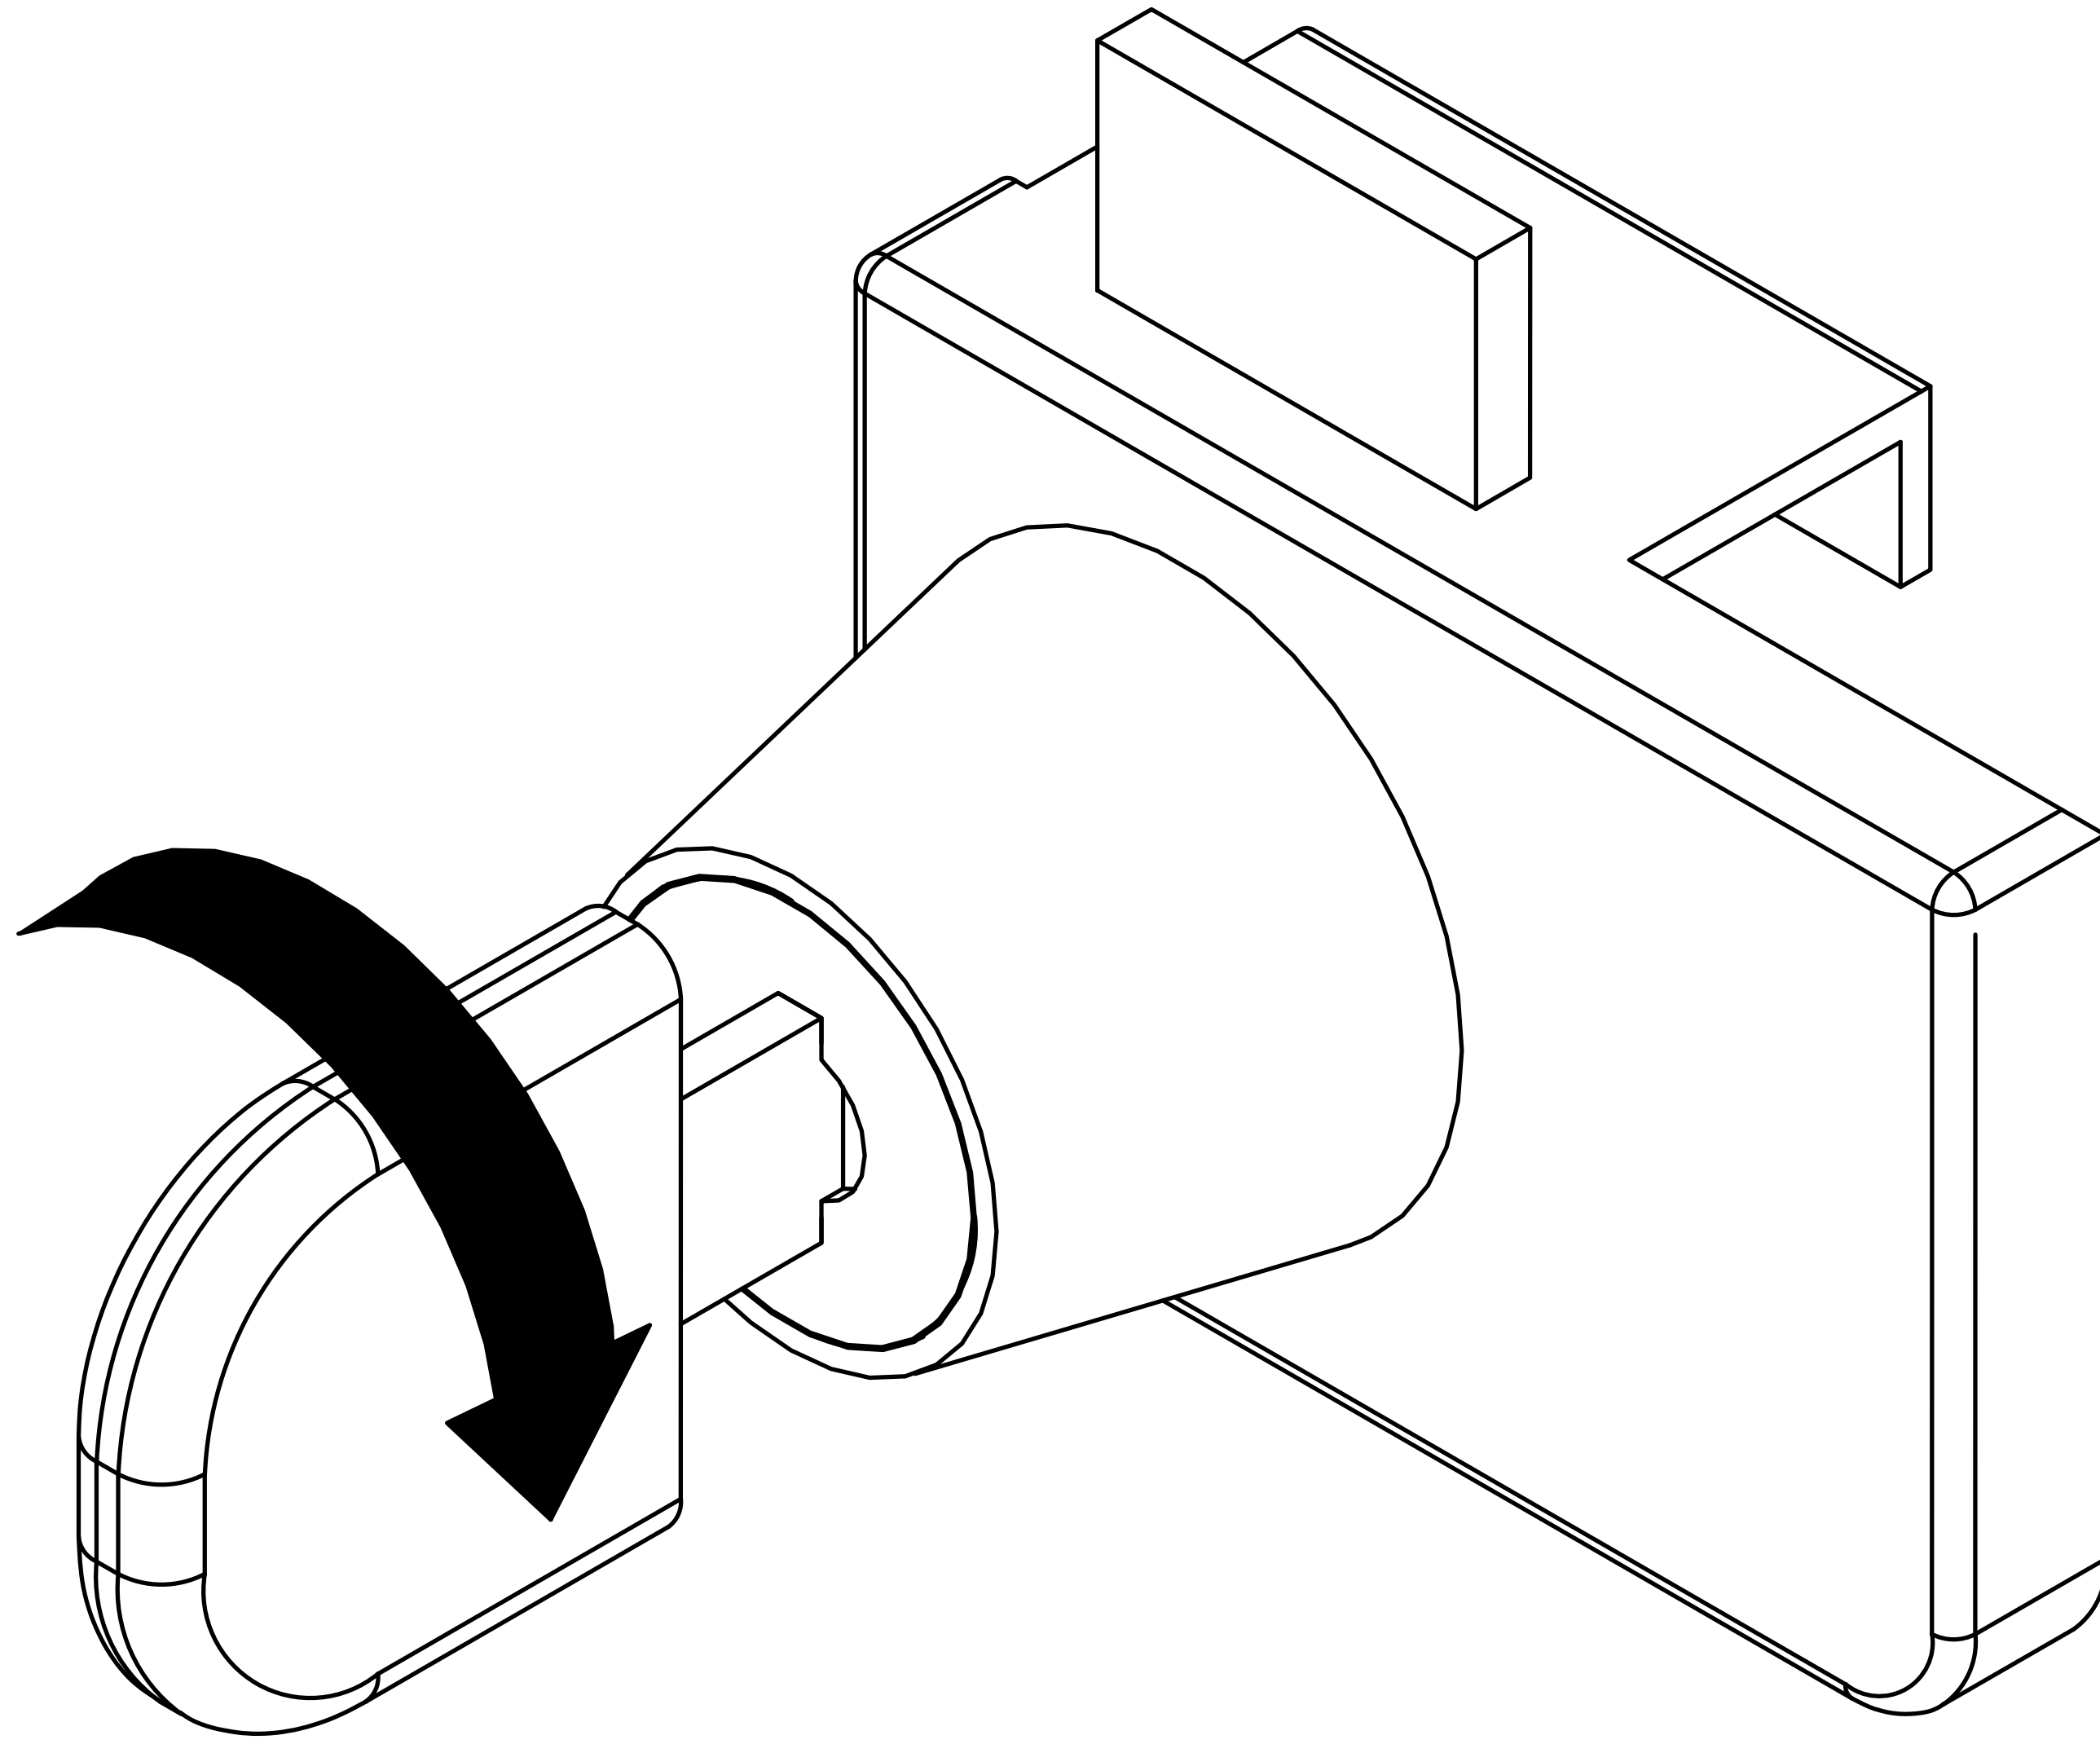


Tip: Turning the door lock to the left opens it

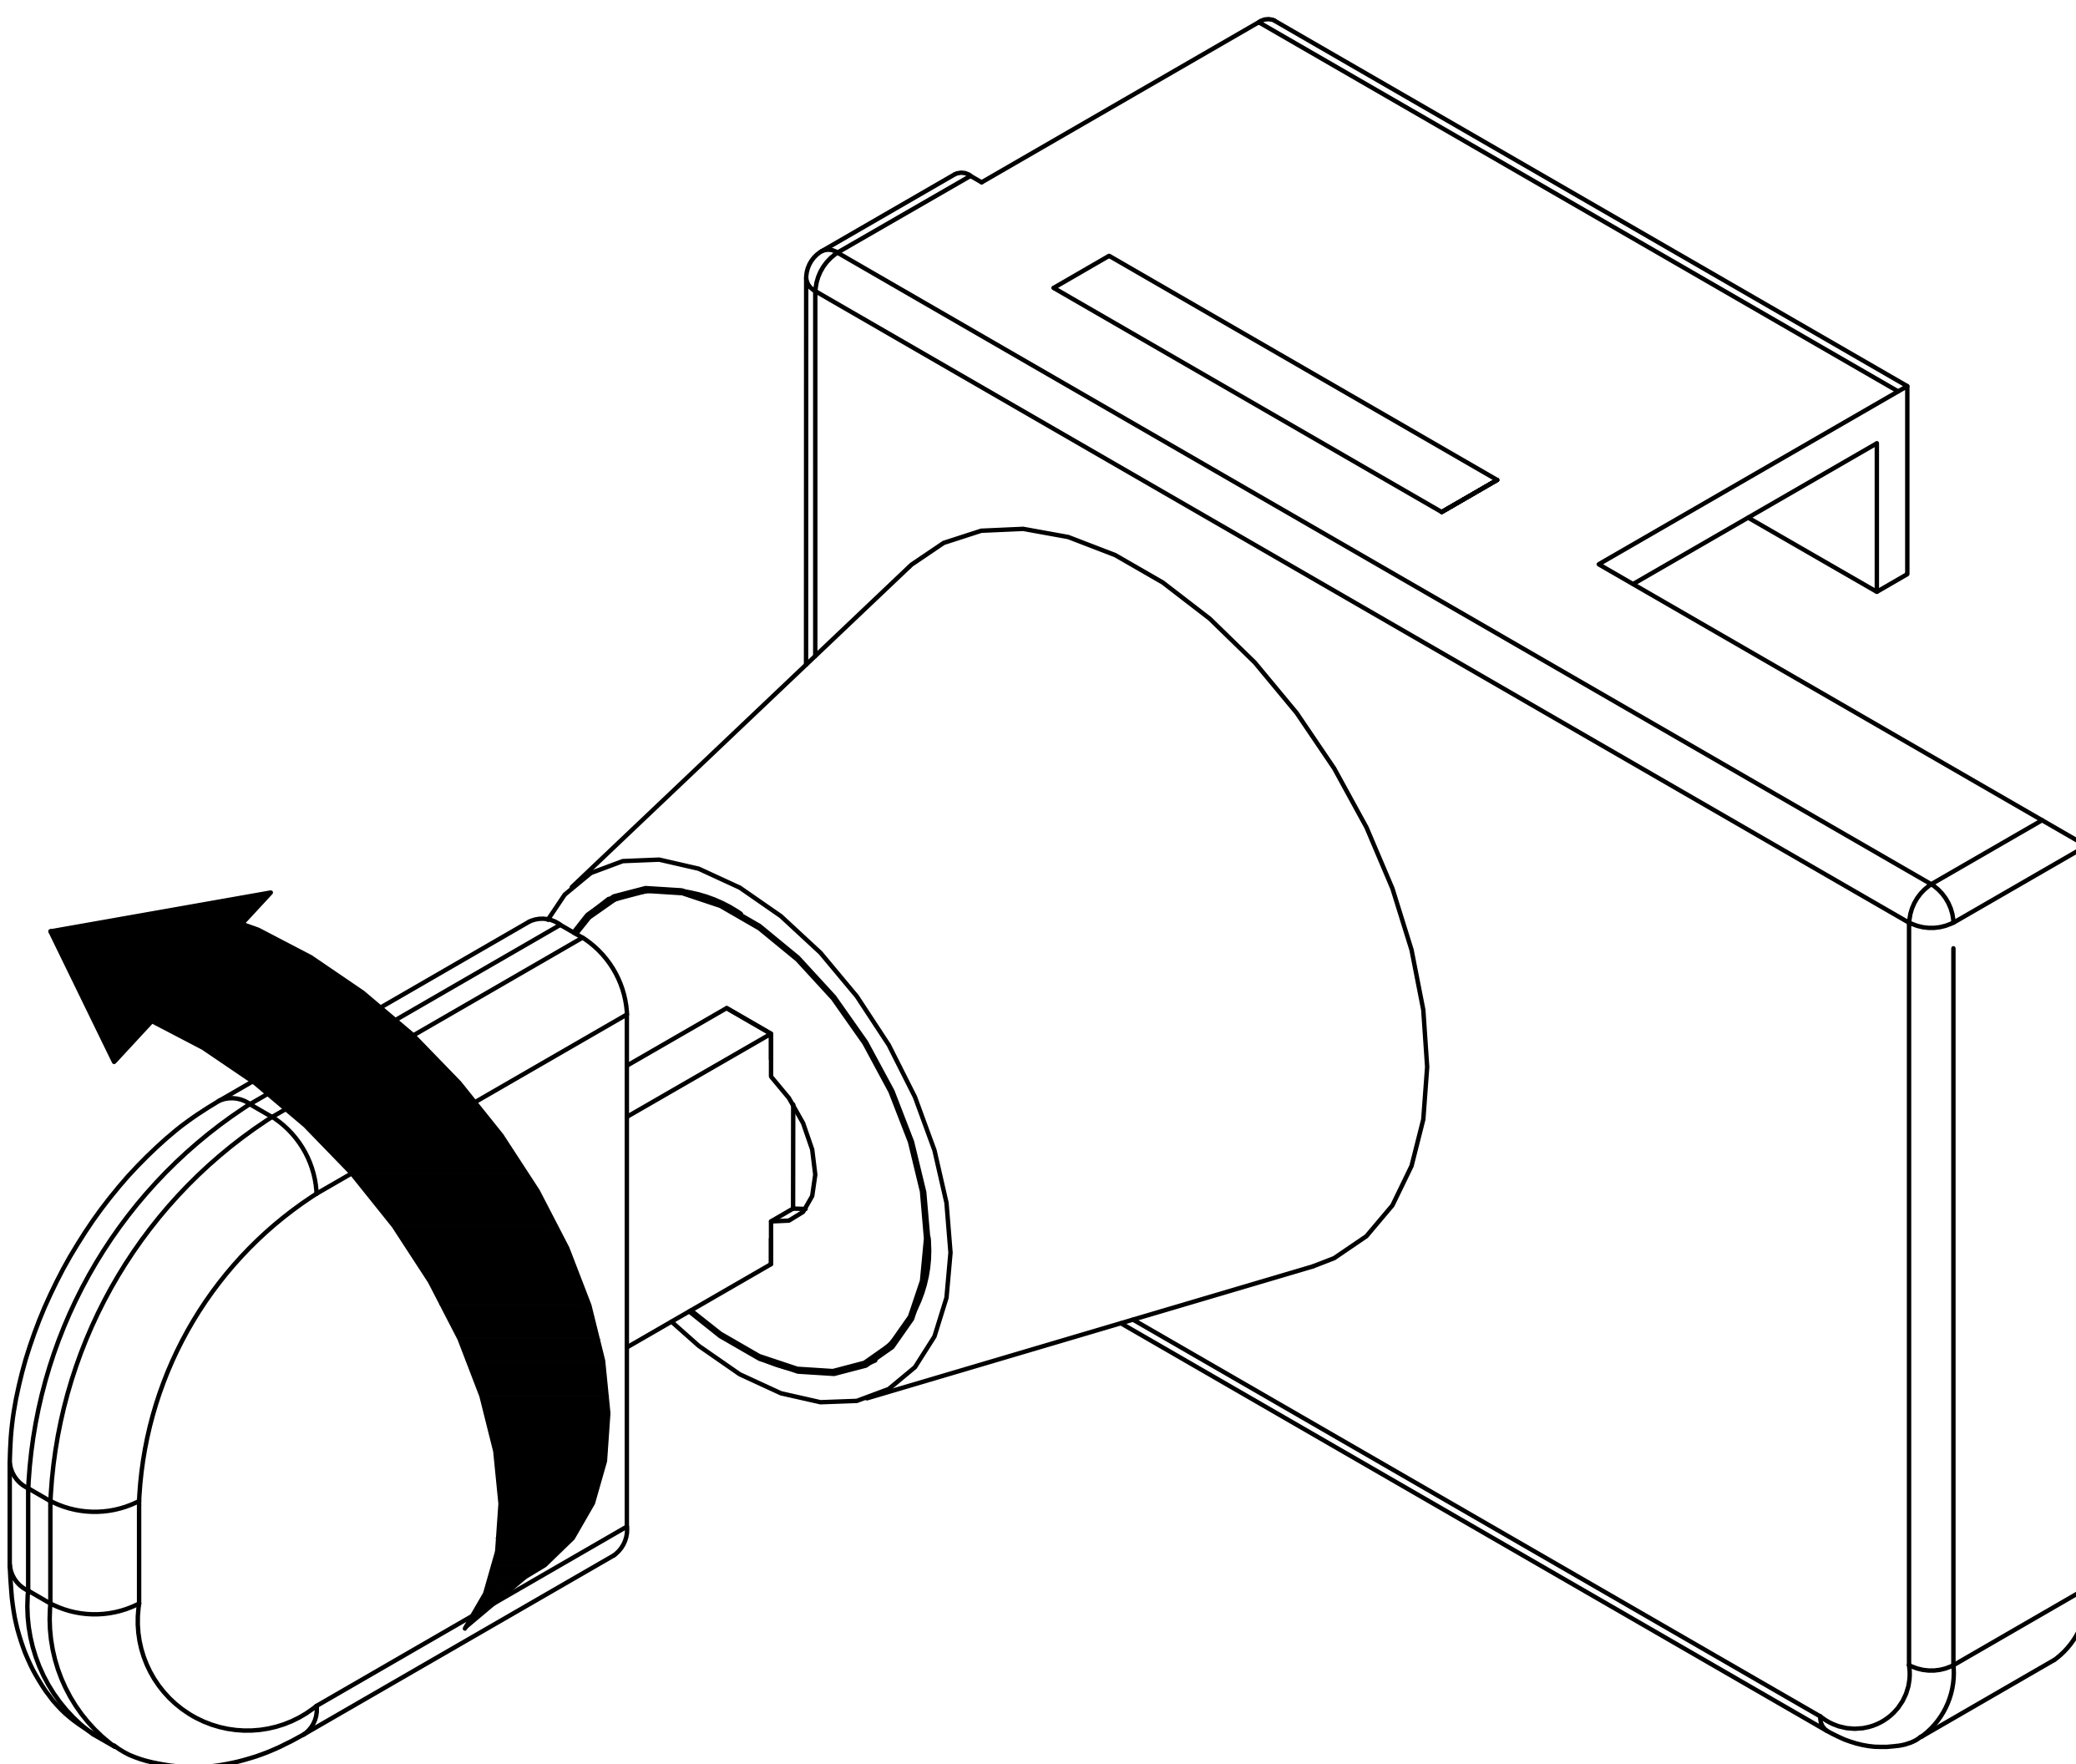


Step 27


first

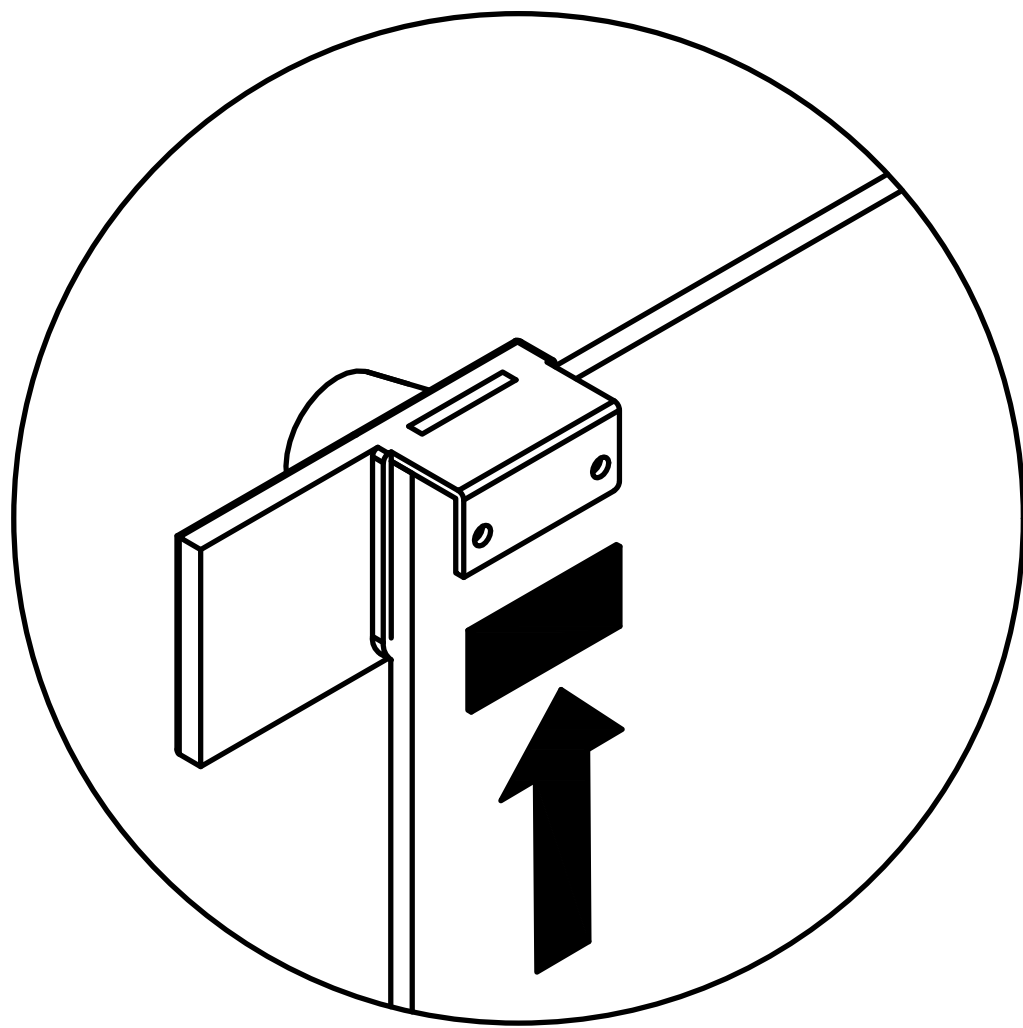


second

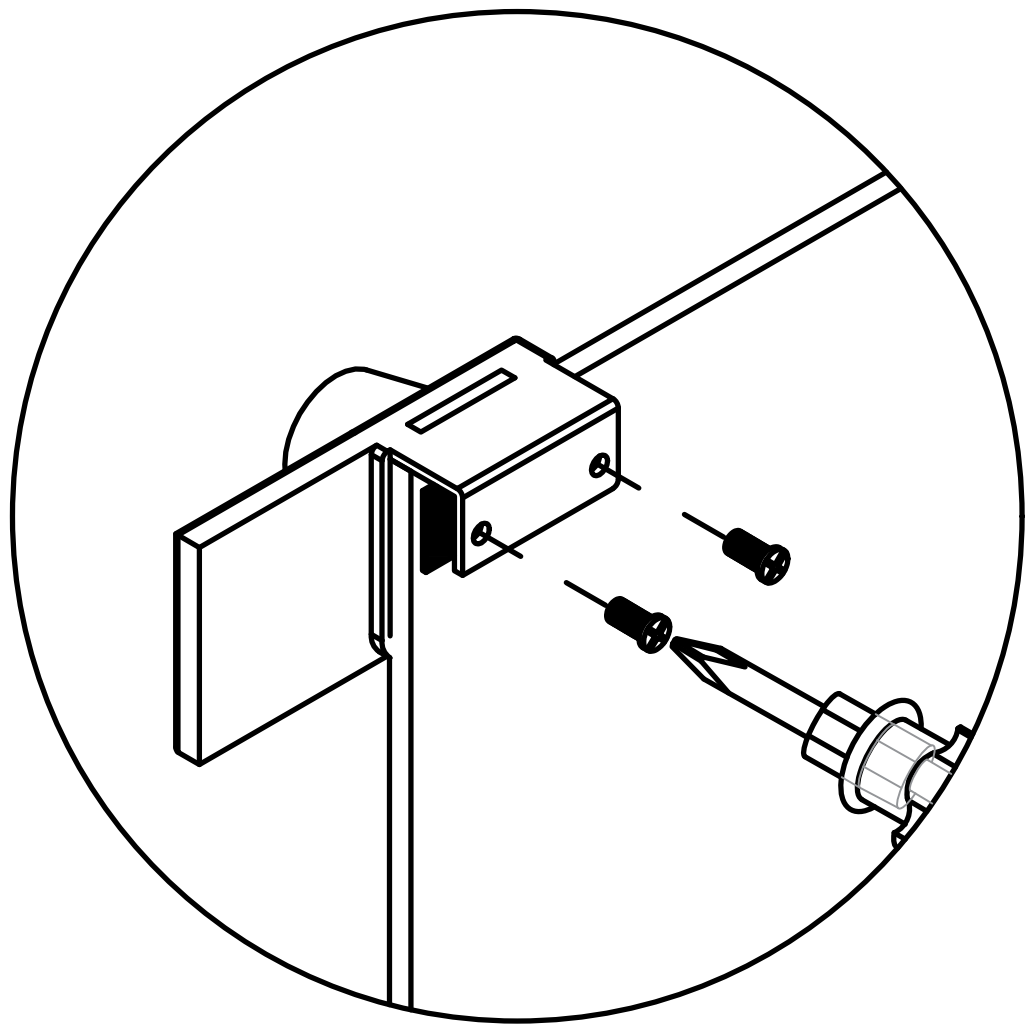

10




x1

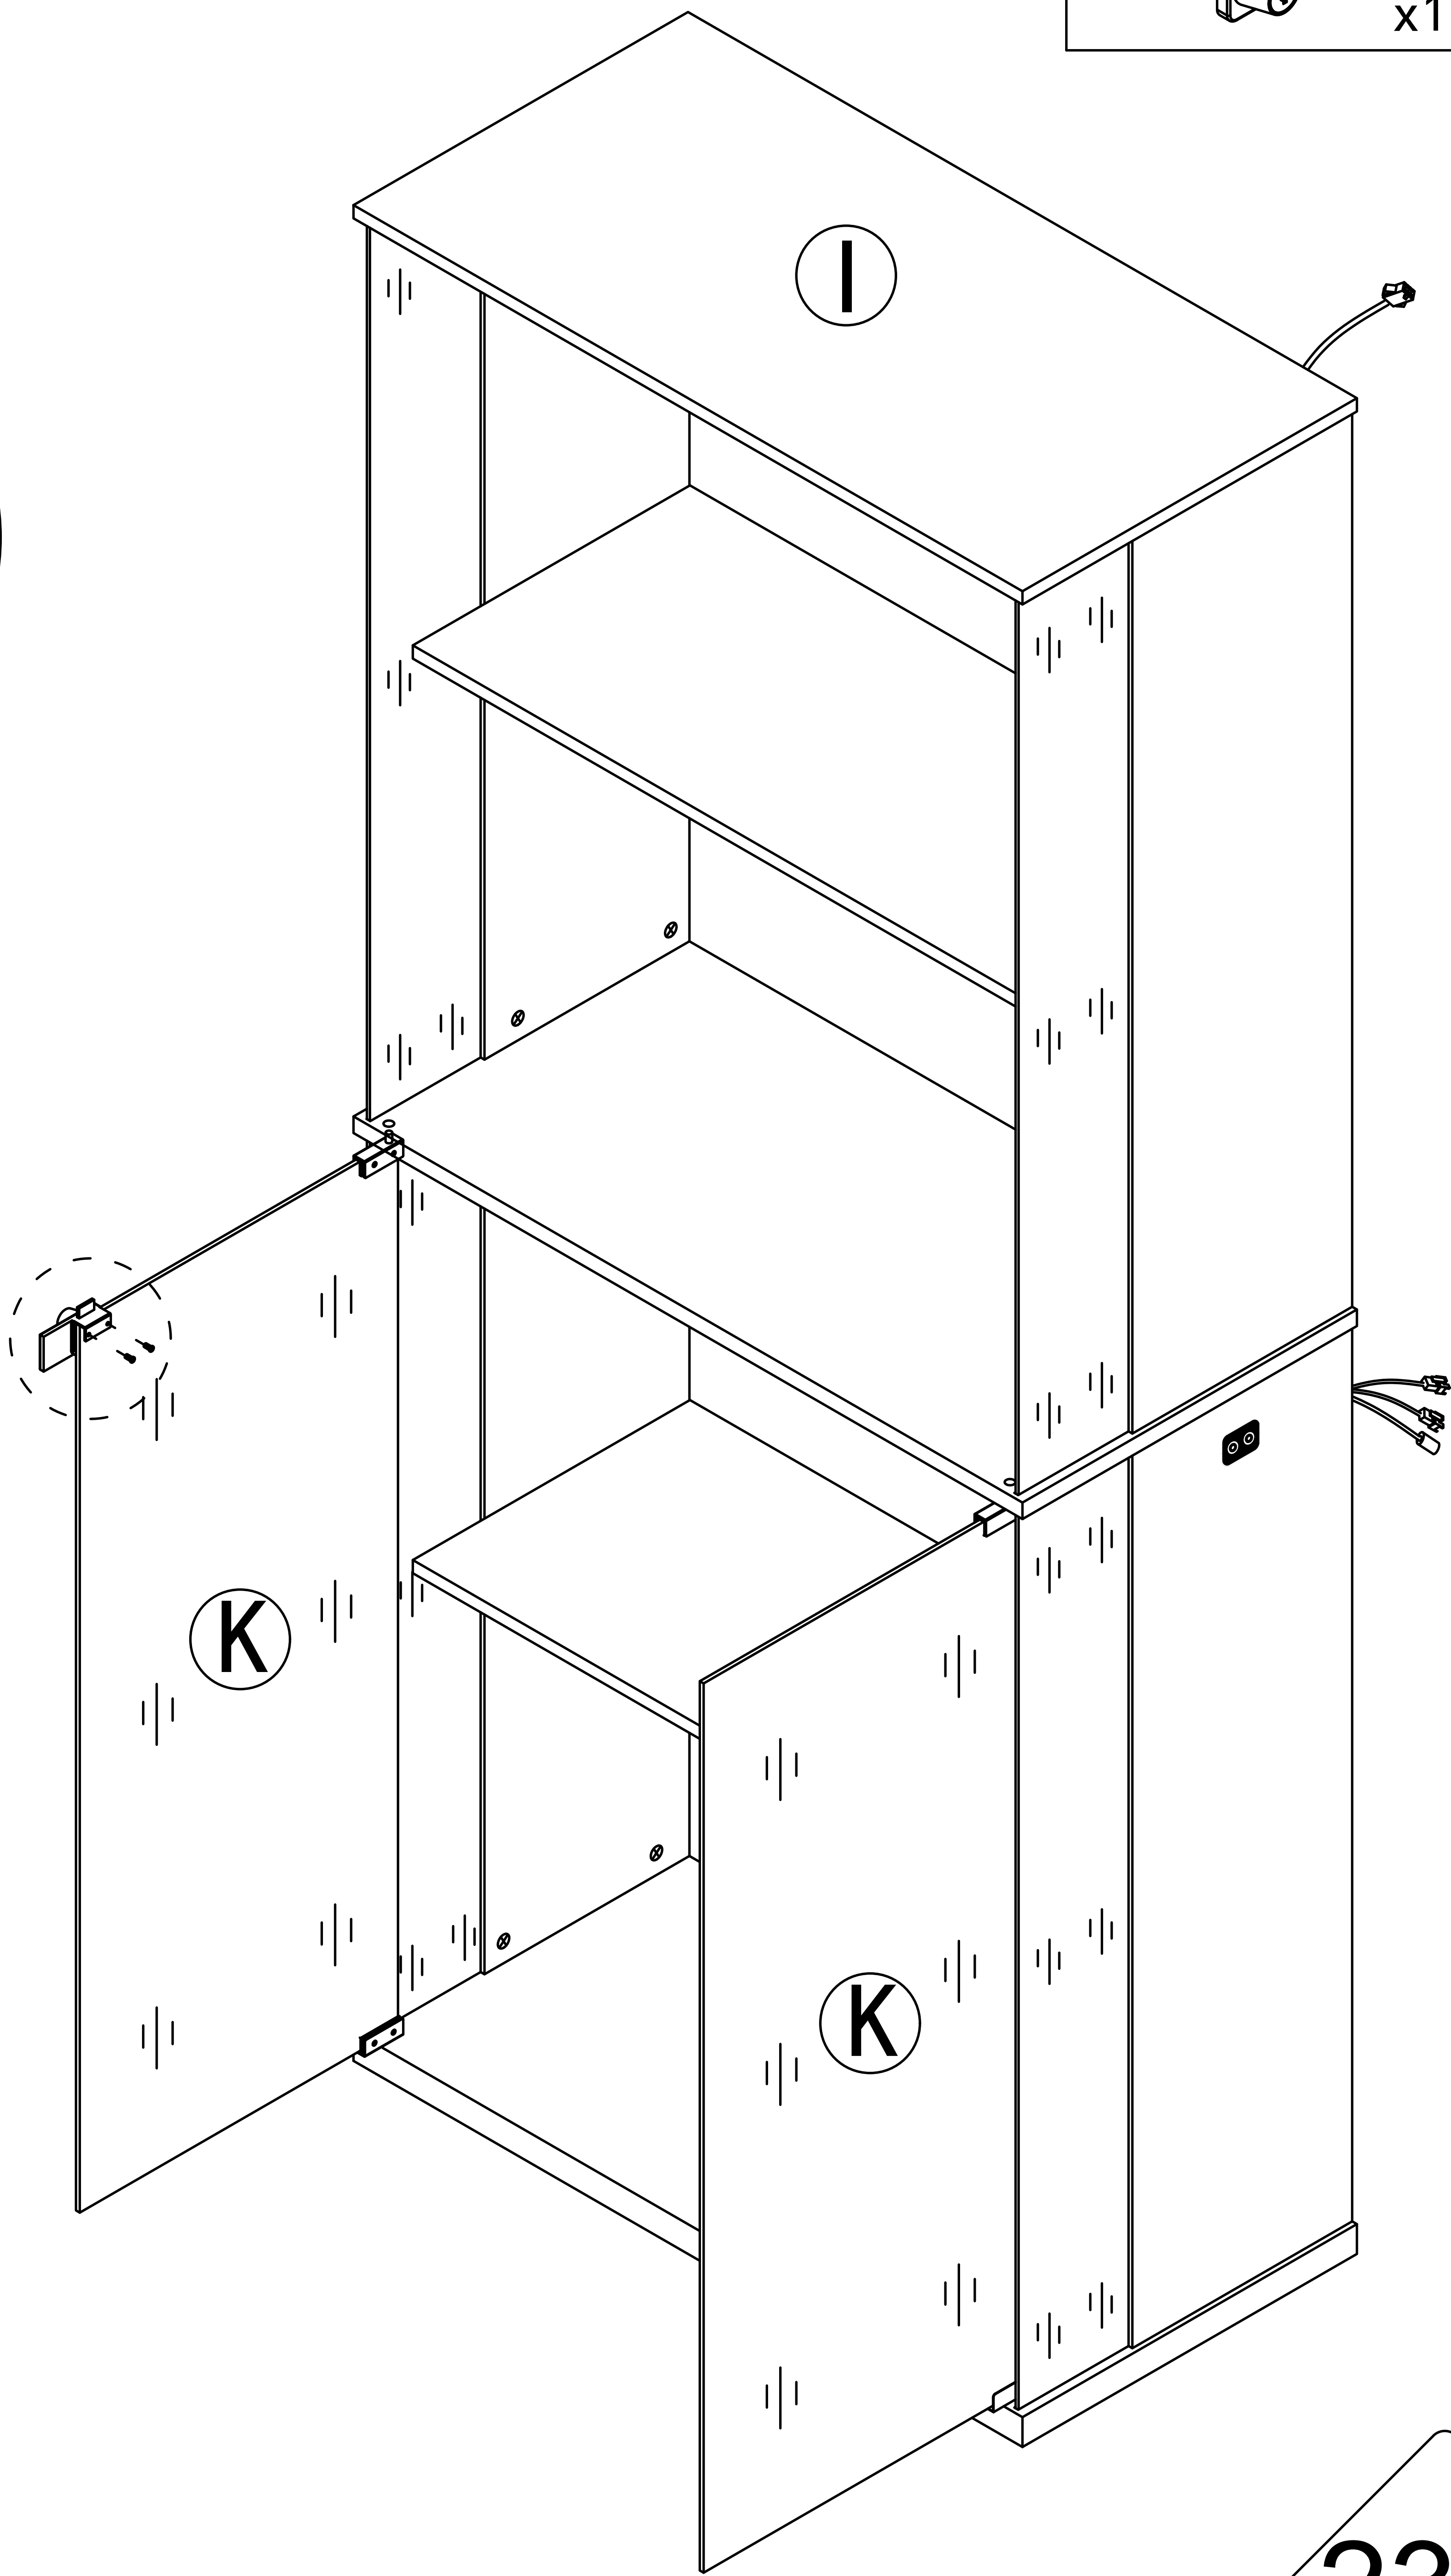


Step 28





First, loosen the screws.

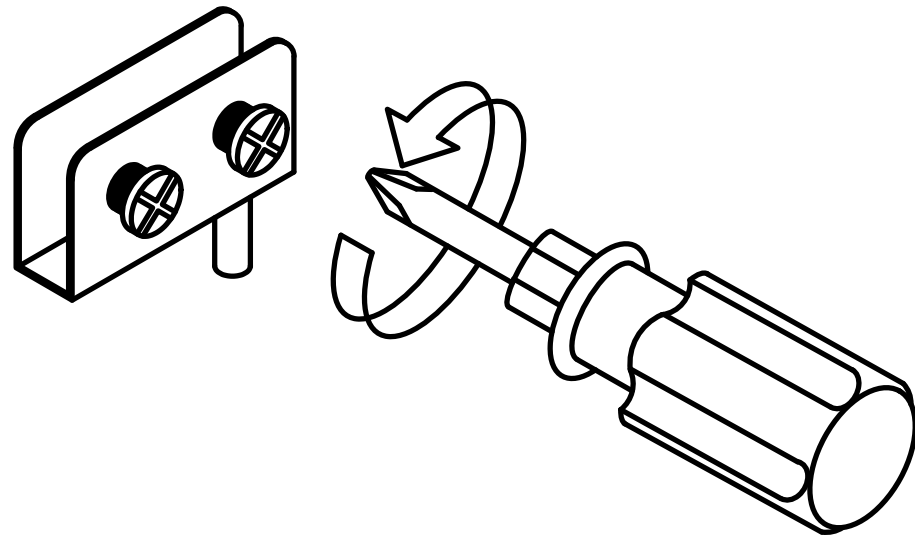


8

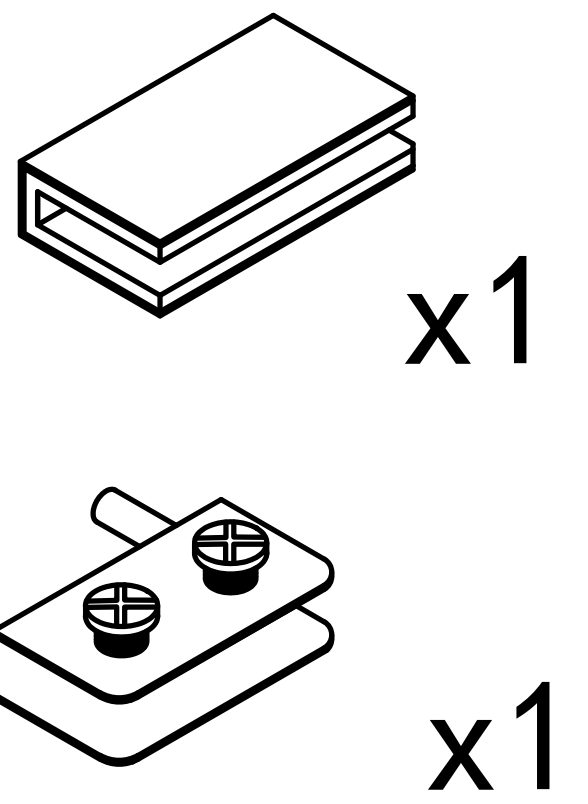

1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

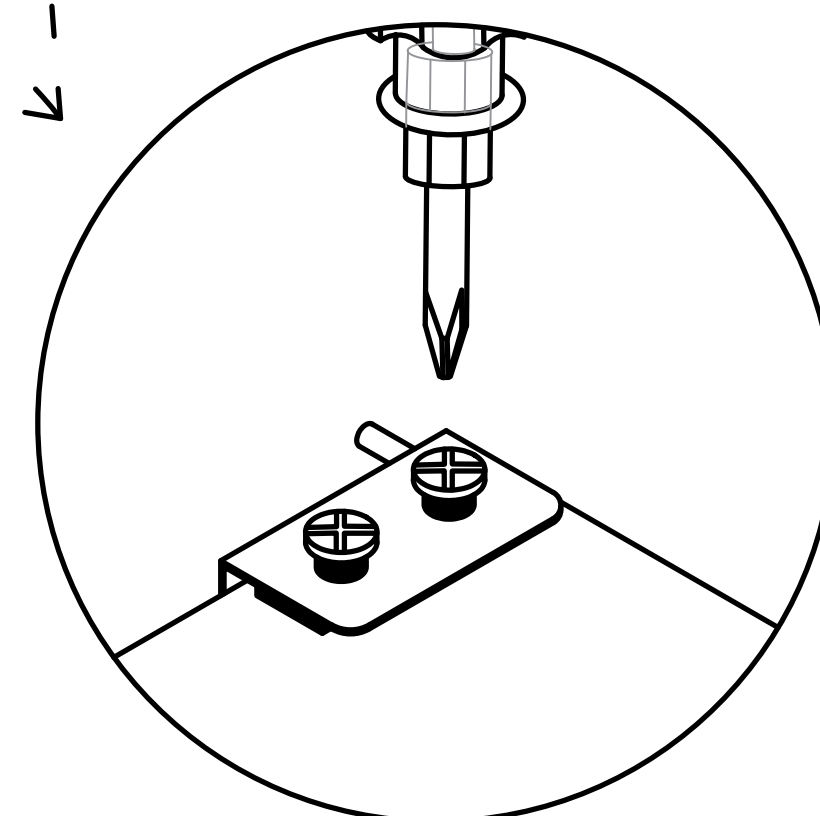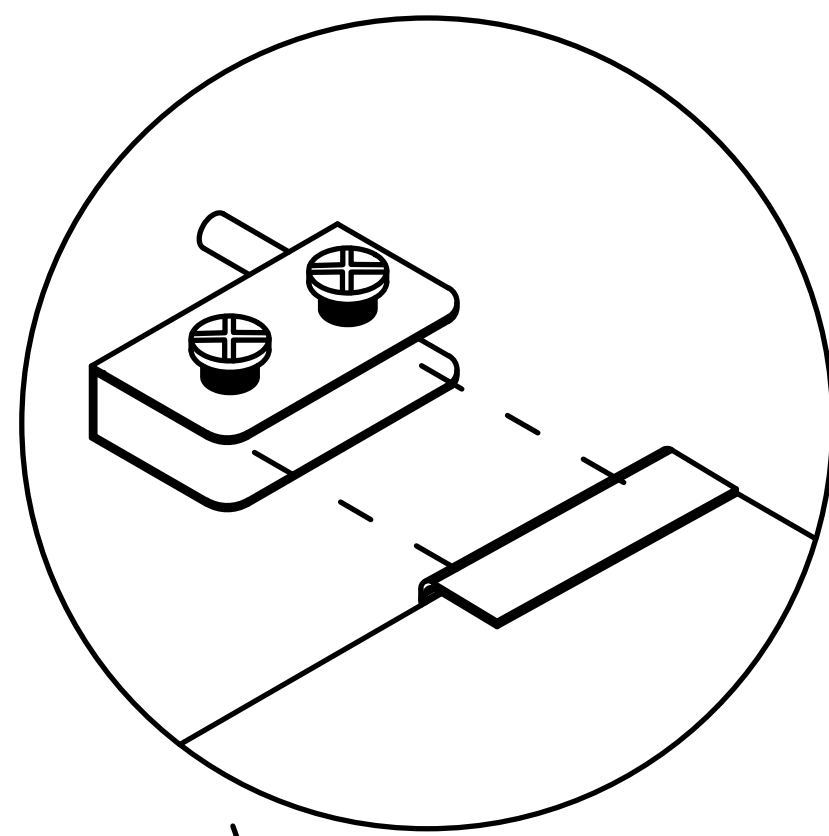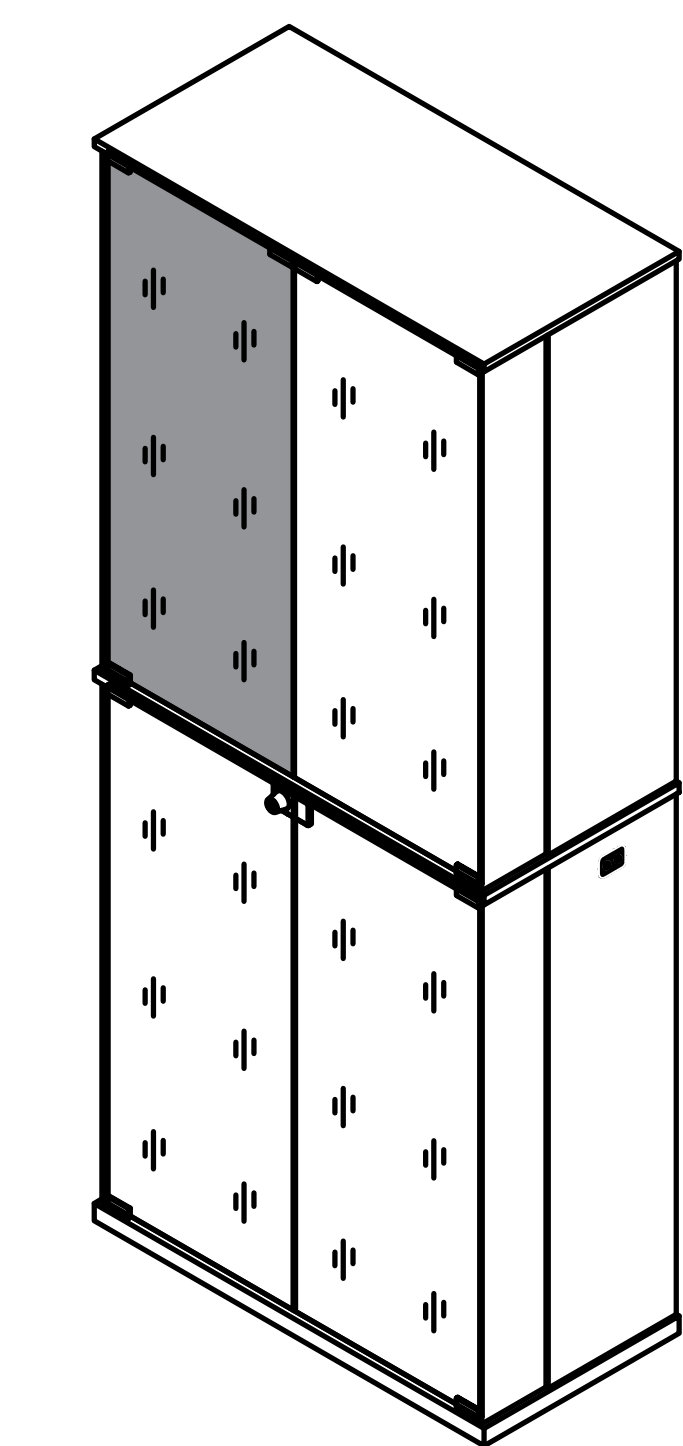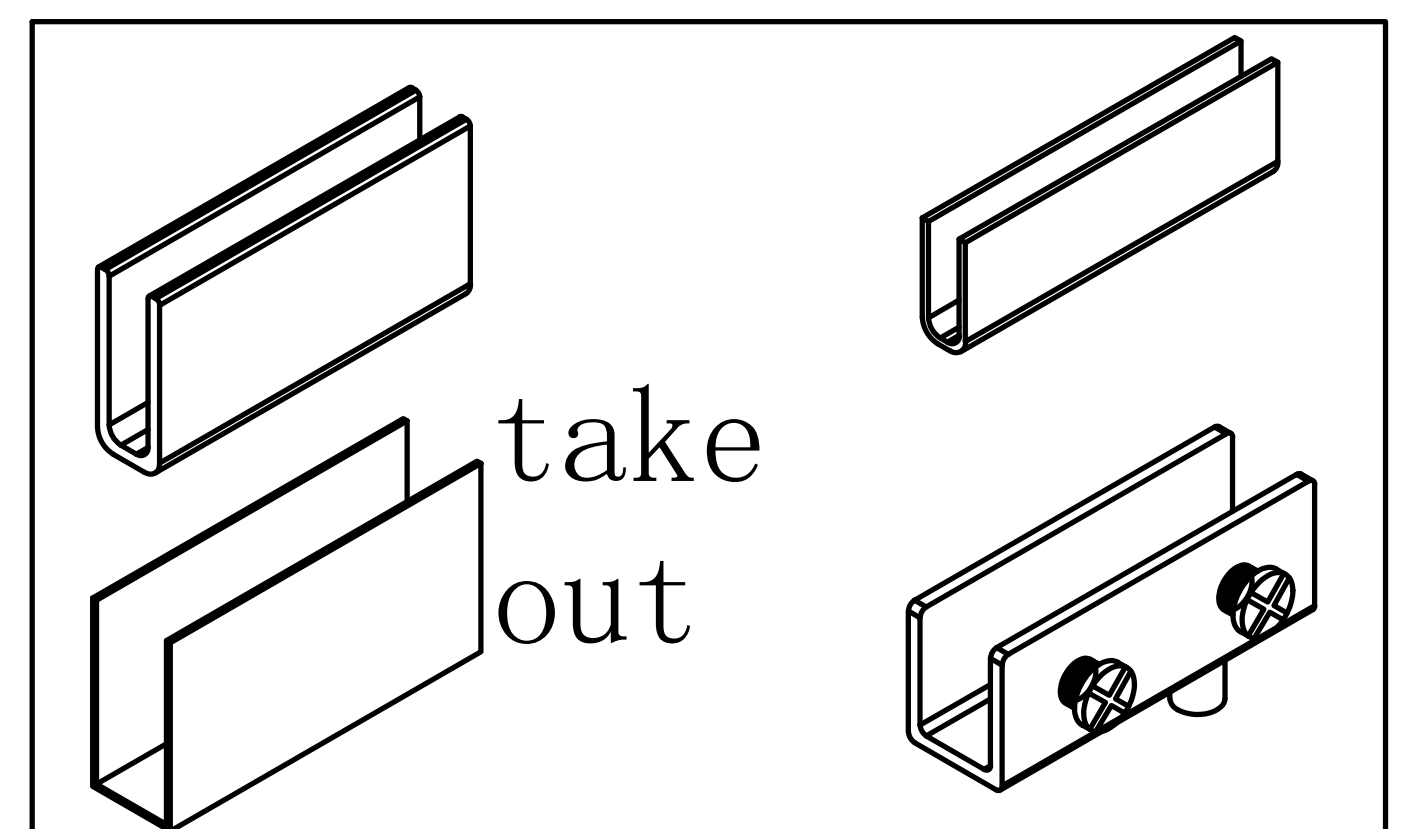


Locking screw

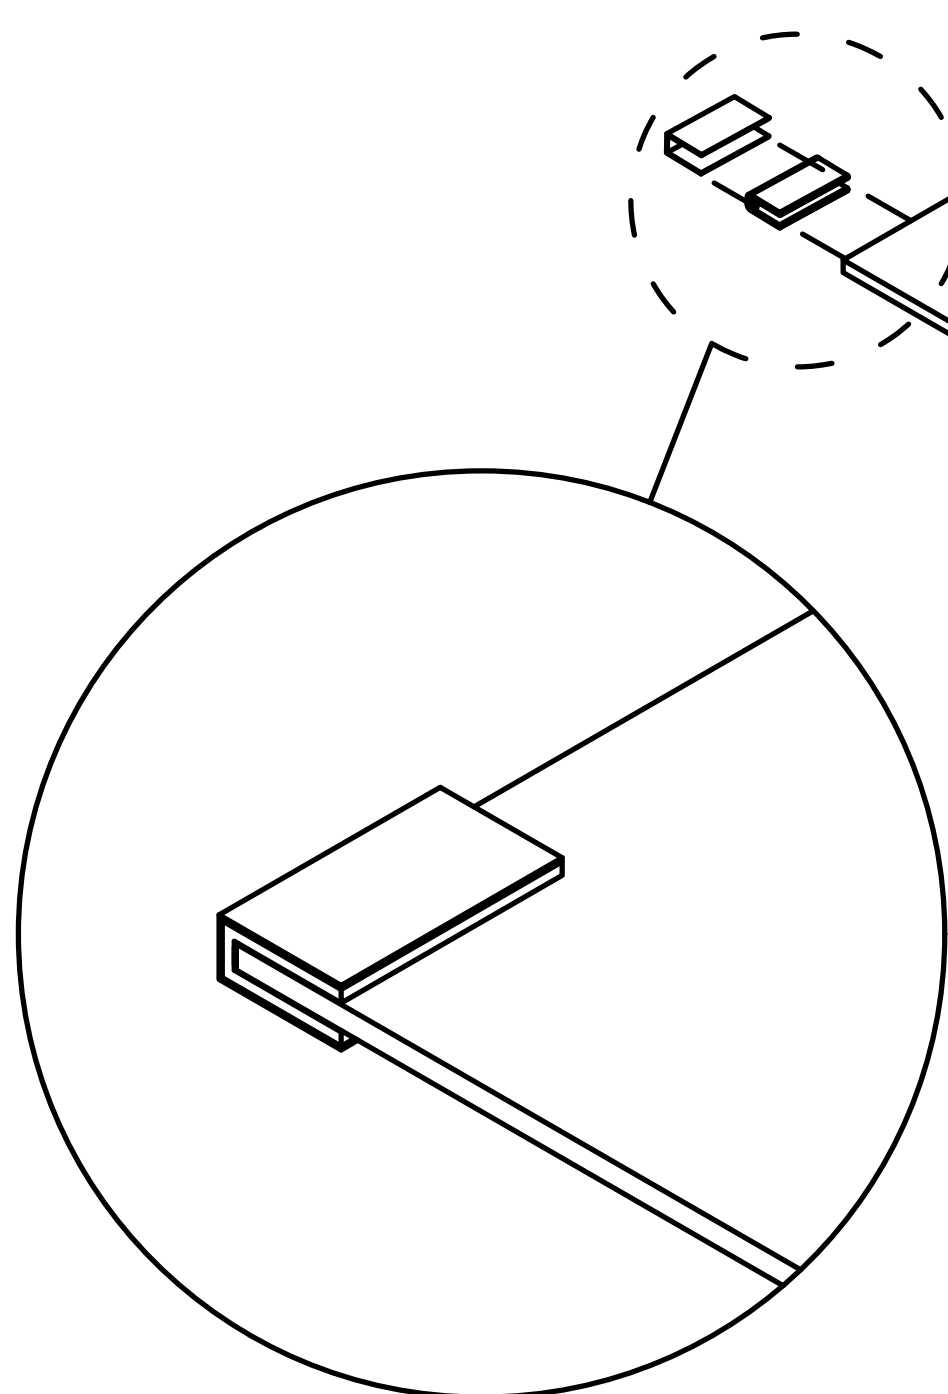


K

Step 29


First, loosen the screws.

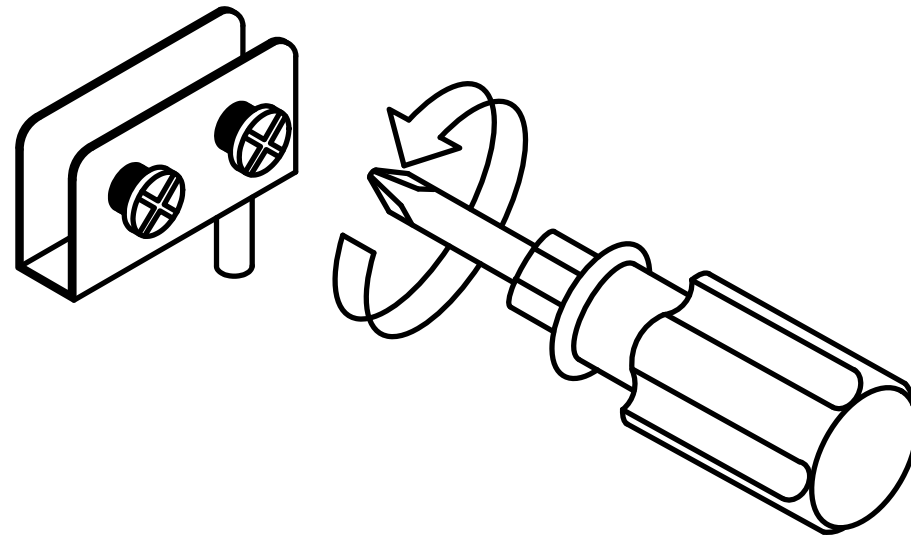

8


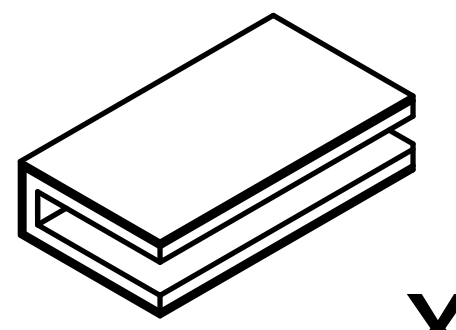


x1




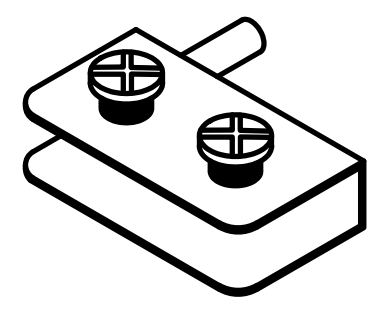


x1

1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

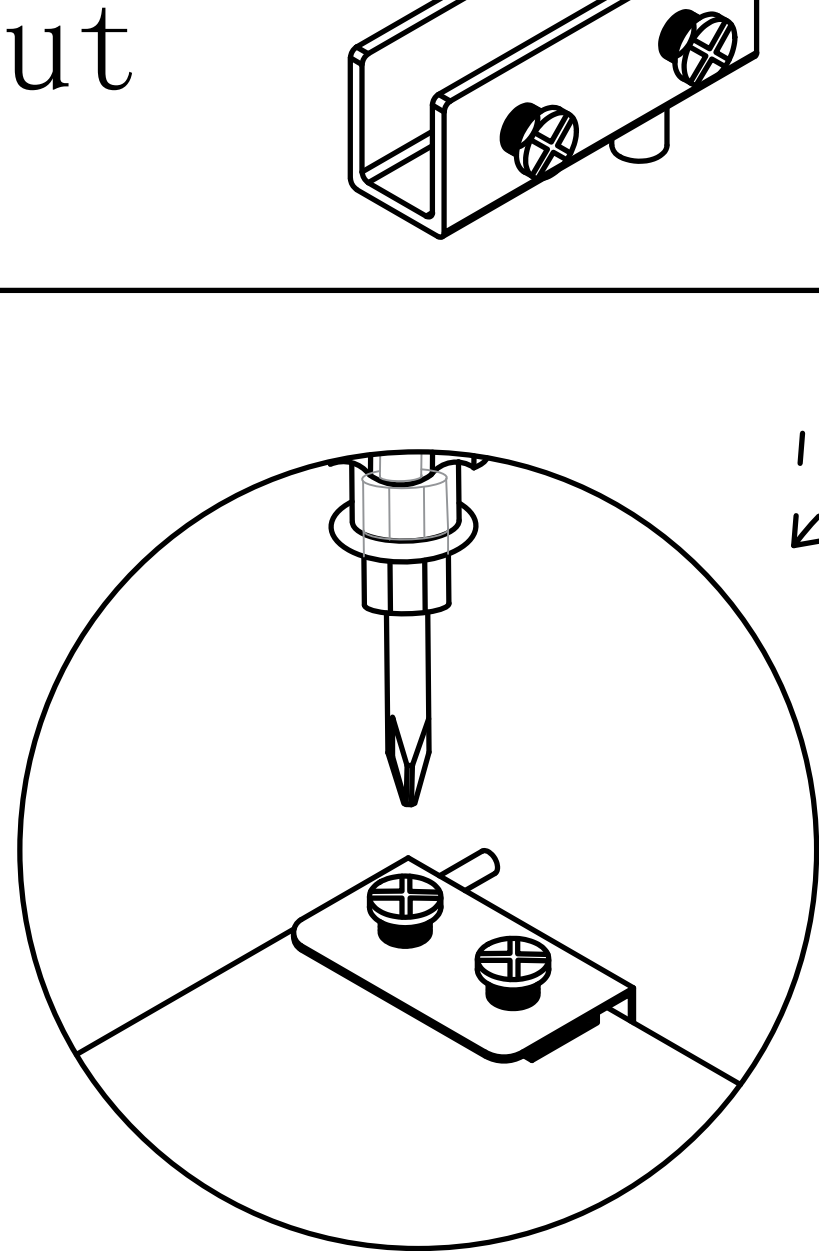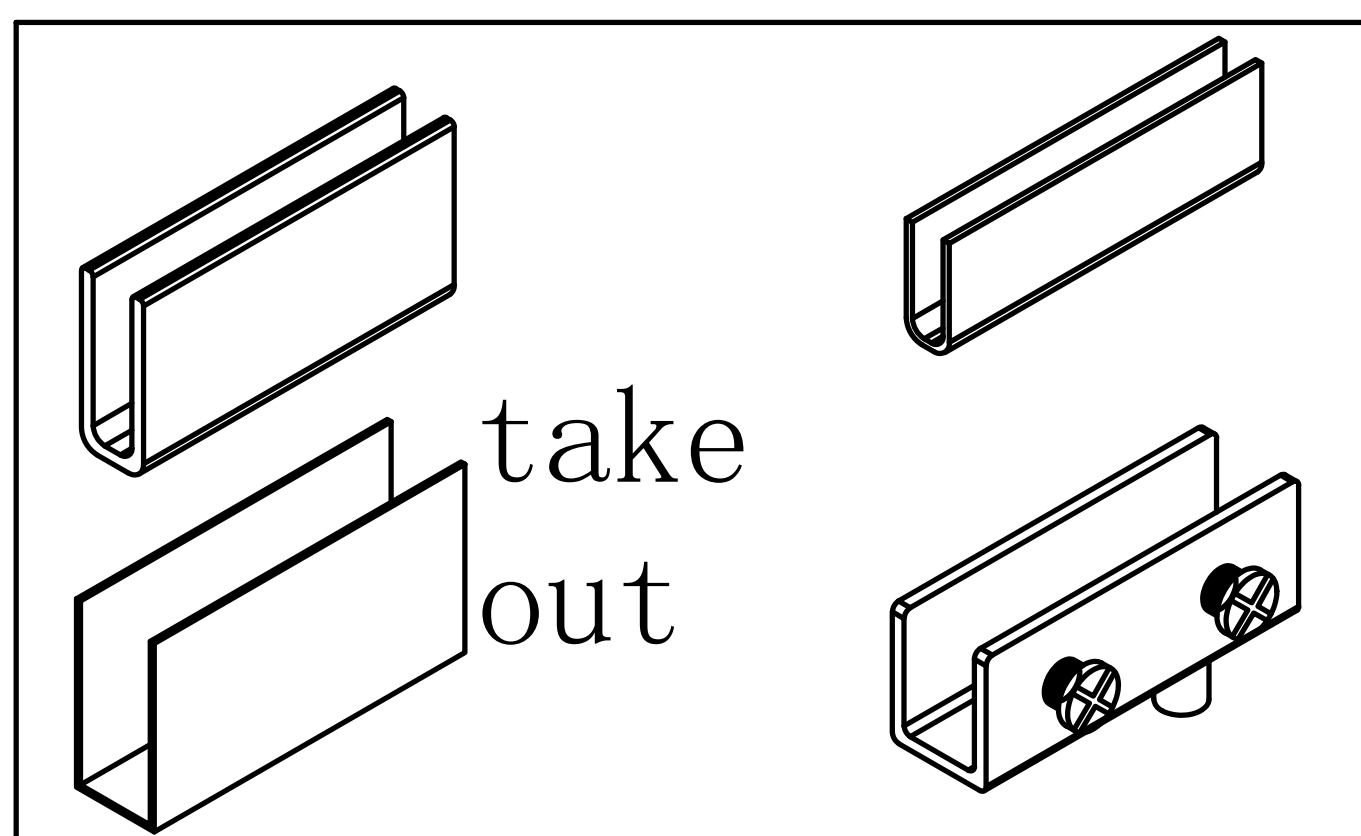



Locking screw

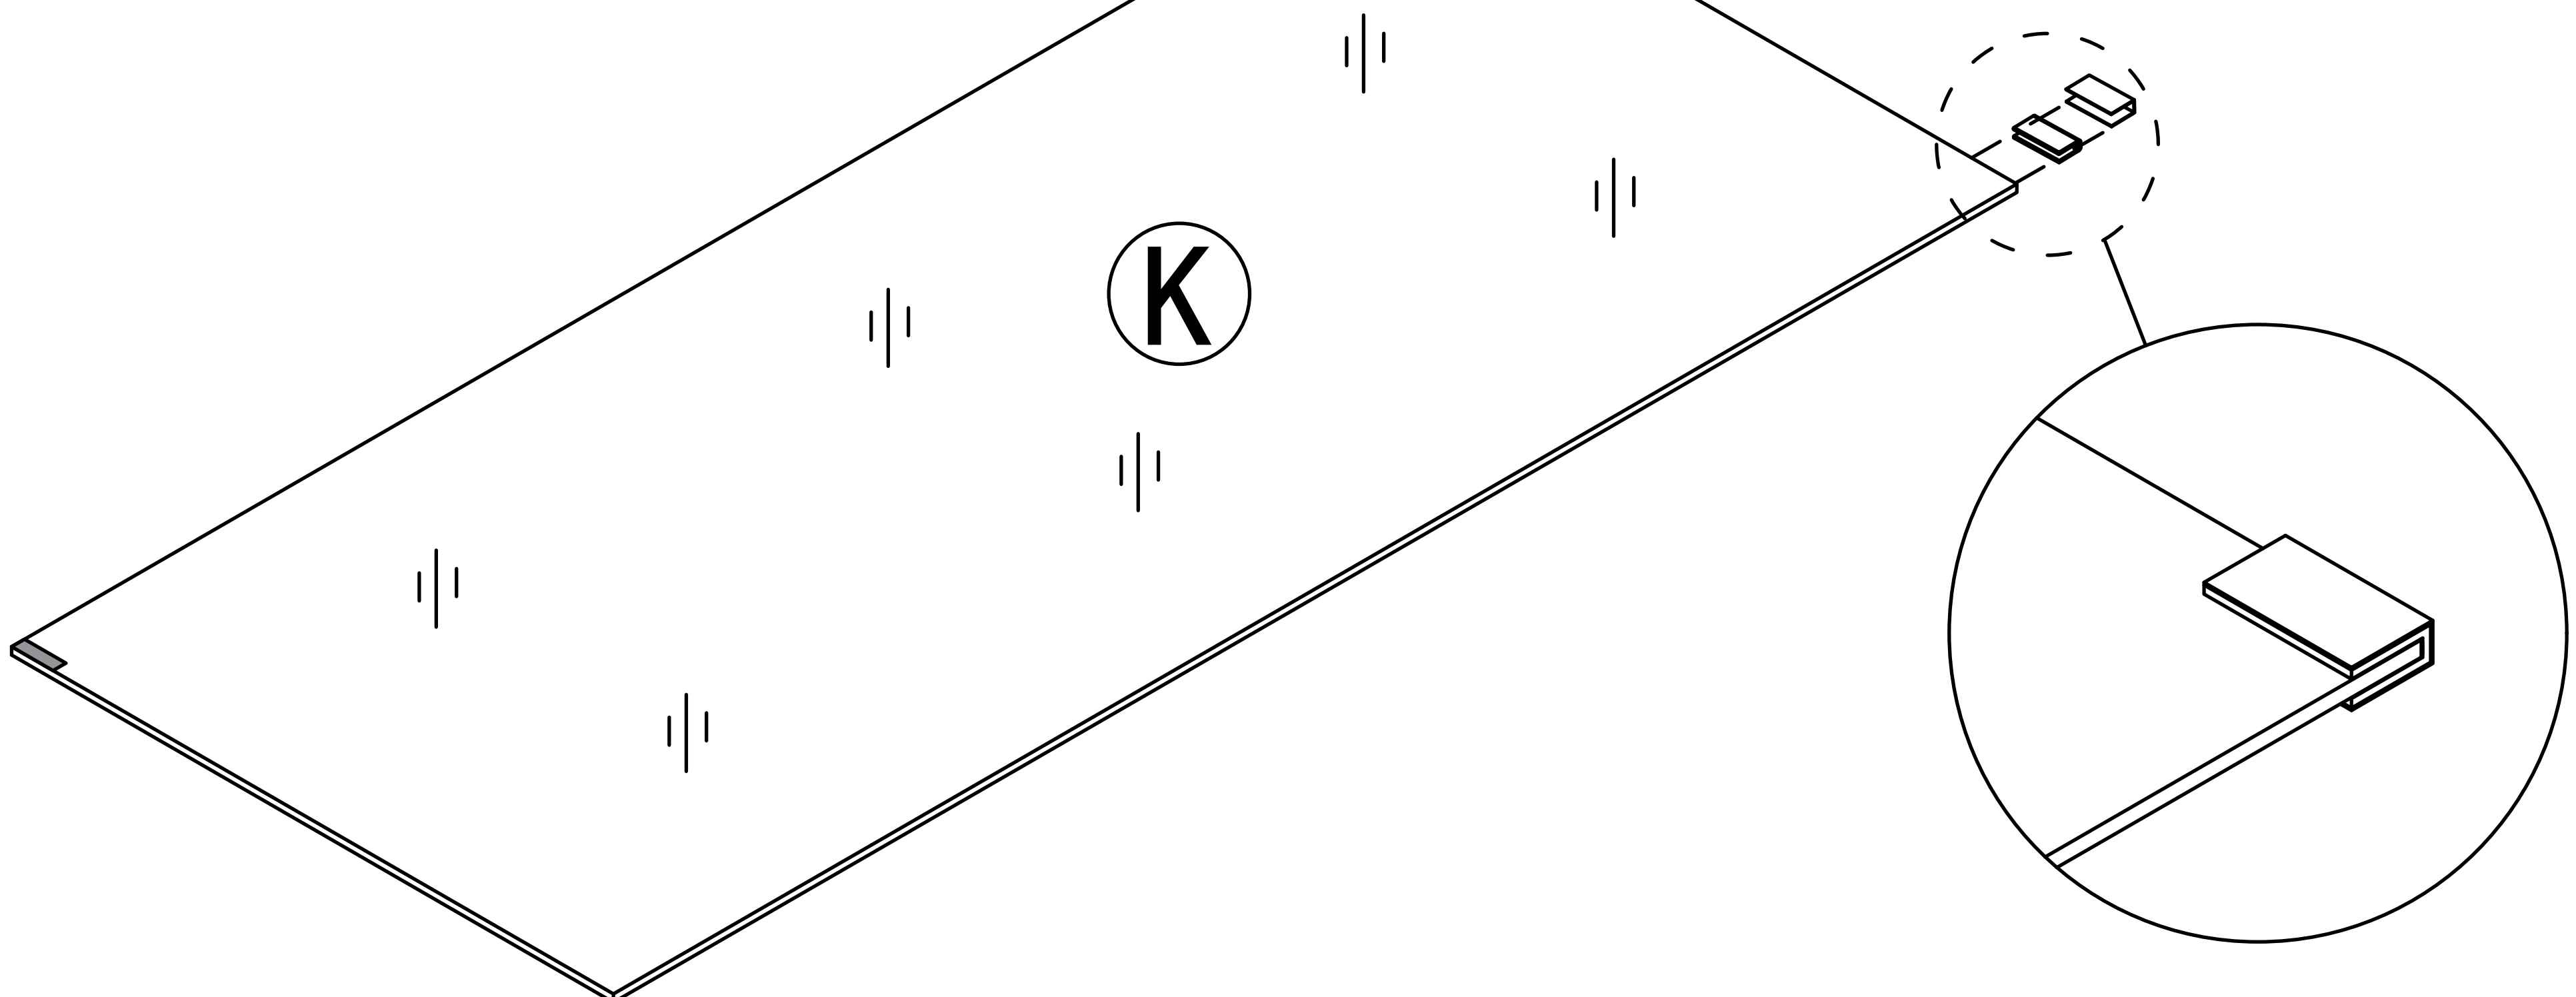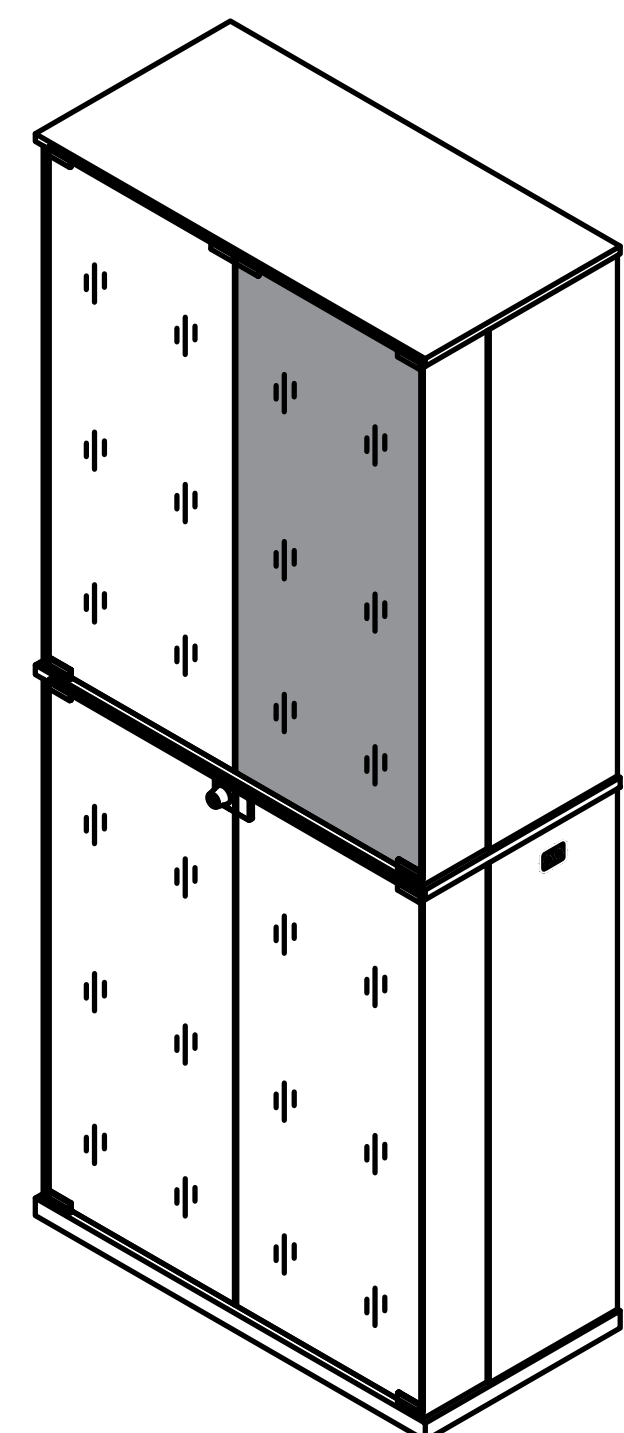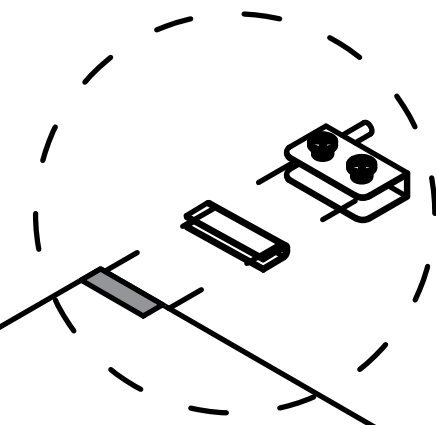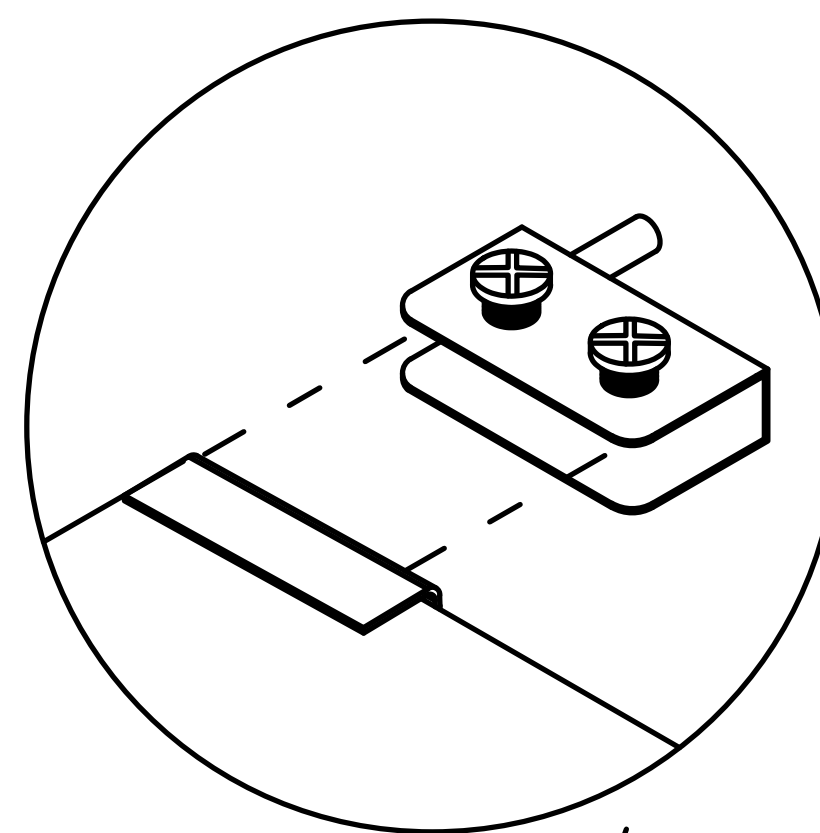


Step 30




- 8

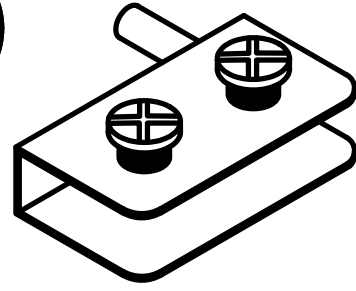

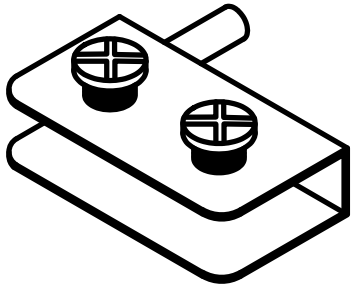x1
- 

x1
- 


x2

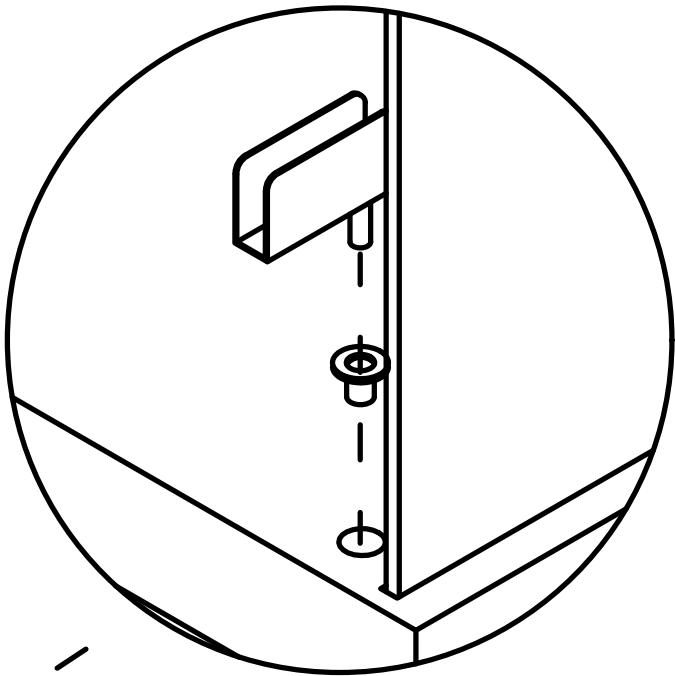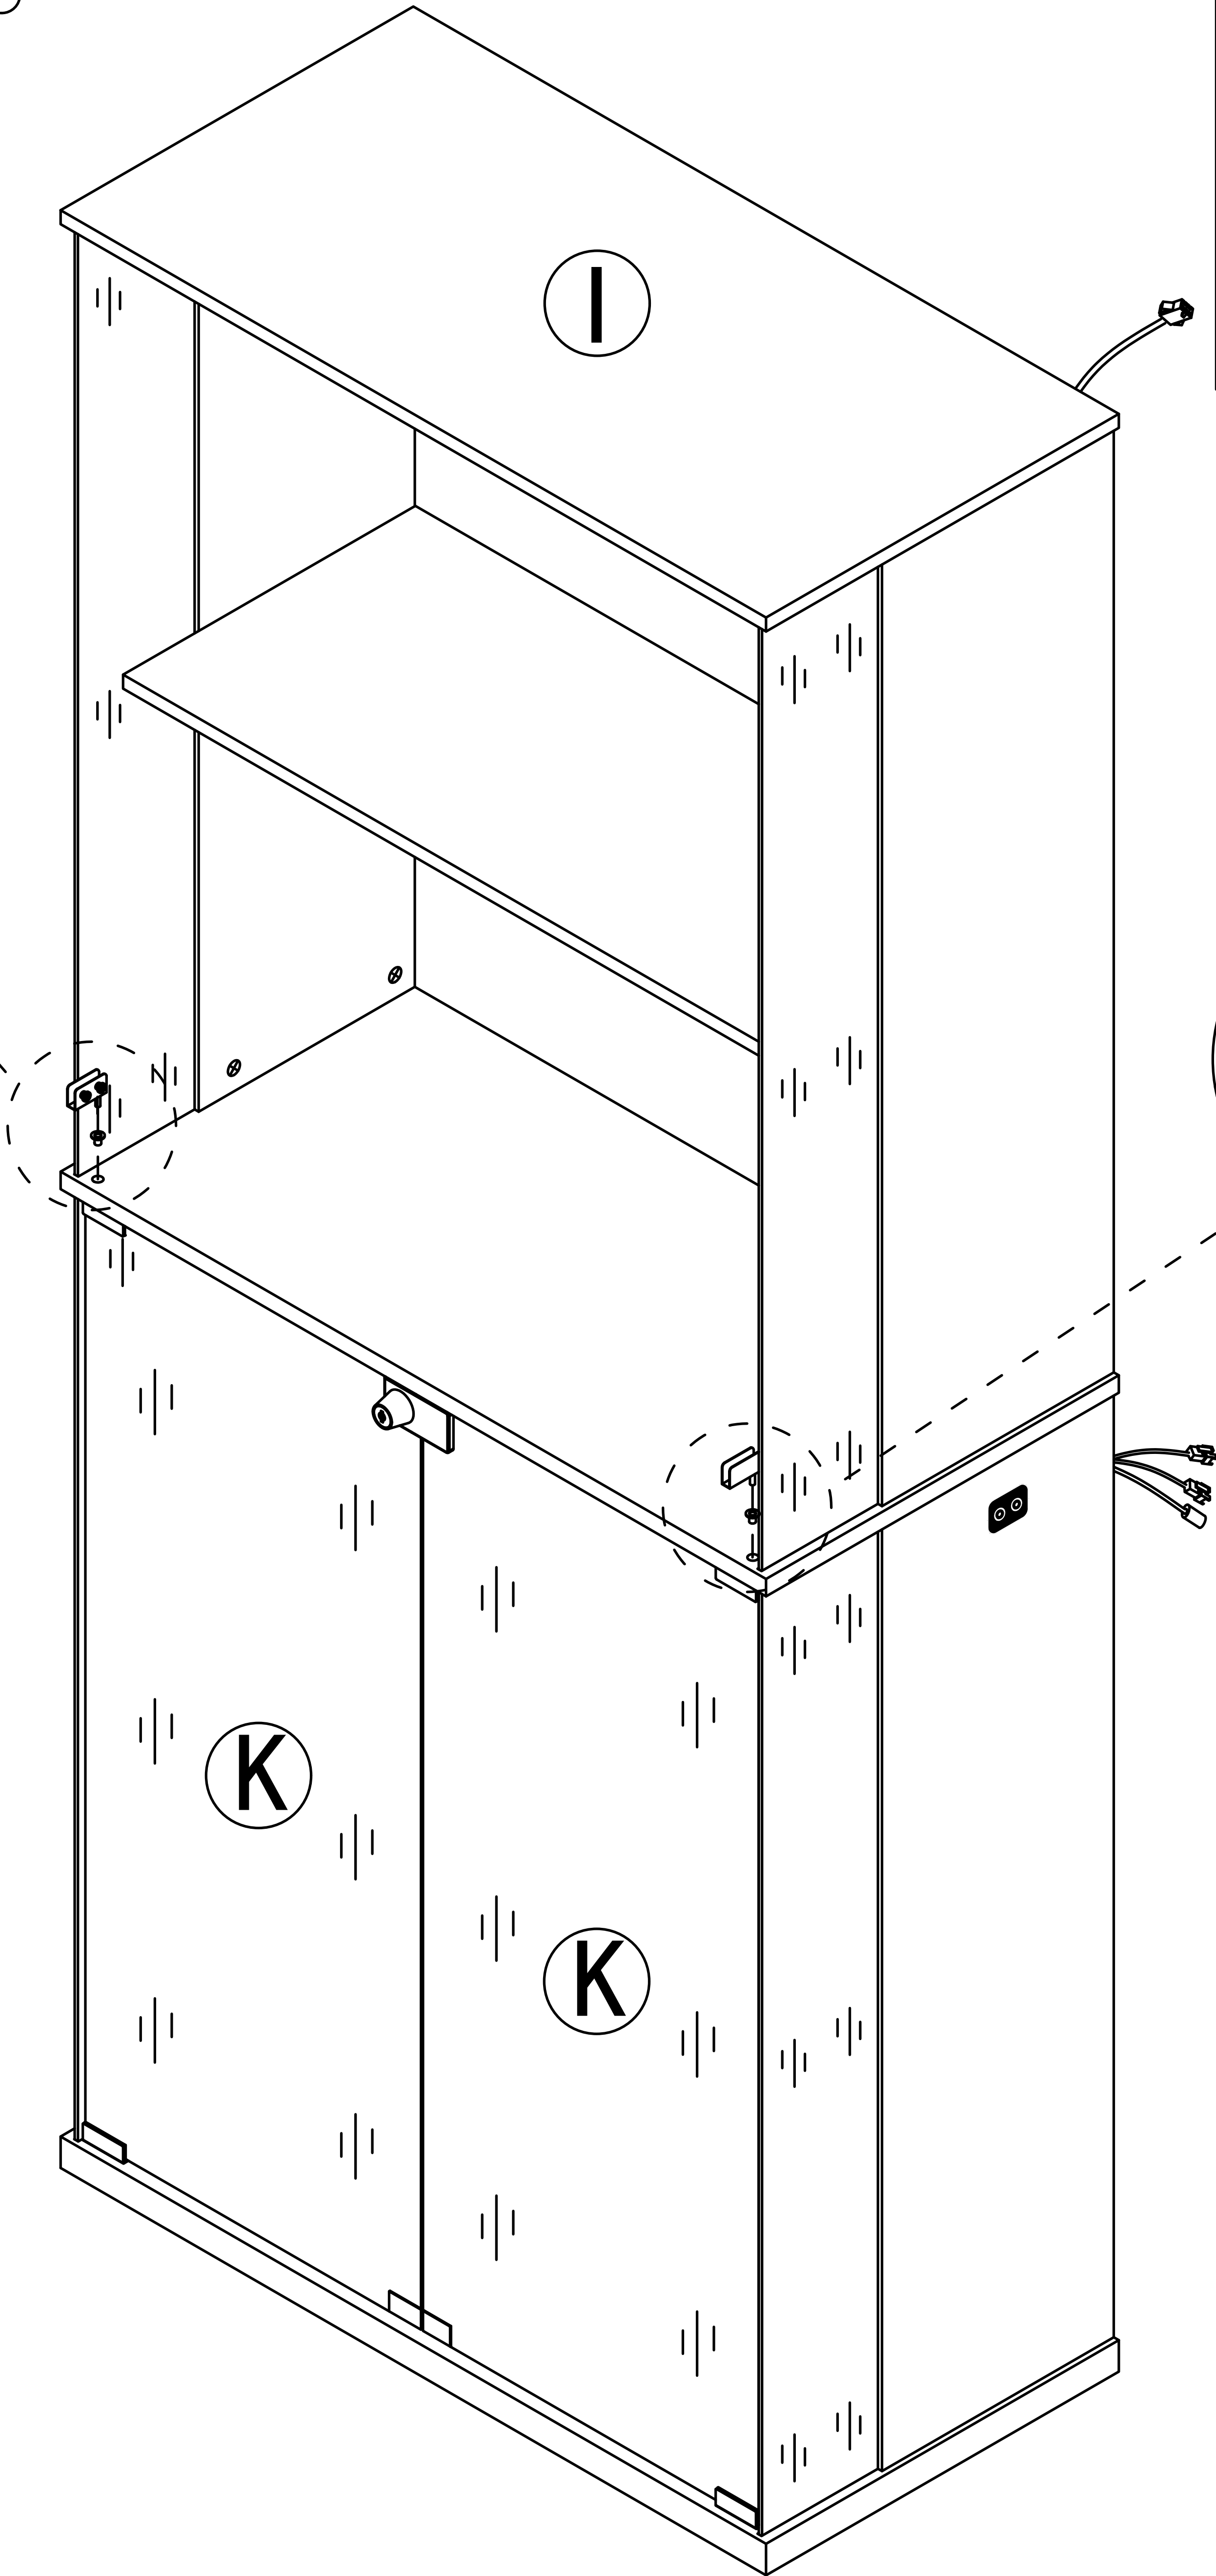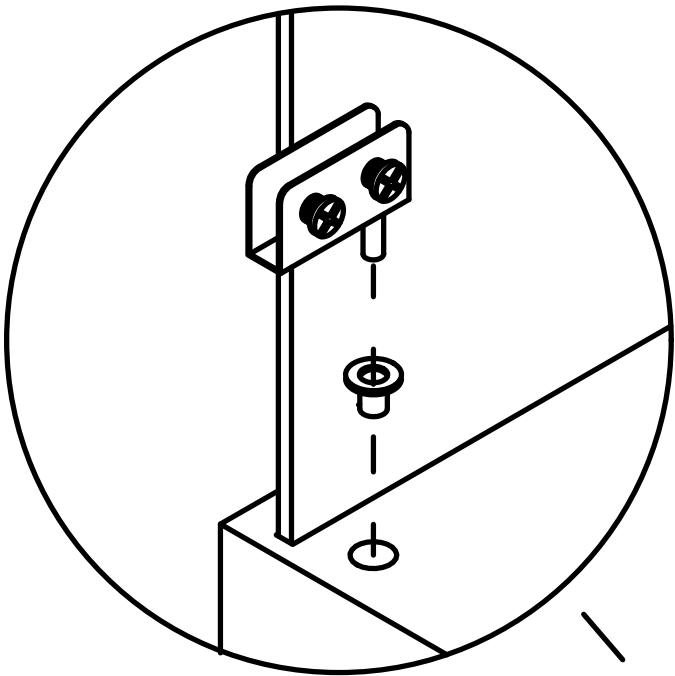

Step 31


Pay attention to the direction of the door hinge during installation

8





x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

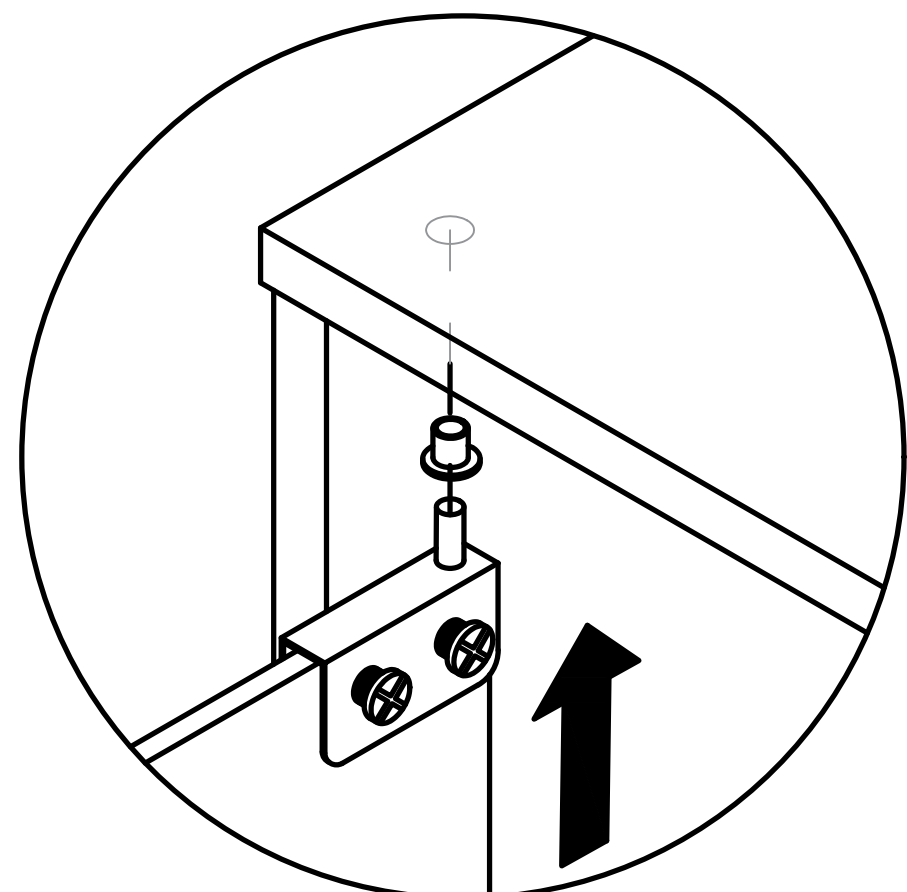


first

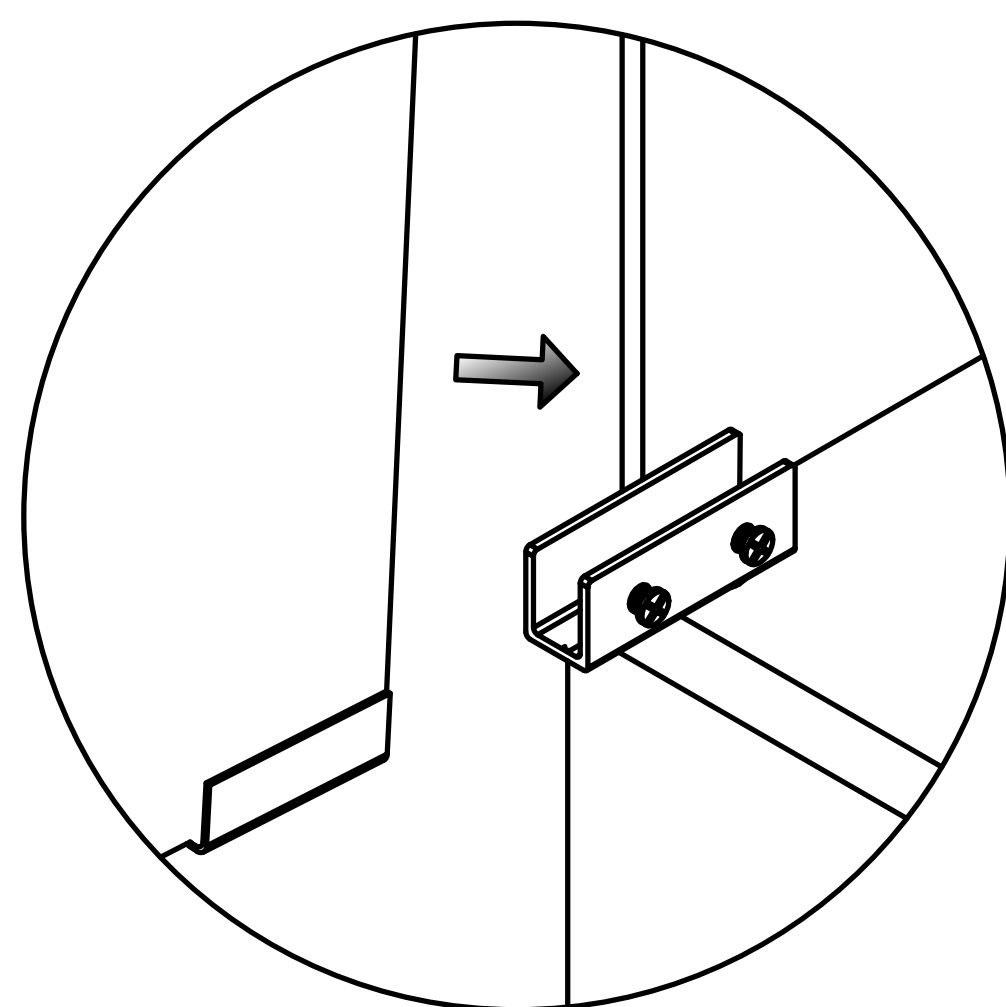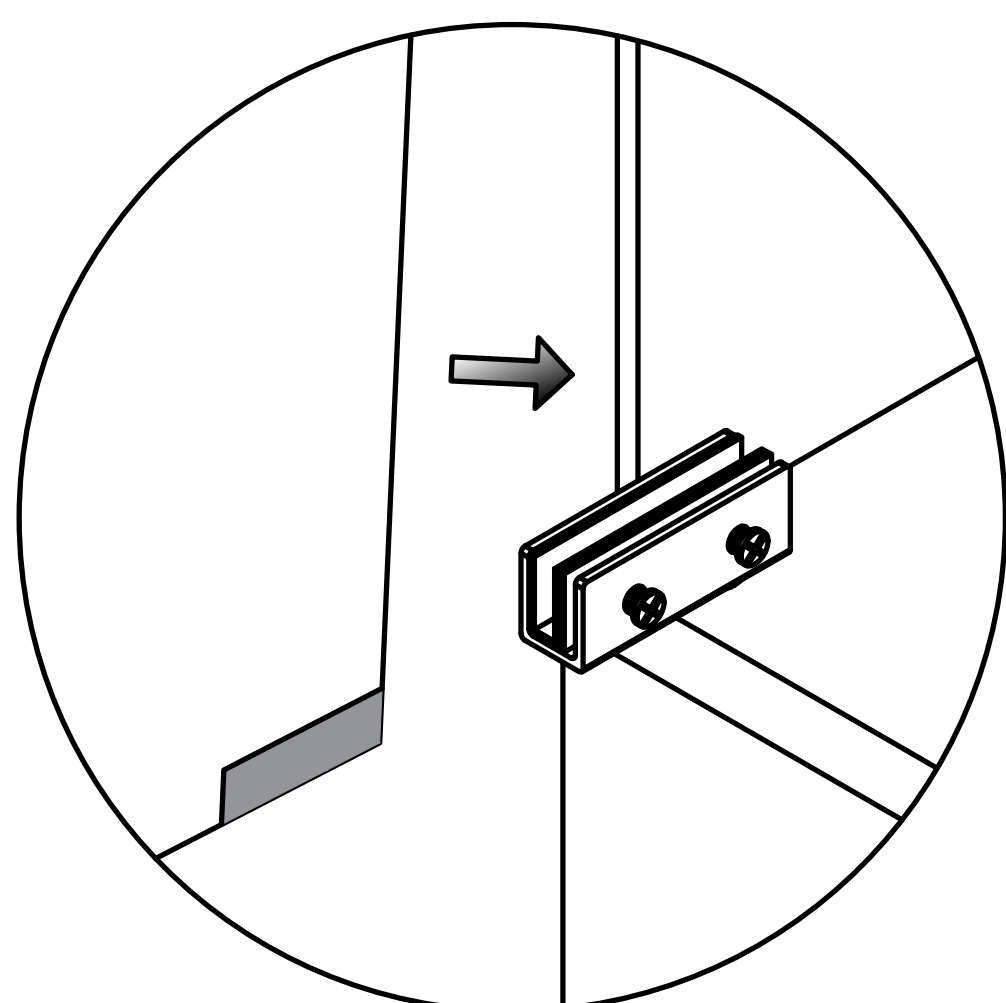


second

Insert the glass into the door hinge's slot.

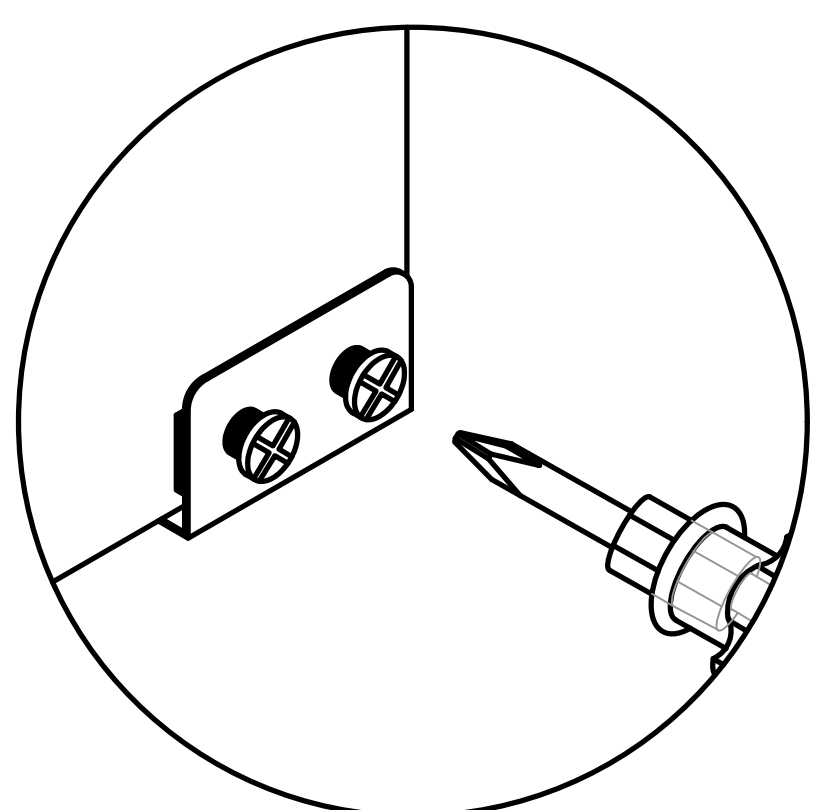


third

Locking screw


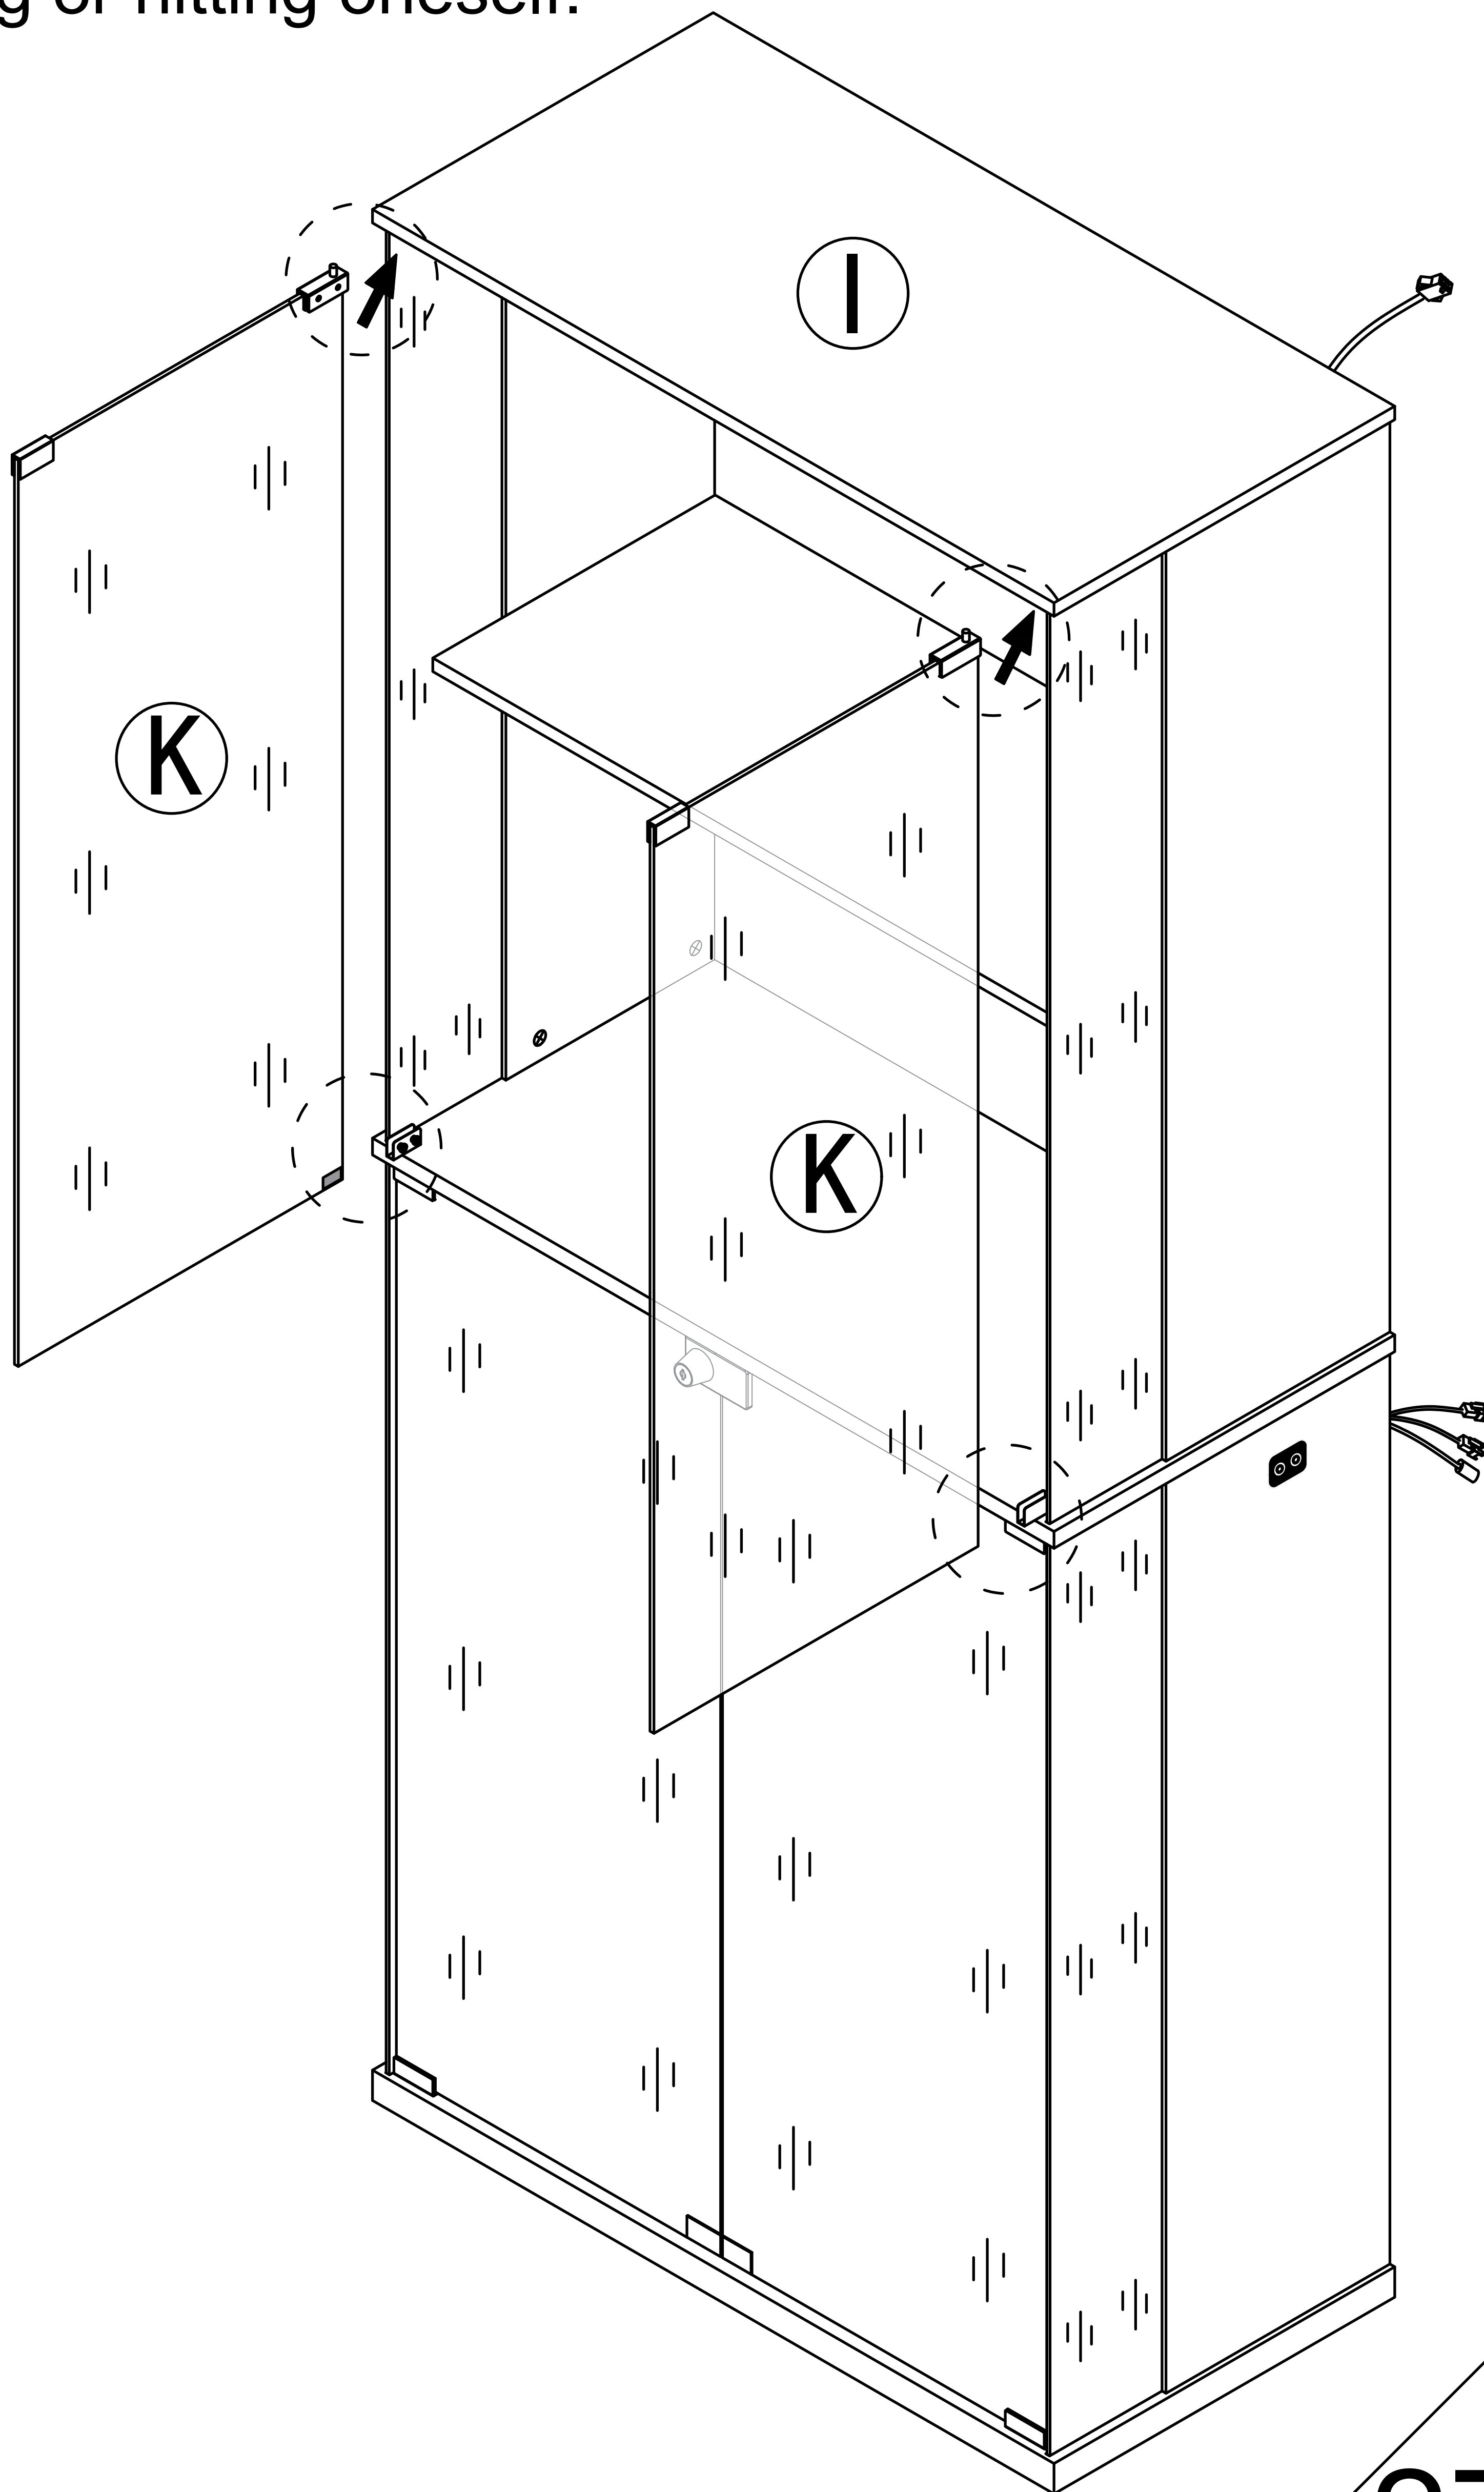


Step 32

Open the glass door

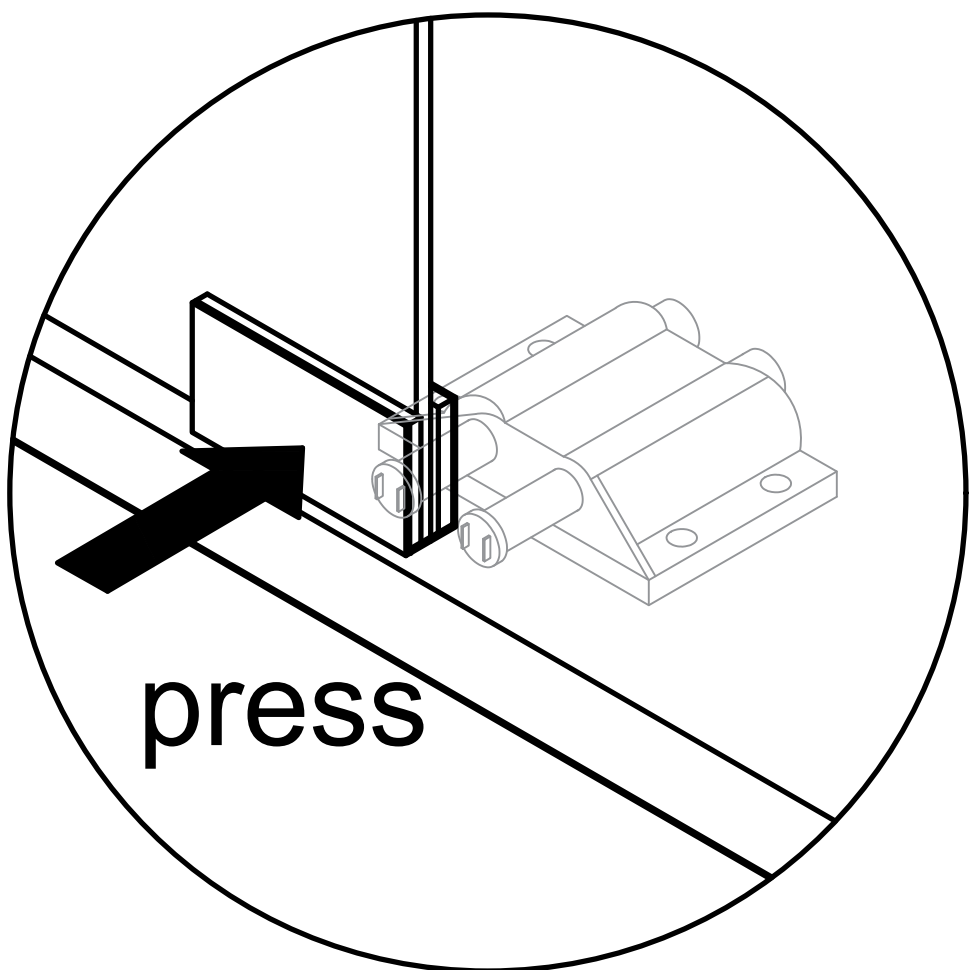


Close the glass door

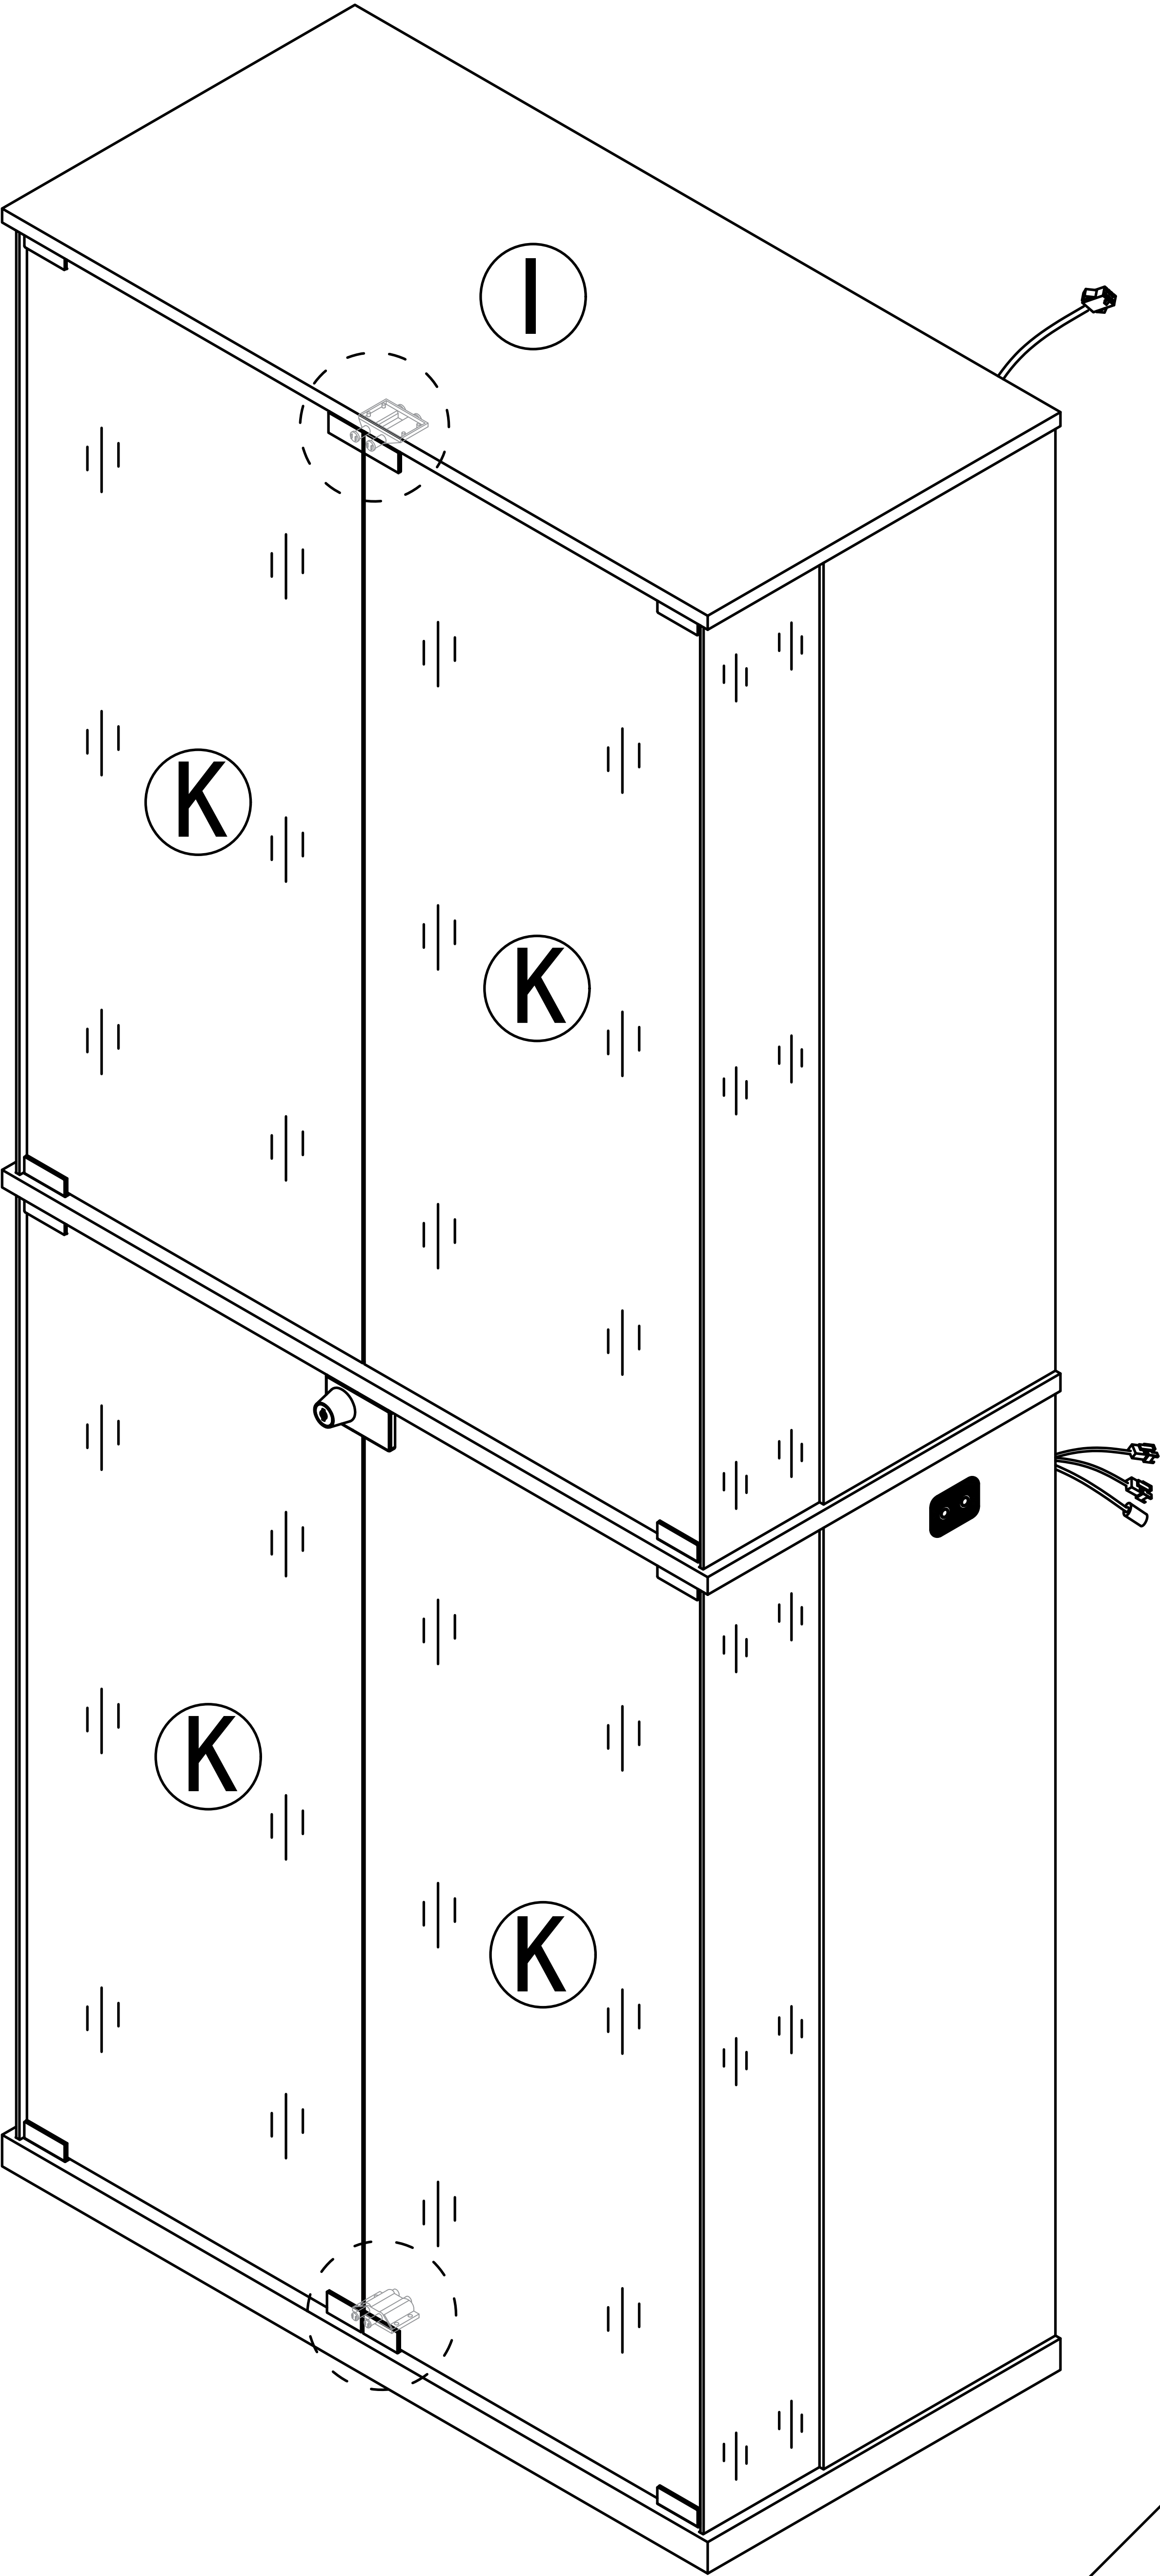
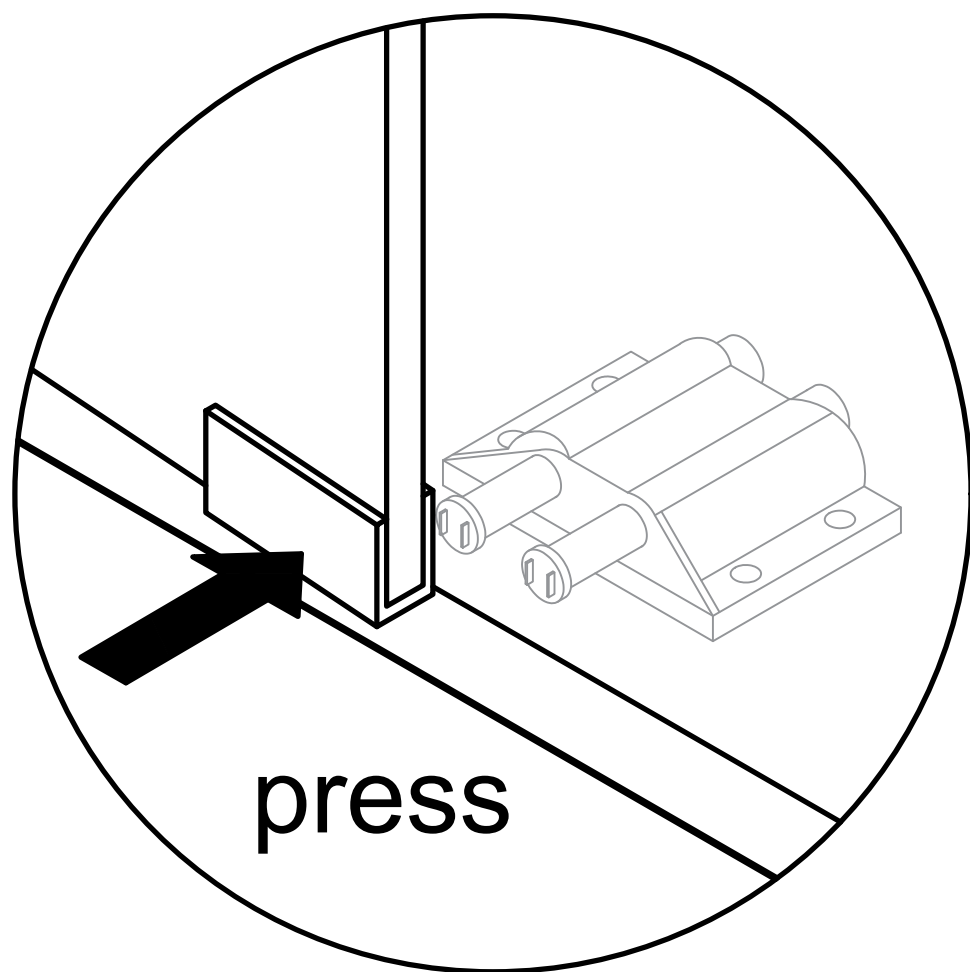


Step 33

5



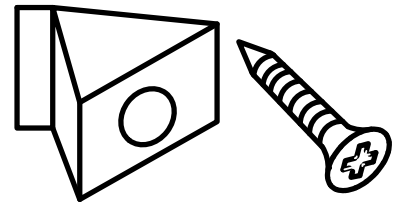


x20

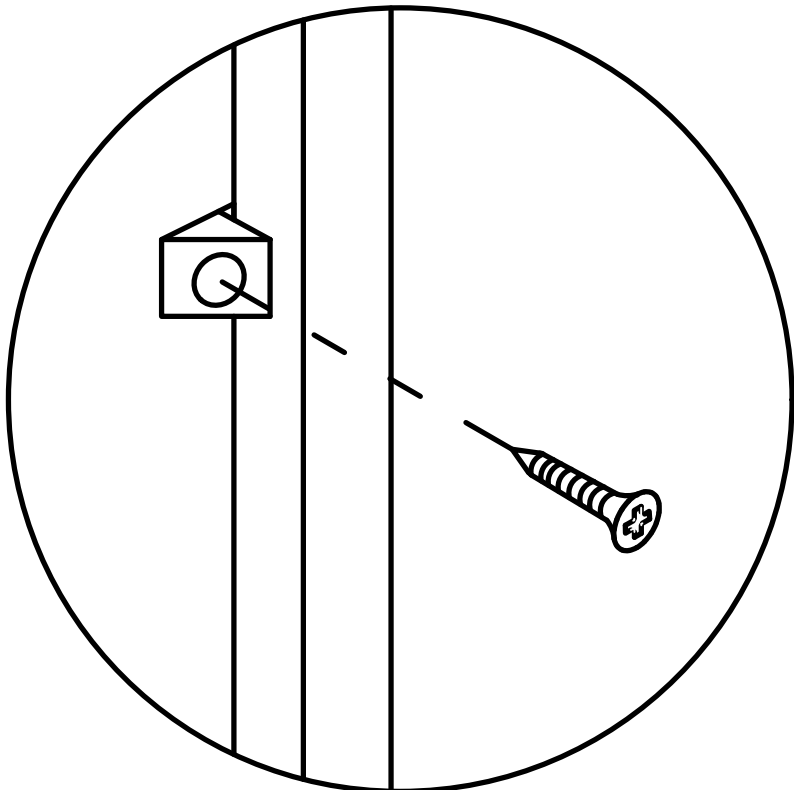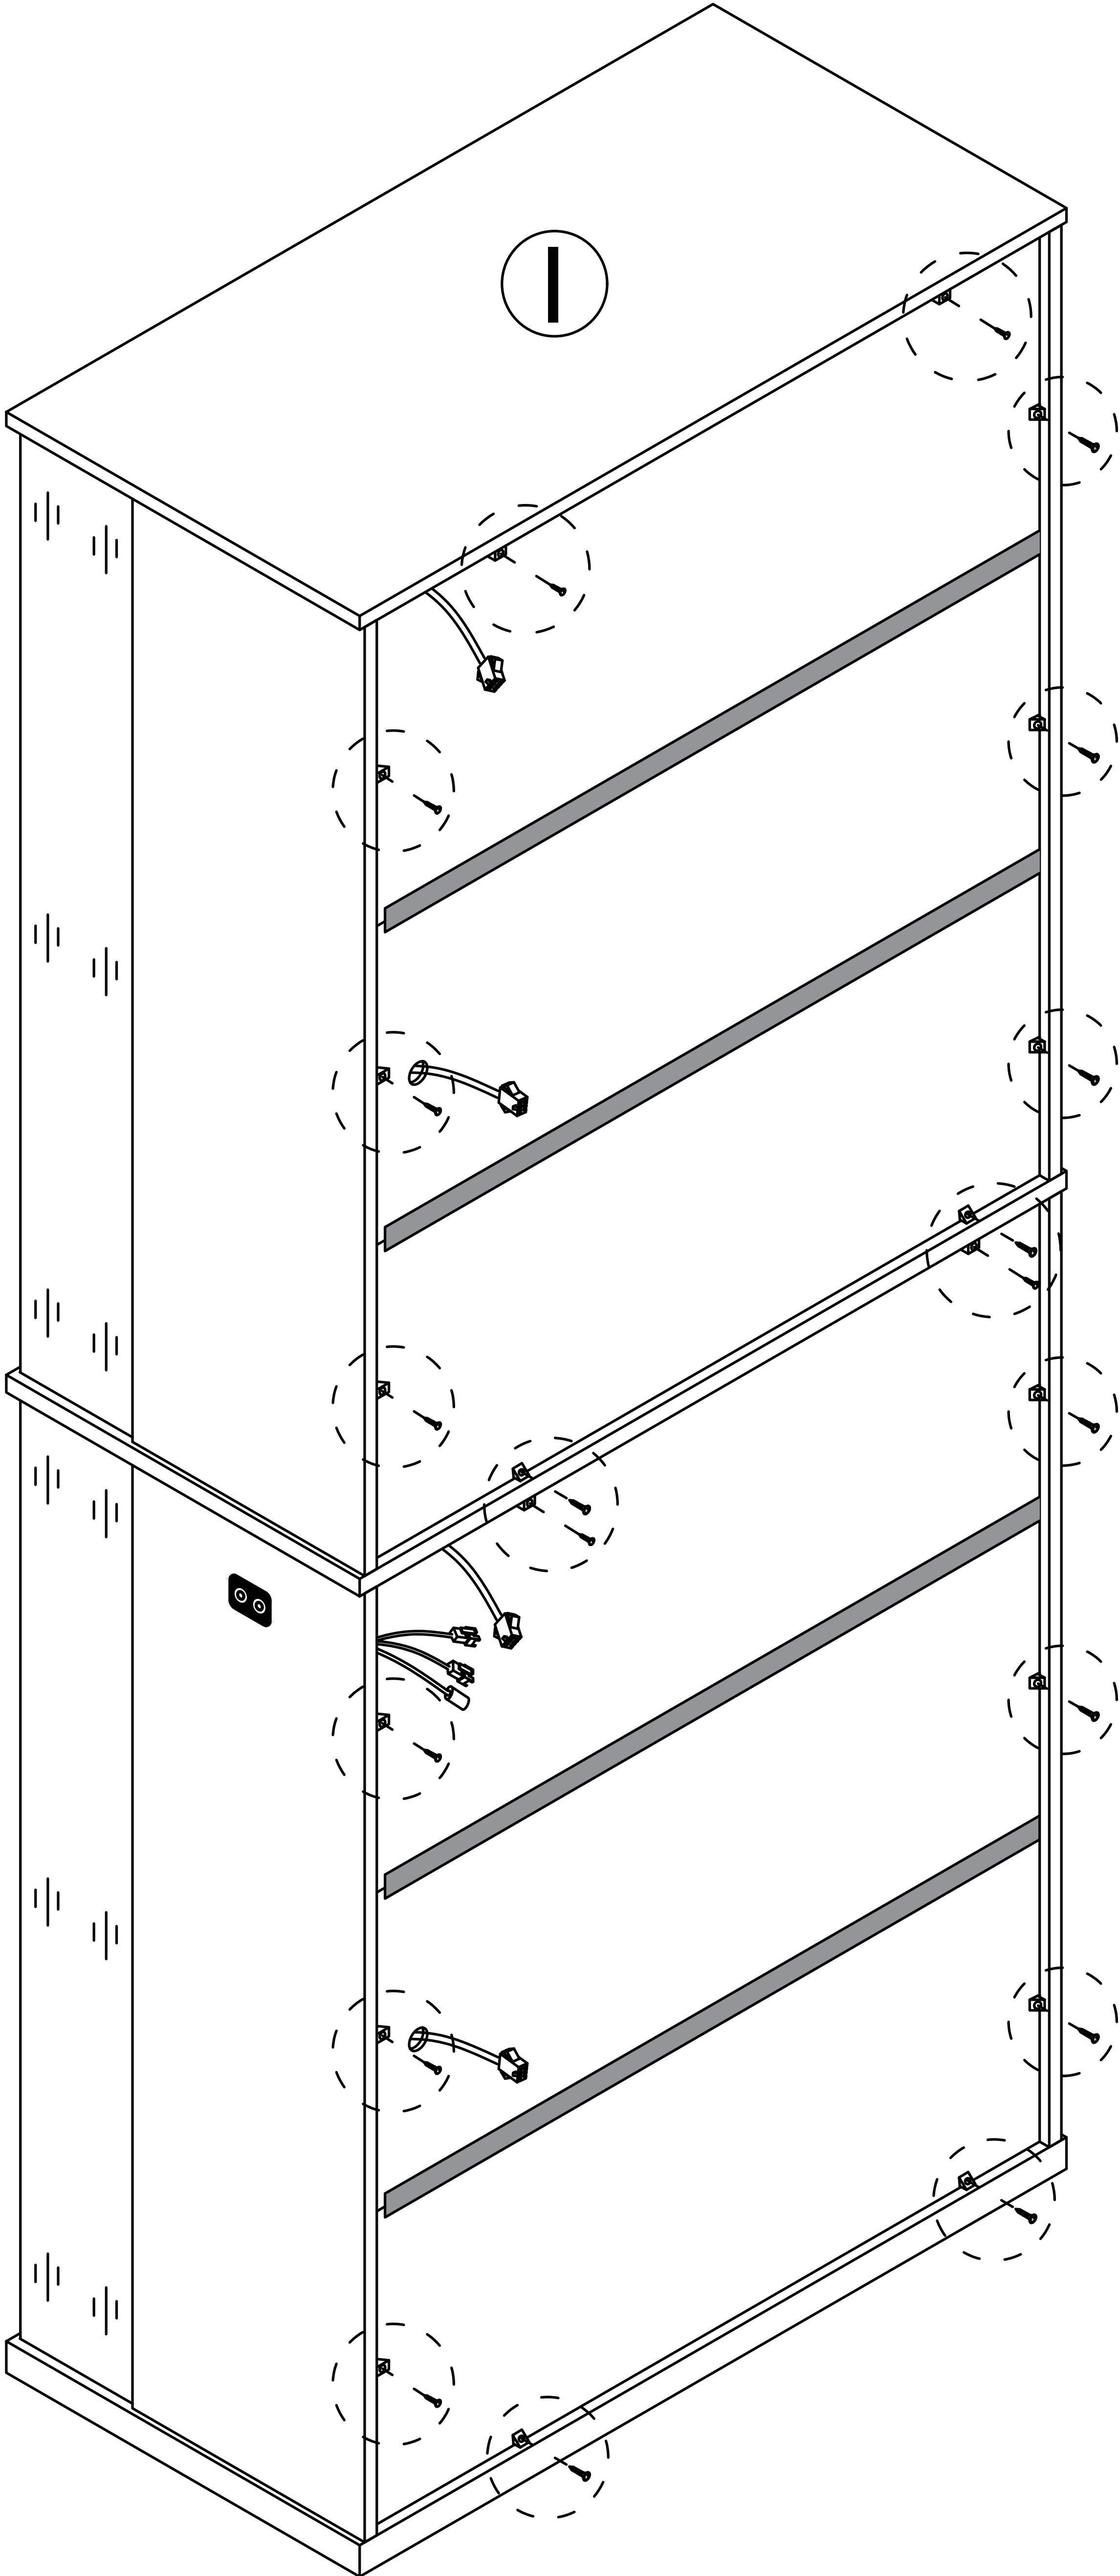


Step 34

7 x2

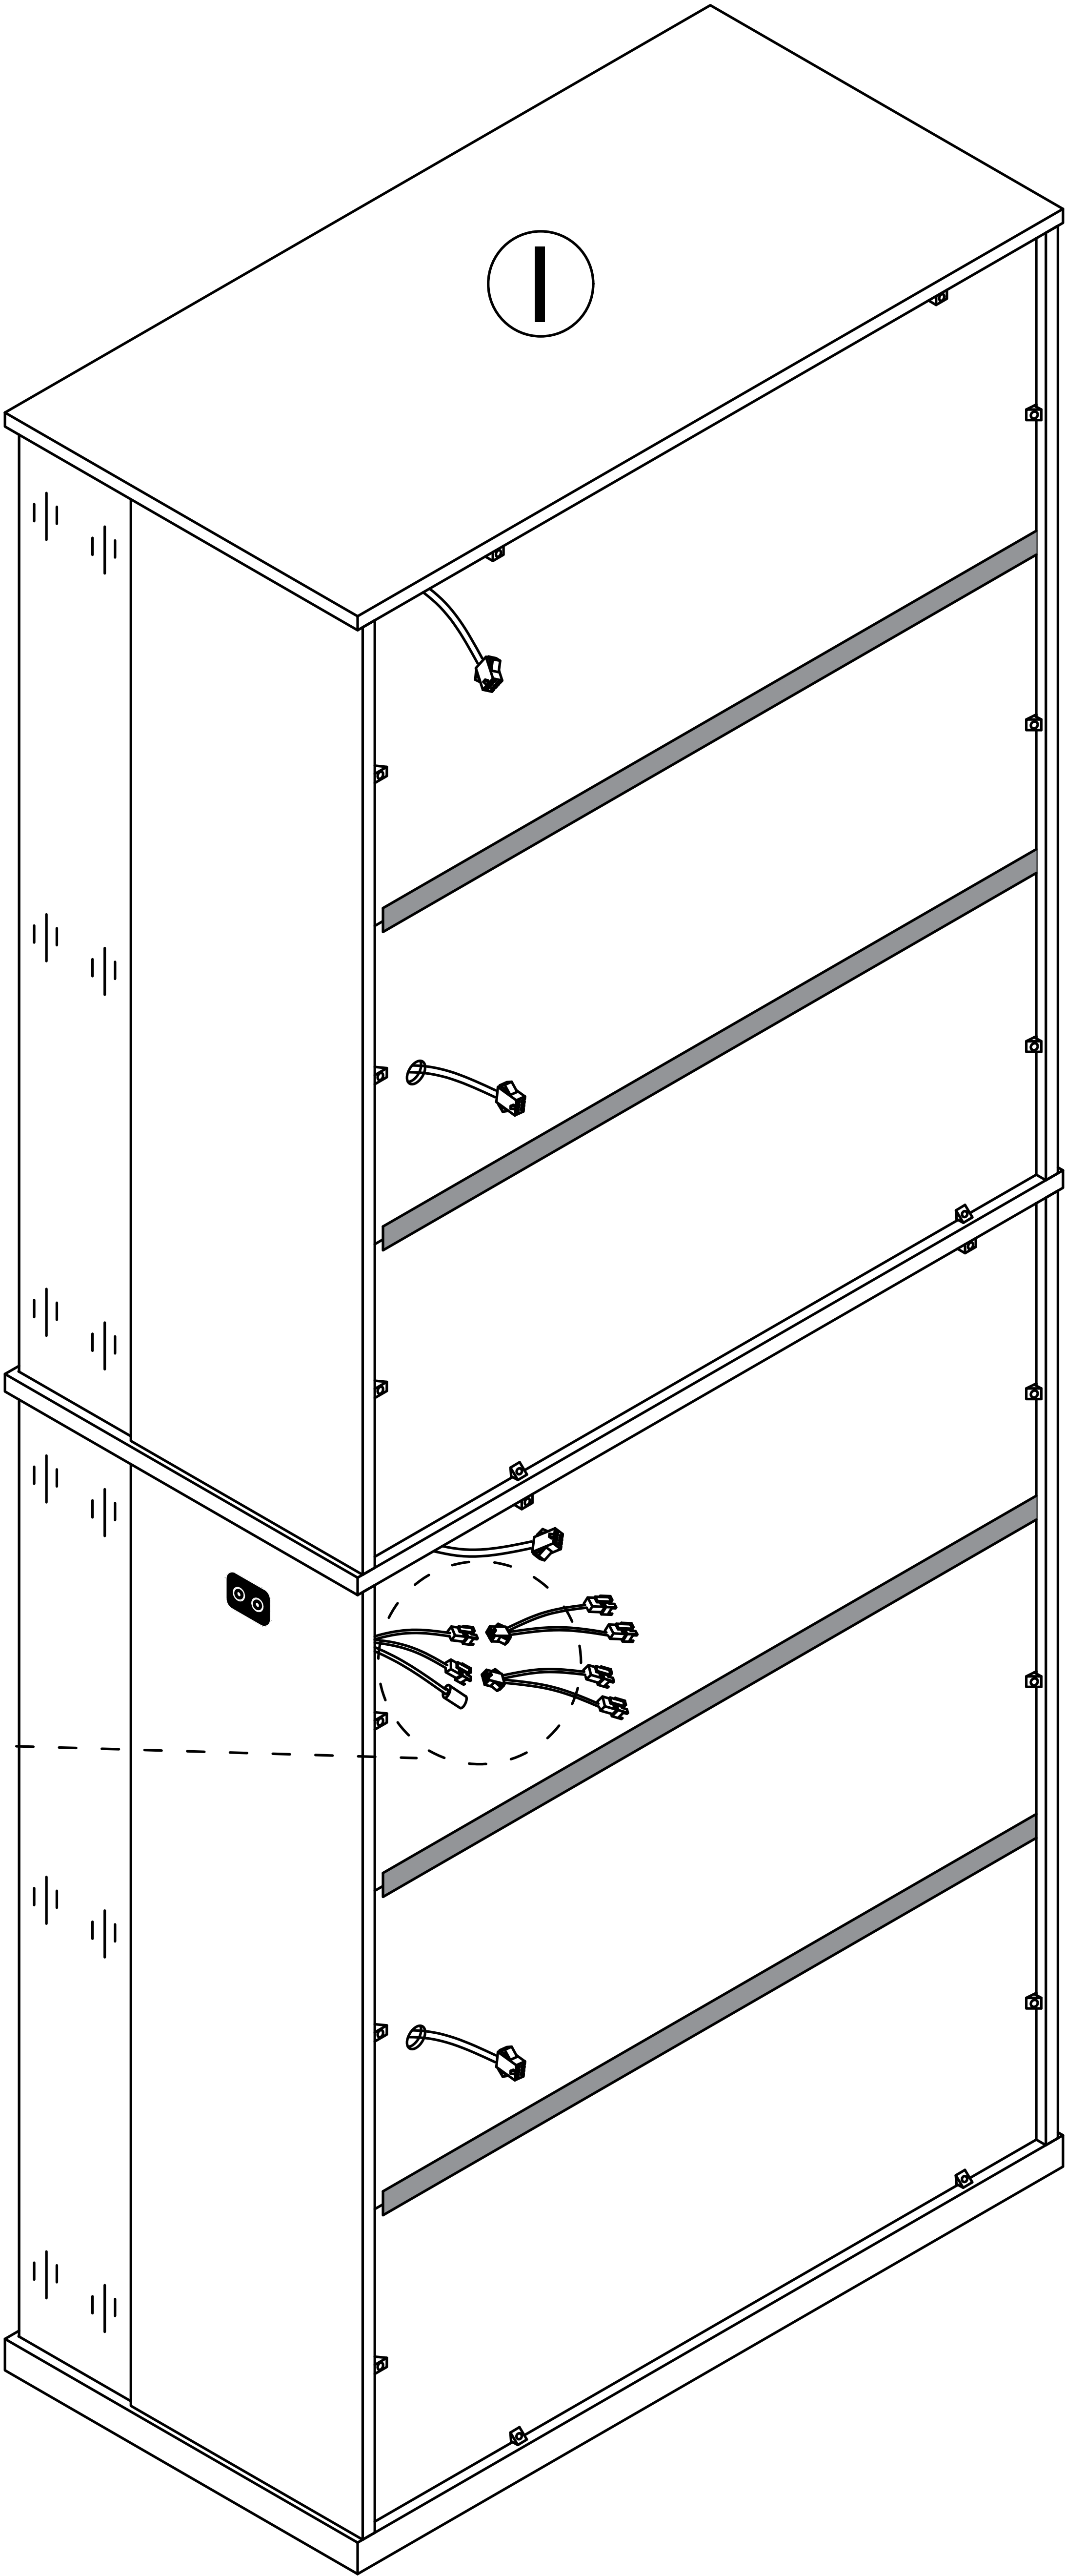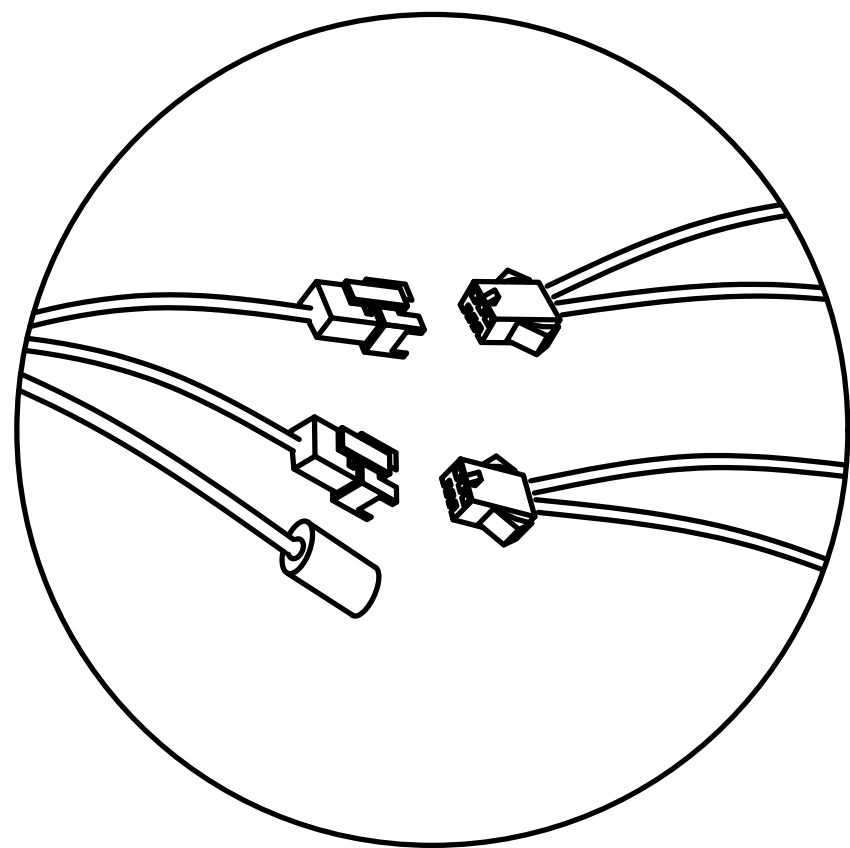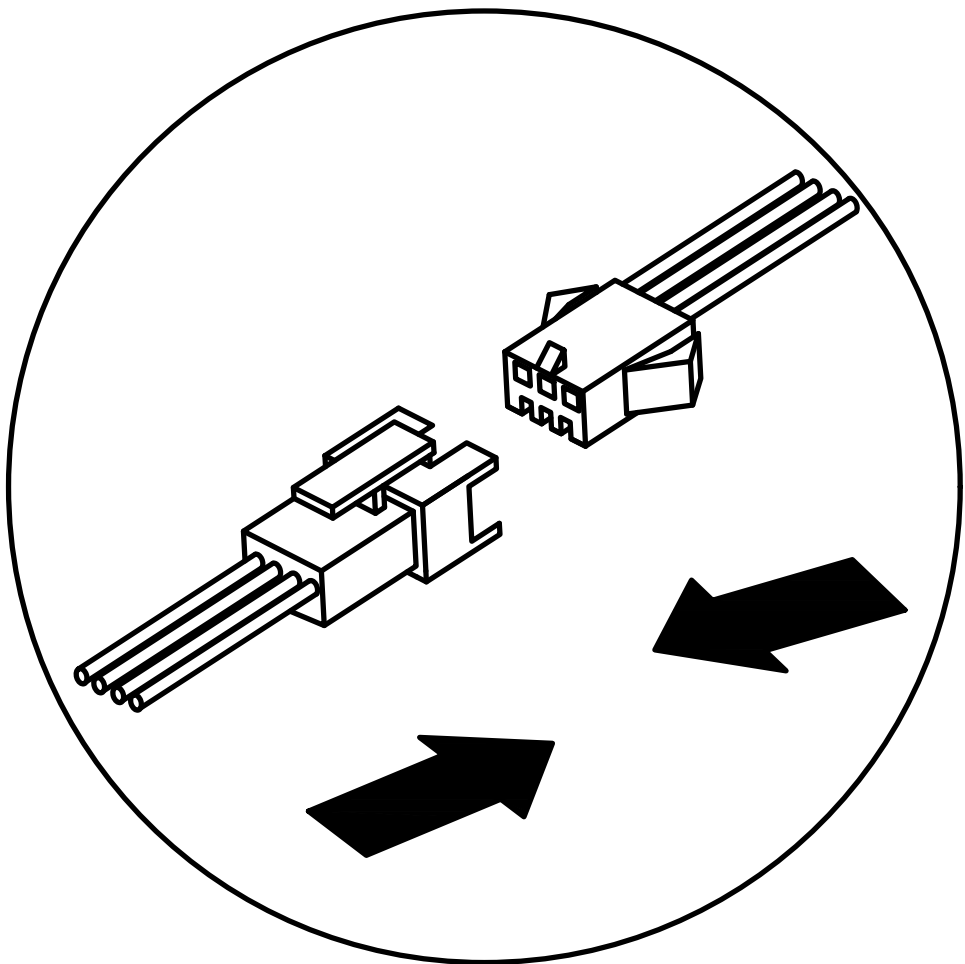


Step 35


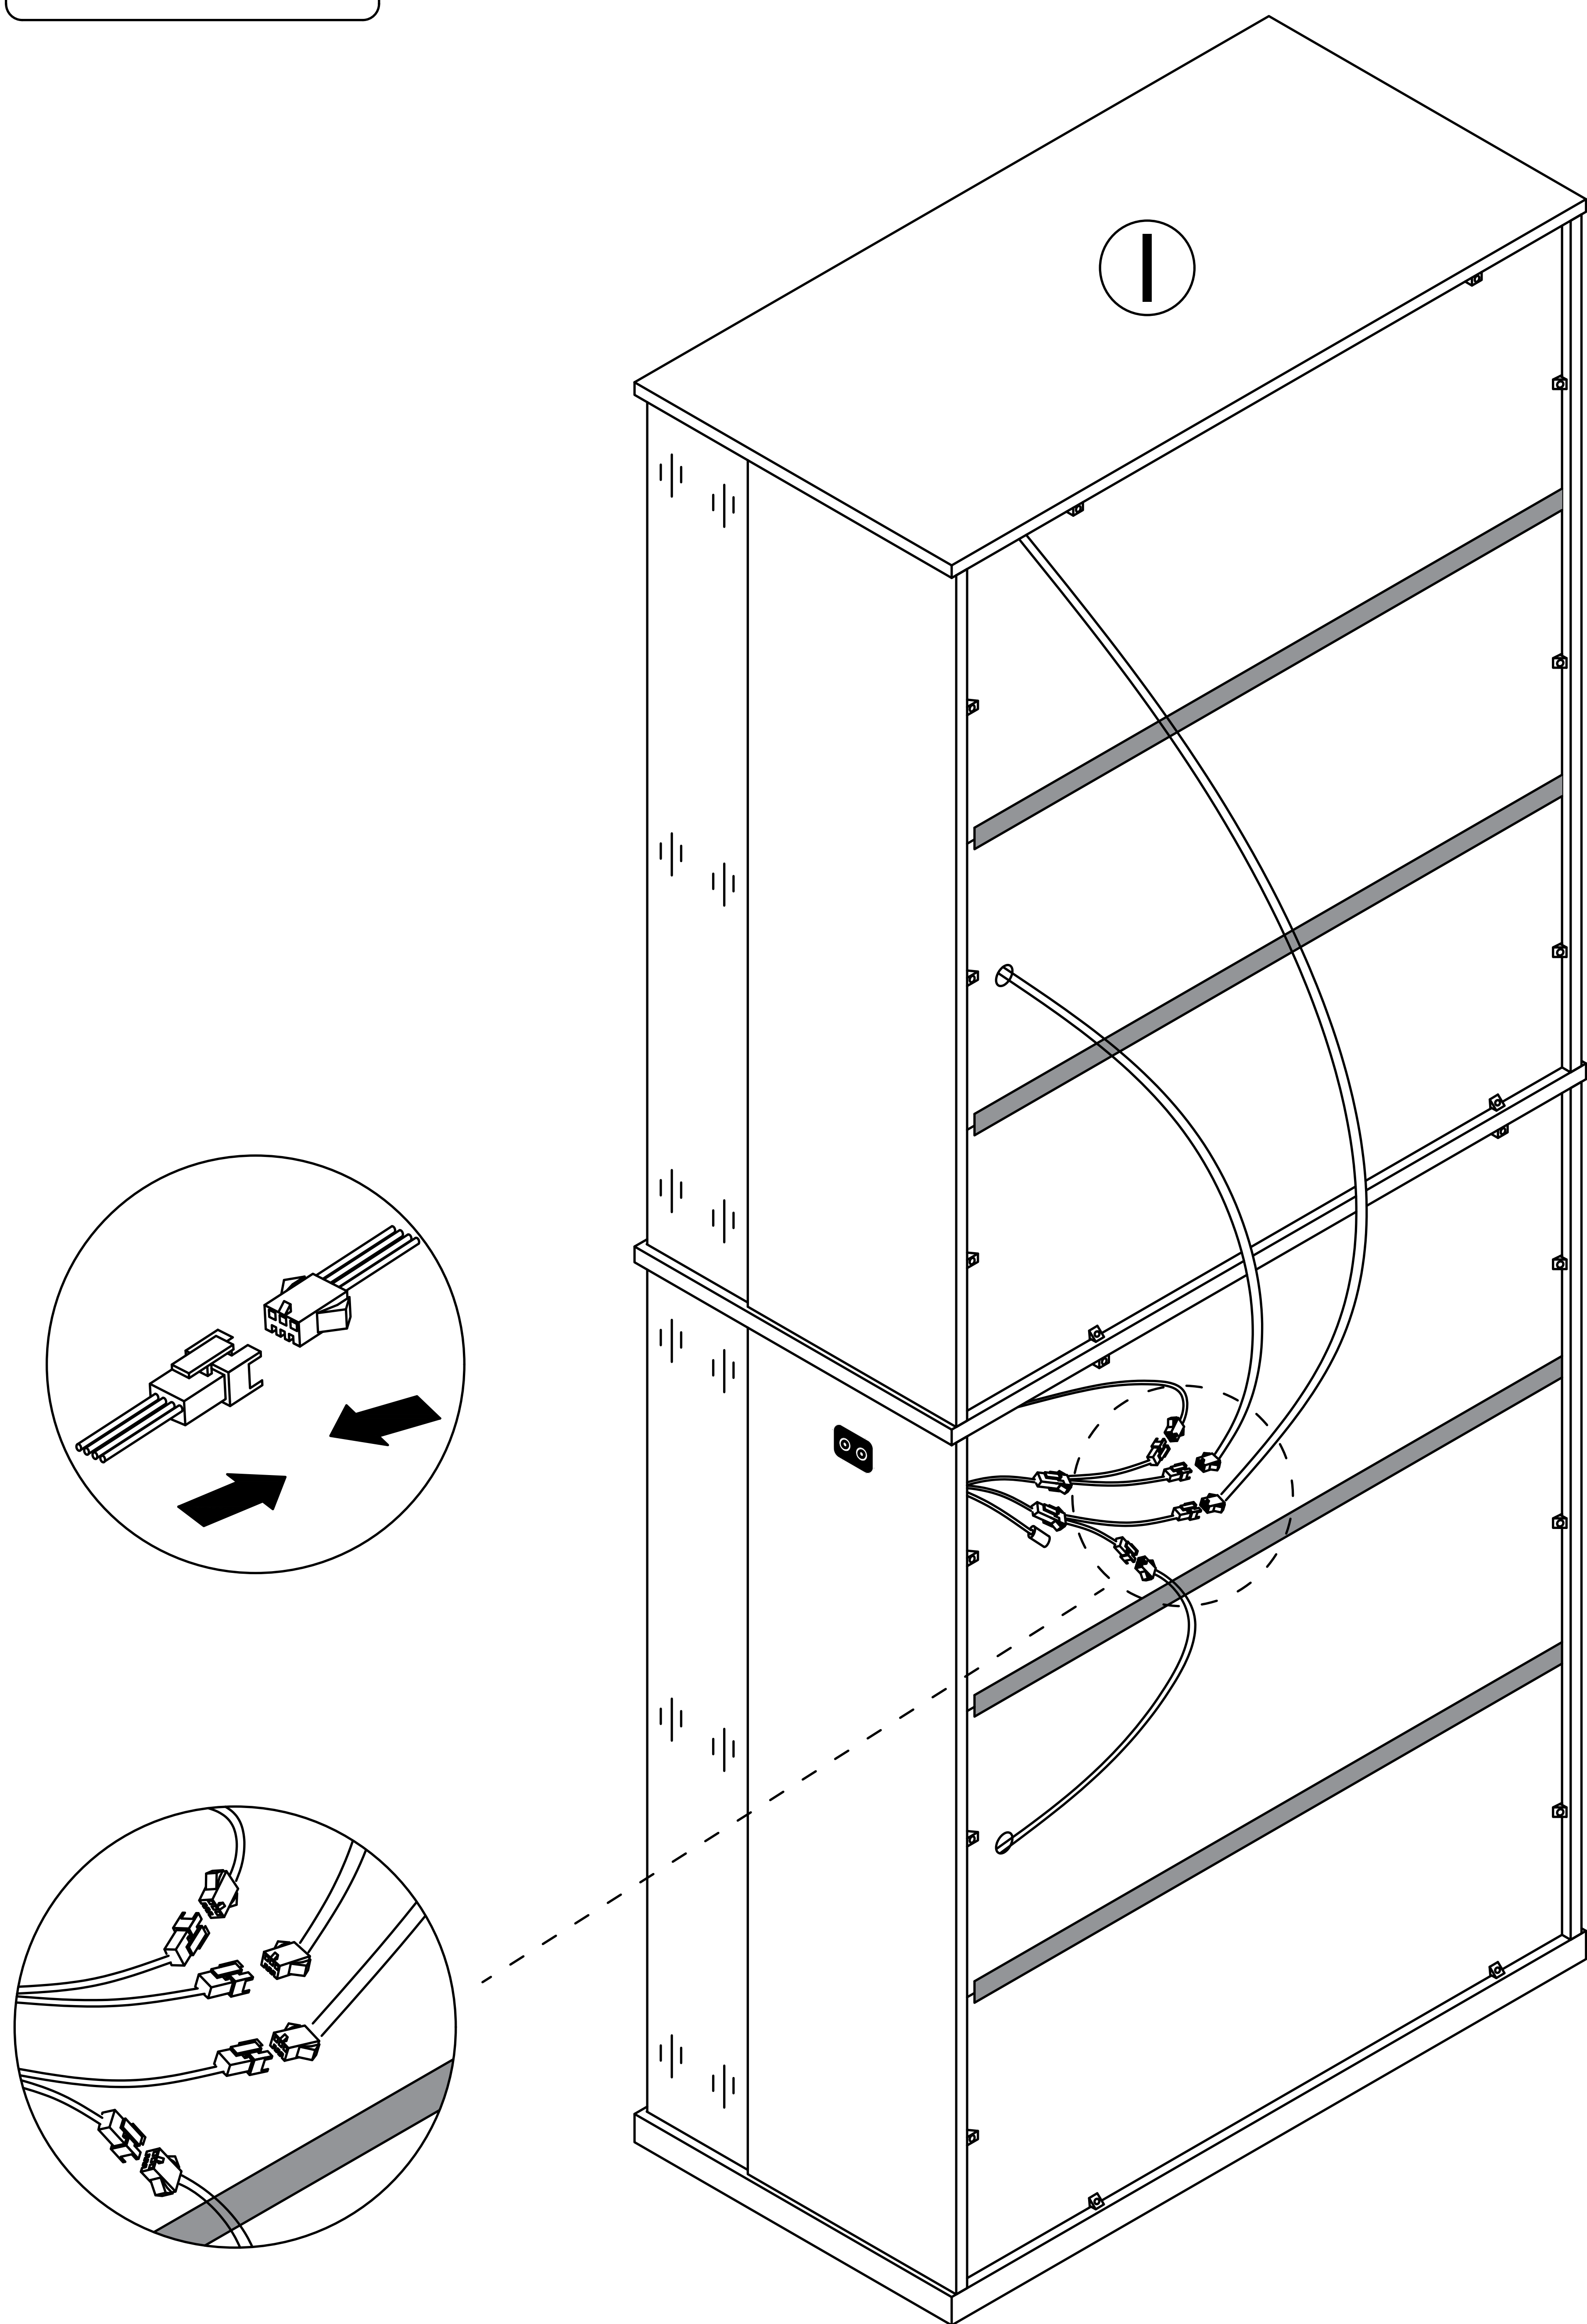


Step 36


6





x5

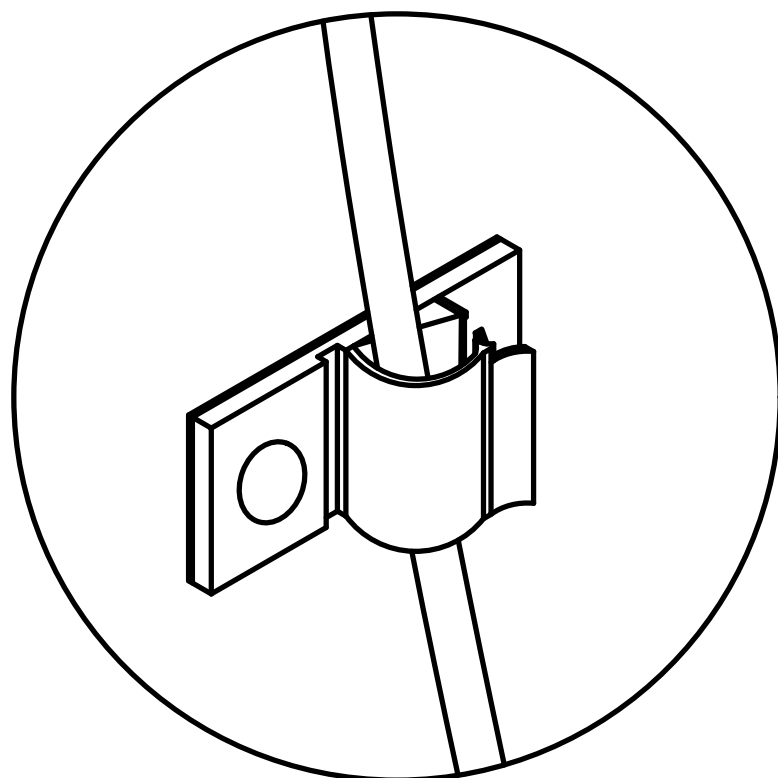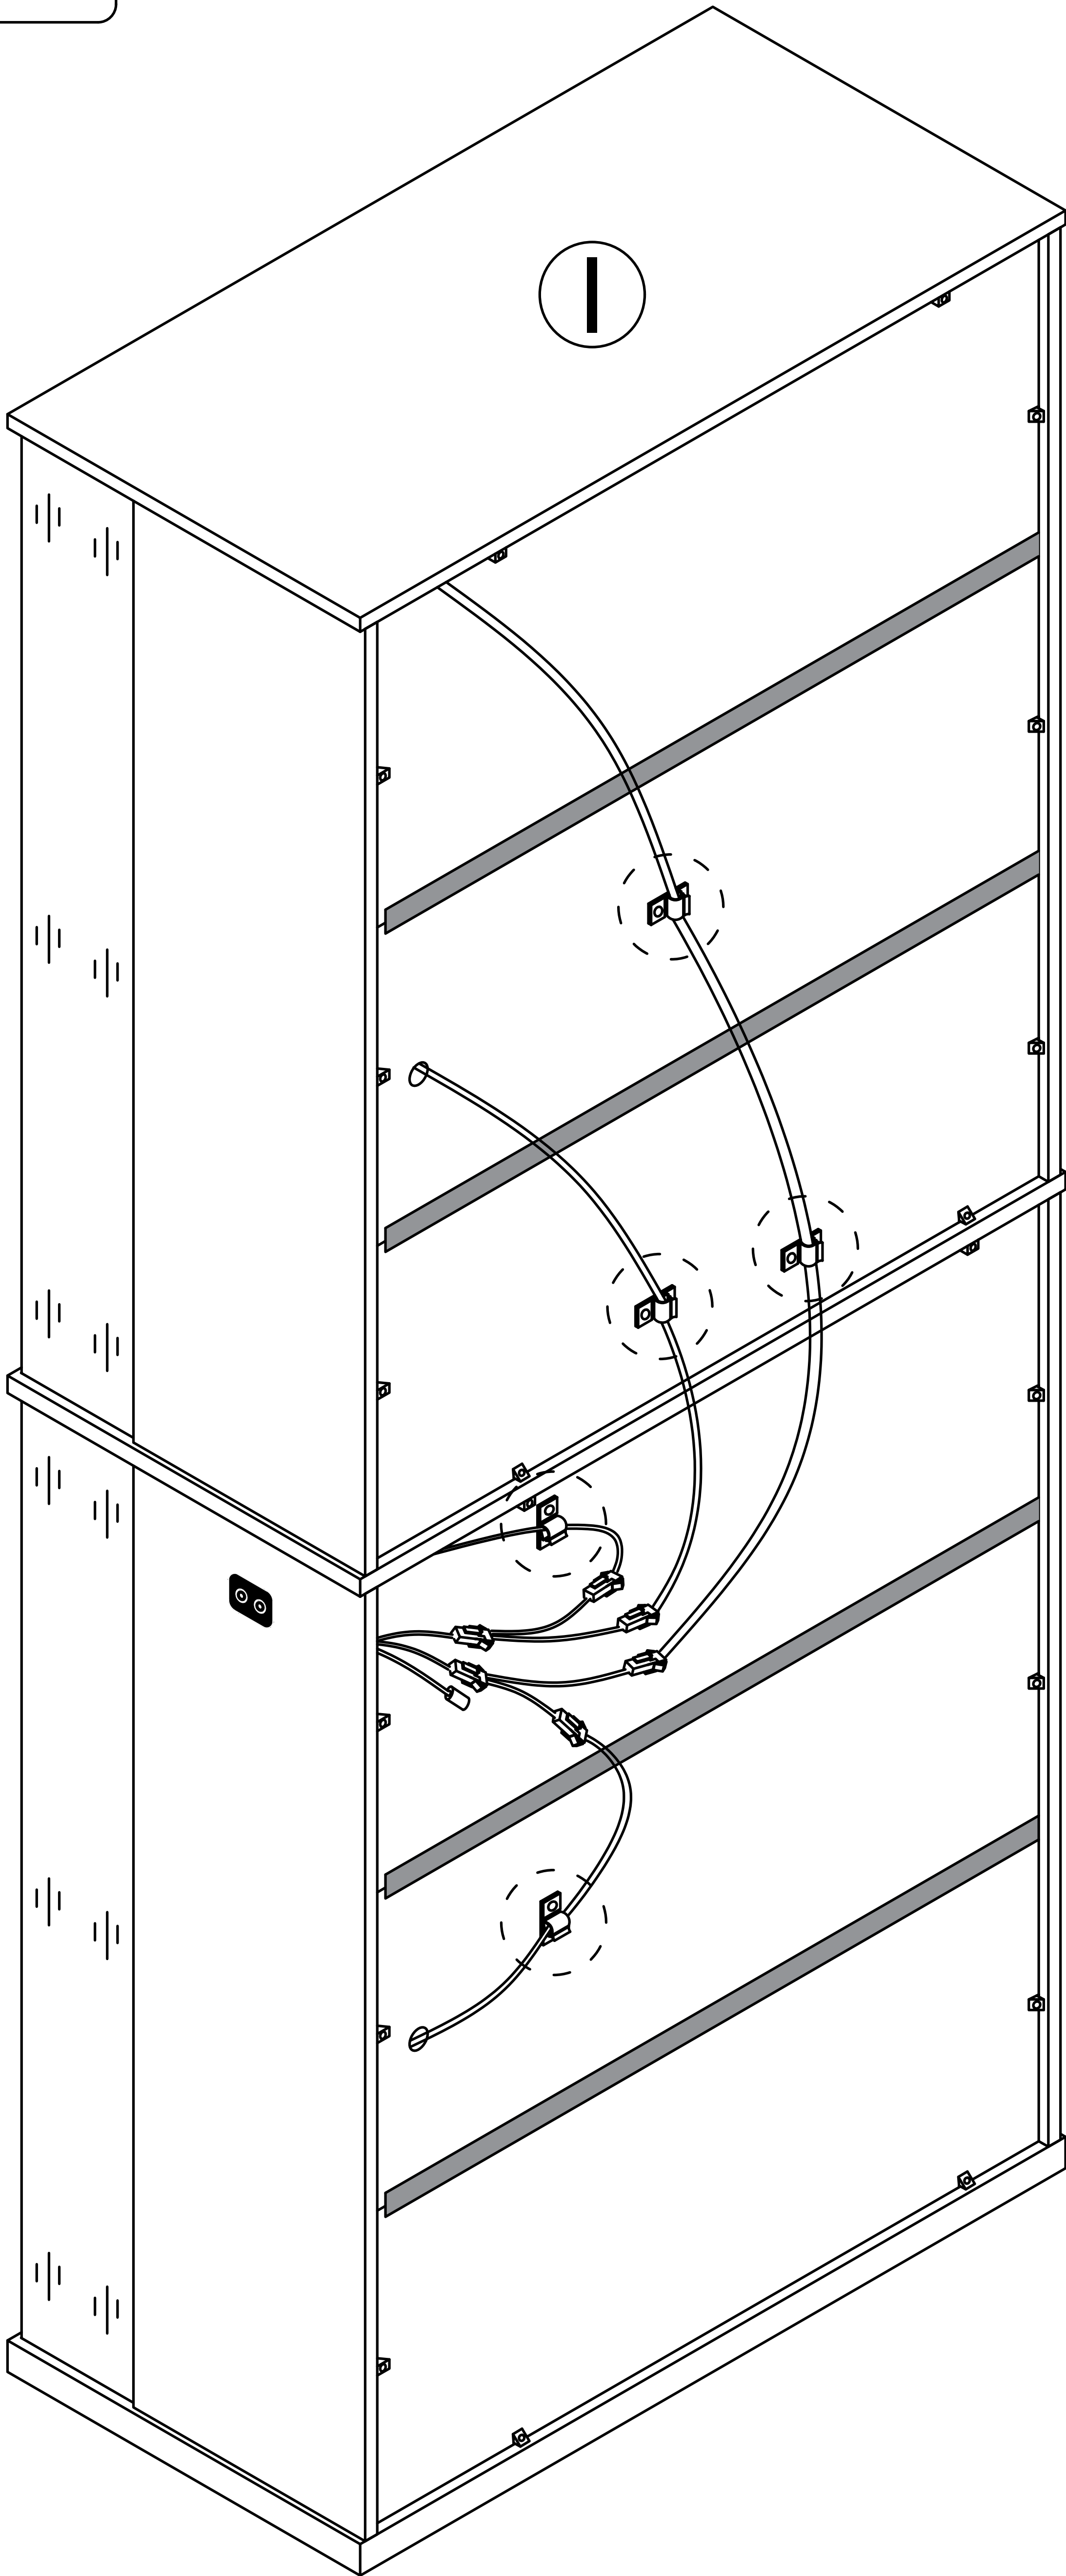

Step 37

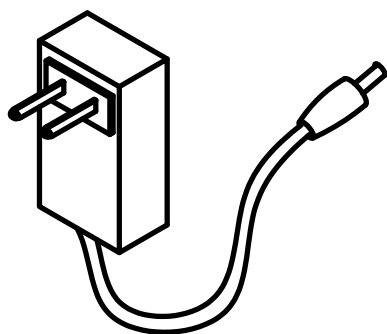


x1

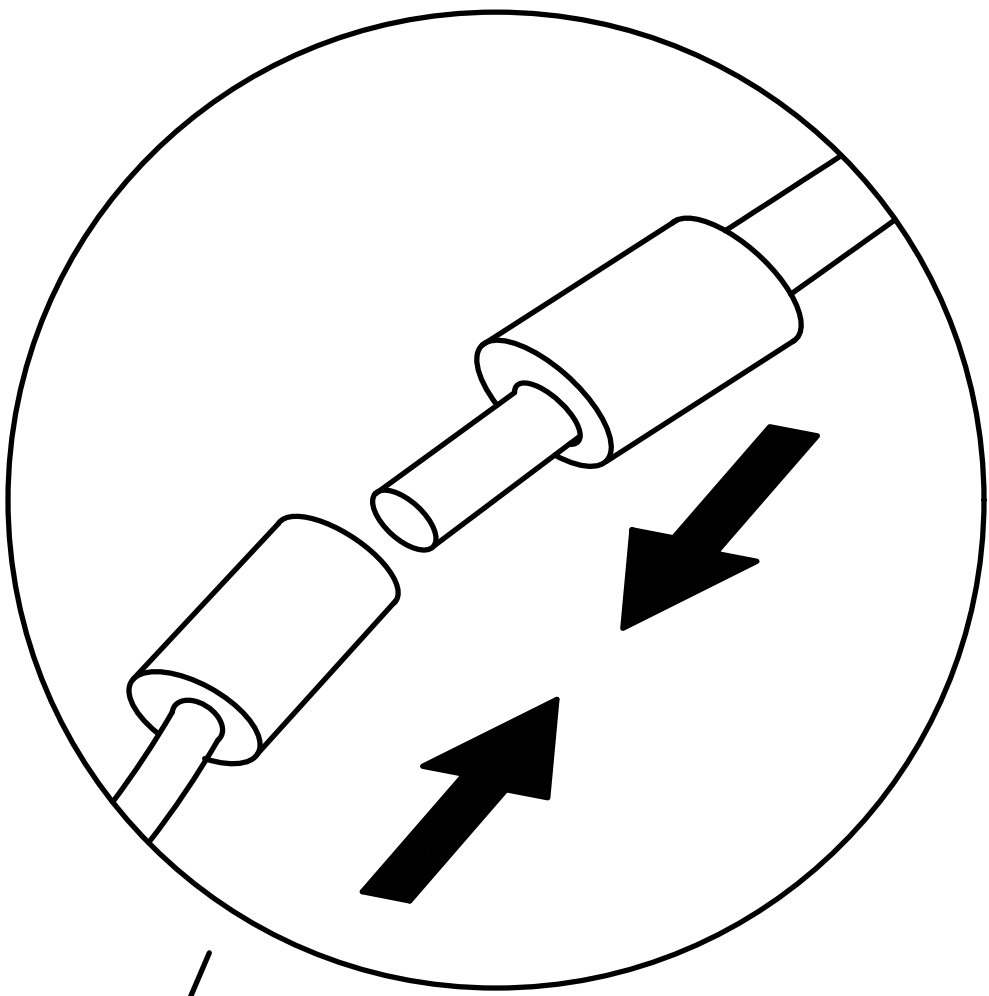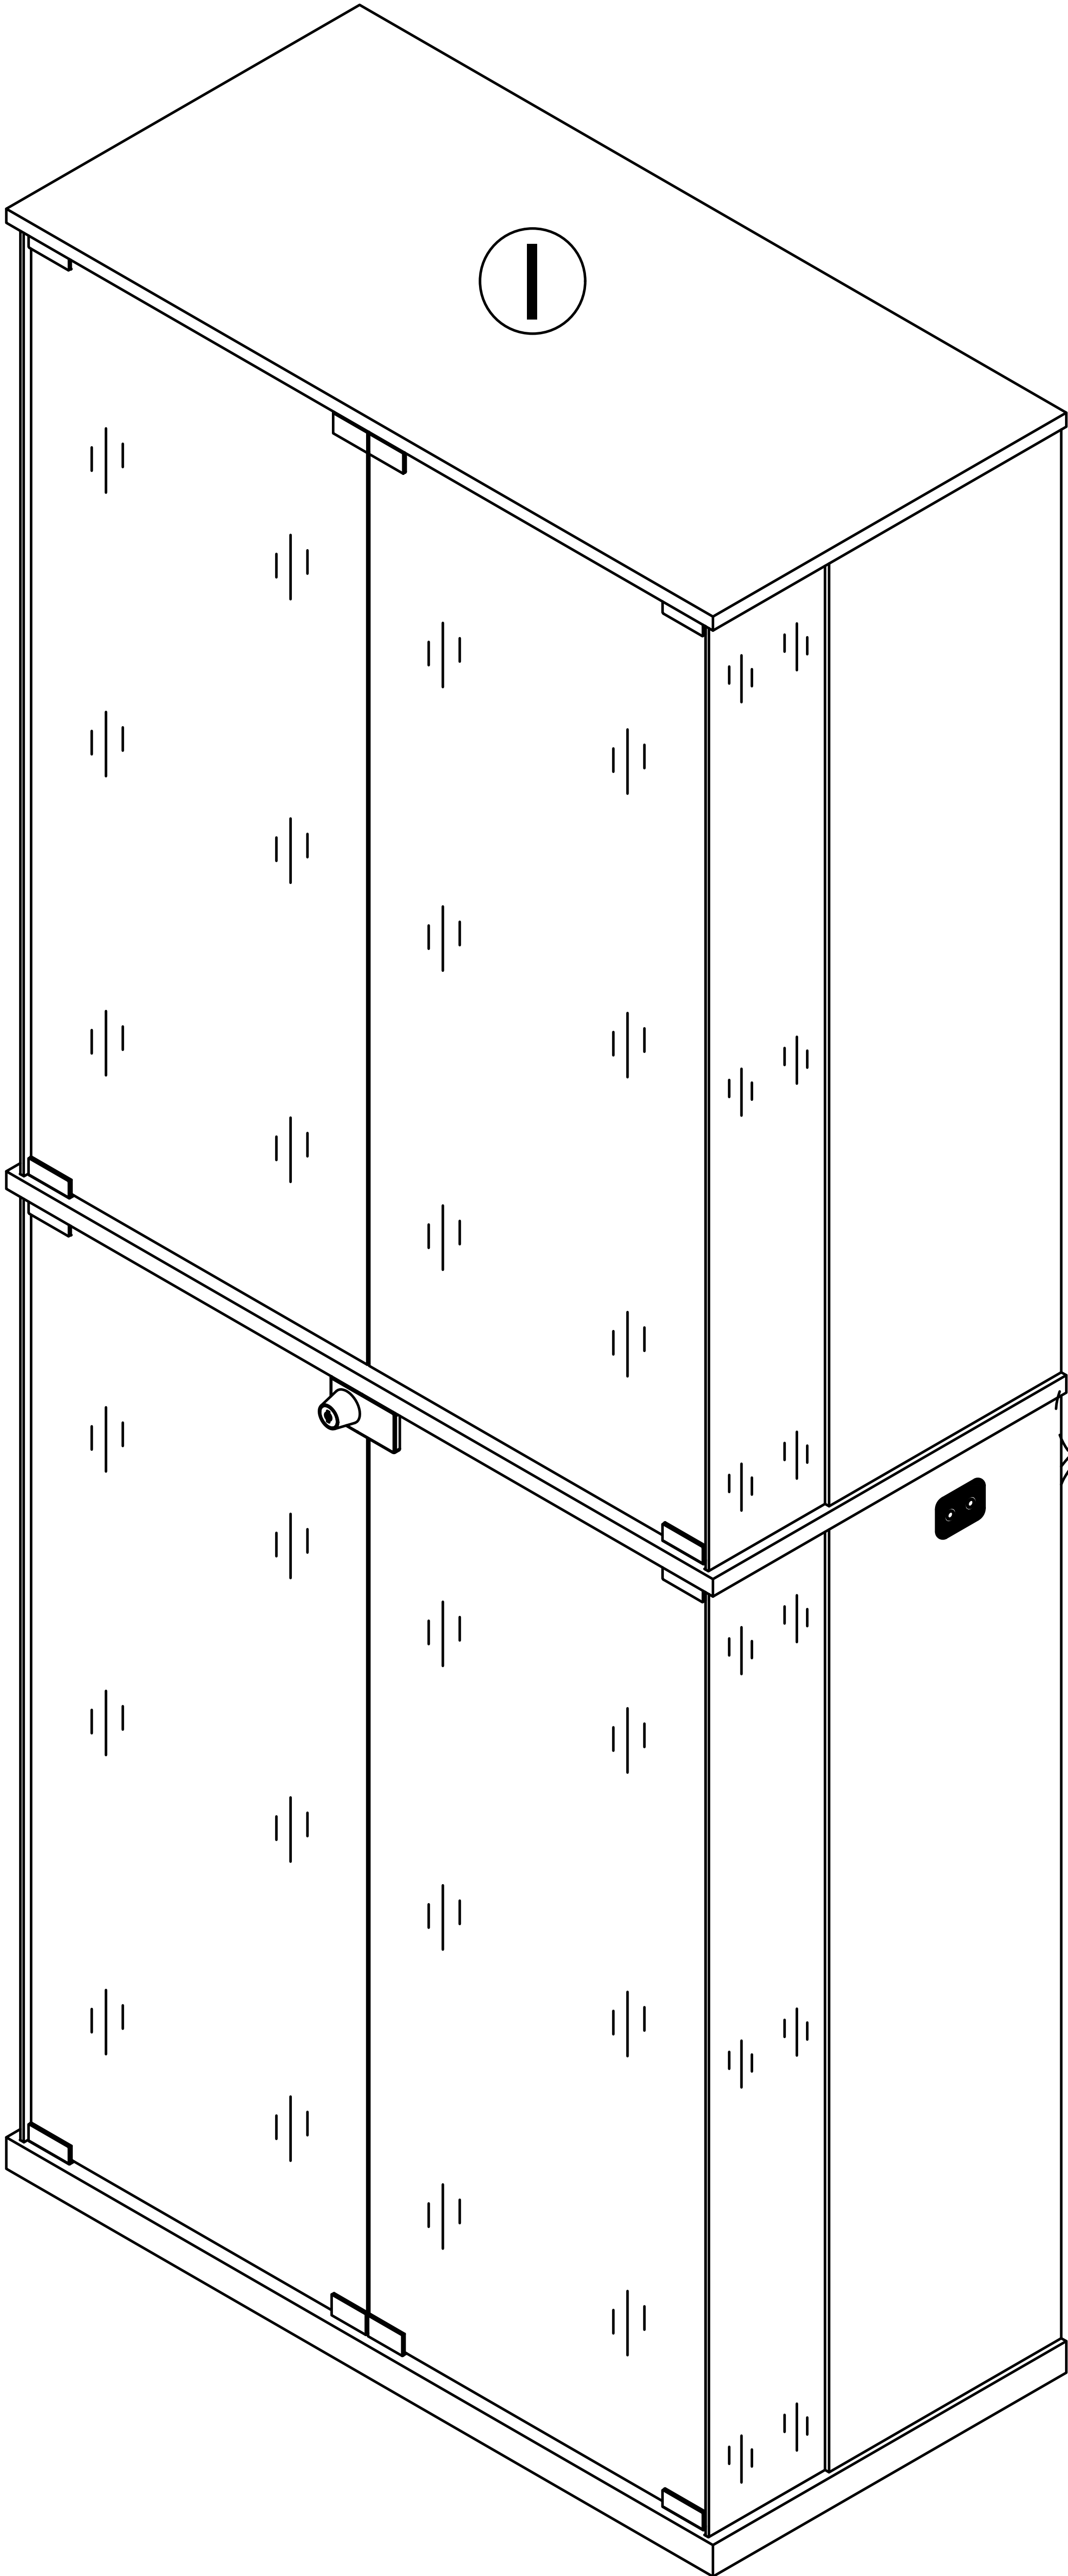


Step 38




Install as required

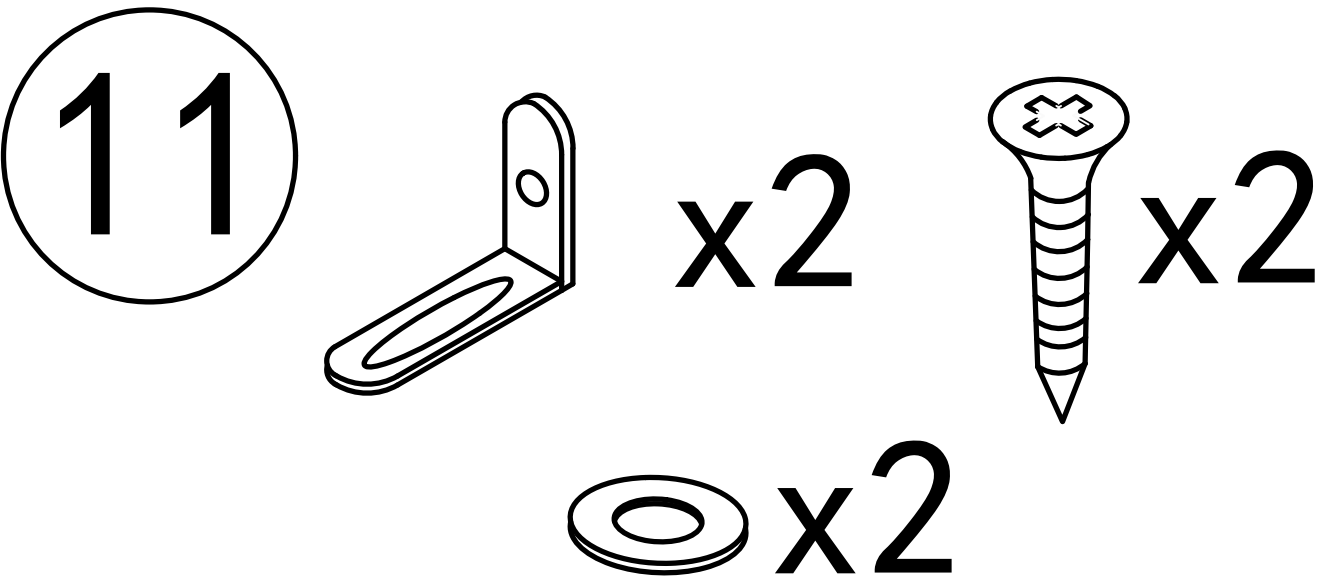

3.5x14mm


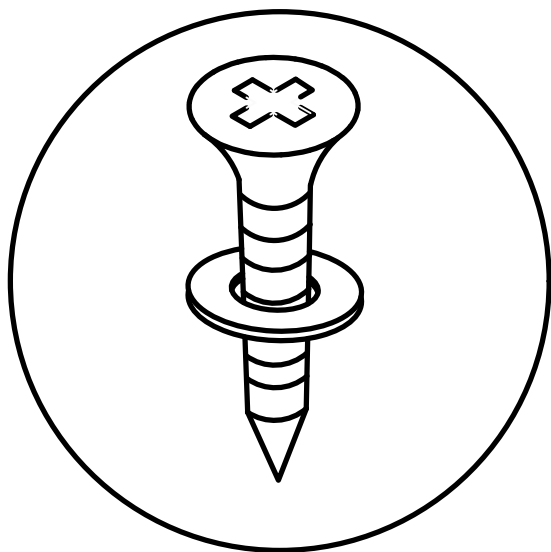


Install the anti fall hardware on the cabinet as shown in the picture first

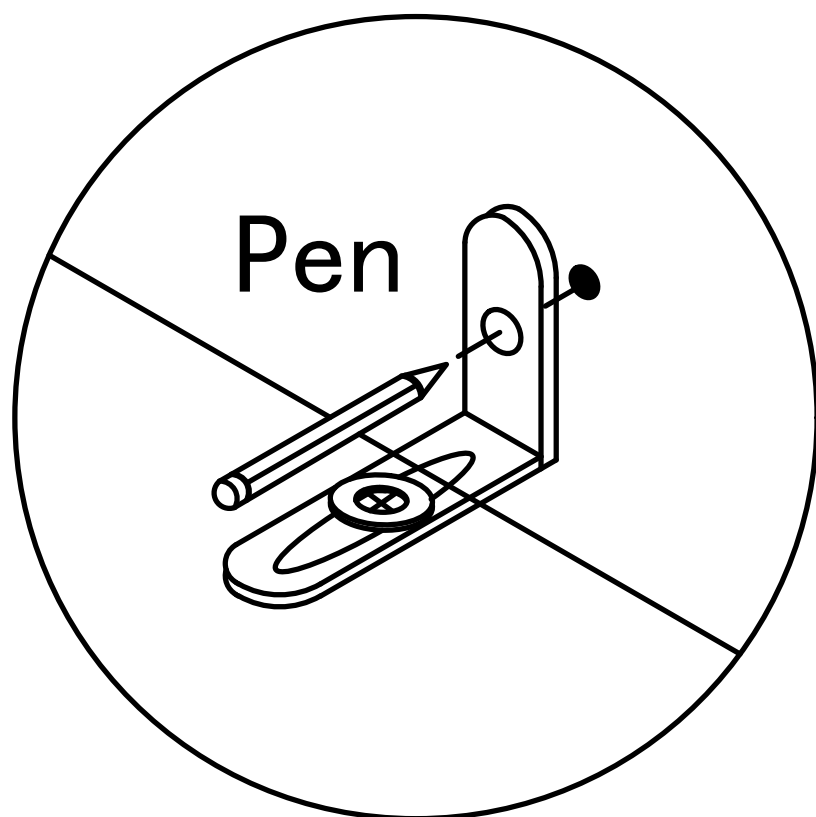
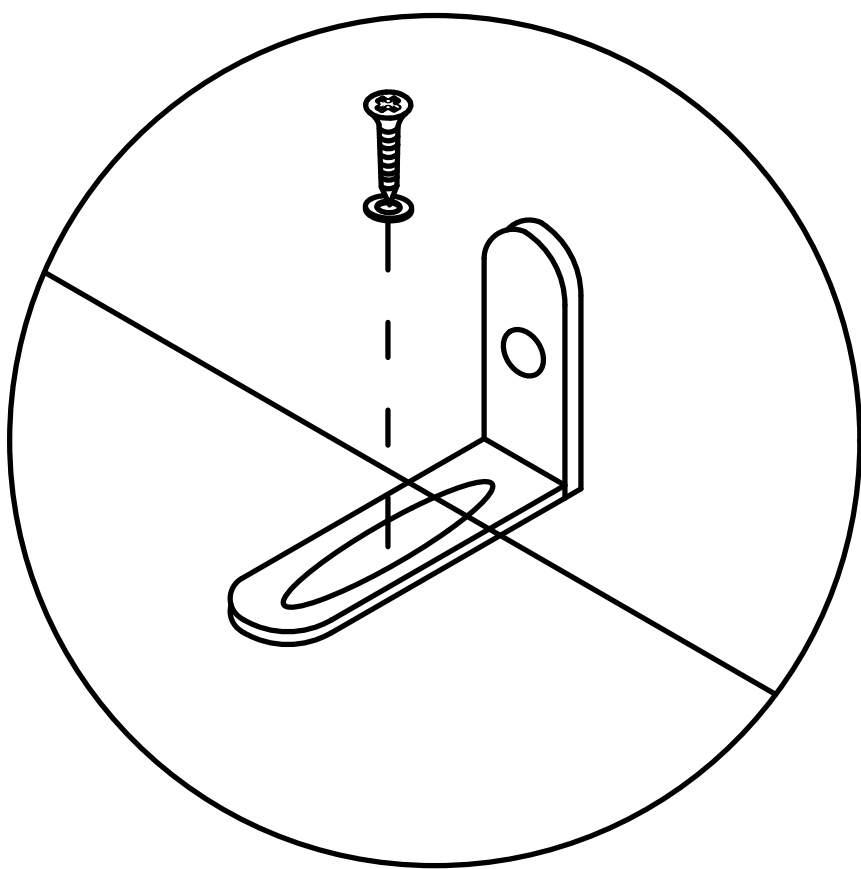
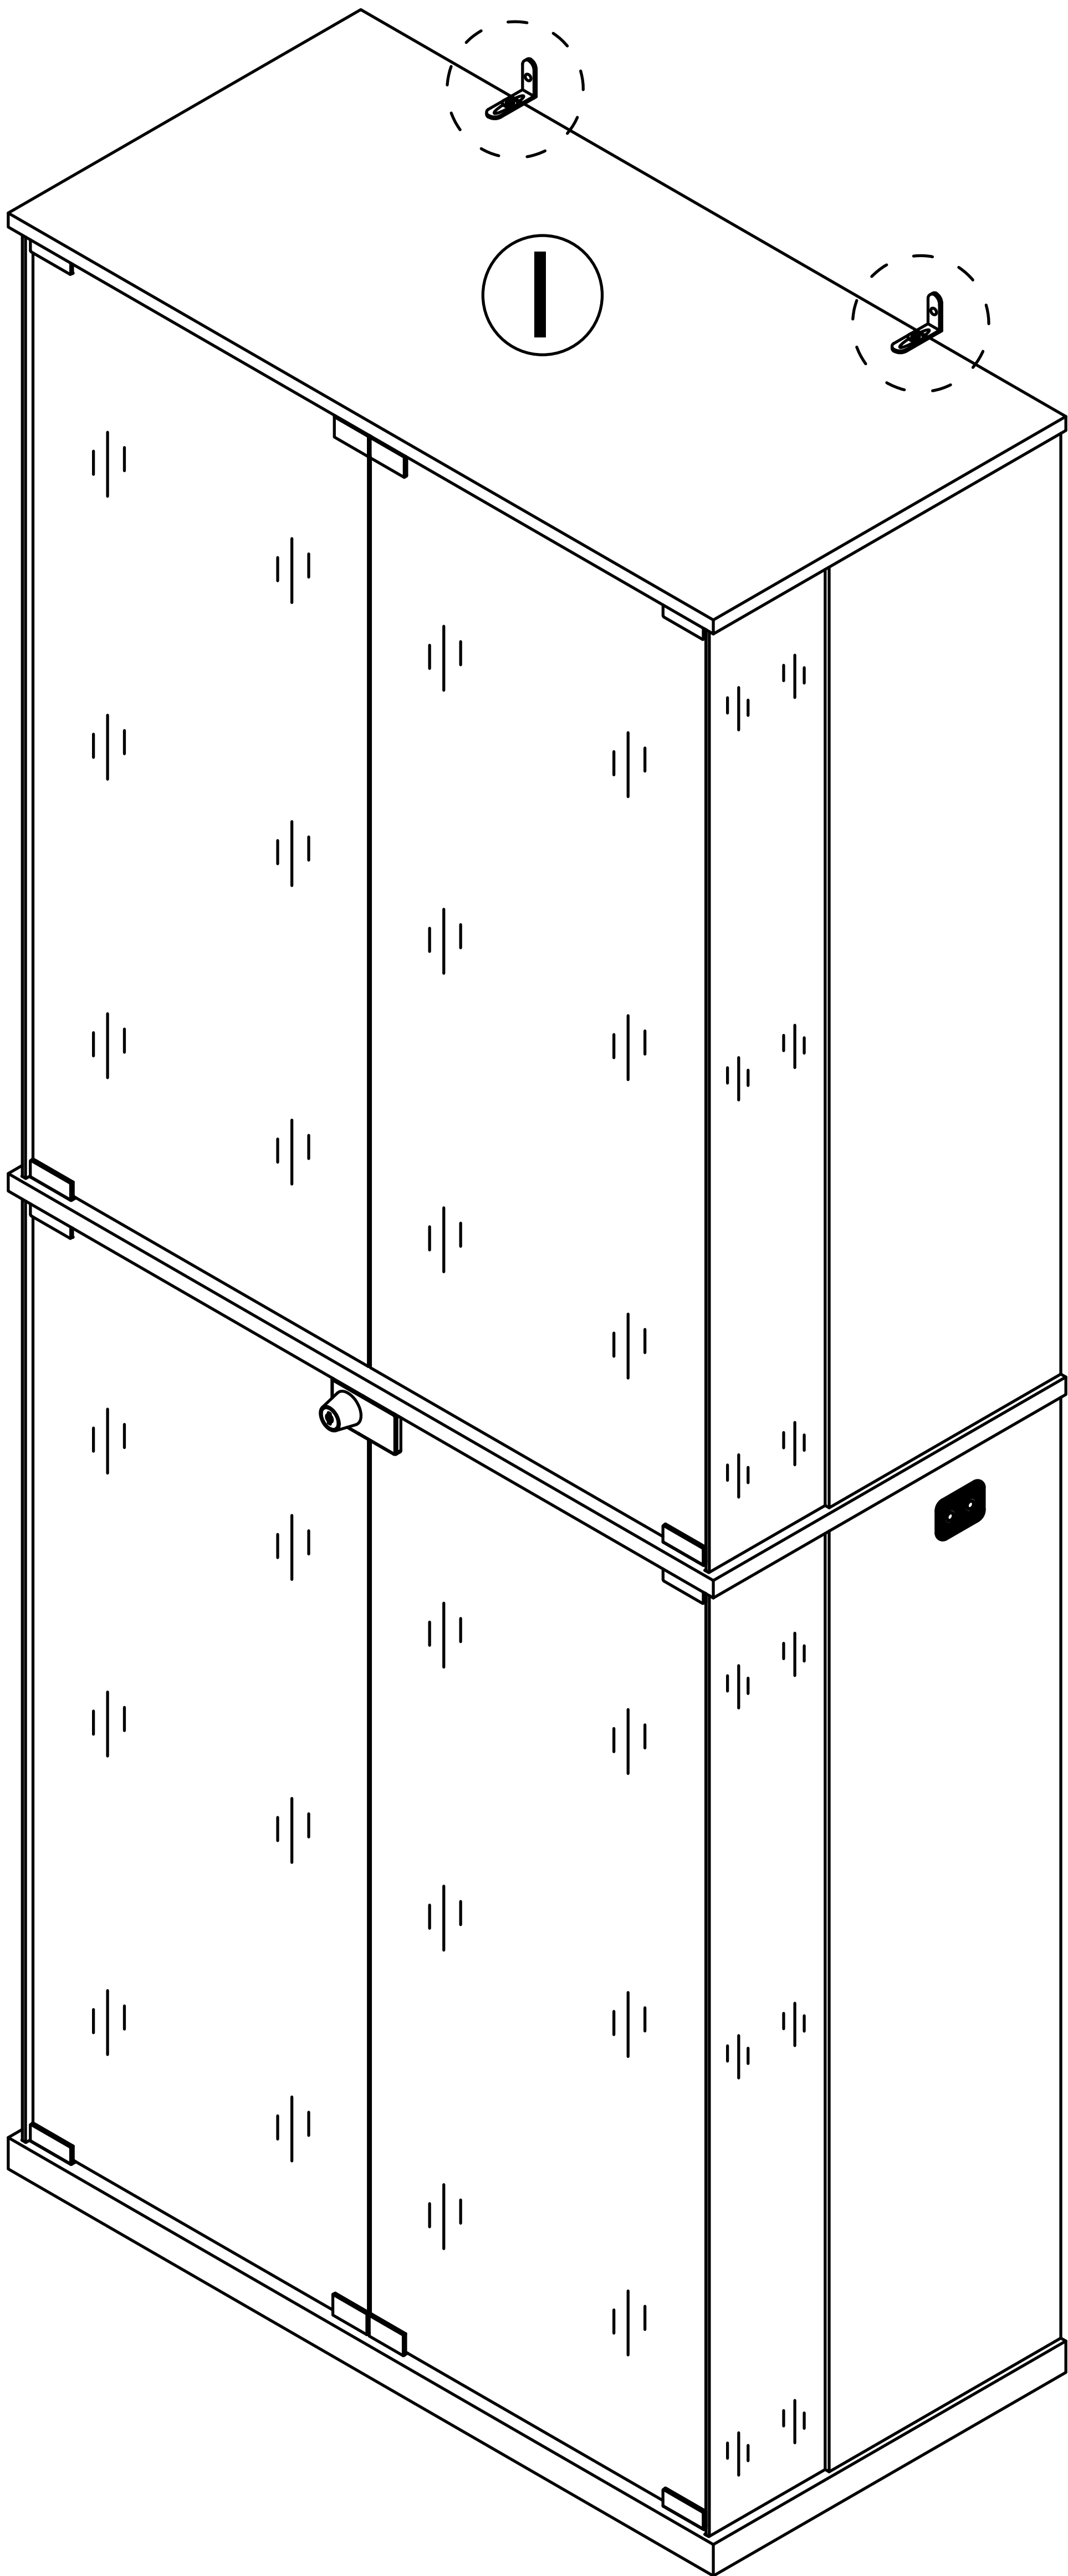


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 39

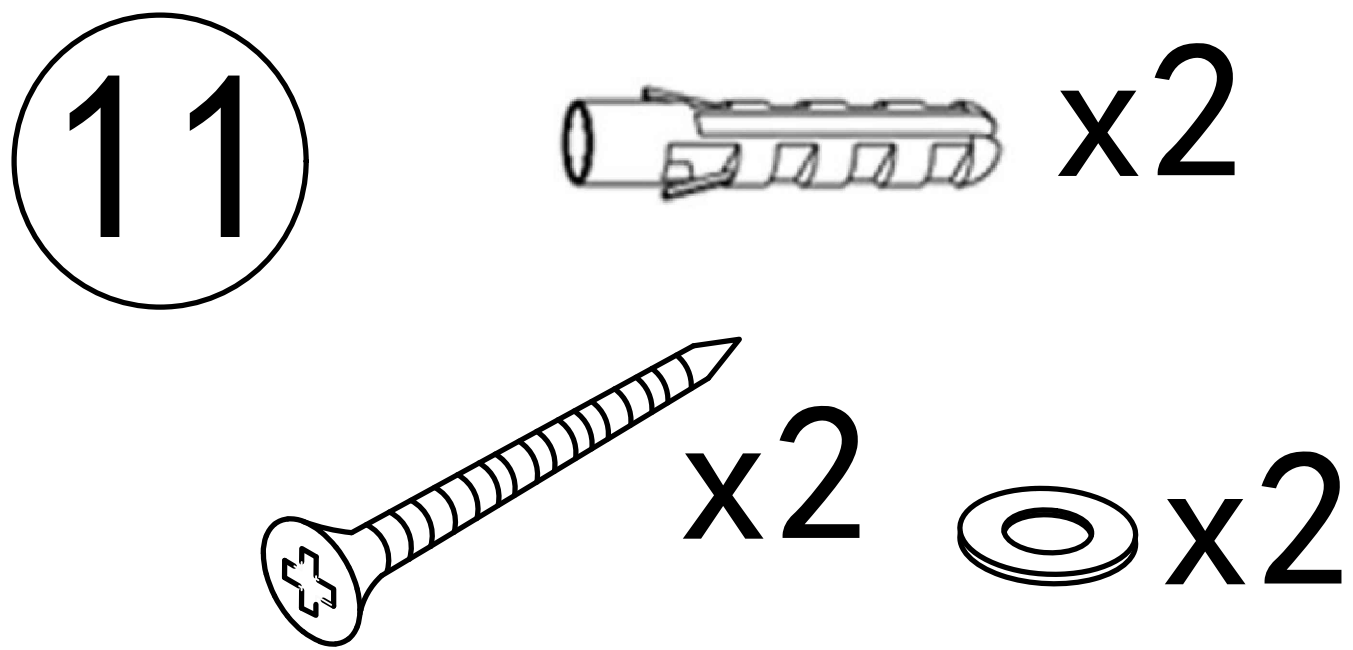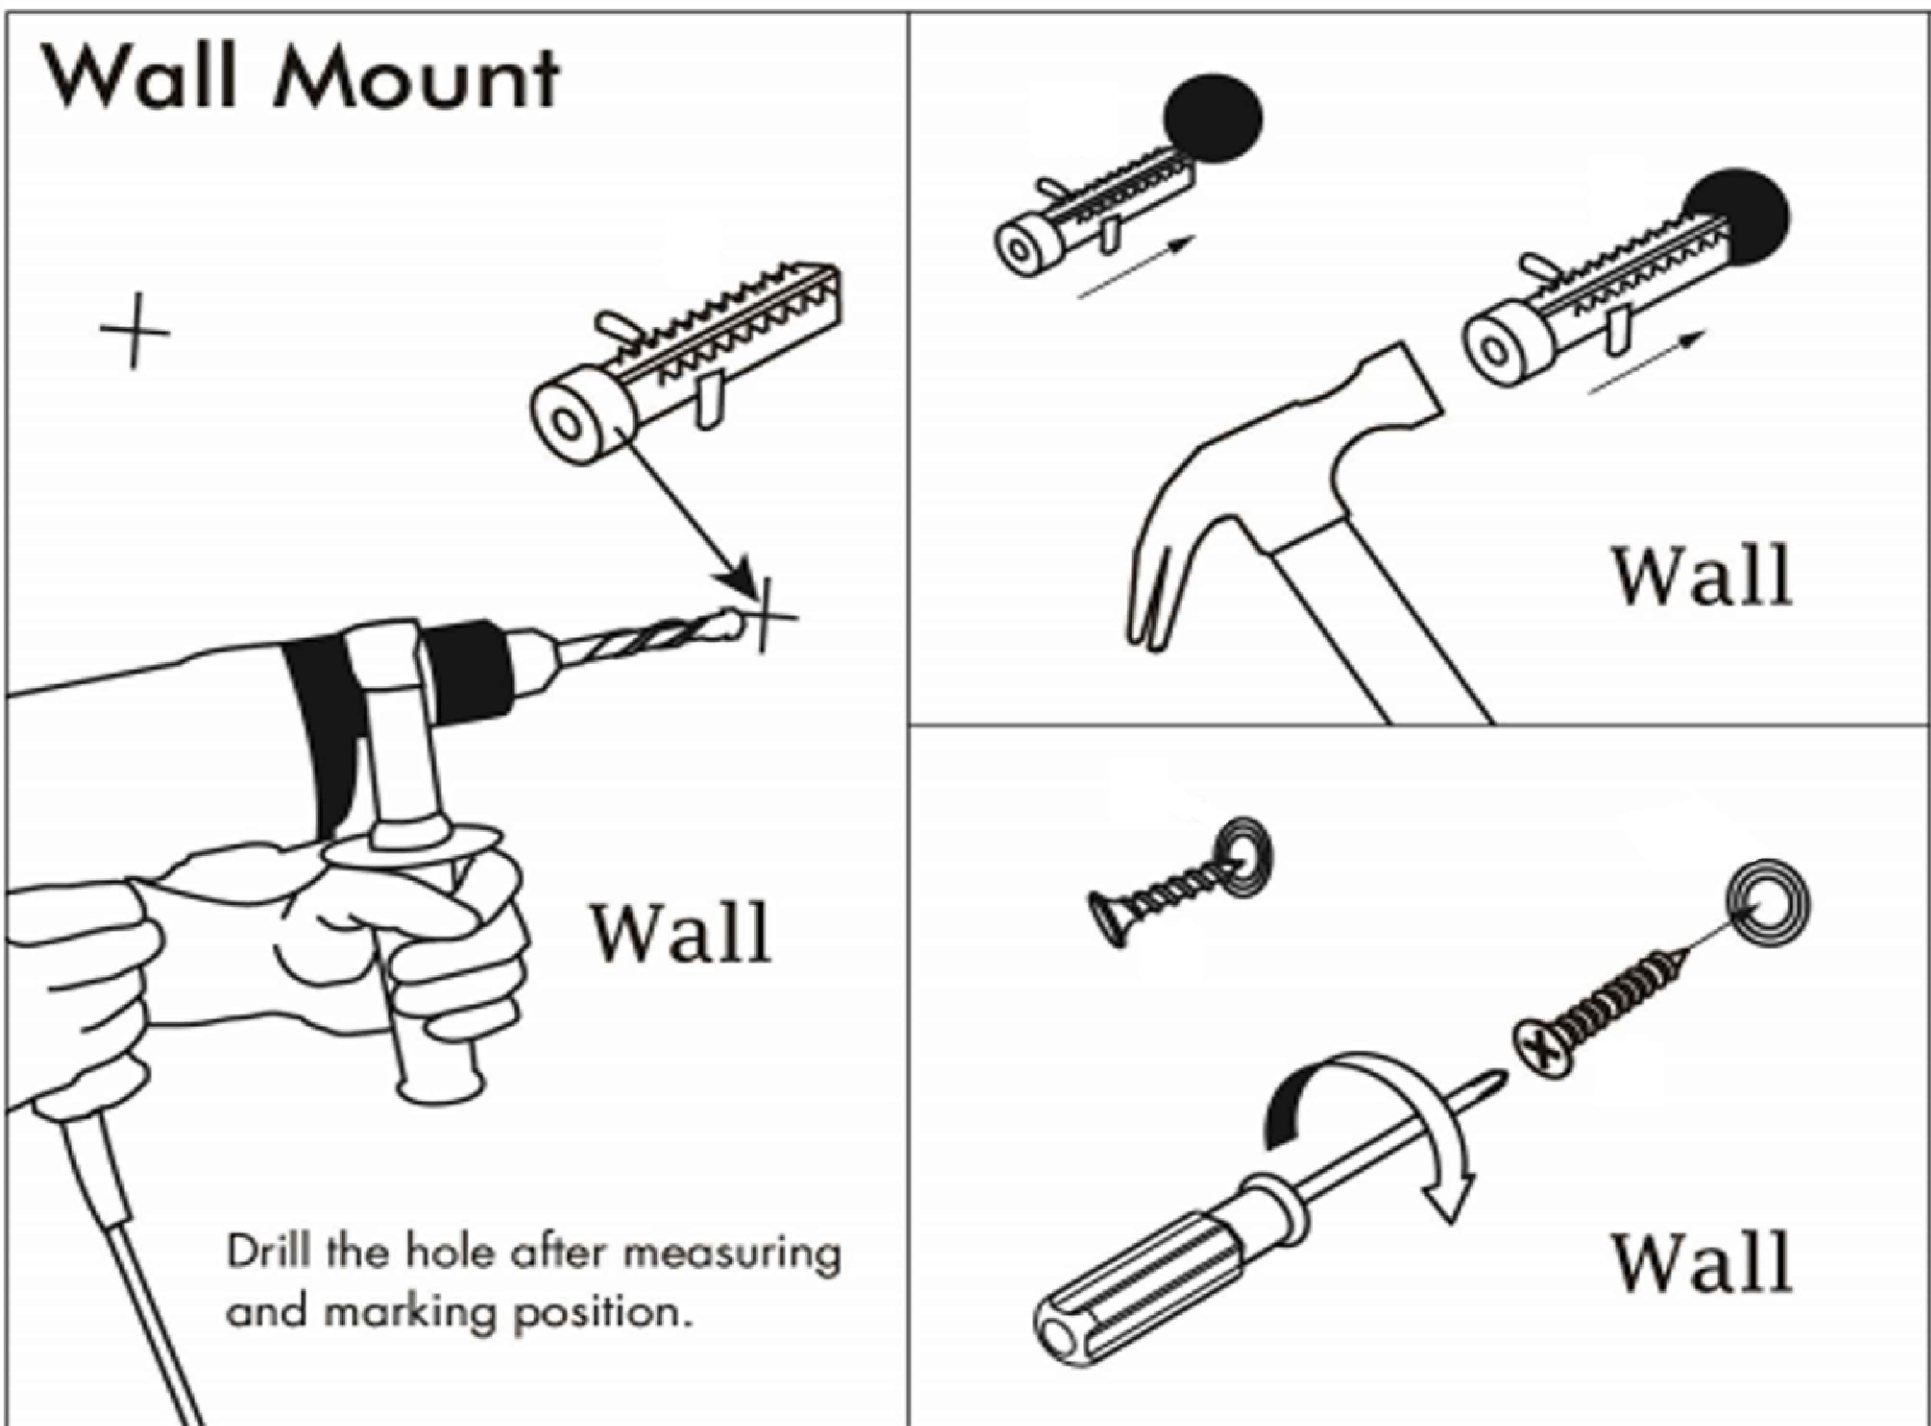

Drill the hole with an electric drill and punch in the colloidal particles

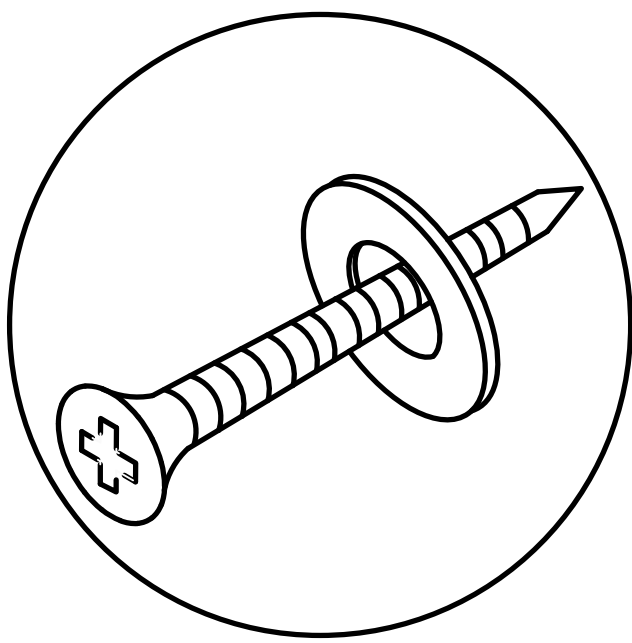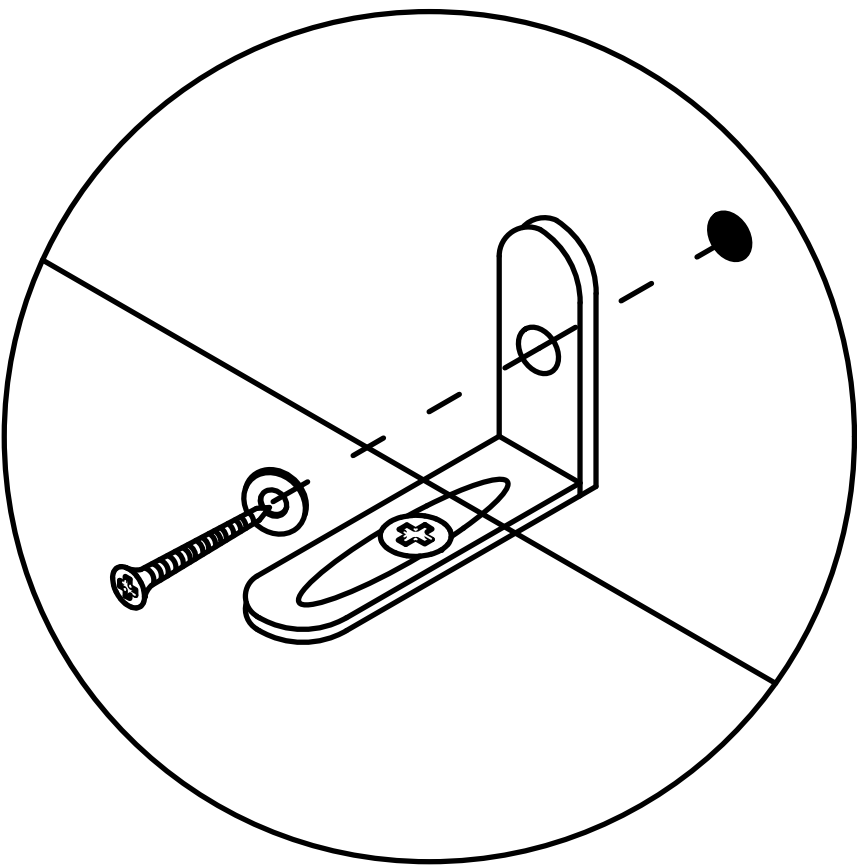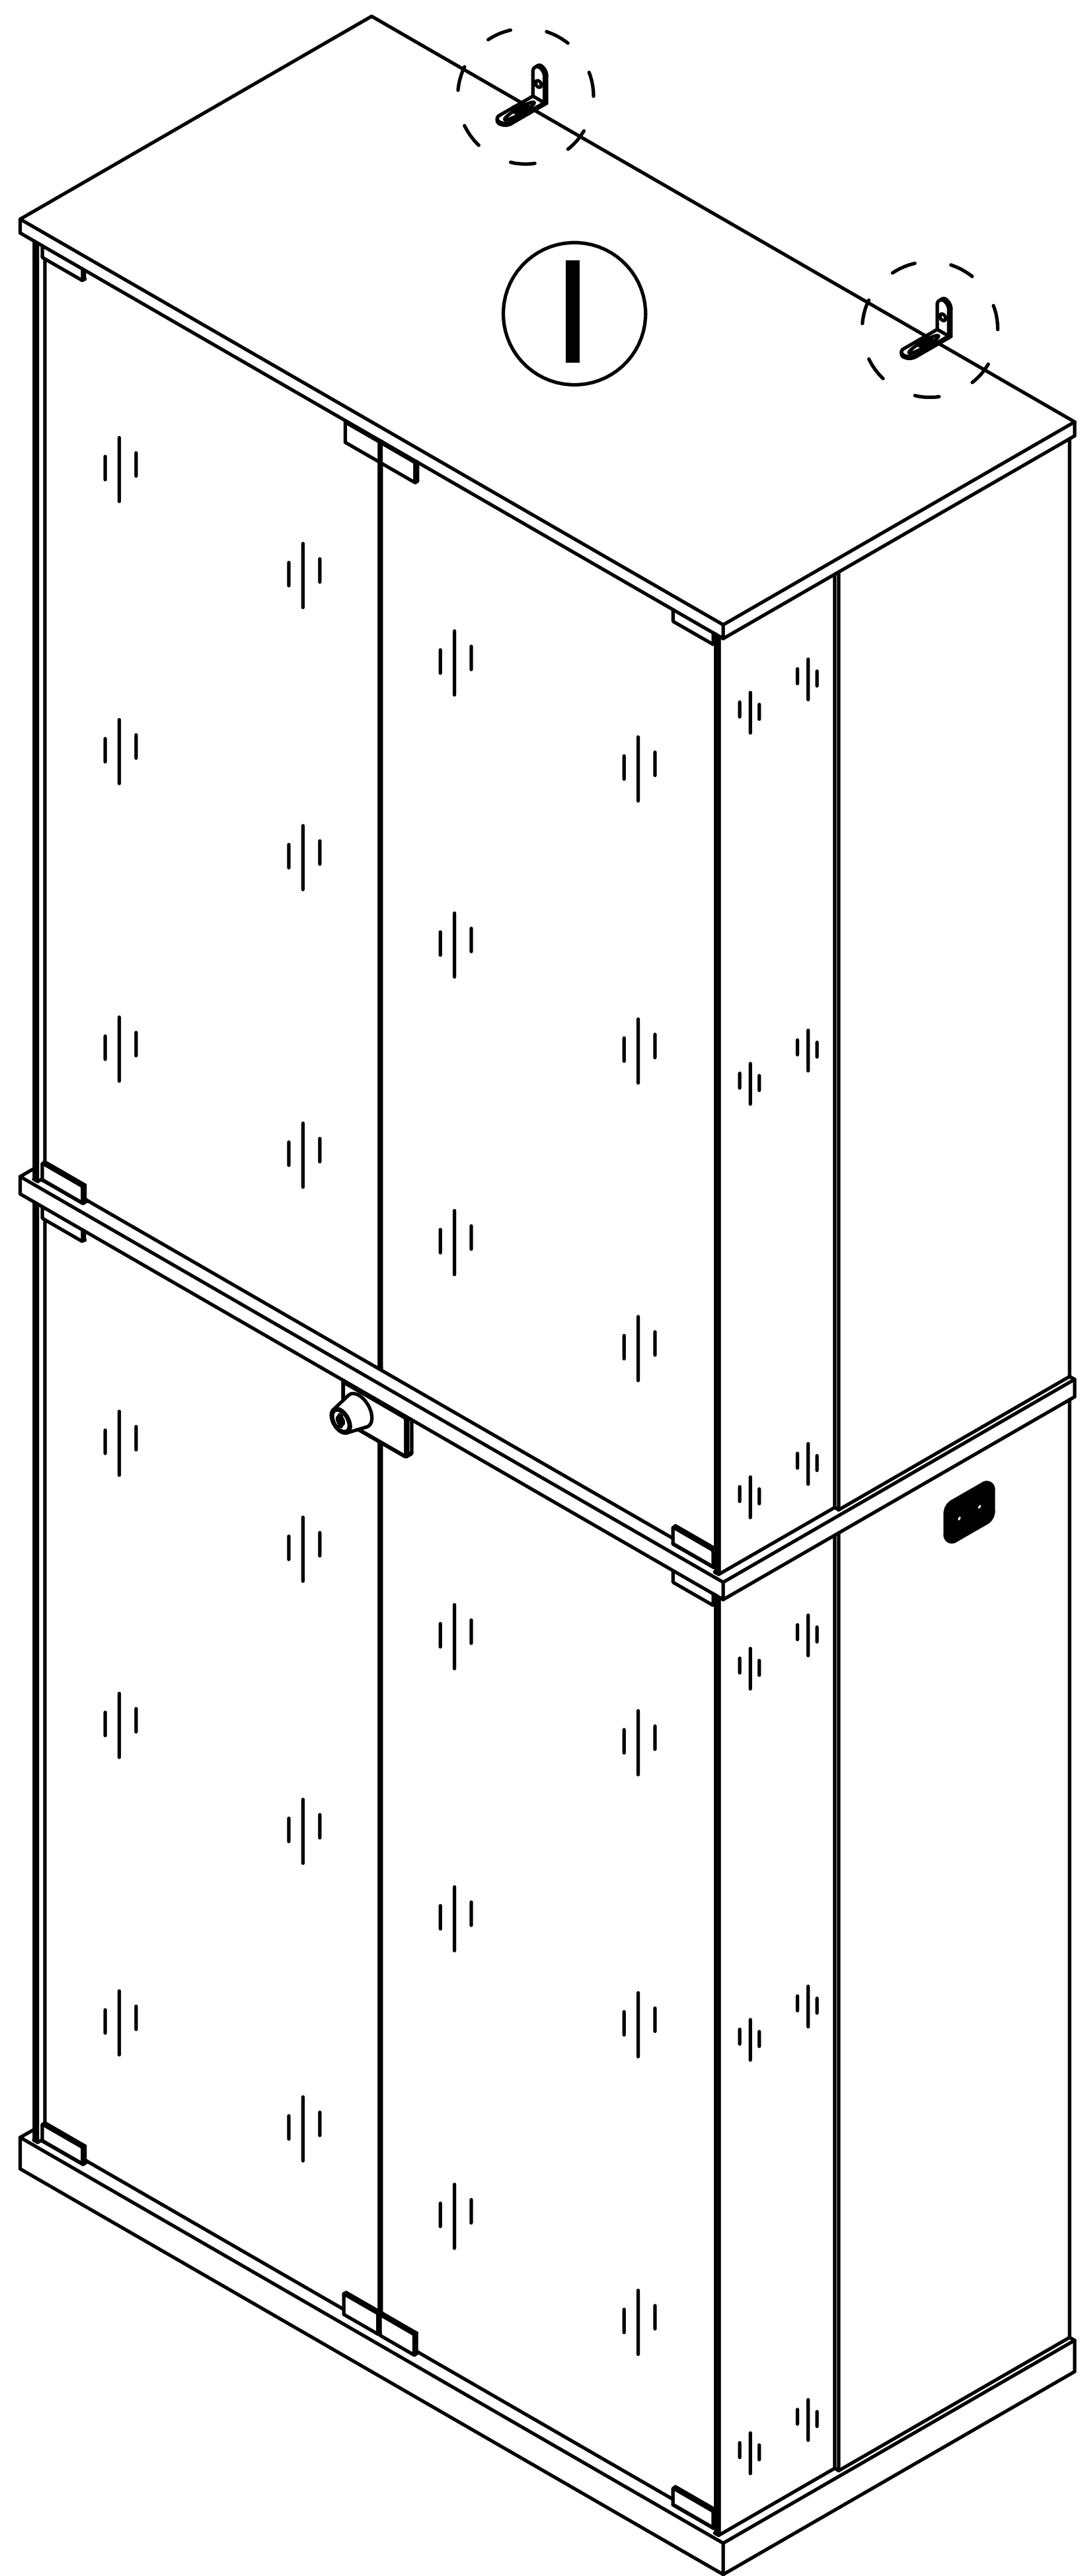

4x45mm

Fix the dressing table to the wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

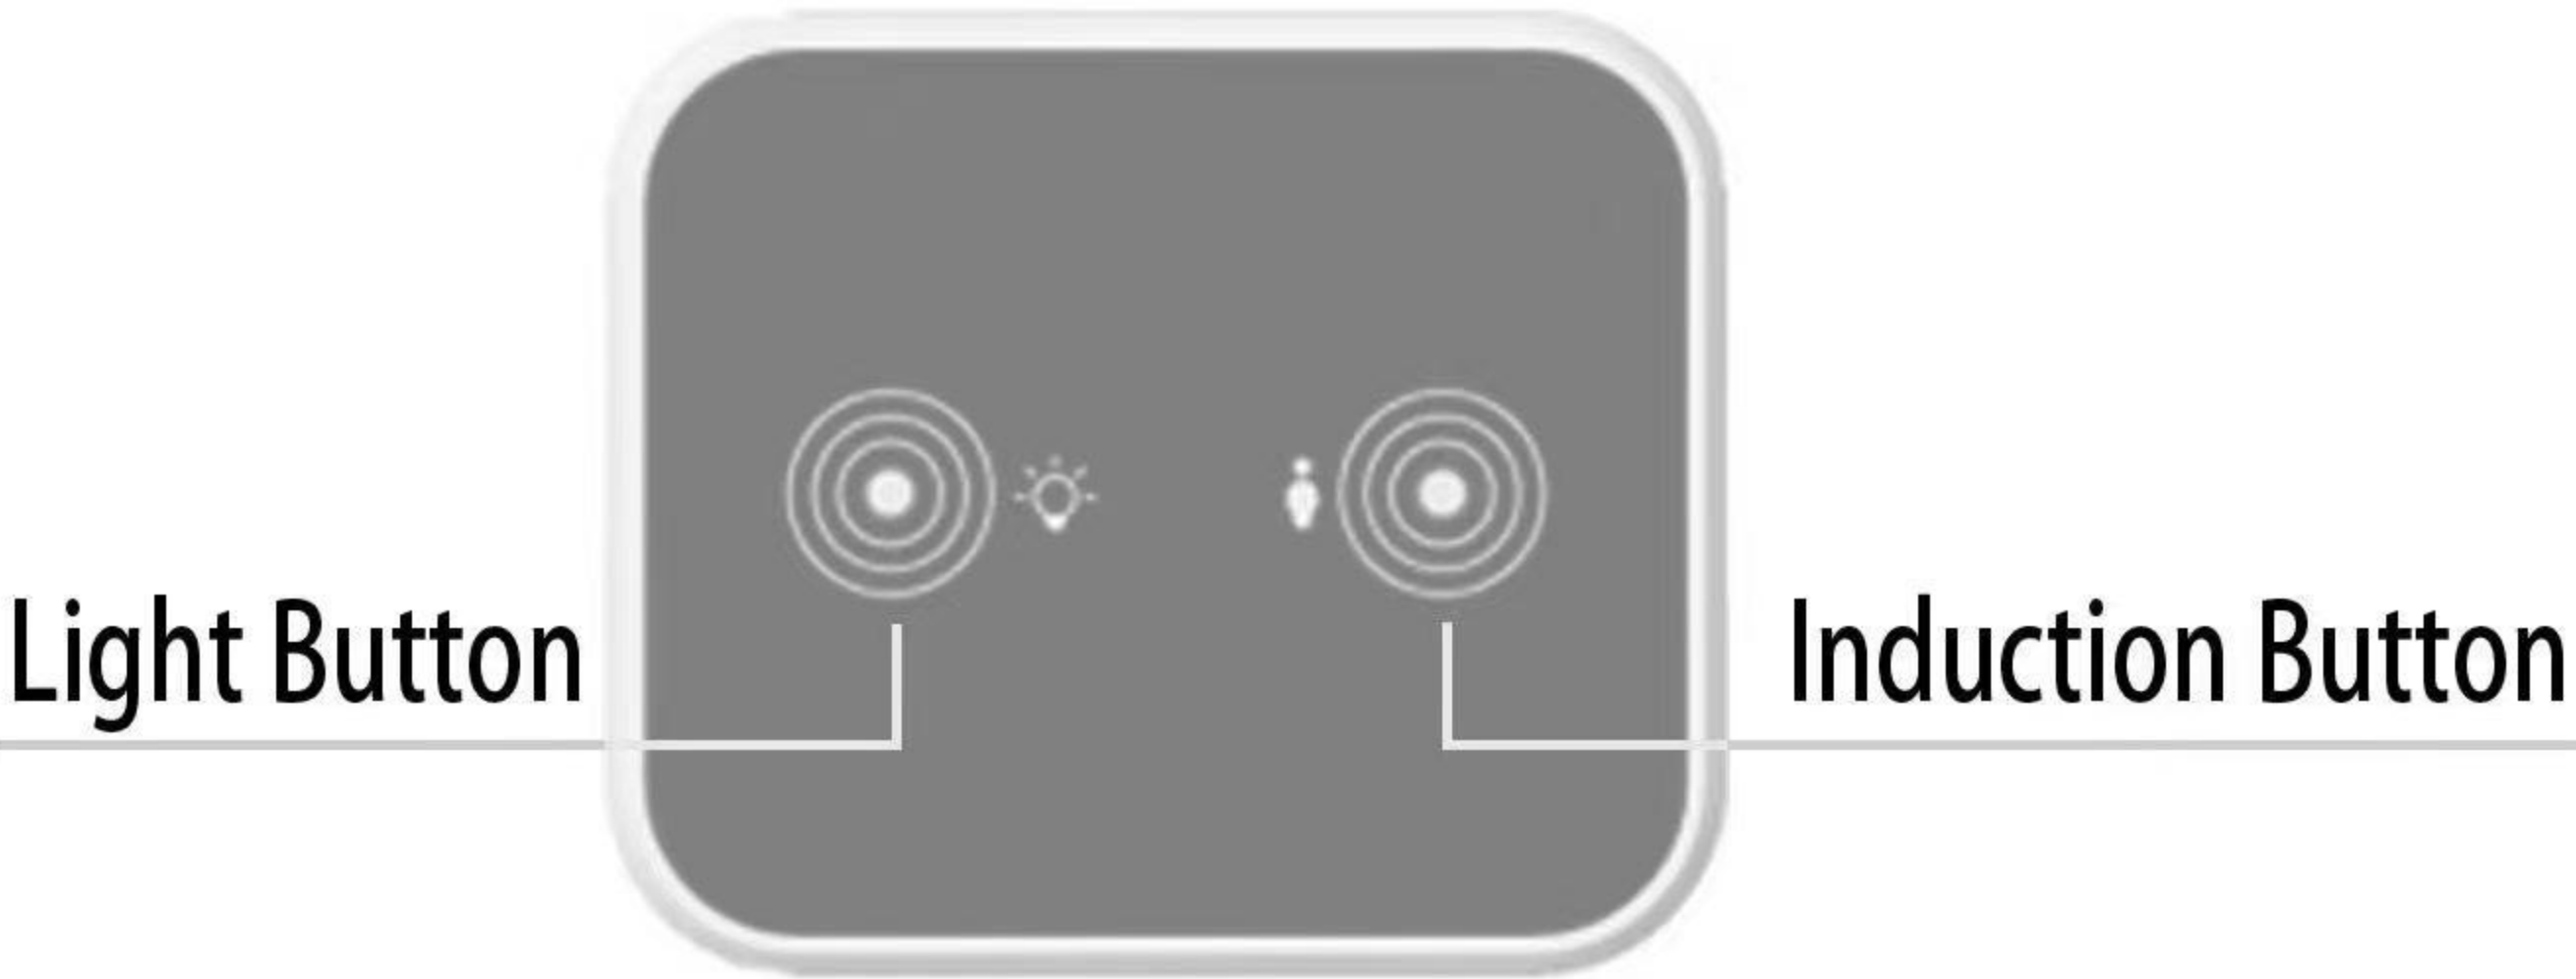

ATTENTION PLEASE

- 1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
- 2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

- A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

- A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.
- B. Long touch to turn off the induction function.
- C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.