





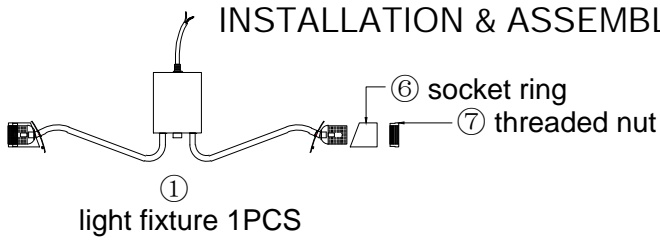


INSTALLATION & ASSEMBLY

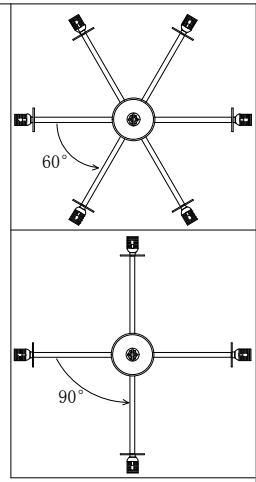



4: 4PCS
6: 6PCS

- ⊗ X 1PCS
- ⚓ X 3PCS
- ⚓ X 3PCS
- ⚓ X 3PCS
- ⚓ X 3PCS

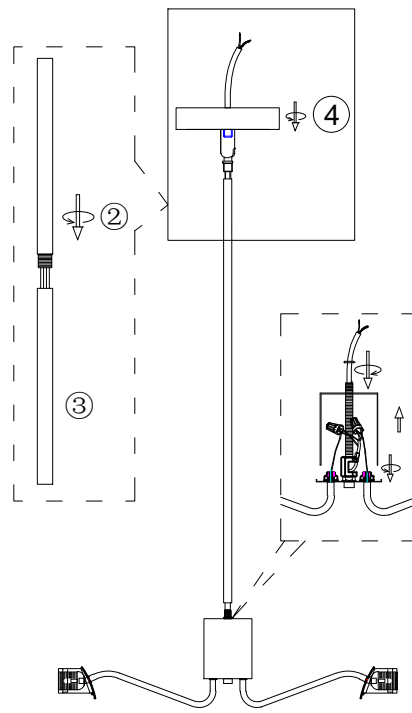


If the arm doesn't tighten enough, please rotate the top nut and washer to loosen and remove out the top cover, use wrench to fasten the nut of the arm, and cover back the top cover when all arms are tighten.

1. Adjust the light arms to suitable position like picture shown.
2. Let the wire of the fixture go through the tube ②, tube ③ and canopy ④, rotate to fix the three parts to the fixture.

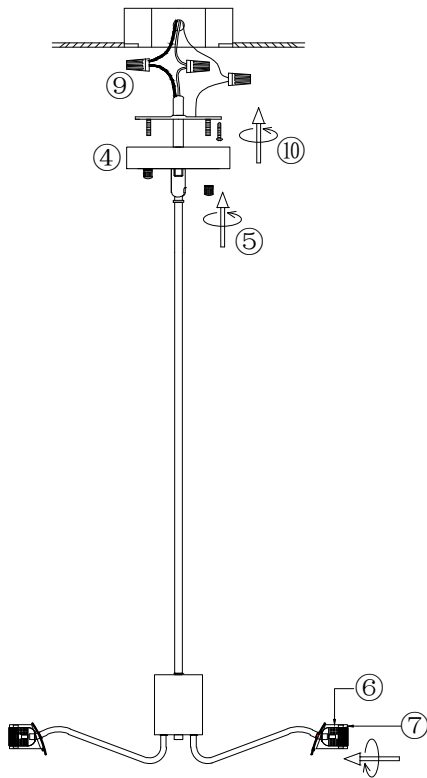

Attention!!!
In order to protect the glass lampshades, the light fixture has to be installed before the lampshades and bulbs!!!

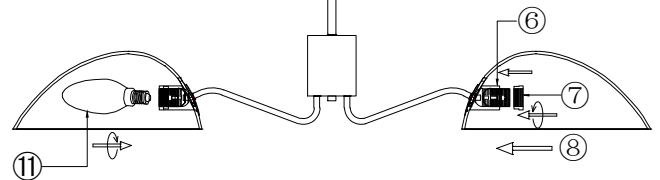

3. Install the bracket to the ceiling junction box with screw ⑩.
4. Connect the wire to your home line with cap connector ⑨.
5. Install the fixture to the bracket with cap nut ⑤.
6. Remove out the socket ring ⑥ and threaded nut ⑦ from bulb holder.

7. Install the lampshade ⑧ to the bulb holder with socket ring ⑥, fasten both with threaded nut ⑦.
8. Install the bulb ⑪.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !