


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.


Hardware Package (included):

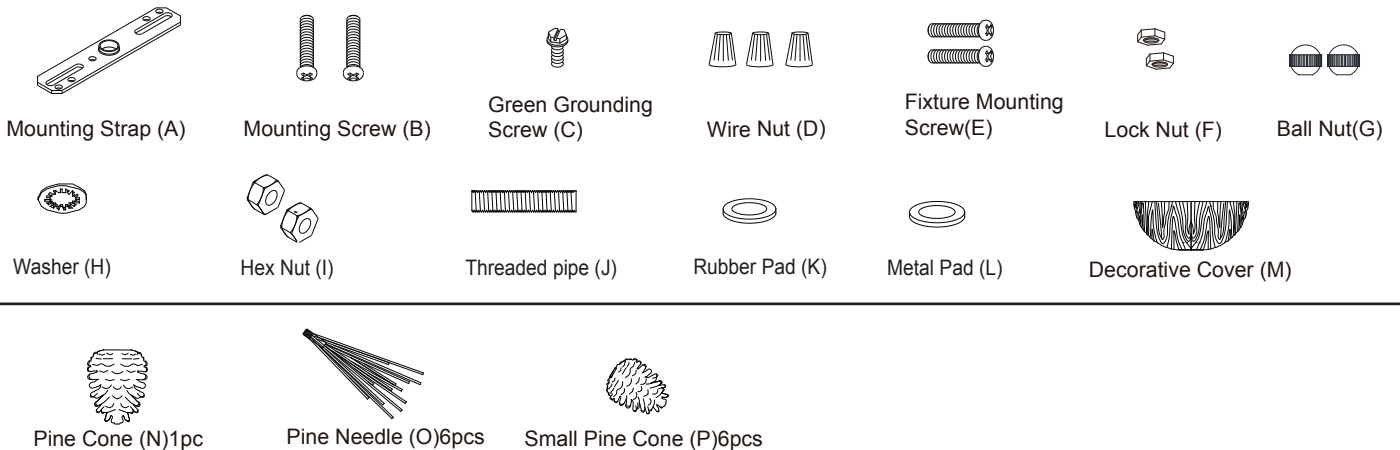

Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap to the outlet box by using two mounting screws.
2. Screw the threaded pipe with hex nut end into the coupling, and tighten it with the washer and hex nut.
NOTE: Depth of threaded pipe may need to be adjusted to properly fit glass shade, decorative cover and small pine cone.
3. Secure the small pine cones and the pine needles onto the main body as shown in the diagram.
4. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
5. Attach the glass shade to the fixture by inserting the threaded pipe, and then secure it with a rubber pad, metal pad and hex nut.
6. Slip the decorative cover up through the threaded pipe, and then secure it with the pine cone.
7. Pull out the source wires from the outlet box, make wire connections using wire nuts as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with the wire nut.
 Carefully put the wires back into the outlet box.


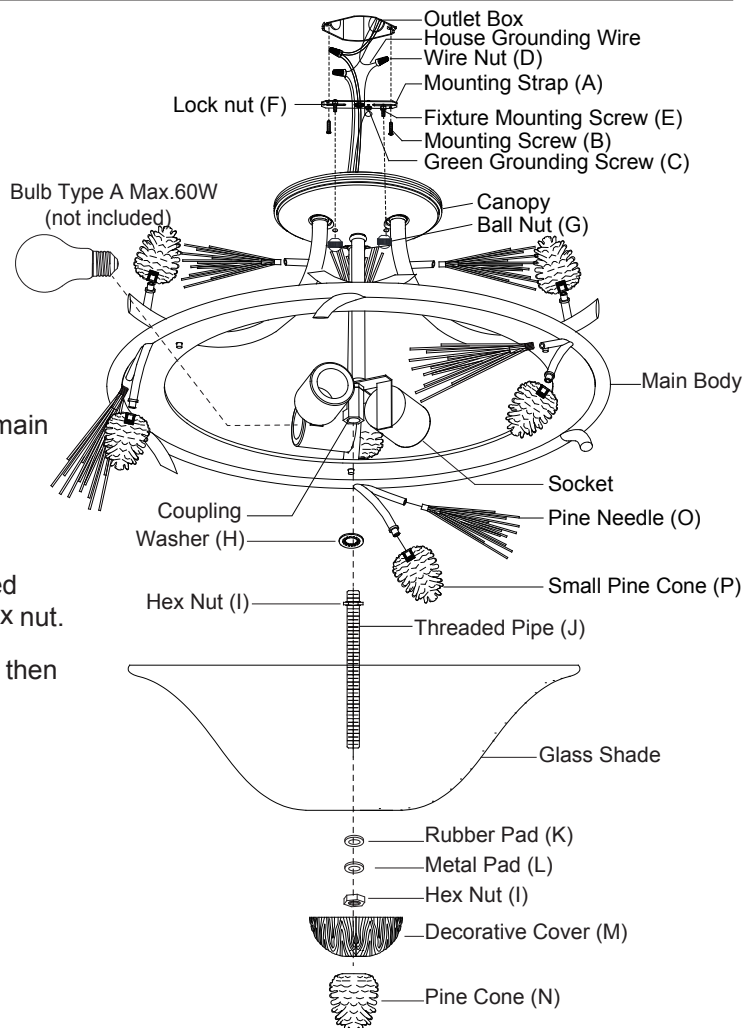
















7. Attach the fixture to the mounting strap by inserting two fixture mounting screws, and then secure it with two ball nuts.


Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

 Mounting Strap (A)	 Mounting Screw (B)	 Green Grounding Screw (C)	 Wire Nut (D)
 Fixture Mounting Screw (E)	 Lock Nut (F)	 Ball Nut (G)	 Washer (H)
 Hex Nut (I)	 Threaded pipe (J)	 Rubber Pad (K)	 Metal Pad (L)
 Decorative Cover (M)			
 Pine Cone (N)	 Pine Needle (O)	 Small Pine Cone (P)	

Assembly Kit
(1 SET)

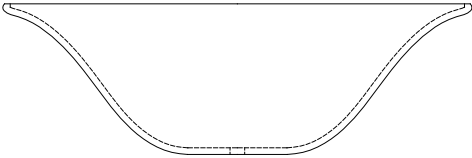

Glass Shade

A: 18"
B: 13"