


Installation & Assembly

To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	Seat	1	
	Seat cushion	1	
	Back cushion	1	
	Base cloth	1	
	Legs	4	
	Connecting buckle x1 8x20mm screws x2		
	Backrest	1	
	Sofa cover	1	
	Pillow	1	
	Inserted rod	2	
	Cover plate	1	

1 Cover the hole with a cover plate.

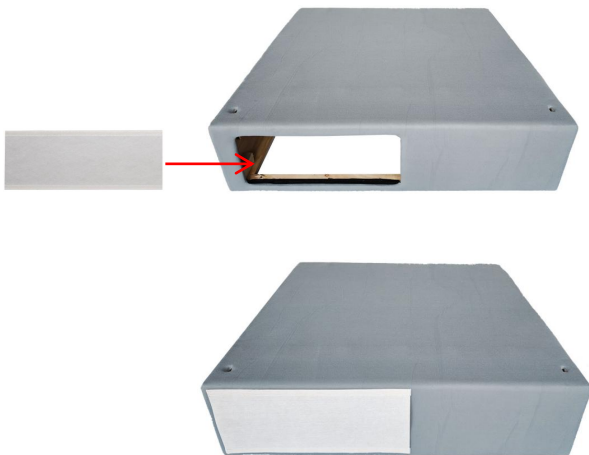


2 Seal the bottom with the base cloth. And then screw the sofa Legs into the reserving holes on the seat.



3 As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.



4

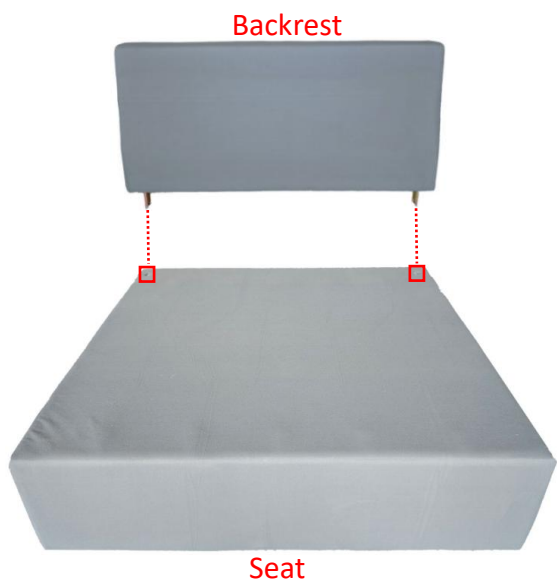


Make sure the flat side is level with the side edge of the seat frame, and the curved side faces inward.



5

Put on the sofa cover.


Suggestion: you'd better not remove the protective strip before finish putting the cover on.



6

Place the seat cushion and back cushion.

The seat cushion can be attached using Velcro.

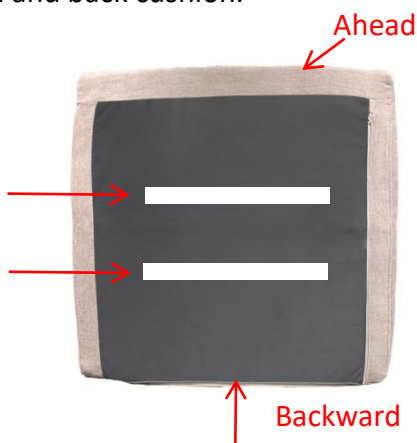

Note: The side of the grey magic cloth that is flush with the edge of the seat cushion should be facing backward.