


Installation Manual


Any question please contact us:
support@jubest.com

MYSD2S-36ST+HD

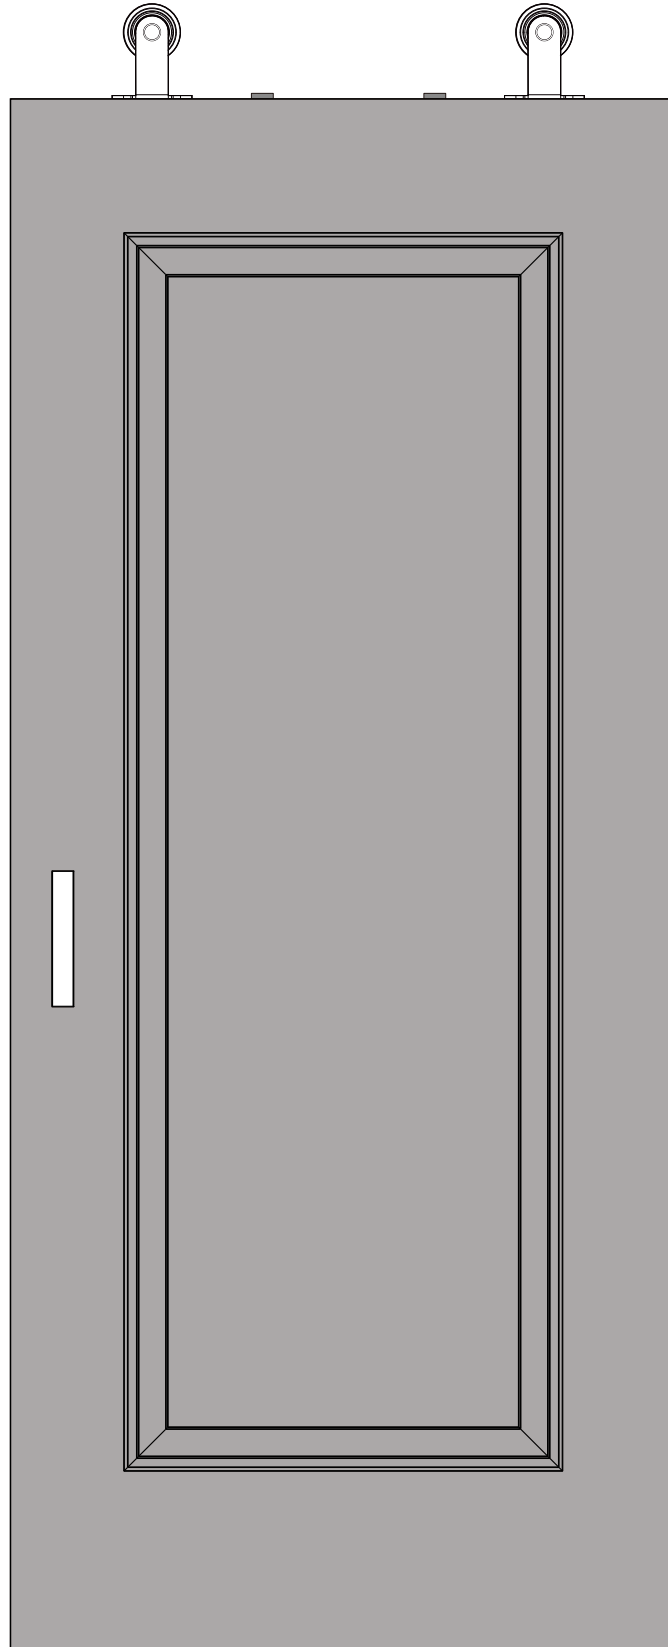

Pre-Installation


TOOLS REQUIRED

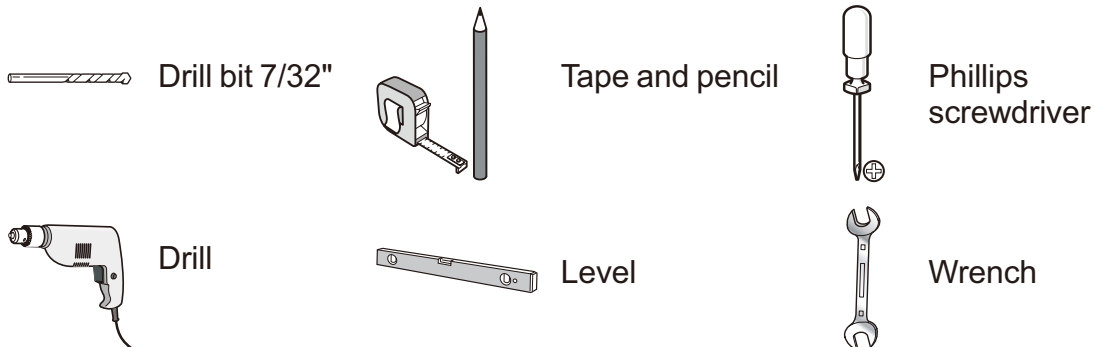


HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.

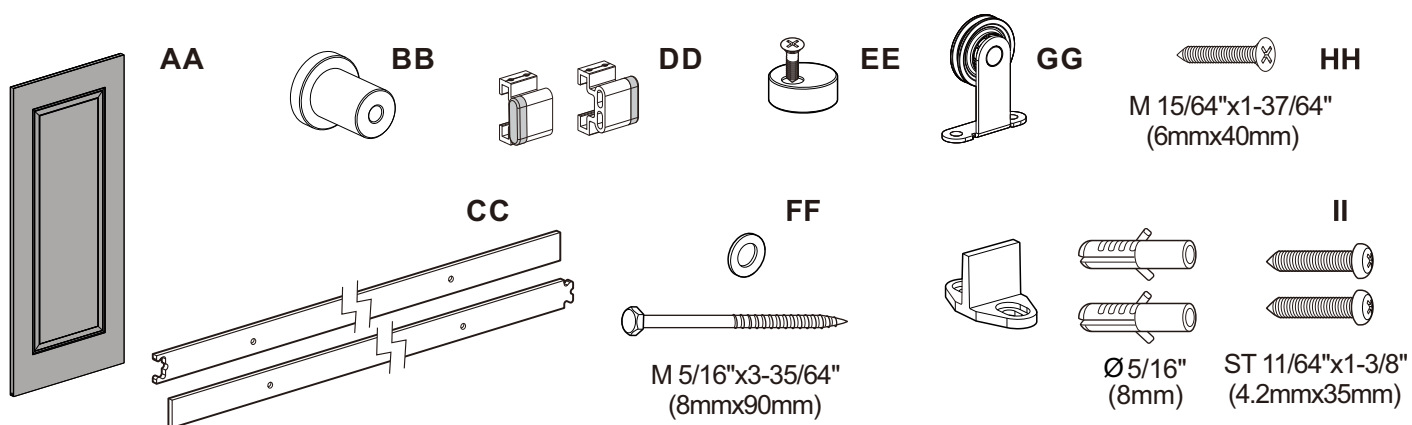

Part	Description	Quantity
AA	36x84 Door	1
BB	Spacer	5
CC	Rail	1
DD	Stopper	1
EE	Anti-Jump Disc with screw	2
FF	Lag screw with washer	5
GG	Door hanger	2
HH	Hanger door screw	4
II	Floor guide with screws	1
JJ	Handle with screws	1
KK	Allen key	1




KK

To provide feedback on a particular part, please mark it by circling in the instruction manual and kindly send us a photo.

Installation


1 Locating Studs

- With a stud finder locate the studs near the door opening.

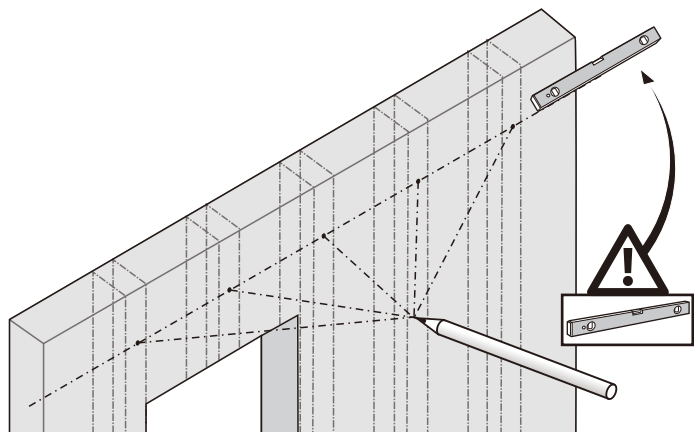

2 Measuring Height


- From the floor, measure 85-11/16" (2177mm) to determine the center height of the rail.

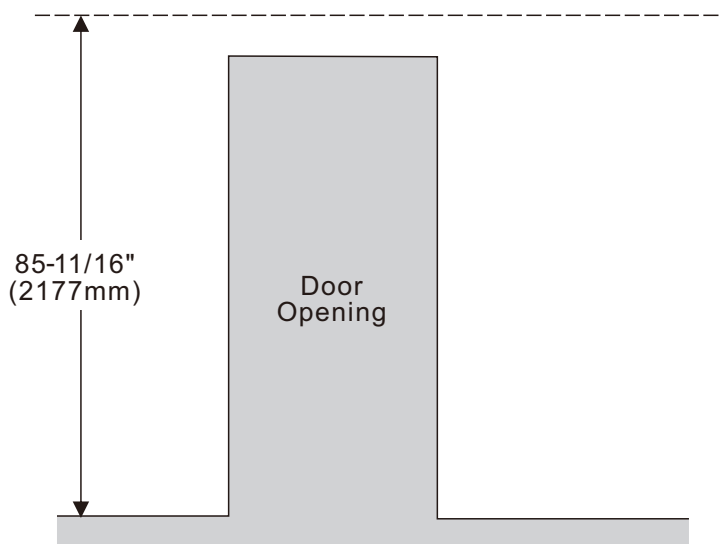

Installation (continued)

3 Drilling Pilot Holes

- ☐ Position the rail on the wall so that the height pass in the middle of each hole.
- ☐ Mark the location for each lag screw over the studs.
- ☐ Drill 7/32" pilot holes at each mark.


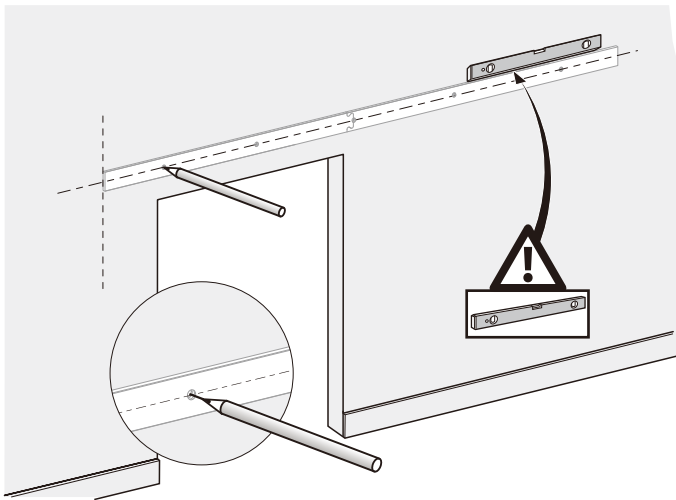


4 Installing the rail



CAUTION: If the rail is not installed level, the door may slide open or closed without warning.


- ☐ Assemble the two rails (CC) together.
- ☐ Place one lag screw with washer (FF) through the middle hole then through a spacer (BB). Do not fully tighten.
- ☐ Repeat process with holes that are at the ends of the rail.
- ☐ Use a level on top of the rail to ensure it is properly levelled.
- ☐ Tighten the three lag screws completely.
- ☐ Repeat for the two remaining lag screws and spacers.

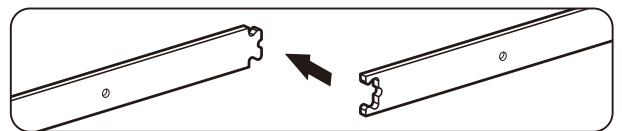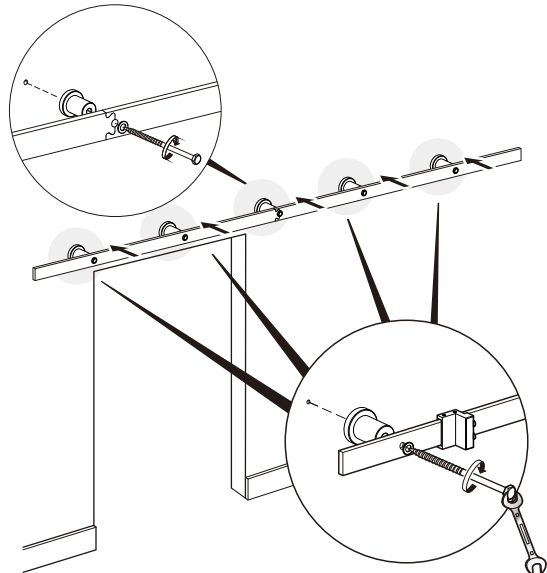

Installation (continued)

5 Fixing Door Hangers

- ☐ Position the hanger (GG) with its middle at 5-29/32" (150mm) from the edge of the door (AA) and centered.
- ☐ Ensure the hanger is straight and secure into place.
- ☐ Repeat on the other side.

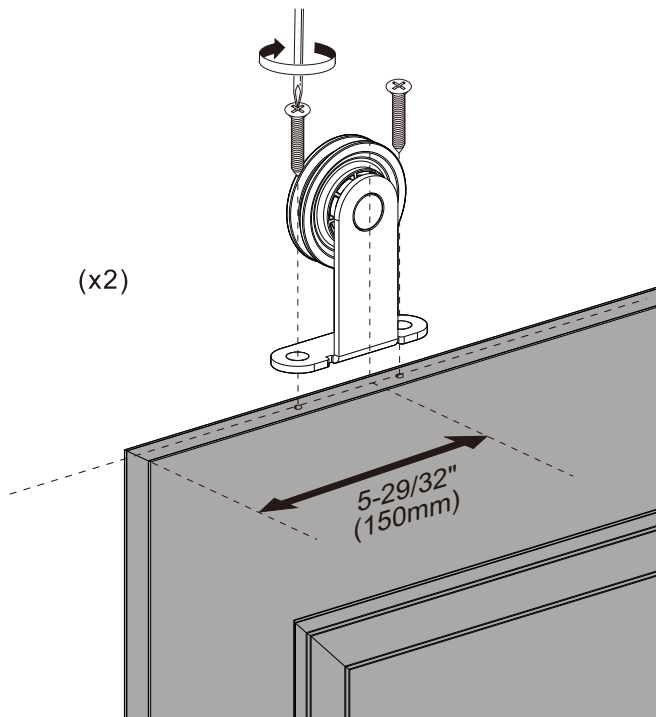


6 Fixing Anti-Jump Discs




IMPORTANT: Anti-jump discs must be installed to prevent door from derailing.

- ☐ Loosely fasten the anti-jump discs (EE) 2" (50mm) from each door hanger.
- ☐ To be able to install the door on the rail, anti-jump discs must be turned towards the front of the door.

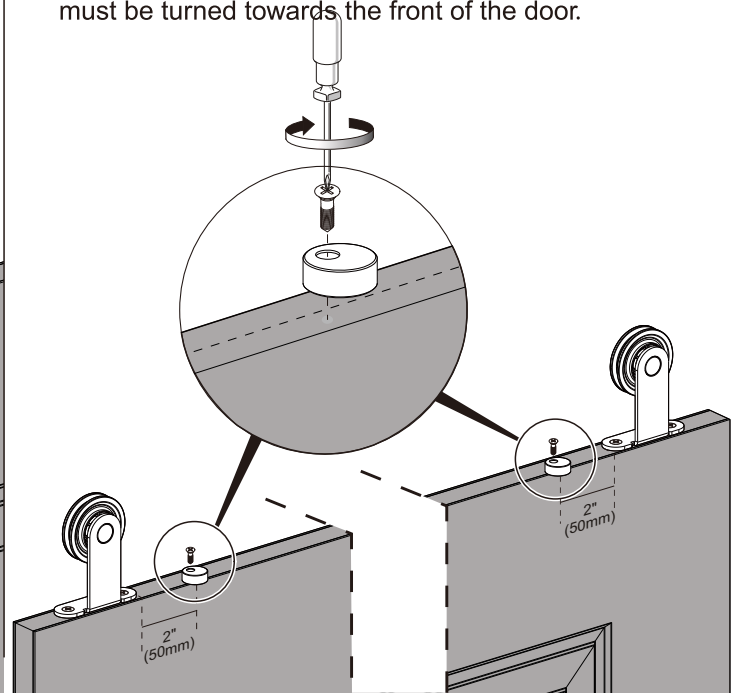

7 Hanging the Door


- ☐ Hang the door on the rail. (figure 1)
- ☐ Rotate anti-jump discs so they are positioned on top of the door and underneath the rail. (figure 2)
- ☐ Tighten the screws.

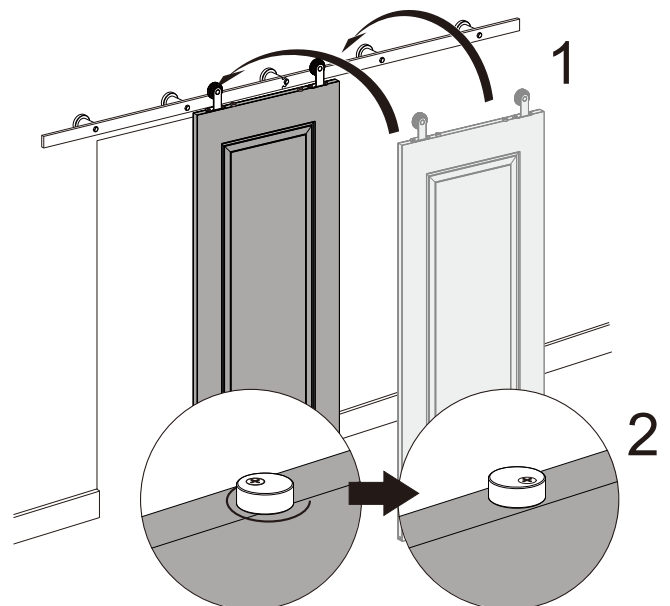

Installation (continued)

8 Installing Floor Guide

- ☐ Ensure the door is levelled.
- ☐ Align floor guide (II) with the bottom groove of the door.
- ☐ Fix the floor guide on the opening side, as close to the doorway as possible.


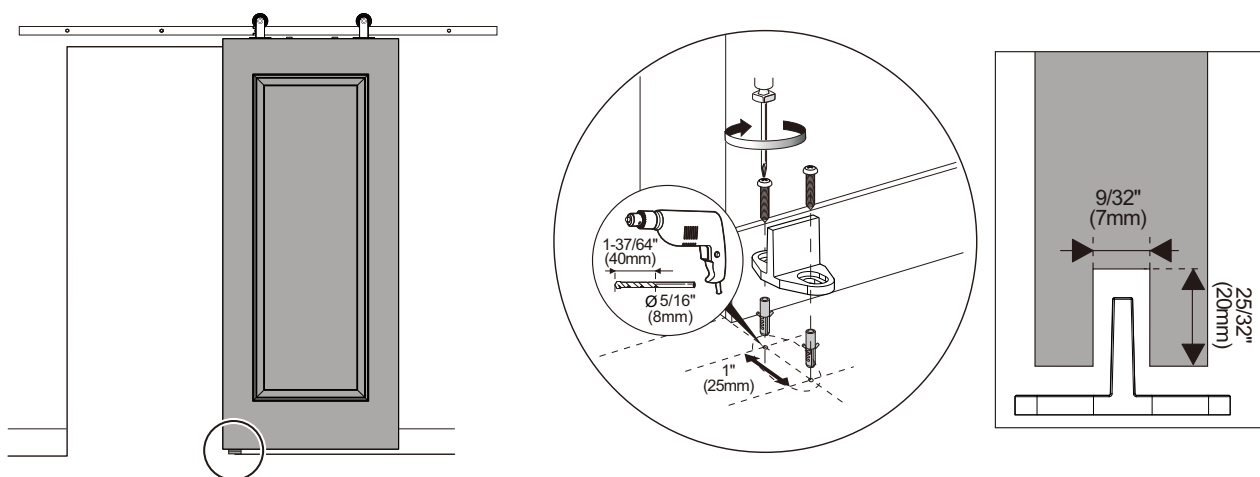


9 Securing Door Stoppers



IMPORTANT: Stoppers are used to avoid the door from rolling out the edge of the rail on both ends.

- ☐ Close the door to the desired position.
- ☐ Insert and secure the door stopper (DD) by tightening the screw.
- ☐ Open the door to the desired position.
- ☐ Insert and secure the door stopper (DD) by tightening the screw

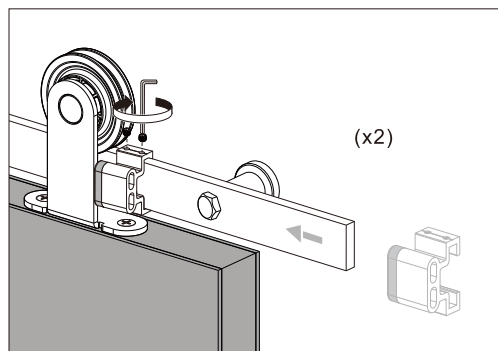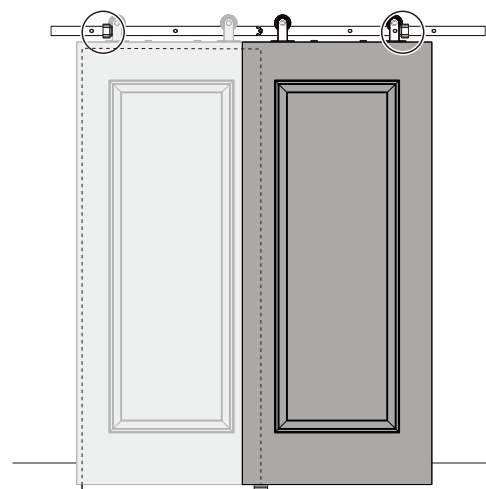

10

Installing Door Handle

- ☐ Put handle in place.
- ☐ Secure with screws.

