


98834

MANIZALES

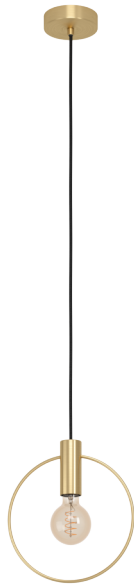

General Information

Material number	98834
Type	pendant light
Product segment	Indoor
Theme	sonstige / nicht zuordenbar
FSC®	FSC® Mix70% Pinus rad. FSC® C152762

Dimensions

Article Height (in mm)	1100
Article Length (in mm)	250
Net Weight (in kg)	0.45 Kilogram
Article Overhang (in mm)	90
Article Width (in mm)	105
Article Diameter (in mm)	110
Canopyens længde (i mm)	400
Canopyens bredde (i mm)	45
Canopyens højde (i mm)	45
Base Diameter (in mm)	160
Base Length (in mm)	240
Base Width (in mm)	120
Einbautiefe (in mm)	50
Ausschnitt (in mm)	68

98834

MANIZALES

Material & Colour

Enclosure Material	steel
Enclosure Colour	brushed brass
Glass/Shade Material	steel
Glass/Shade Colour	white
Cable Colour	textil-cable black

Functionality

Switch Type	without switch
Battery	No
Function	LED not replaceable
Battery Type	Li-ion; 1200mAh
Sensor Angle (in °)	120
Sensitivity min. (in lux)	30
Burning Time min. (in sec.)	5
Burning Time max. (in sec.)	15
Distance (in Meter)	6

Technical Information

Protection Degree	IP20
Protection Class	2
Mains Voltage	220-240V,50/60Hz
Operation Voltage	220-240V,50/60Hz
max. Wattage (1)	1X40W
Dimmable	No
Spannung	220-240V 50/60Hz
U out	46-70V
I out	300mA
Hz	100Hz

Illuminant 1

Illuminant Type (1)	E27
Illuminant incl. (1)	Exclusive
Socket Type (1)	E27

98834

MANIZALES

Illuminant 1

Socket Type (1)	SOLAR-LED
Illuminant Type (1)	LED
Illuminant incl. (1)	Inclusive
Kelvin Complete	3000K, 4000K, 6000K
Light colour Complete	WW+NW
Nominal Lifetime (in h)	5000
Tænd-/slukcyklusser	15000
Energy efficiency class (EEI)	F
Dimmable	No
Info changeability□light source/driver	LED exchangeable by a specialist, no driver included
Lyskildens faktiske effekt (0,1 W præcision)	18
Farvetolerance (LED, SDCM)	<6
Lumen Complete	264

Lyskilde 1

Fatningstype (1)	GU10
Lyskildetype (1)	GU10-LED
Lyskilde	Inklusiv
Energieffektivitetsklasse	F
Info changeability□light source/driver	LED kan udskiftes af kunde, Ingen driver inkluderet

