


TOP VIEW

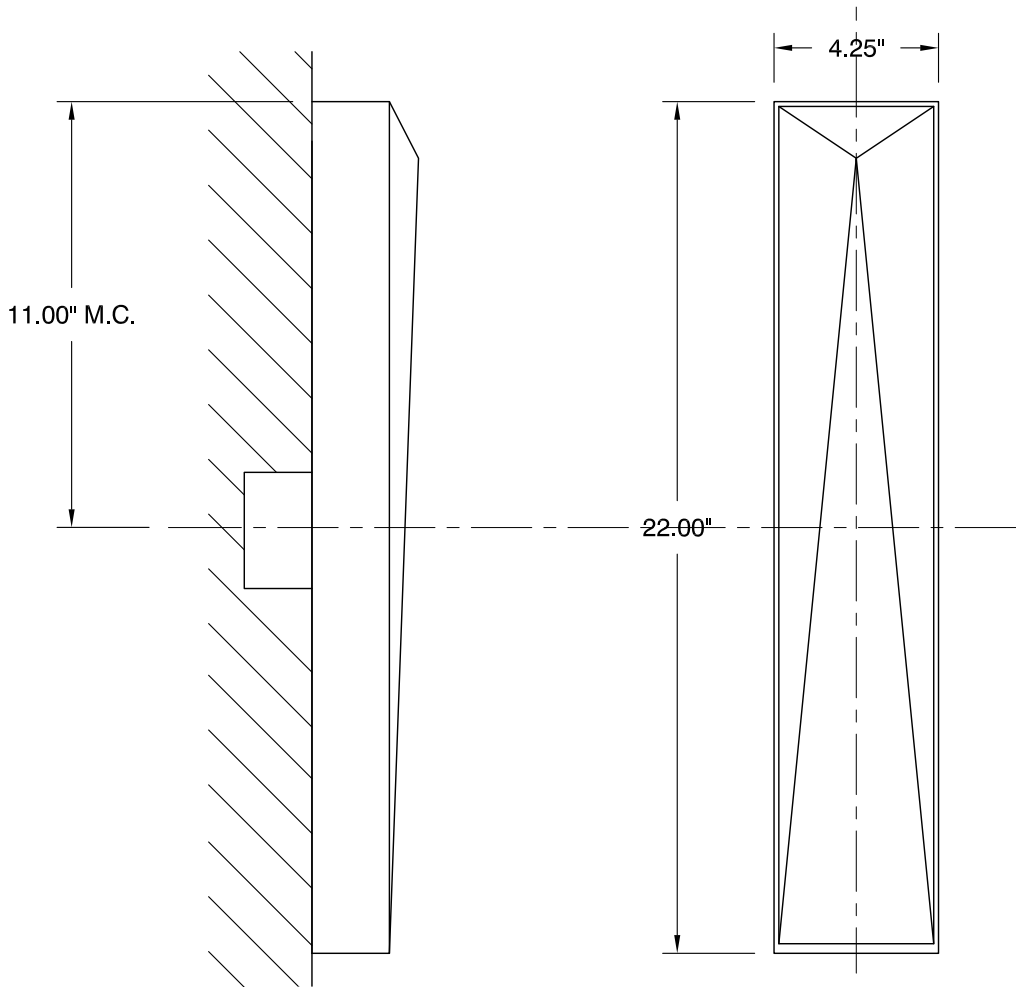

SIDE VIEW

FRONT VIEW

ELIF outdoor
 120v **3-737-16**
 277v **37-737-16**

OXYGEN LIGHTING ©

LAMPING

- o (2x) 10.1w LED Arrays
- o 3000K, 350mA (ea.)
- o Initial Lumens: 2920 lm
- o Delivered Lumens: 653 lm
- o CRI >80
- o Color Consistency: 3 Step MacAdam Ellipse

DRIVER (Dimmable)

- o (2x) 0-10v & Reverse Phase Dimming
- Constant Current, 12w, 350mA

METAL FINISHES

- (All finishes polyester powder coat)
- o **16** - Gray
- o **22** - Oiled Bronze

DIFFUSER

- o Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o 4.25" (w) x 22.00" (h)
- 2.75" (ext.)

SPECIAL NOTE

- o Add caulking around fixture base at the wall to prevent water from entering fixture.

INSTALLATION

- o 2" x 3" J-Box or 4" Octagonal J-Box
- o ETL WET Listed (installer must provide a bead of caulk between fixture housing and mounting surface)
- o Wall mount
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 250.0



Sample Catalog Number

Series #	Finish		Catalog Number
3-737	16	=	3-737-16

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____

