



## LED Center Basket Troffers

5 CCT and 3 Wattage Selectable

Project: \_\_\_\_\_ Location: \_\_\_\_\_

Date: \_\_\_\_\_ Part #: \_\_\_\_\_

Notes: \_\_\_\_\_



### Performance & Features

#### Product Highlights

- 5-CCT Selectable  
3000K/3500K/4000K/5000K/6500K
- Energy-saving, long lifespan
- No UV or IR in the beam
- NO flickering, NO humming
- Green and eco-friendly without mercury

#### Detail Specification:

- Finish: Long lasting white finish available with high durability
- IP: Damp Location Rated
- Beam Angle: 120°
- CRI: >80
- Operating Temp: -40°F to 140°F
- Lens: Frosted
- Life: L70 of 100,000 hours

#### Certifications

- ETL Listed, DLC Listed
- 5 Year Limited Warranty
- FCC

#### LED Driver

- 0-10V Dimmable
- 120-277V
- Flicker-Free

Quick Order

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
2x2 -25W-30W-35W - Selectable TRO2-35W-5CCT-DV2-NA-F-WH	25W/30W/35W	3200 / 3750 / 4500	5CCT 3000K/3500K/4000K /5000K/6500K	125	White
2x4 -36W-42W-50W - Selectable TRO4-50W-5CCT-DV2-NA-F-WH	36W/42W/50W	4500 / 5250 / 6500	5CCT 3000K/3500K/4000K /5000K/6500K	125	White


Contact for custom configuration & specifications




White finish available

Dimensions

TRO2-35W-5CCT-DV2-NA-F-WH

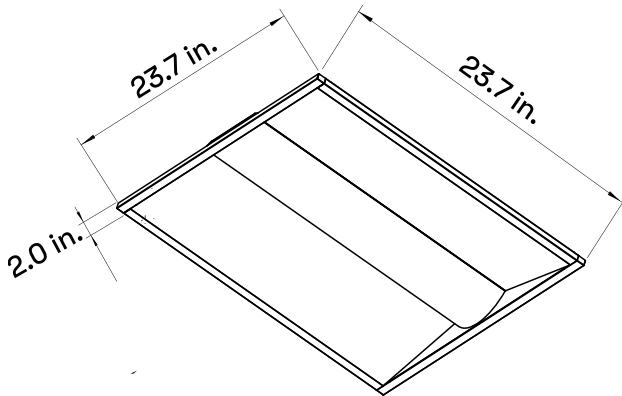

TRO4-50W-5CCT-DV2-NA-F-WH


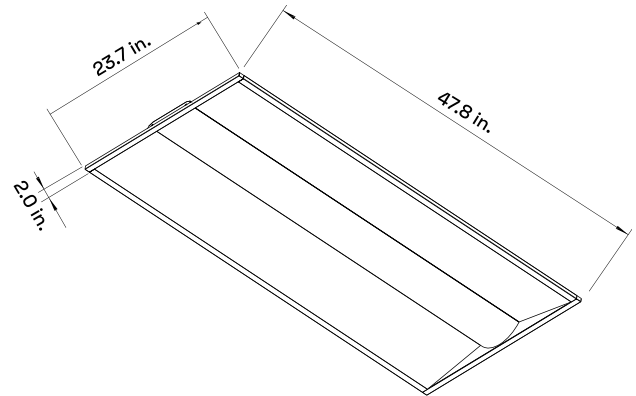


Packaging Dimensions

SKU#	Master Carton	Qty
TRO2-35W-5CCT-DV2-NA-F-WH	24.3x24.0x4.8in	2
TRO4-50W-5CCT-DV2-NA-F-WH	48.3x24.0x4.8in	2

Photometry

TRO2-35W-5CCT-DV2-NA-F-WH

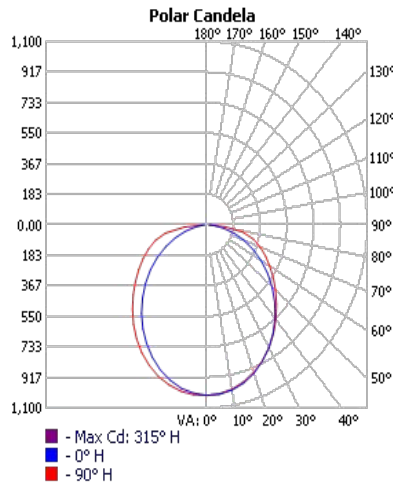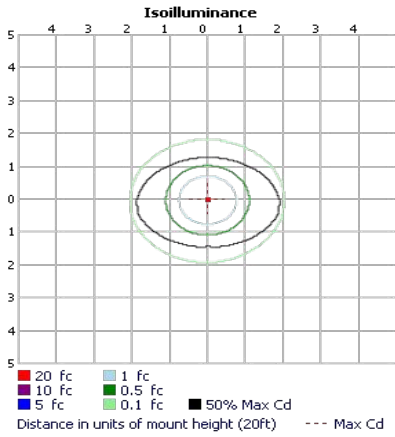

## Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	788.6	25.8%
0-40	1,286.5	42.1%
0-60	2,274.9	74.5%
60-90	780.3	25.5%
0-90	3,055.2	100%

BUG Rating	B1 - Ux - G1	
Forward Light	Lumens	Lumens %
Low(0-30):	397.4	13%
Medium(30-60):	758.3	24.8%
High(60-80):	346.9	11.4%
Very High(80-90):	63.8	2.1%
Back Light		
Low(0-30):	391.5	12.8%
Medium(30-60):	728.6	23.8%
High(60-80):	319.5	10.5%
Very High(80-90):	50.3	1.6%
<b>Trapped Light:</b>	0.000	0%

Note: Additional Photometry available on request

Accessories



PIR Motion Sensor  
TRO-MS