ASSEMBLY INSTRUCTION

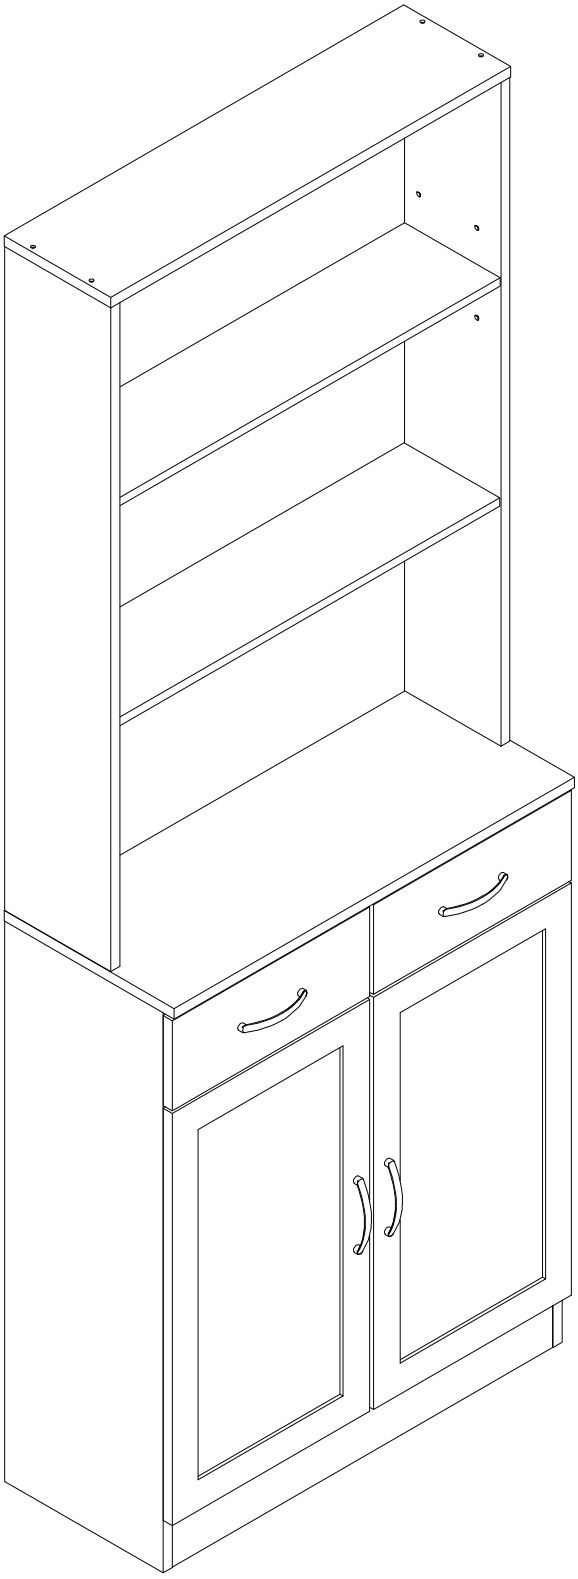

PARTS LIST

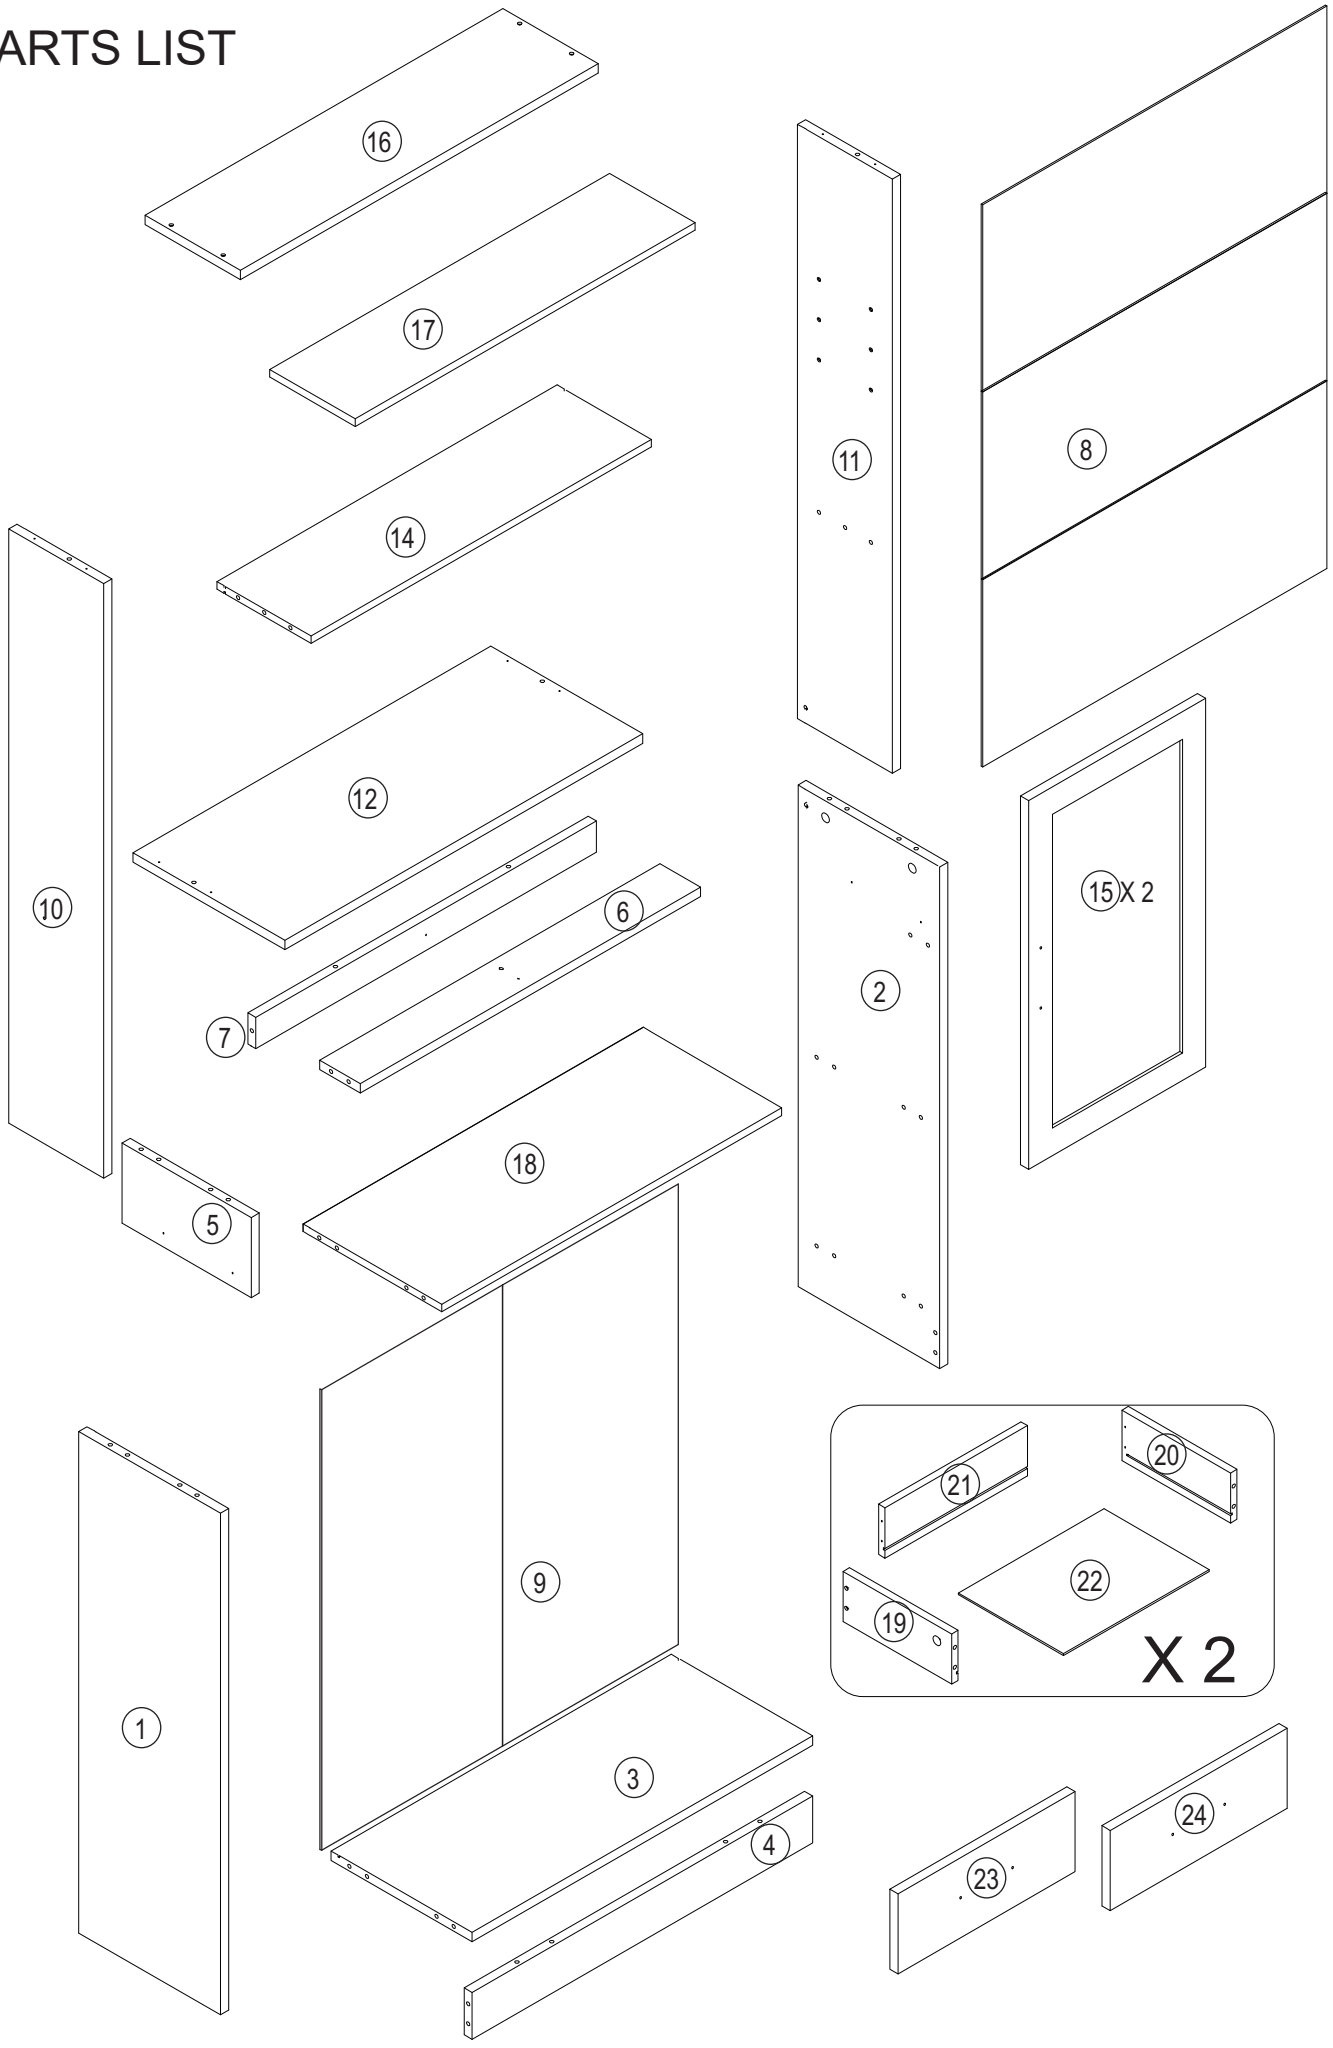

1

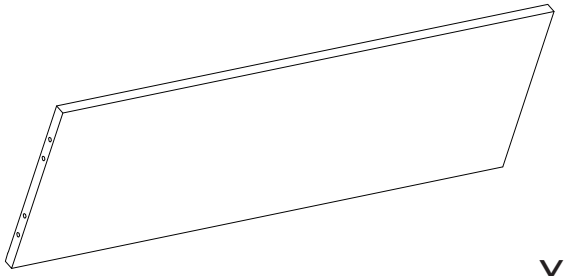

X 1

2

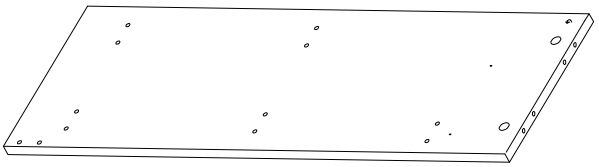

X 1

3

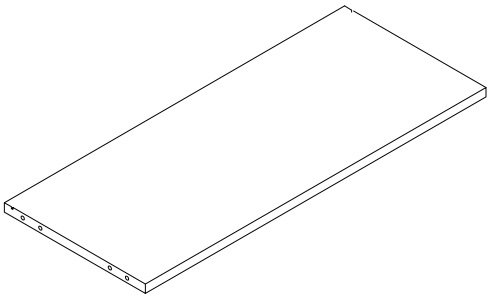

X 1

4

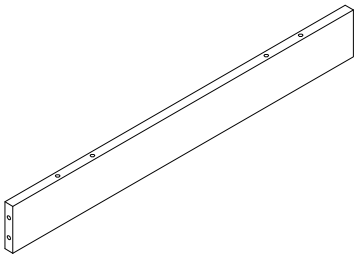

X 1

5



X 1

6

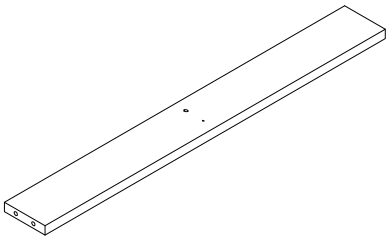

X 1

7

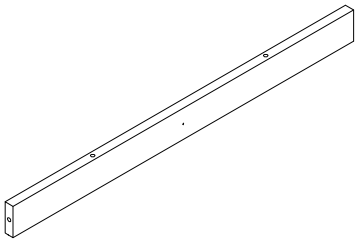

X 1

8

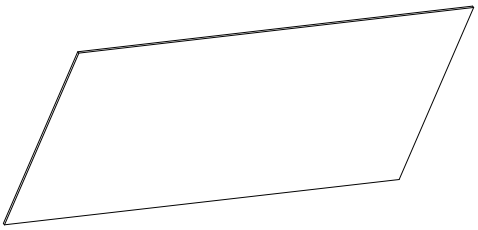

X 3

9

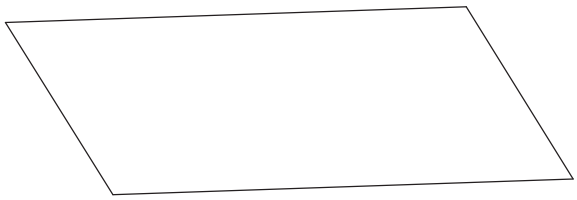

X 2

10

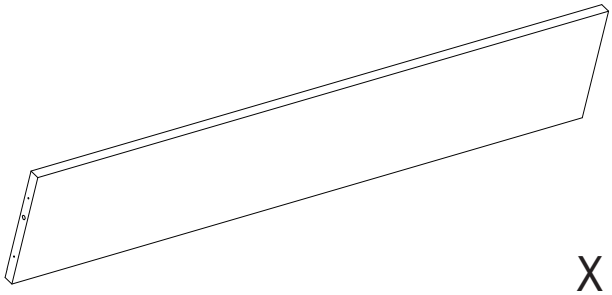

X 1

11

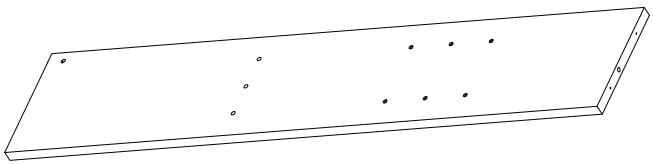

X 1

12

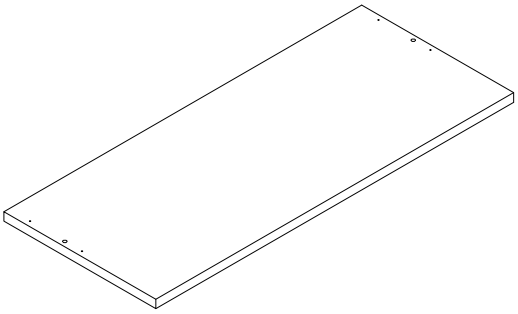

X 1

14

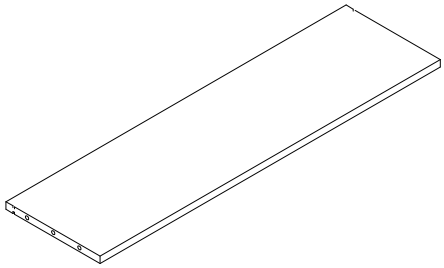

X 1

15

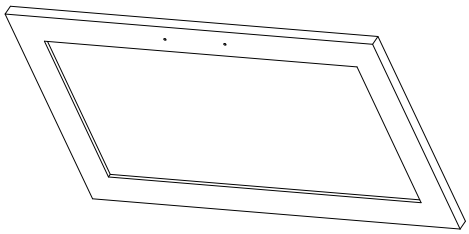

X 2

16

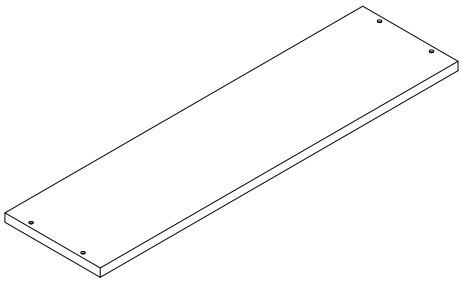

X 1

17

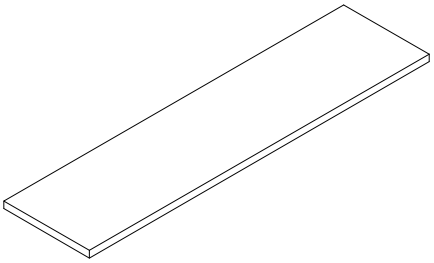

X 1

18

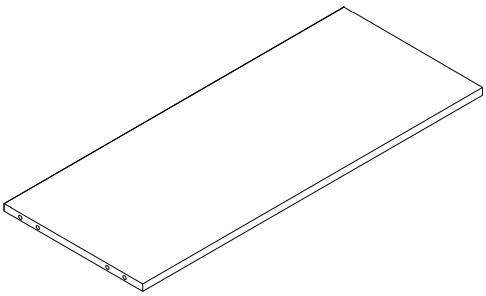

X 1

19



X 2

20



X 2

21



X 2

22



X 2

23



X 1

24



X 1

Hardware:

 32 x A	32 x B	 31 x C	(CL)  2 x D
(CR)  2 x D	(DL)  2 x D	(DR)  2 x D	16 x E Ø3.5*12
 4 x F Ø4*35	8 x G	 1 x H	 4 x I
4 x J Ø3*14	 4 x K	 8 x L Ø4*30	4 x M
8 x N M4x16	 4 x O	24 x P Ø4*14	 2 x Q
 2 x R	2 x T Ø4*14	 42 x U	6 x V

STEP 1

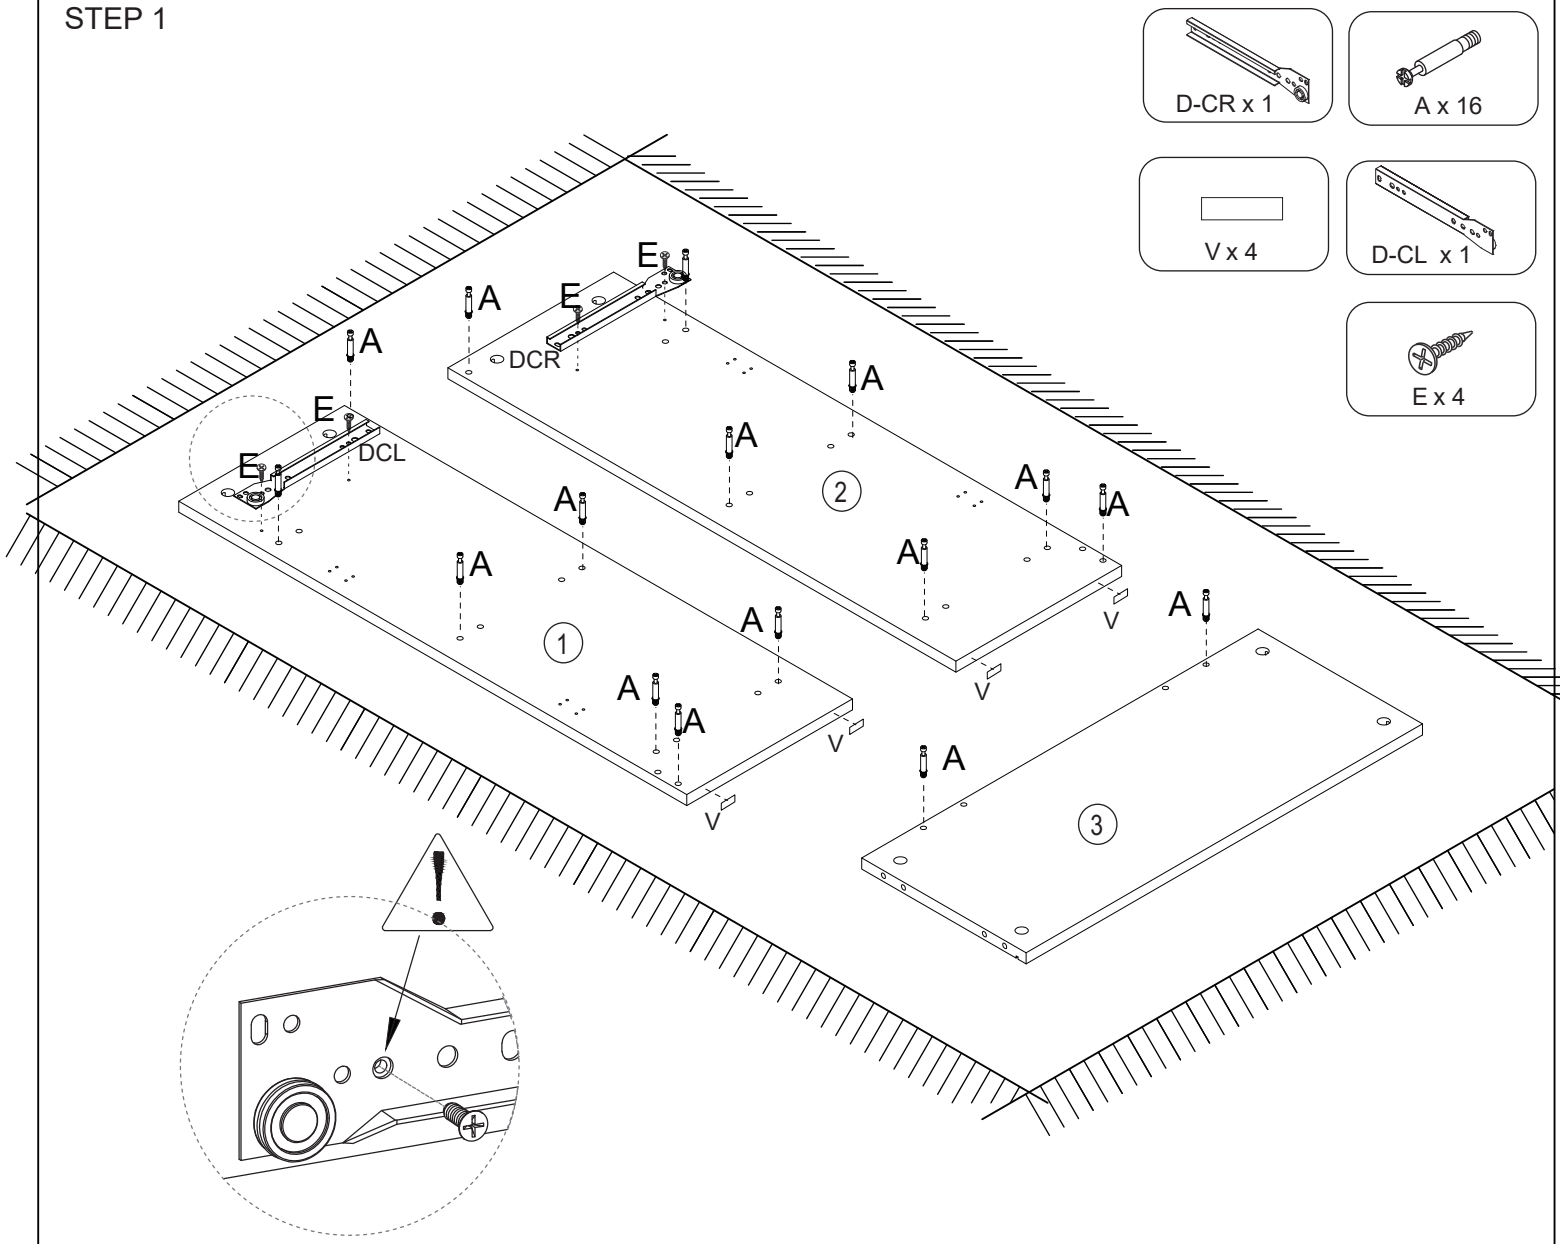

STEP 2

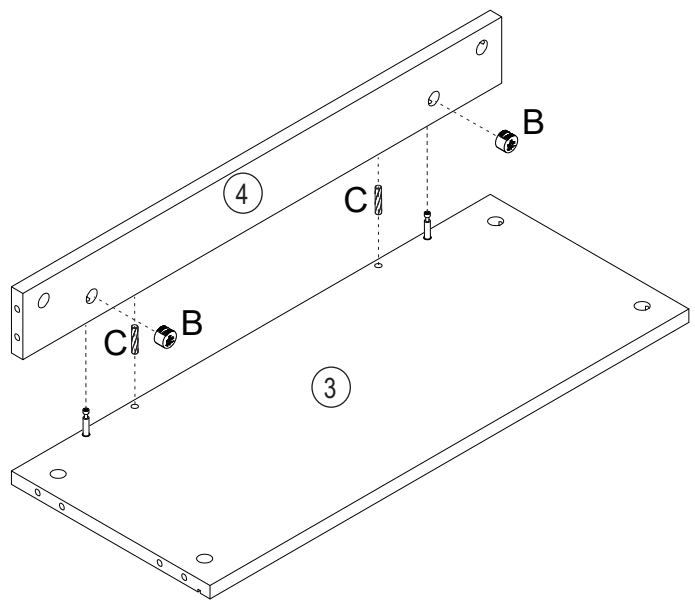

STEP 3

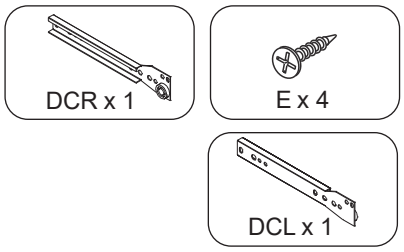

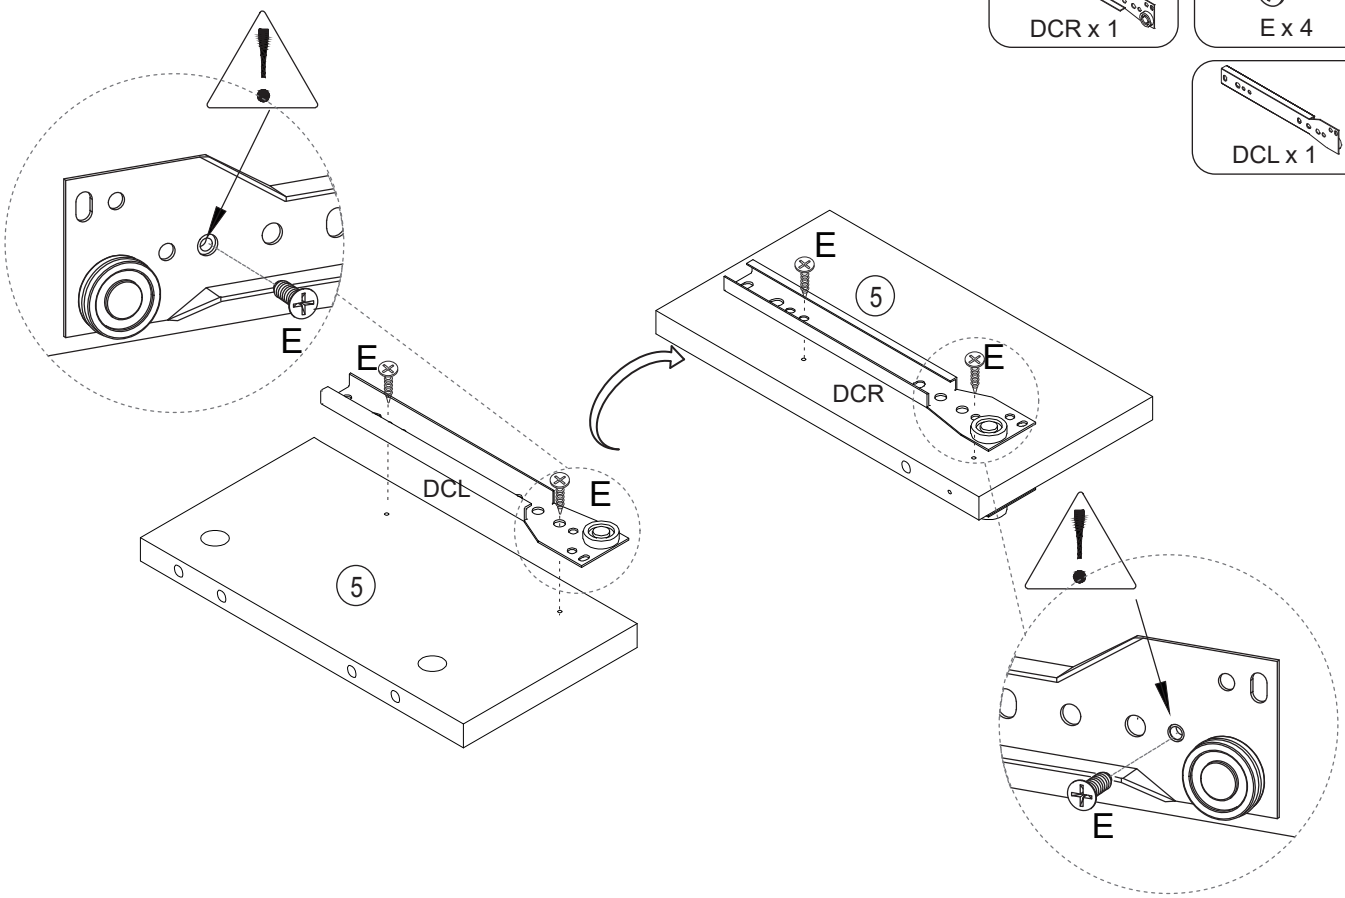

STEP 4



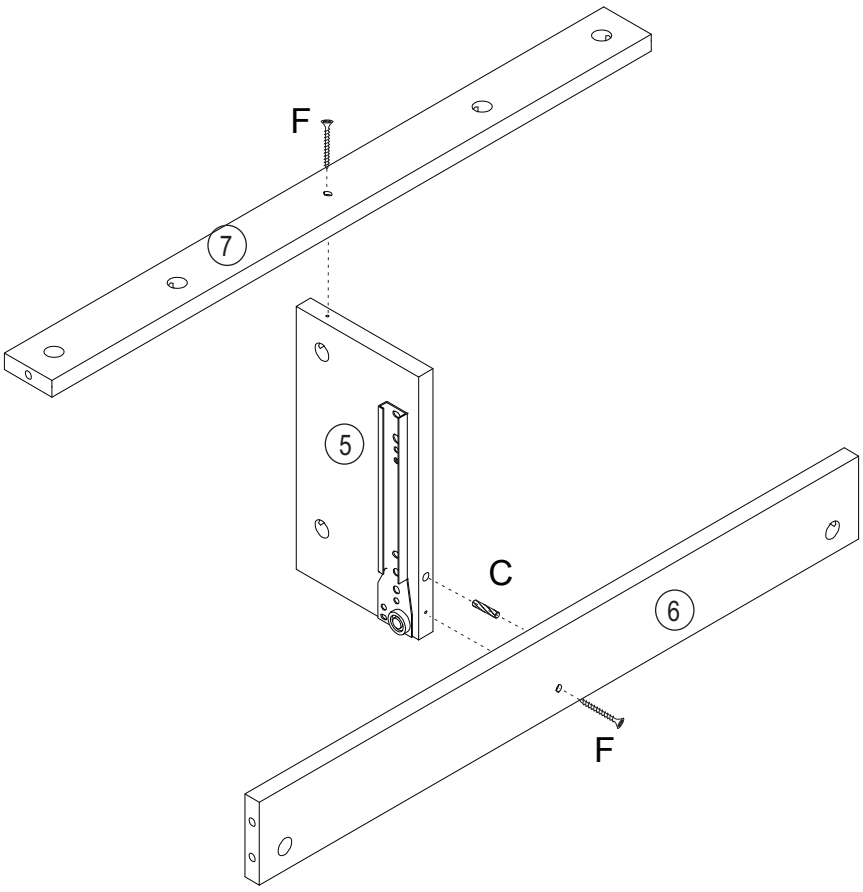

STEP 5

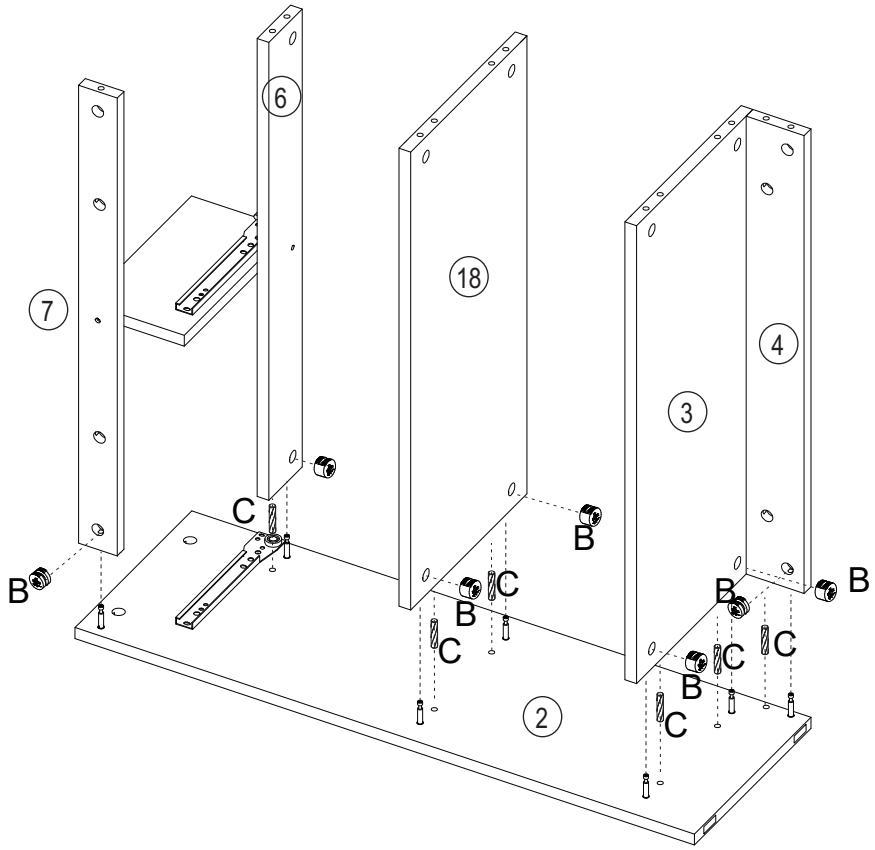
6
18
7
4
3
C
B
B
C
B
C
B
B
C
C
B
C
2


B x 7


C x 6

STEP 6

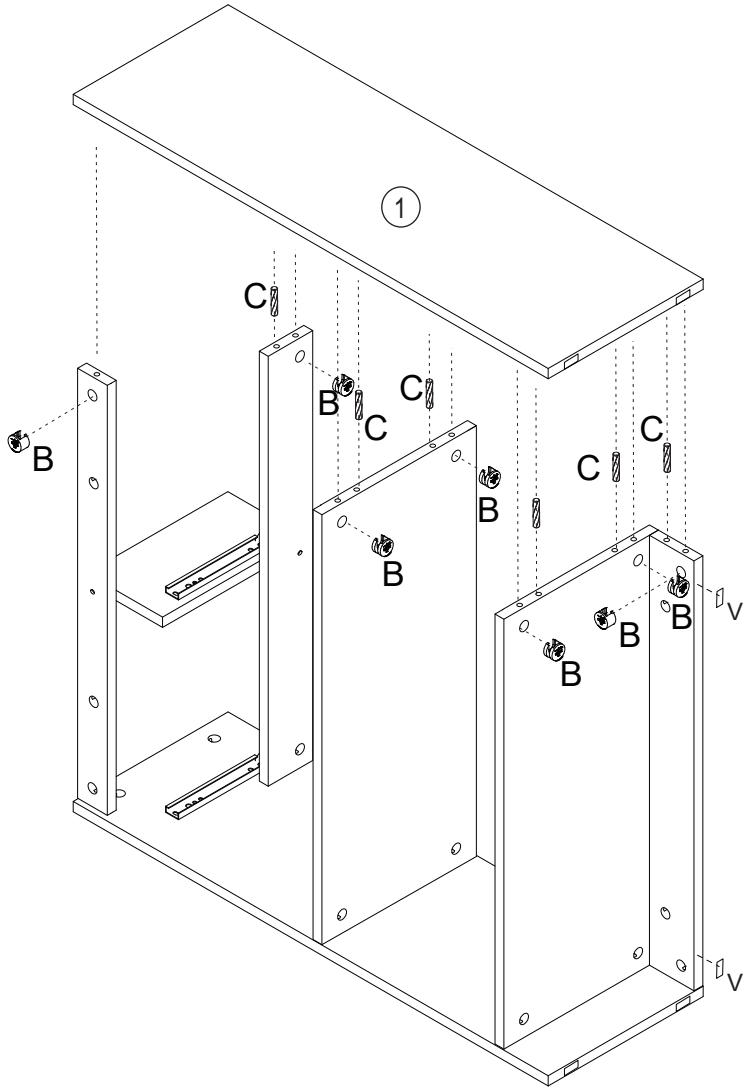
1
C
B
C
C
B
B
C
C
C
B
B
B
B
V
V


B x 7


C x 6


V x 2

STEP 7



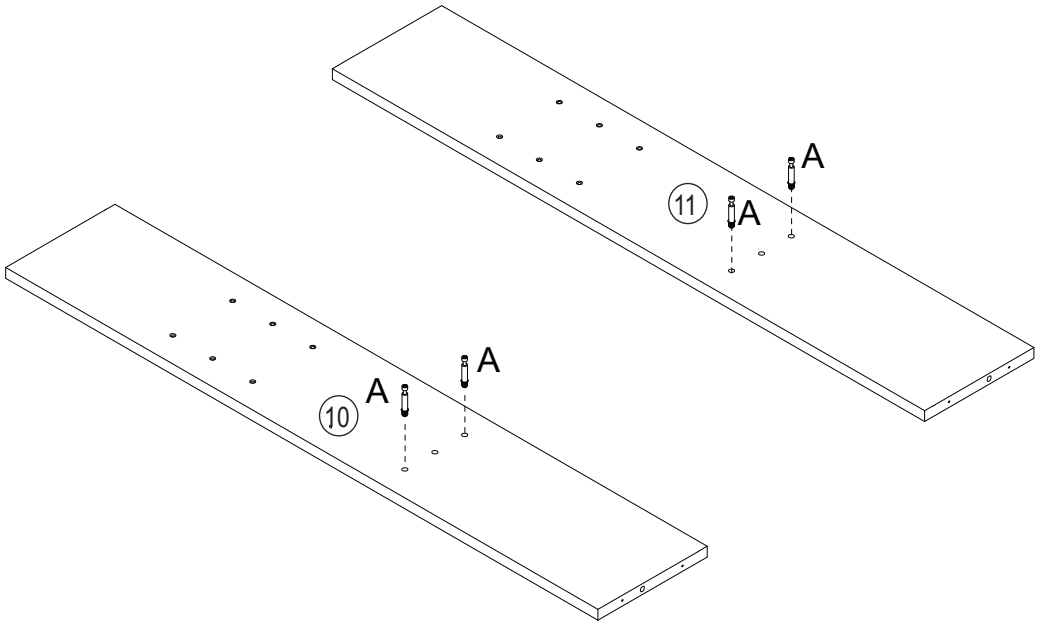

STEP 8





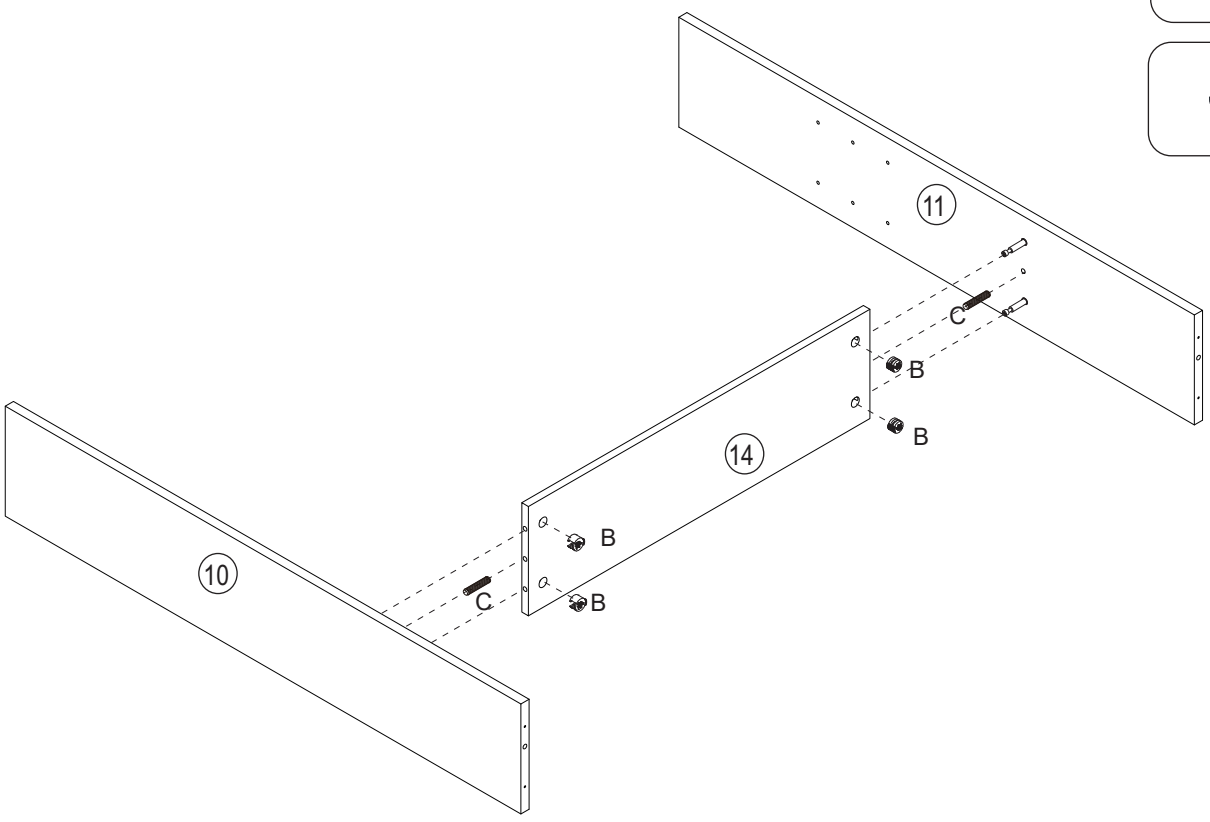

STEP 9

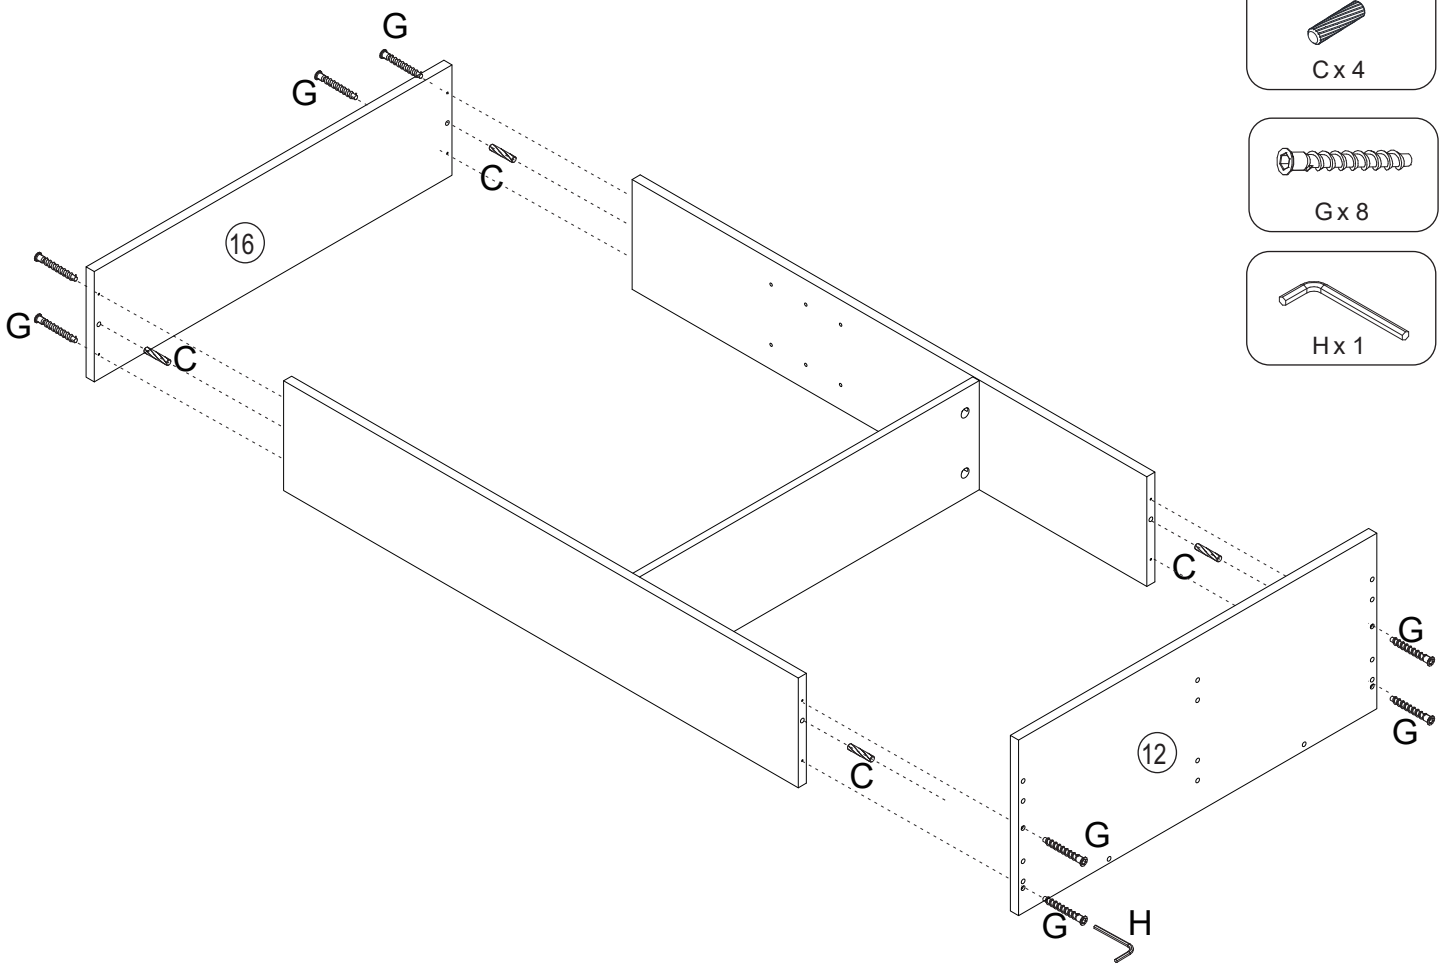

STEP 10

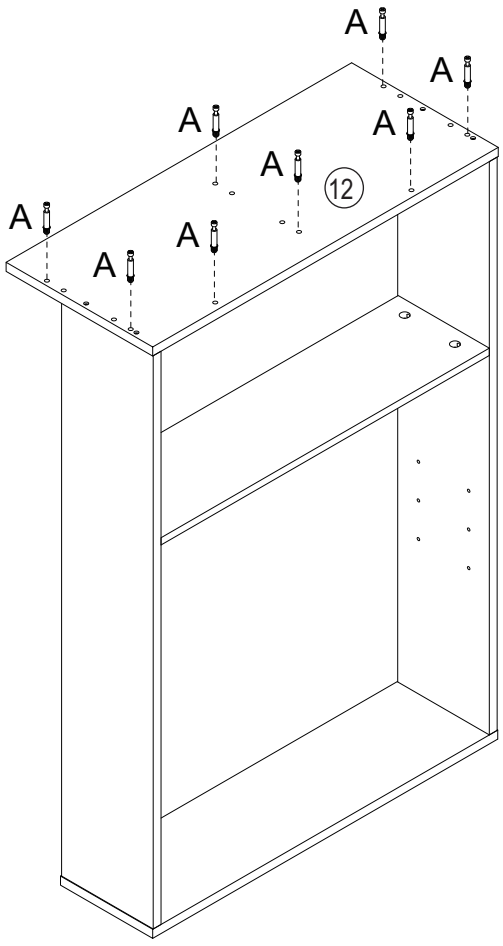



STEP 11

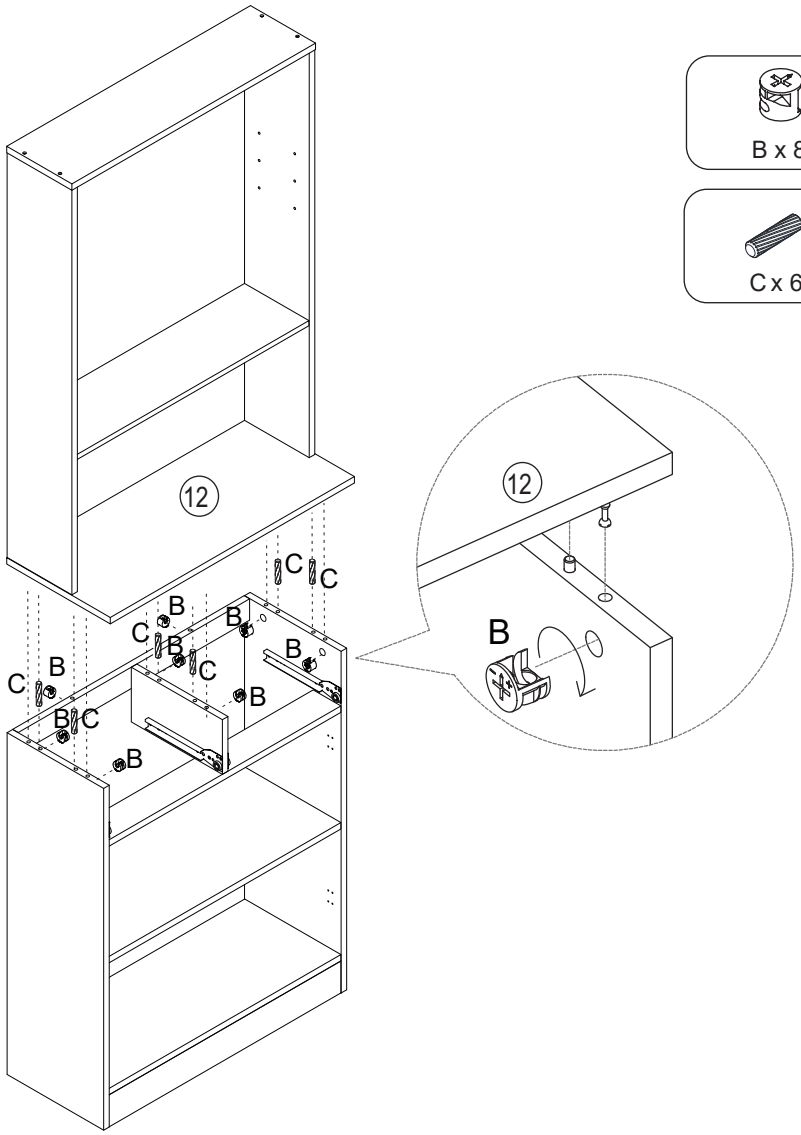





STEP 12

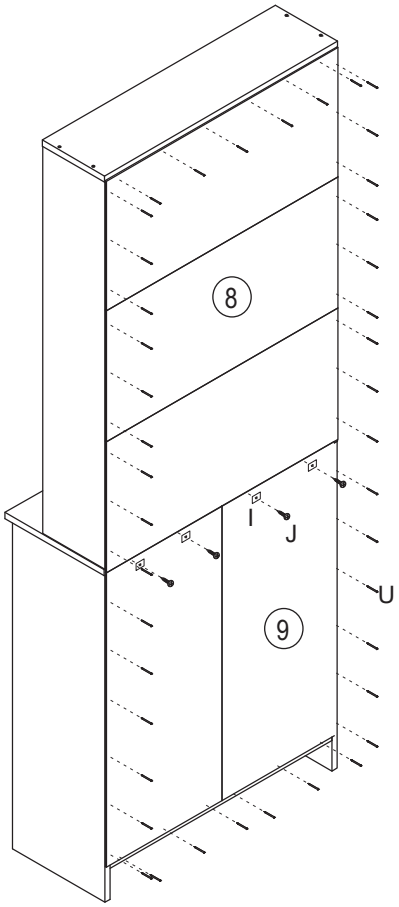







STEP 13



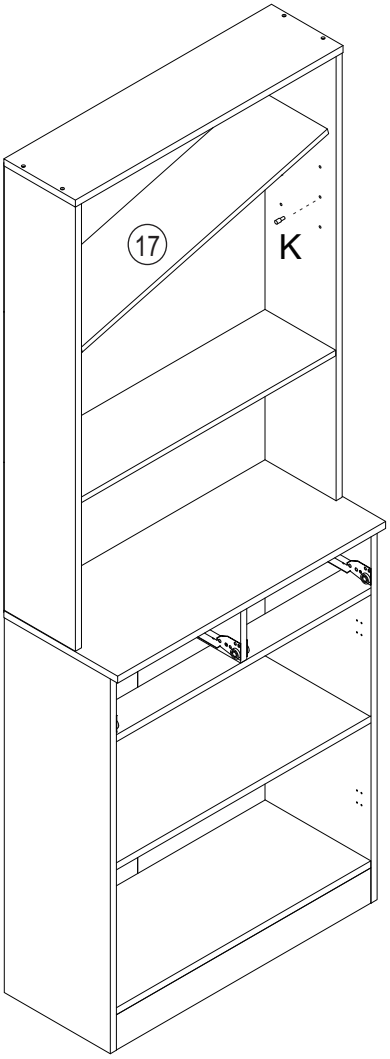

STEP 14



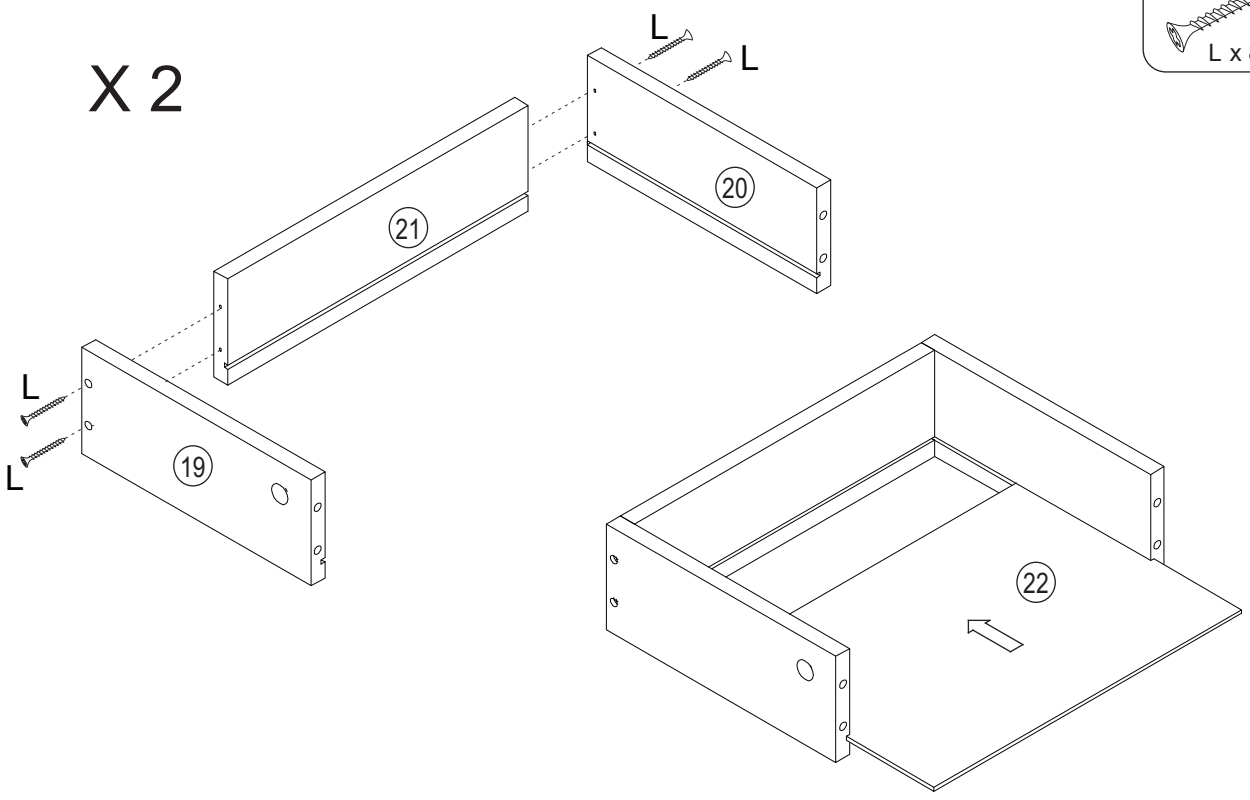

STEP 15

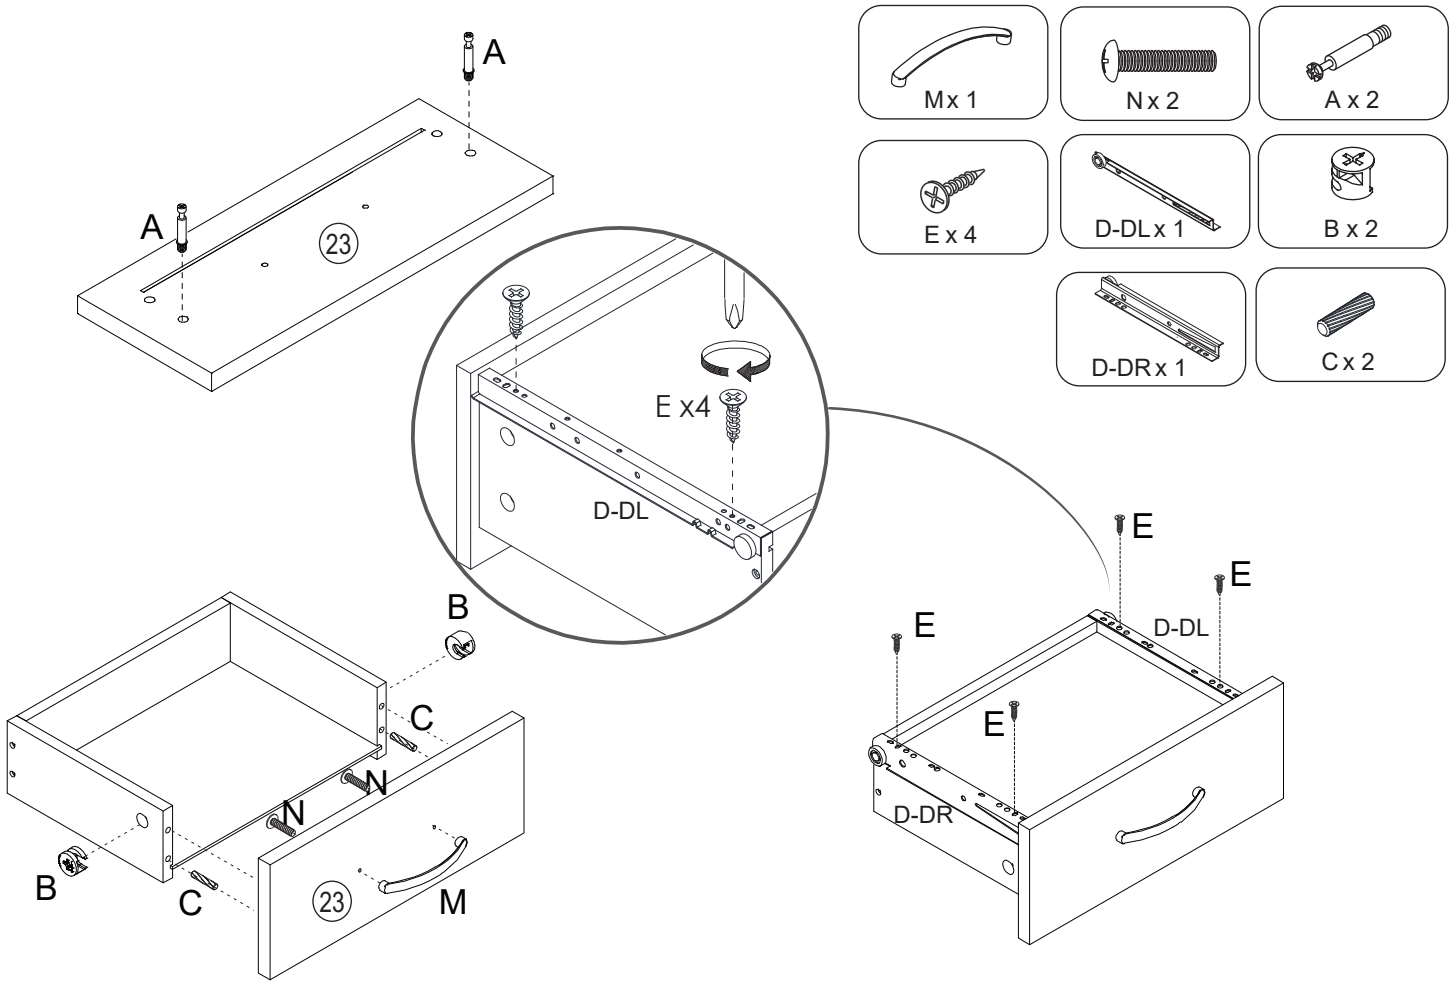

STEP 16

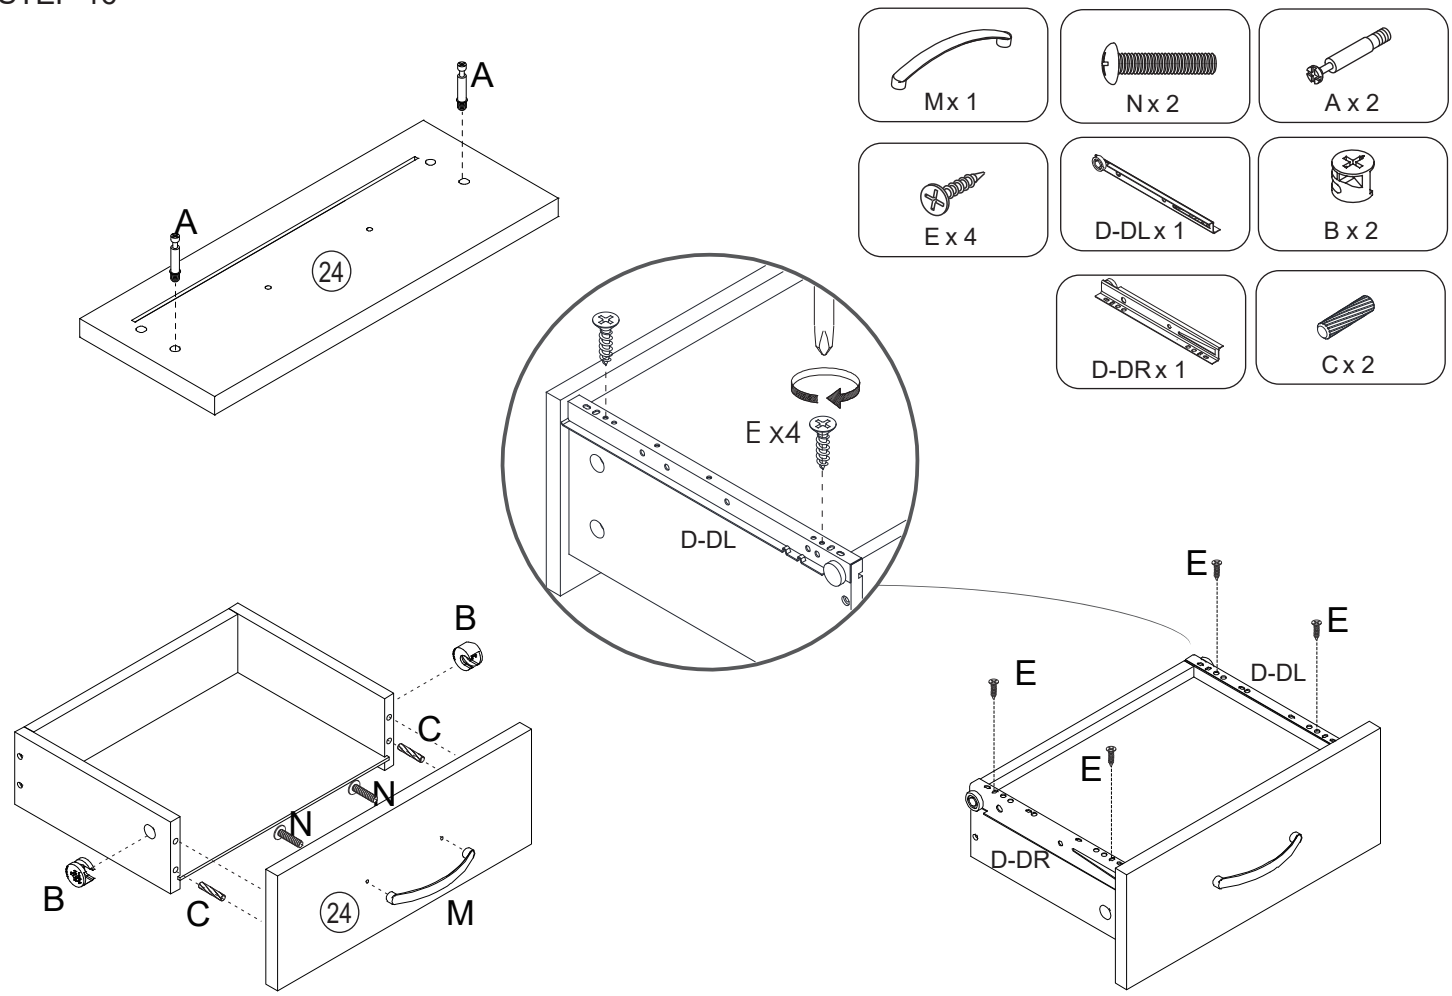

STEP 17

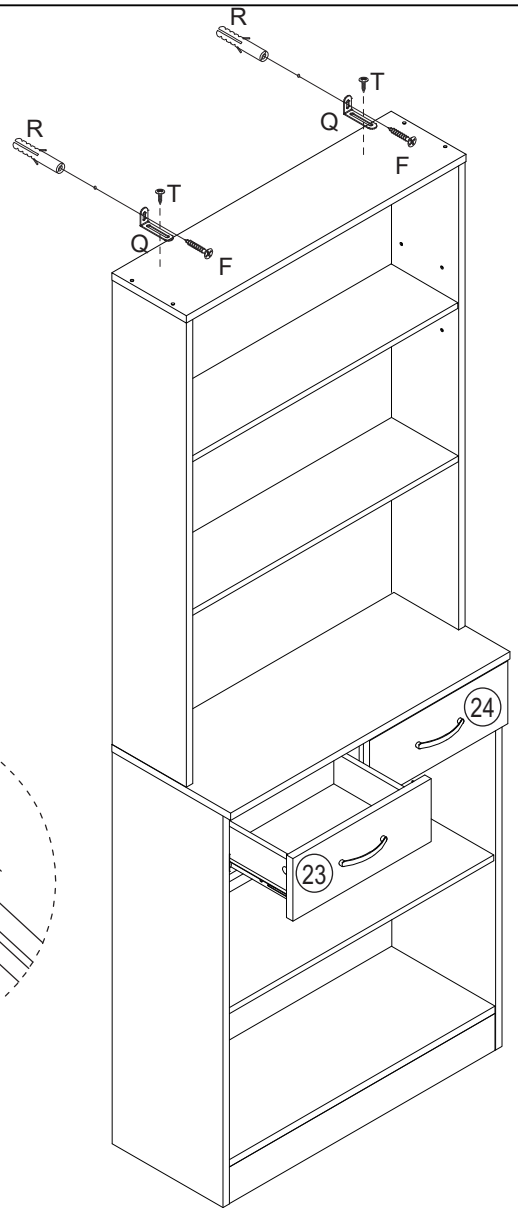



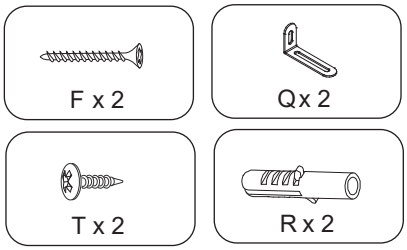

STEP 18

X 2

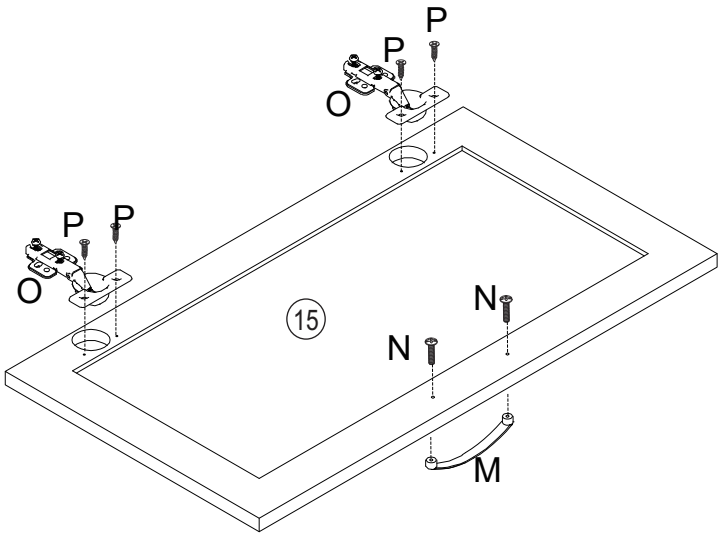

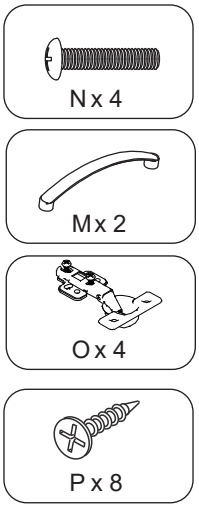

STEP 19

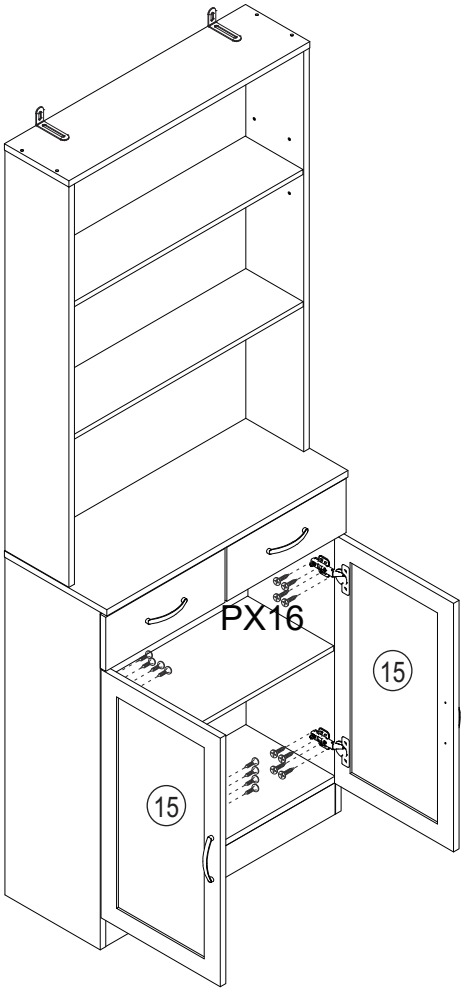



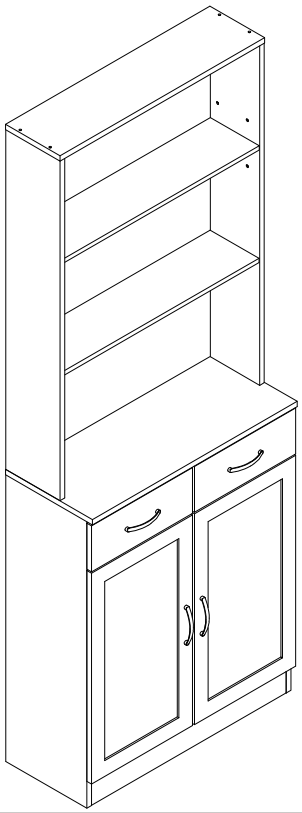

Attention: For safety and stability, we suggest you have to secure the anti-tip accessories to the wall to prevent tipping, injury, and property damage.

Installation Completed

Cabinet Door Adjustment Instructions

Height adjustment:

a) Locate the height adjustment screws on the hinge.

b) Use the Phillips screwdriver to either tighten or loosen the screws to raise or lower the cabinet door as desired.

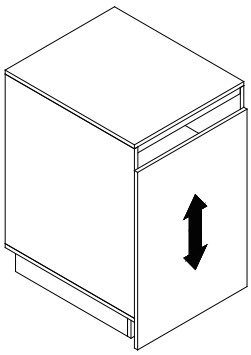

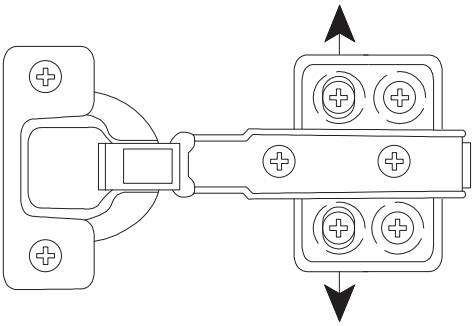

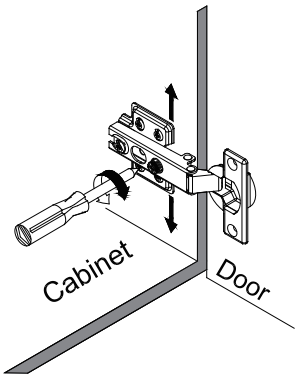

Side-to-side adjustment:

a) If the cabinet door needs to be moved closer to or away from the cabinet frame, locate the side - to-side adjustment screws on the hinge.

b) Use the Phillips screwdriver to adjust these screws and gradually move the door in the desired direction.



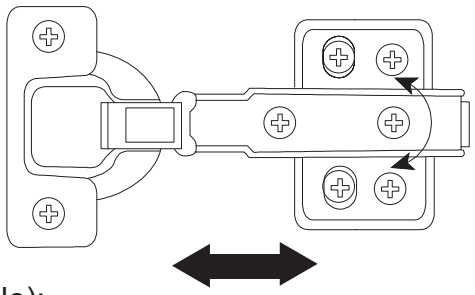



Depth adjustment (if applicable):

a) Check if the cabinet door needs to be brought closer to or further away from the cabinet frame.

b) For-depth adjustment, locate the depth adjustment screws on the hinge.
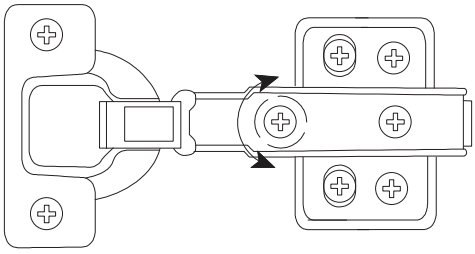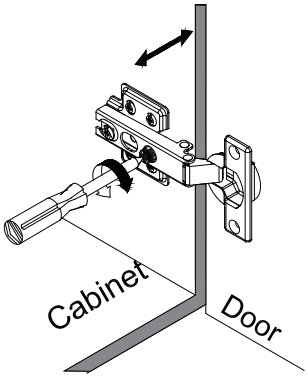
c) Use the Phillips screwdriver to turn these screws clockwise or counterclockwise accordingly.