

Features

- Spacious design accommodates up to two bathers.
- Corner layout minimizes footprint without compromising bathing area.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Integral faucet deck.

Material

Acrylic.

Installation

Corner alcove.

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/Whirlpool Footstop

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-24916 Wireless Music Kit

K-7259 Brass toe tap bath drain

K-23726 Drain treatment

K-23732 Tub & shower cleaner

K-7161-AF 1-1/2" adjustable pop-up drain above- or through-floor

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-7265 Brass toe tap bath drain

K-37386 rough-in cable drain, PVC, 30" cable

K-7166-AF Bath Drain

K-37380 30" Rough-in Cable Bath Drain



Codes/Standards

CSA B45.5/IAPMO Z124

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond





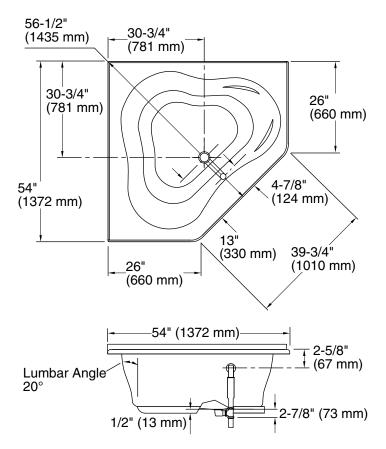

Technical Information

All product dimensions are nominal.

Installation: Corner Drain location: Center


Basin area, bottom: 44" x 36" (1118 mm x 914 mm)
Basin area, top: 56" x 43" (1422 mm x 1092 mm)

Weight: 51 lbs (23.1 kg)


Minimum floor load: 35 lbs/ft² (170.9 kg/m²)

Water depth: 15" (381 mm)
Water capacity: 76 gal (287.7 L)

K-1155-F No change in measurements if connected with drain illustrated. (K-11677)



Tile Flange Detail



Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

