

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Viggo

## Linear Multi Light 4CCT

| Model & Size                 | Color Temp & CRI               | Watt | Lumens | Finish   |
|------------------------------|--------------------------------|------|--------|----------|
| PD-69403L1 24"<br>- 3 Lights | 2<br>700K/3000K/3500K/4000K 90 | 15 W | 401    | BK Black |

Example: **PD-69403L1-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

### FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120/277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% ,TRIAC: 100-5%                |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL                                  |
|               | Damp Location Listed                       |
| Construction: | Aluminum body with etched acrylic diffuser |

### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

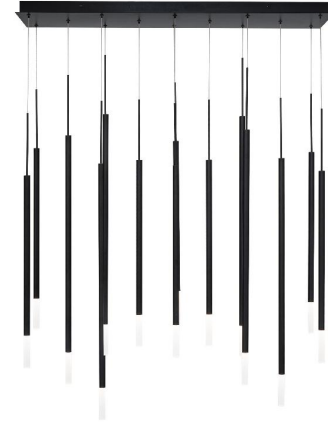


### FINISHES:



Black

### LINE DRAWING:

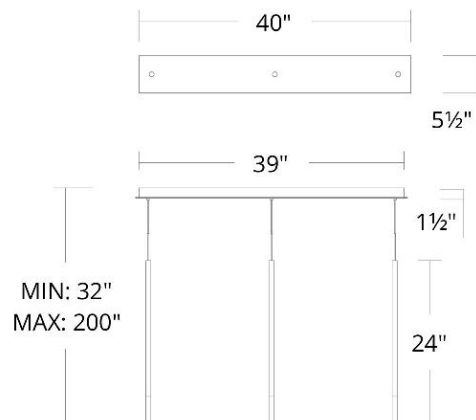

PD-69403L1

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Viggo

## Linear Multi Light 4CCT

| Model & Size                 | Color Temp & CRI               | Watt | Lumens | Finish   |
|------------------------------|--------------------------------|------|--------|----------|
| PD-69403L2 32"<br>- 3 Lights | 2<br>700K/3000K/3500K/4000K 90 | 15 W | 401    | BK Black |

Example: **PD-69403L2-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

### FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120/277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL                                  |
|               | Damp Location Listed                       |
| Construction: | Aluminum body with etched acrylic diffuser |

### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

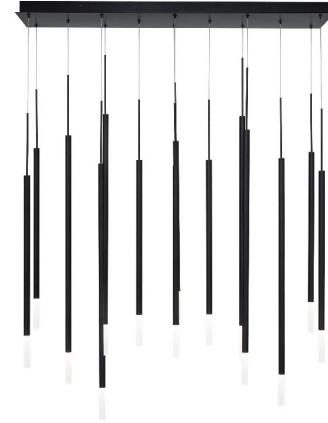


### FINISHES:



Black

### LINE DRAWING:

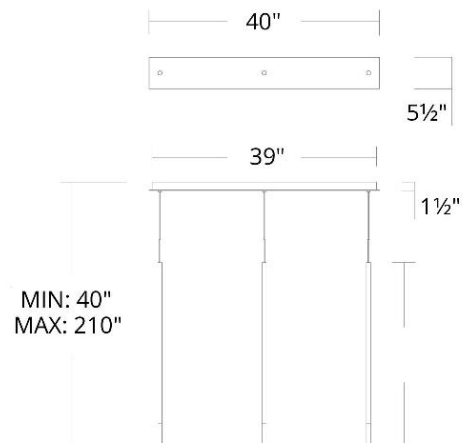

PD-69403L2

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Viggo

## Linear Multi Light 4CCT

| Model & Size                 | Color Temp & CRI               | Watt | Lumens | Finish   |
|------------------------------|--------------------------------|------|--------|----------|
| PD-69405L1 24"<br>- 5 Lights | 2<br>700K/3000K/3500K/4000K 90 | 20 W | 536    | BK Black |

Example: **PD-69405L1-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

### FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120/277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% ,TRIAC: 100-5%                |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL                                  |
|               | Damp Location Listed                       |
| Construction: | Aluminum body with etched acrylic diffuser |

### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

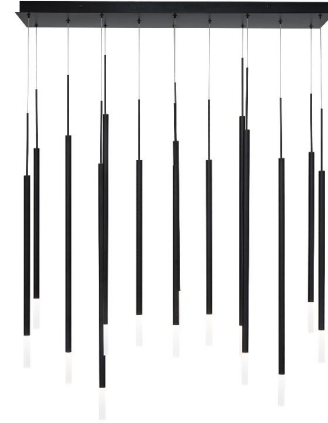


### FINISHES:



Black

### LINE DRAWING:

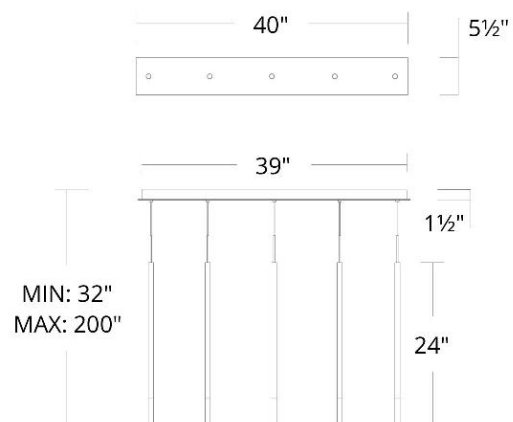

PD-69405L1

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Viggo

## Linear Multi Light 4CCT

| Model & Size                 | Color Temp & CRI               | Watt | Lumens | Finish   |
|------------------------------|--------------------------------|------|--------|----------|
| PD-69405L2 32"<br>- 5 Lights | 2<br>700K/3000K/3500K/4000K 90 | 20 W | 536    | BK Black |

Example: **PD-69405L2-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

### FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120/277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% ,TRIAC: 100-5%                |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL<br>Damp Location Listed          |
| Construction: | Aluminum body with etched acrylic diffuser |

### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

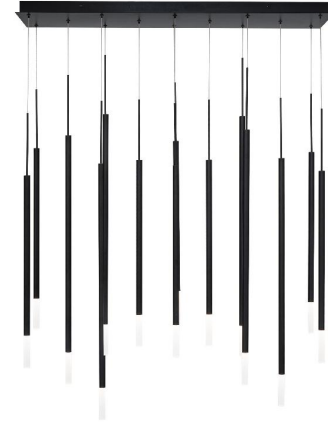


### FINISHES:



Black

### LINE DRAWING:

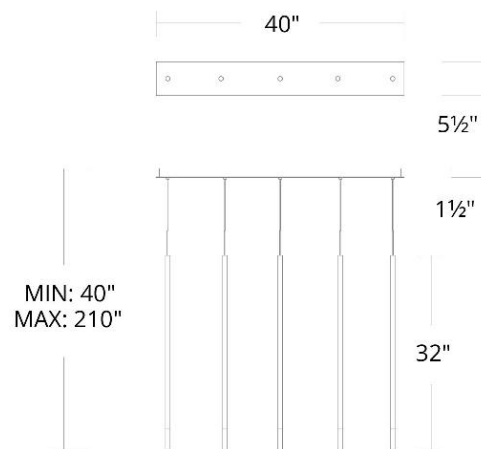

PD-69405L2

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Viggo

## Linear Multi Light 4CCT

| Model & Size              | Color Temp & CRI               | Watt | Lumens | Finish   |
|---------------------------|--------------------------------|------|--------|----------|
| PD-69414L 32" - 14 Lights | 2<br>700K/3000K/3500K/4000K 90 | 57 W | 1607   | BK Black |

Example: **PD-69414L-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

### FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120/277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% ,TRIAC: 100-5%                |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL                                  |
|               | Damp Location Listed                       |
| Construction: | Aluminum body with etched acrylic diffuser |

### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

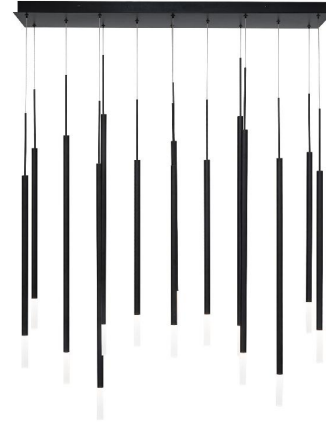


### FINISHES:



Black

### LINE DRAWING:

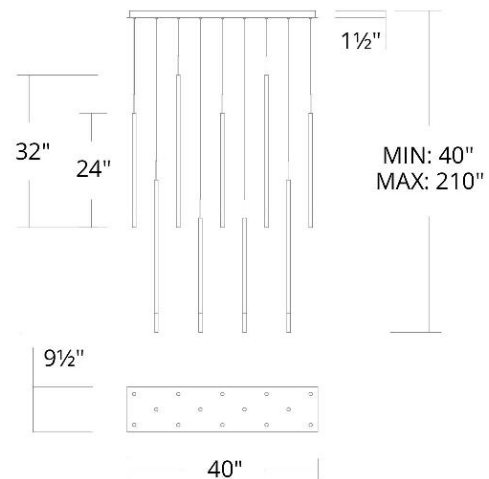

PD-69414L

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Viggo

## Linear Multi Light 4CCT

| Model & Size                 | Color Temp & CRI               | Watt | Lumens | Finish   |
|------------------------------|--------------------------------|------|--------|----------|
| PD-69423L 32" -<br>23 Lights | 2<br>700K/3000K/3500K/4000K 90 | 95 W | 2543   | BK Black |

Example: **PD-69423L-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

### FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120/277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% ,TRIAC: 100-5%                |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL                                  |
|               | Damp Location Listed                       |
| Construction: | Aluminum body with etched acrylic diffuser |

### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

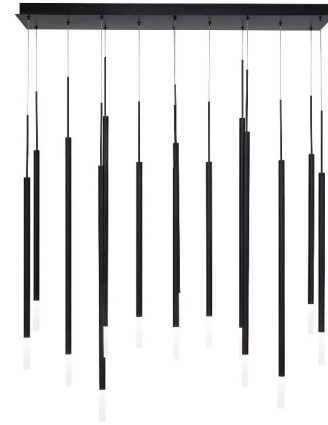


### FINISHES:



Black

### LINE DRAWING:

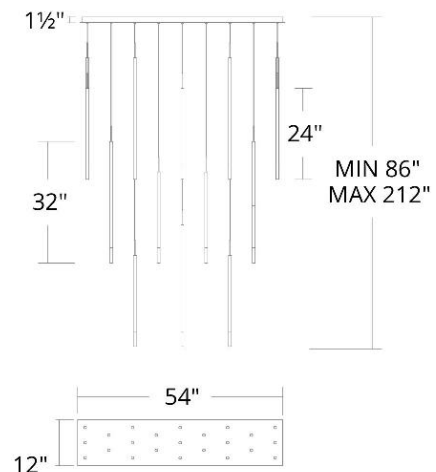

PD-69423L