

Product Dimensions



INTRODUCTION

Towel Warmers were designed and built with simplicity in mind. Constructed of high quality 304 stainless steel expertly welded in unique designs, towel warmers are safe and easy to use.

While most of our models require hard-wiring to a power source (except plug-in models) they do not require a control.

If your goal is to get the comfort of a nice warm towel after the bath or shower, then wire it to your light switch. By the time you're done, your towel will be wonderfully warm.

If the plan is to dry the towels faster in an active household or prevent the discomfort of moldy towels in a poorly ventilated space, then wire it to a separate switch which you can leave on separately from the lights or fan.

When combining a towel warmer to a Floor Heating system you can conveniently connect the device to your 4E® Smart WiFi thermostat. Double-check the amperage draw of the existing system before combining both on the same controller. If unsure, contact a professional installer/electrician, or call us at (888) 927-6333.

Mounting the towel warmer is very simple with the enclosed instructions. Make sure to read this manual for the do's and don't's and solicit the help of qualified tradesmen when necessary.

FIRST THINGS FIRST

Carefully unpack your towel warmer and ensure all pieces are included for a successful installation.

Watch our videos online or access the online technical information at our website.

Contact us with any questions on the contents of your order. Check the resistance of the heating cable coming from the towel warmer with an ohm-meter or Alligator Tester.

Check the chart below and ensure your reading is within 10% of the approved resistance reading.

TOWEL WARMER INSTALLATION INSTRUCTIONS


CODE	TUBE SHAPE	BARS	FINISH	VOLTAGE	AMPERAGE	RESISTANCE
9006				110V	0.2	1600
CODE	TUBE SHAPE	BARS	FINISH	VOLTAGE	AMPERAGE	RESISTANCE
CD001				110V	0.2	1600

1, Plug-in

2, hard-wired



Accessory A: Wall plug Accessory B: Self-tapping screws Accessories C: Horseshoe

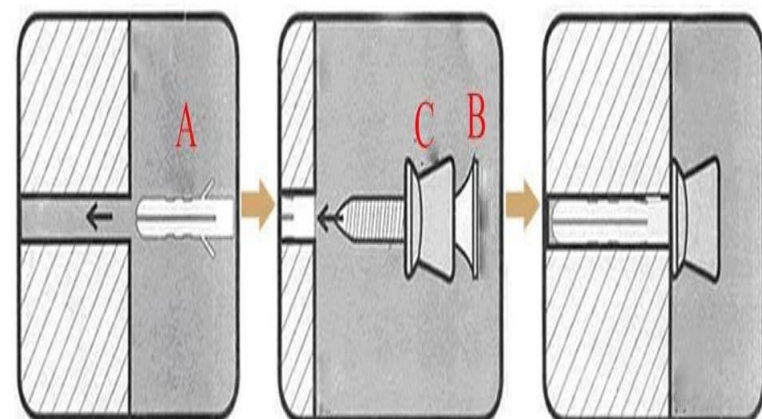

Installation process:

- As shown in the figure, nail the wall plug (accessory A) into the hole in the direction indicated by the arrow, flush with the wall.
- Pass the "self-tapping screws" (accessory B) through the center hole of the "horseshoe" (accessory C) and secure it to the wall plug in the direction of the arrow.
- Install the towel holder support foot on the horseshoe and tighten the screws with the hex wrench to tighten it completely on the wall.

intertek
Total Quality Assured

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: SANI CANADA
370 TAPSCOTT RD
TORONTO, ONTARIO
CANADA

Manufacturer: SANICANADA

Address: SANI CANADA
370 TAPSCOTT RD
TORONTO, ONTARIO
CANADA

Country: Same as Manufacturer

Party Authorized To Apply Mark: Intertek Testing Services Zhejiang Ltd. Hangzhou Branch

Report Issuing Office:

Control Number: 5022407 Authorized by: for L. Matthew Snyder, Certification Manager



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability in any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in this agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the listed material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of ensuring appropriate usage of the Certification mark in accordance with the agreement. They are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

Intertek Testing Services NA Inc.
545 East Algonquin Road, Arlington Heights, IL 60005
Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

Electric Heating Appliances [UL 499:2014 Ed.14+R21May2021]
Safety of Household and Similar Appliances - Part 1: General Requirements [CSA C22.2#60335-1:2016 Ed.2]
Household and Similar Electrical Appliances - Safety - Part 2-43: Particular Requirements for Clothes Dryers and Towel Rails (R2018) [CSA E60335-2-43:2013 Ed.3]
Product: Towel Warmer
Models: 9001, 9002, 9005, 9006, 9017, 9018, 9030, 9039, 9040, 9045, SC06

CODE REQUIREMENTS

- Please note that this appliance must be installed as prescribed by the relevant wiring rules and regulations, including the regulations covering installation of appliances and accessories in 'wet areas' such as bathrooms, showers and laundries. Installations should be in accordance with National and Local Electrical Codes applicable in both the US and CANADA.
- In plain words, make sure that all wiring connections are done safely and according to code. Check with a professional electrician if unsure. Some areas require rigid or flexible conduit. Most areas require all connections to be made in an approved electrical box. Again, follow the instructions and hire licensed help where required to comply with your local regulations.

Note:

- This appliance requires a connection to ground
- An accessible all pole disconnection switch is required in the fixed wiring
- The heated towel warmer should be mounted vertically with the cord exiting from the base; it should be positioned at least 600mm/2 feet above the floor.

DO'S, DONT'S AND SAFETY INFORMATION

- Because this appliance gets hot, young children and impaired people or persons with disabilities should be supervised when nearby. Do not let children treat the towel rail as a toy.

As with any electrical appliance, you should be aware of basic safety precautions when using this heated towel warmer. Please read these instructions, and file them for future reference:

- Do not hang excessive loads from the towel warmer rails. While securely anchored to the wall when properly installed, it is not intended to replace or serve as a grab bar.
- The towel warmer should NOT be used for anything other than its intended use of warming up and drying bathroom towels.
- Occasionally wipe down your towel warmer from time to time with a damp cloth and/or a stainless steel cleaner. Do not use any abrasives or corrosive cleaners.
- Be aware that the towel rail will get slightly hotter than normal during warmer weather and when insulated by towels.
- Do not put the towels, or anything else which has been in contact with hazardous liquids, on this towel rail.
- Do not immerse the towel rail in any liquid.

ELECTRICAL

- Electrical work should be performed by a licensed electrician.
- Use this appliance only with the voltage specified on the rating label.
- Make sure the supply cord never touches heated surfaces. If the electrical cord or connection is damaged DO NOT attempt to repair; please contact the supplier.
- Do not install towel rails in areas which may be subjected to saturation of water resulting in ingress of moisture. It is recommended that all units are protected via a GFCI circuit. The GFCI can be included on your breaker at the panel, or built into the thermostat like the Smart thermostat.

TOWEL WARMER INSTALLATION INSTRUCTIONS

MOUNTING YOUR TOWEL WARMER

Do note that all models will have the power cord exiting on the bottom right bracket (when facing the towel warmer mounted on the wall). Plan accordingly when setting up switches and electrical rough-in.

POSITIONING YOUR TOWEL WARMER

Select a desired position to mount the towel rail i.e. at least 600mm/2 feet above the floor and 300mm/1 foot away from all permanent fixtures in the surrounding area (toilet, vanity, etc).

The left side of your towel warmer must be anchored into a stud. Use a stud-finder tool to locate the 2x4 behind your drywall and mark it with a pencil. Hold your towel warmer level at the desired height and line it up with the stud on the left hand side.

Using a pencil, draw around the end of each tube to mark their positions on the wall. Make sure your marks are level and square as these will determine where you will secure the device to the wall.

Screw the mounting inserts securely to the wall at the locations marked. Press the towel warmer onto the mounting inserts gradually, checking that each leg is lined up with the mounting inserts before applying force. Mount the towel warmer with a single grub screw on each of the 4 brackets.