


CONCEALED FIXING INSTRUCTIONS

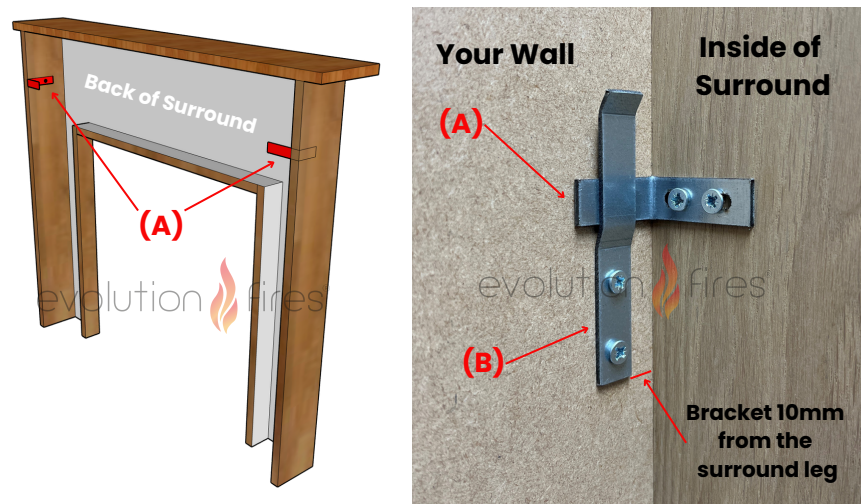


- Screw the two L-shaped brackets **(A)** to the inside leg of the surround flush with the rear edge.
- Place the surround against the wall lightly scribe the wall on the outside of the leg and measure inwards the thickness of the surround leg plus 10mm. This is the line for the outside bracket **(B)** onto the wall.
- Ensure the leg bracket **(A)** will fall halfway between the two bends on the wall bracket **(B)** onto the wall.
- Lift the surround onto the wall brackets. To adjust, lift the surround off and loosen the screws and move the bracket **(A)**

PLEASE NOTE

The small screws are to fit the L-shaped bracket **(A)**
The long screws are used to fit bracket **(B)** to the wall

CONCEALED FIXING INSTRUCTIONS

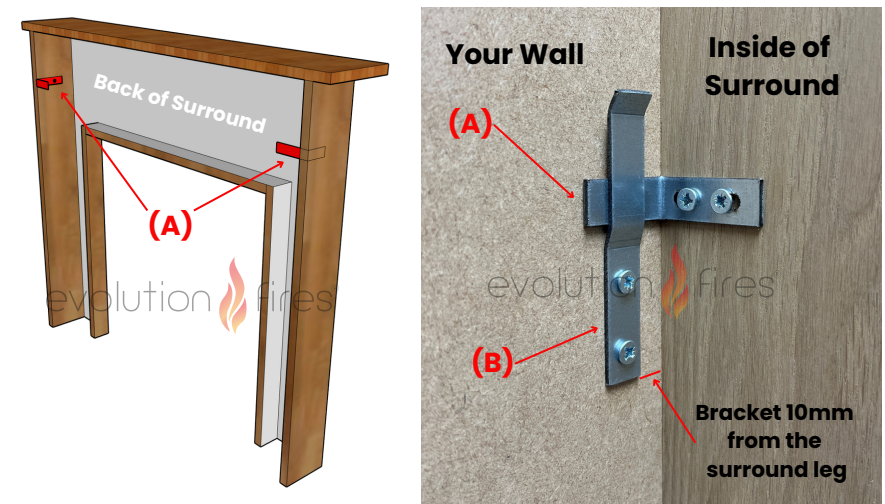

- Screw the two L-shaped brackets **(A)** to the inside leg of the surround flush with the rear edge.
- Place the surround against the wall lightly scribe the wall on the outside of the leg and measure inwards the thickness of the surround leg plus 10mm. This is the line for the outside bracket **(B)** onto the wall.
- Ensure the leg bracket **(A)** will fall halfway between the two bends on the wall bracket **(B)** onto the wall.
- Lift the surround onto the wall brackets. To adjust, lift the surround off and loosen the screws and move the bracket **(A)**

PLEASE NOTE

The small screws are to fit the L-shaped bracket **(A)**
The long screws are used to fit bracket **(B)** to the wall