

# Fluence<sup>®</sup>

# Frameless sliding shower door K-702213-6L

#### **Features**

- 1/4" (6 mm) thick Crystal Clear tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Smooth, quiet operation.
- Gently curved inside and outside towel bars complete the look of this door.
- CleanCoat® nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.

#### Material

- Tempered glass ensures maximum safety and durability.
- Anodized aluminum hardware prevents rusting or corrosion.

#### Installation

- Fits opening widths 40" 43" (1016 mm –1092 mm).
- 3/8" (10 mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

### **Recommended Products/Accessories**

K-23723 Faucet cleaner

### **Included Components**

Additional Components: Hardware kit



## Codes/Standards

CPSC 16CFR 1201 ANSI Z97.1

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.

**Color Code Description** 

III SHP Bright Polished Silver

# Available Glass Options Code Description


L Crystal Clear





# Fluence<sup>®</sup>

# Frameless sliding shower door K-702213-6L

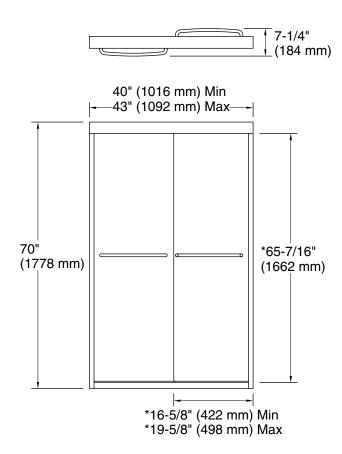


# **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 40" (1016 mm)
Opening Width - Max: 43" (1092 mm)
Walk-through - Min: 16-5/8" (422 mm)
Walk-through - Max: 19-5/8" (498 mm)
Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

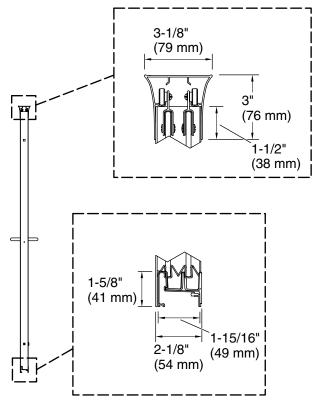

\*Walk-through

#### **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 72" (1829 mm) to allow for installation clearance.

