

### Features

- Frameless, 5/16-inch-thick tempered Frosted glass.
- Center-guided door system for smooth, quiet sliding action.
- Frameless design with minimal metal allows for greater ease of cleaning.
- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space.
- Low bottom track creates easy entry and exit to the bathing space.
- CleanCoat® glass treatment repels water for improved ease of cleaning.
- Out-of-plumb adjustability for simpler installation.

### Installation

- Sliding shower door.

### Components

Additional included component/s: Hardware Kit.



### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



SHP	Bright Polished Silver
-----	------------------------



ABZ	Anodized Dark Bronze
-----	----------------------




BNK	Anodized Brushed Nickel
-----	-------------------------

### Available Glass Options

Code	Description
------	-------------

D3	Frosted
----	---------

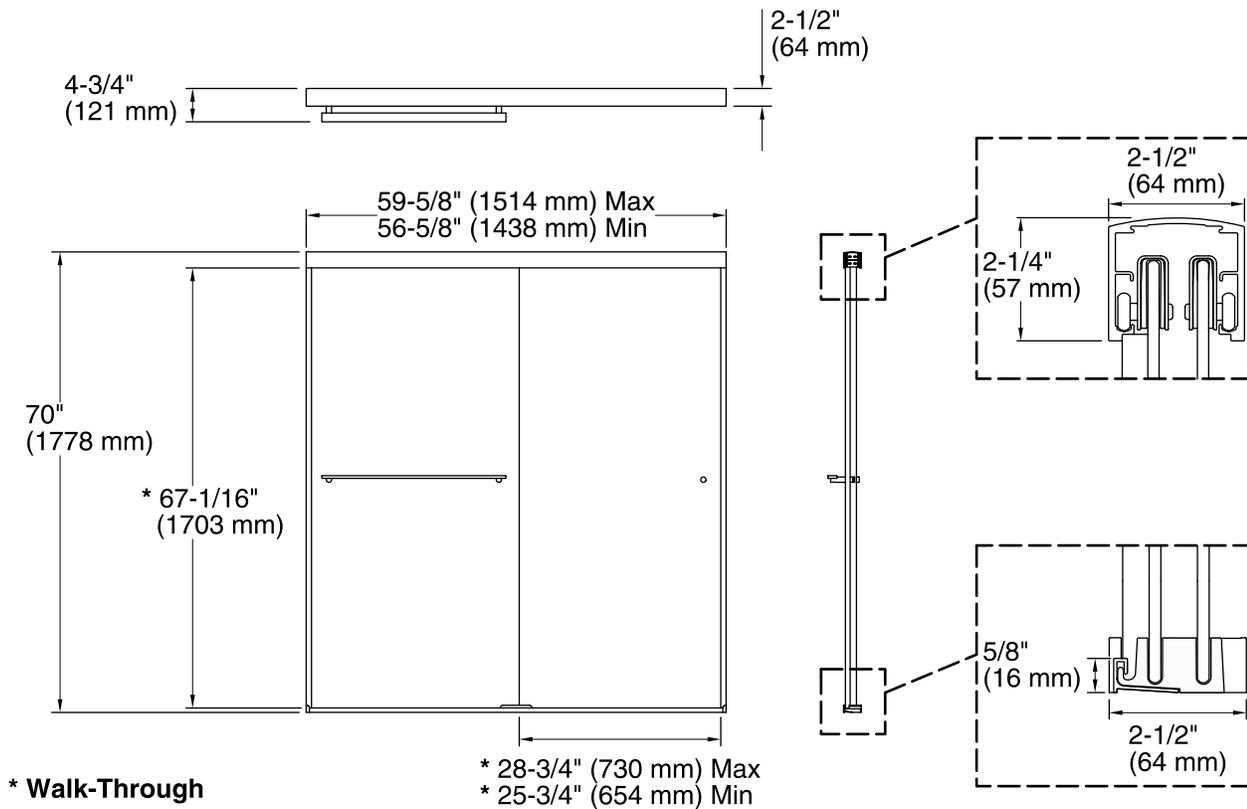

### Technical Information

All product dimensions are nominal.

Installation type:	For shower base installation
Opening style:	Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	25-3/4" (654 mm)
Walk-through - Max:	28-3/4" (730 mm)
Glass thickness:	5/16" (8 mm)
Glass coating:	CleanCoat®

### Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

**NOTICE:** The vertical opening should be a minimum of 72-1/2" (1842 mm) to allow clearance for installing the top track over the wall jambs.