



Product installation instruction



1. The lamp frame is tightened with two 5-centimeter screw and the hole corresponding to the chassis.

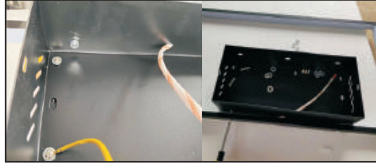


2. The middle lamp frame is tightened with four 4-centimeter screws



3. Three lamp frames are connected and plugged into the terminal of the power driver.




4. The power driver is well connected to 82-240V or 220-240V household appliances. (Note: Household appliances can be connected without distinction between positive and negative poles)

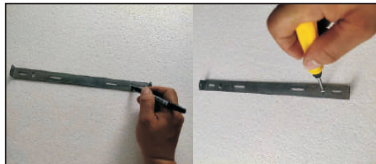

5. Fix the hanging plate with a screw at the position to be installed.



6. Screw locking for lamp body and hanging board



7. Installation Completion Effect Diagram

- 1 Applicable voltage: 85-240V or 220-240V(50HZ).
2. Please install this lamp by a professional electrician.
3. Please wear gloves during installation in case of scratching the lamp surface.
4. Keep the installation environment ventilating and dry.
5. Keep the lamp away from corrosive chemical and air such as acid and alkali.
6. Please don't wash it with water, but wipe it with a soft cloth.
7. During replacing the bulbs, remember to cut the power off.