



K-438-K

1/2" ceramic high-flow valve system with diverter for finished-deck or rim-mount installation only

Features

- Quarter-turn ceramic disc valves exceed industry longevity standards, ensuring durable performance for life
- 11.0 to 12.0 gpm (gallons per minute) high-flow rate is ideal for multiple outlet installations or rapid bath filling
- For use with finished deck-mount or rim-mount installation only
- For use with K-T387, K-T428, KT10292, K-T10592, or K-T16236 bath valve trim, and K-923 laminar bath filler (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 00:01 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1

Valves

Included Valve: Diverter

Material

- Brass valve bodies
-

Recommended Products/Accessories

K-923 Wall- or -ceiling-mount bath filler


Warranty

See website for detailed warranty information.


KOHLER® Faucet Lifetime Limited Warranty



Finished Deck-Mount Installation

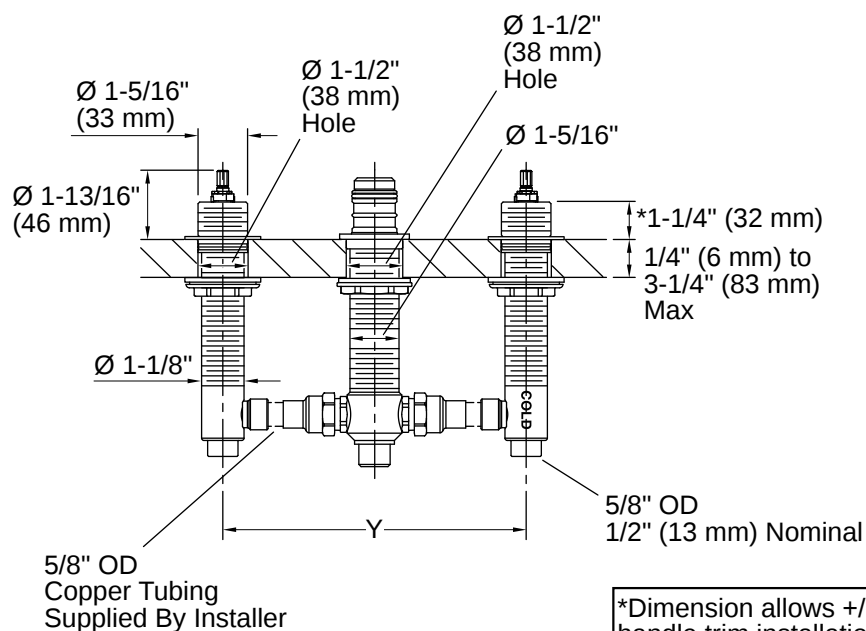

Finished Rim-Mount Installation

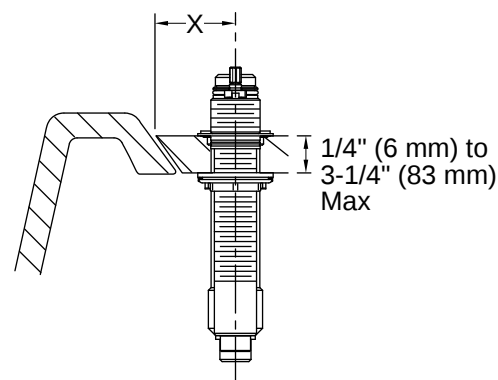

*Dimension allows +/-1/4" (6 mm) handle adjustment during handle trim installation.

X = Distance from centerline of spout inlet to front of spout base plus 1/2" (13 mm).

Y = Distance between valve body centerlines vary. Minimum distance is 8" (203 mm).

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 00:01 - US-CA