


30" PROFESSIONAL INDUCTION RANGE

STAINLESS STEEL

INDUCTION
HARDWAREINDUCTION HARDWARE
IR-PRO-30-SS · 30" PROFESSIONAL RANGE
PRODUCT DIMENSIONS · INCHES · NOT TO SCALE

STANDARD 30" OPENING · 240 V · 50 A · NEMA 14-50 — ANTI-TIP BRACKET MANDATORY

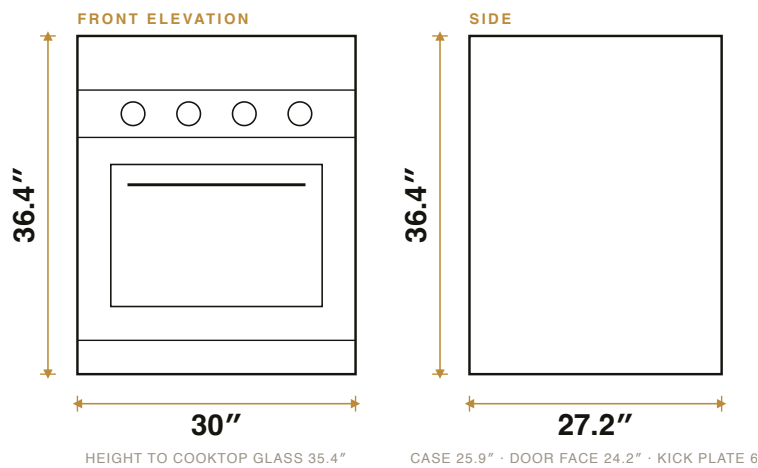

SPECIFICATIONS

SKU	IR-PRO-30-SS
Finish	Stainless Steel (single live finish)
Overall W x D x H	30 x 27.3 x 36.4 in
Installation	Standard 30 in opening · freestanding
Electrical service	240 V · 50 A dedicated · NEMA 14-50P cord
Oven capacity	5.0 cu ft true convection
Oven temperature range	170–500°F
Product weight	210 lb
Packaged weight	300 lb
Package W x D x H	35 x 30 x 46 in
Certification	ETL

Installation — Freestanding into a true 30 in opening on a level floor — the 27.3 in case sits proud of a 24 in base cabinet. Dedicated 240 V · 50 A circuit with NEMA 14-50R receptacle in place before delivery; anti-tip bracket mandatory.

OVERVIEW

The entry point to professional induction — a 30-inch freestanding range with efficient hob technology.

KEY FEATURES

- 4-zone induction hob
- Convection oven
- Anti-tip bracket included
- Manufactured in solar-powered, net-zero facilities — engineered in Lake Tahoe, Nevada
- Lifetime parts warranty · Restore & Renew refurbishment

OVERALL DIMENSIONS

30" Professional Induction Range

IR-PRO-30-SS
DIMENSIONS IN INCHES [MILLIMETERS]

KEY DIMENSIONS

Overall W x D x H	30 x 27.3 x 36.4"
Overall depth, handle to rear	27.2" [690]
Case depth	25.9" [658]
Depth to door face	24.2" [615]
Body depth at the plinth	25.0" [636]
Height to cooktop glass, adjustable	36.0-37.2" [915-945]
Rear rail height	5.9" [149]
Kick plate height	6.7" [170]
Foot inset from the front	4.0" [101]
Cabinet opening	30" · freestanding
Product weight	210 lb
Packaged weight	300 lb
Package W x D x H	35 x 30 x 46"

ATTENTION ELECTRICIAN

240 V · 50 A on a dedicated circuit, terminating in a **NEMA 14-50R** receptacle positioned clear of the range feet and in place before delivery.

Height is set by the leveling feet. 36.0" includes the 0.6" minimum foot height; the feet add up to 1.2" more. Set the range to the counter before committing the backsplash.

Depth. The 27.3" case sits proud of a 24" base cabinet. Confirm the opening is a true 30" and the floor is level where the feet land, then fit the anti-tip bracket before walking the range back.

PRODUCT VIEWS — SIDE AND FRONT ELEVATION

