

Features

- Acrylic
- Rectangular shape
- Molded lumbar supports and armrests
- Drop-in, 3-side integral flange
- 60" (1524 mm) x 42" (1067 mm) x 21" (533 mm)


BATH WITH INTEGRAL FLANGE

K-1113-L
ALSO K-1113-R

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

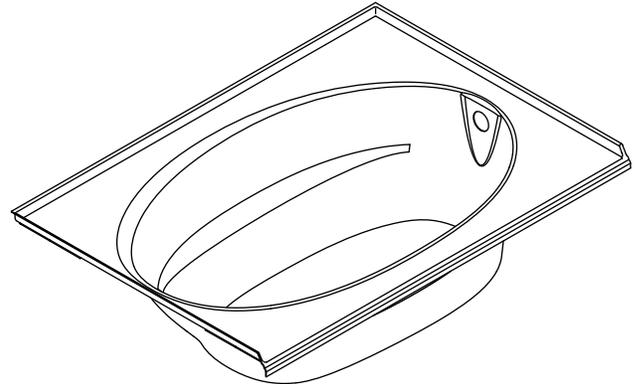

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes	
K-1113-L	Drop-in, 3-side integral flange, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1113-R	Drop-in, 3-side integral flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Recommended Accessory			
K-11677	Drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7166	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

Product Specification:

The rectangular shaped bath shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Bath shall be made of acrylic. Drop-in bath shall have a 3-side integral flange. Bath shall have molded lumbar supports and armrests. Bath shall be Kohler Model K-1113-__-__.

WINDWARD™

Technical Information


Fixture*:	basin area	top area	weight
Bathing well	43" (1092 mm) x 20-1/2" (521 mm)	53-1/2" (1359 mm) x 32-1/8" (816 mm)	80 lbs (36 kg)
	water depth	capacity	
To overflow	15" (381 mm)	57 gal (215.9 L)	
* Approximate measurements for comparison only.			
Drop-in cut-out dimensions:			
58-1/2" (1486 mm) x 40-1/2" (1029 mm)			

Installation Notes

Install this product according to the installation guide.


Floor support under the bath must provide for a minimum of 33 lbs/square foot (162 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

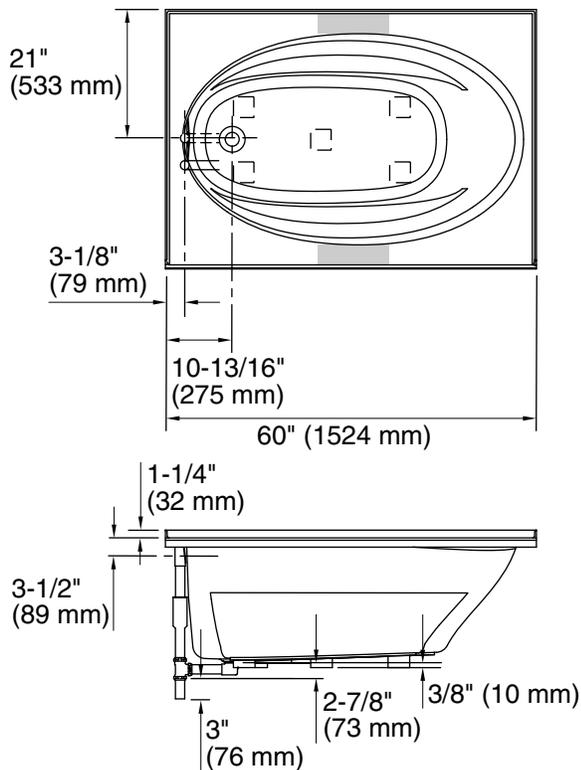


No change in measurements if connected with drain illustrated. (K-11677)


■ Recommended faucet area



Tile Flange Detail



Drop-In Rim Detail

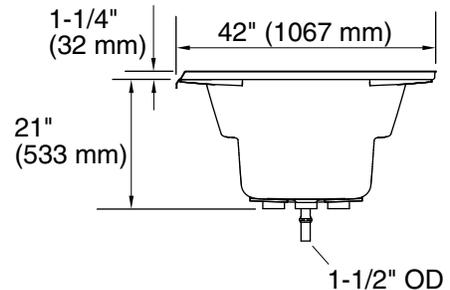

Product Diagram