


Features

- Acrylic
- Reinforced with fiberglass (FRP)
- Molded-in floor pattern
- Coordinating Memoirs® Suite
- 60" (152.4 cm) x 34" (86.4 cm) x 4-1/2" (11.4 cm)

60" (152.4 cm) ONE-PIECE ACRYLIC SHOWER RECEPTOR K-9568

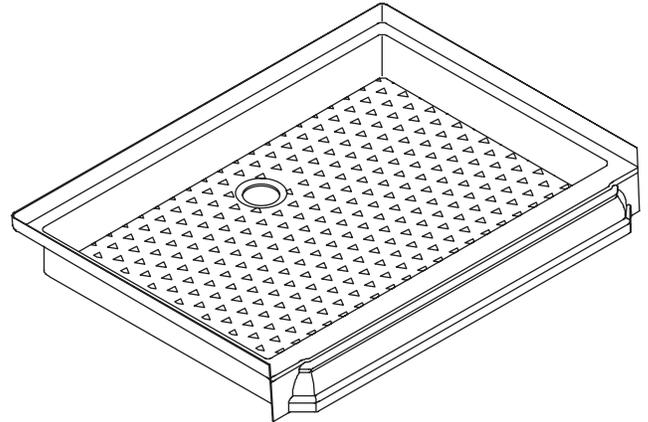

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- IAPMO/UPC
- CSA International
- CSA B45.0
- CSA B45.5

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-9568	60" (152.4 cm) one-piece acrylic shower receptor	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
Recommended Accessory				
K-9132	Shower drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
Optional Accessories				
Refer to Fixtures Price Book for shower door selections, glass options, and color information.				

Product Specification

The one-piece shower receptor shall be 60" (152.4 cm) in length, 34" (86.4 cm) in width, and 4-1/2" (11.4 cm) in height. Shower receptor shall be made of acrylic reinforced with fiberglass (FRP). Receptor shall have molded-in floor pattern and be part of the coordinated Memoirs suite. Shower receptor shall be Kohler Model K-9568-_____.

Technical Information

Fixture:	
Weight	68 lbs (30.8 kg)
Drain hole	3-3/8" (8.6 cm) D.
Configuration	one-piece

Installation Notes

Install this product according to the installation guide.


IMPORTANT! When installing this unit with Kohler Portico shower doors, the receptor will need to be recessed a minimum of 1/2" (1.3 cm) in from the water-resistant wall material to ensure proper door placement.

Shimming may be required to level the fixture.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).

When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

Some shimming between stud frame and fixture may be required.

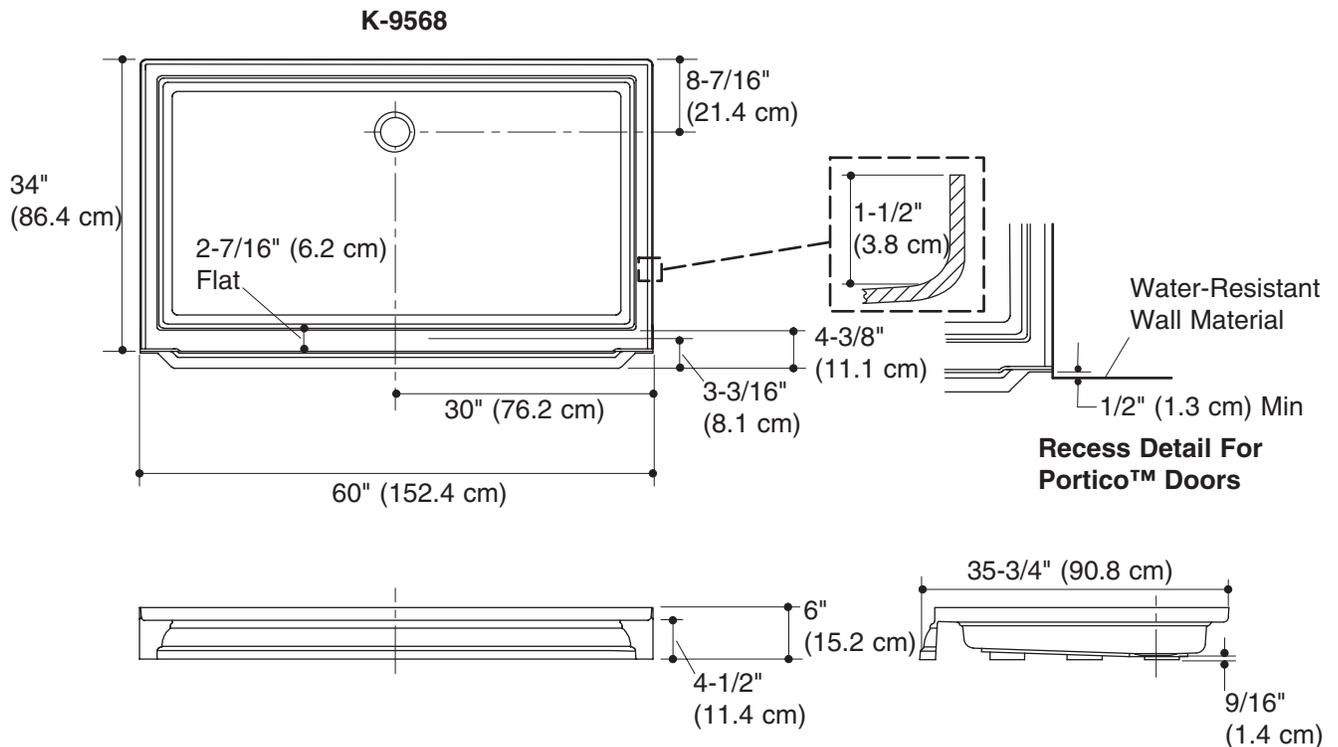

Product Diagram