

Features


- Acrylic
- 8 color-matched Kohler hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- Integral apron with removable access panel
- Left or right drain
- Textured bottom surface
- Integral tile flange on three sides for alcove installation
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7
- UL 1795

BATH WHIRLPOOL WITH HEATER K-1357-HL ALSO K-1357-HR

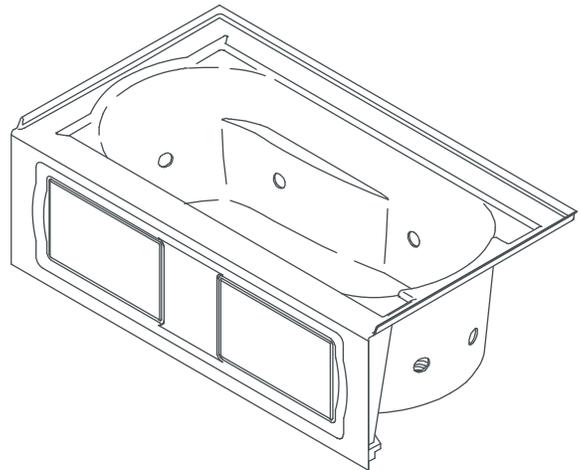

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1357-HL	Bath whirlpool with heater – left drain and integral apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1357-HR	Bath whirlpool with heater – right drain and integral apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories				
K-7161-AF	Adjustable pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-7213	Clearflo bath cable drain with PVC tubing	<input type="checkbox"/> CP		<input type="checkbox"/> Other _____
K-7214	Clearflo bath cable drain without PVC tubing	<input type="checkbox"/> CP		<input type="checkbox"/> Other _____

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 20" (508 mm) in height. Product shall have 8 color-matched Kohler jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall have integral apron with removable access panel and integral tile flange on three sides for alcove installation. Product shall have a textured bottom surface and a drain at left or right. Bath whirlpool shall be Kohler Model K-1357-____-____.

DEVONSHIRE®

Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	42" (1067 mm) x 20" (508 mm)
Basin area, top	51" (1295 mm) x 24" (610 mm)
Weight	160 lbs (72.6 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	60 gal (227.1 L)
* Approximate measurements for comparison only.	

Pump:	V	Hz	A	
1-speed	120	60	7	
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15A, 60 Hz

Heater 120 V, 15A, 60 Hz

Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 51 lbs/square foot (251 kg/square meter) loading.

K-1357-HL

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

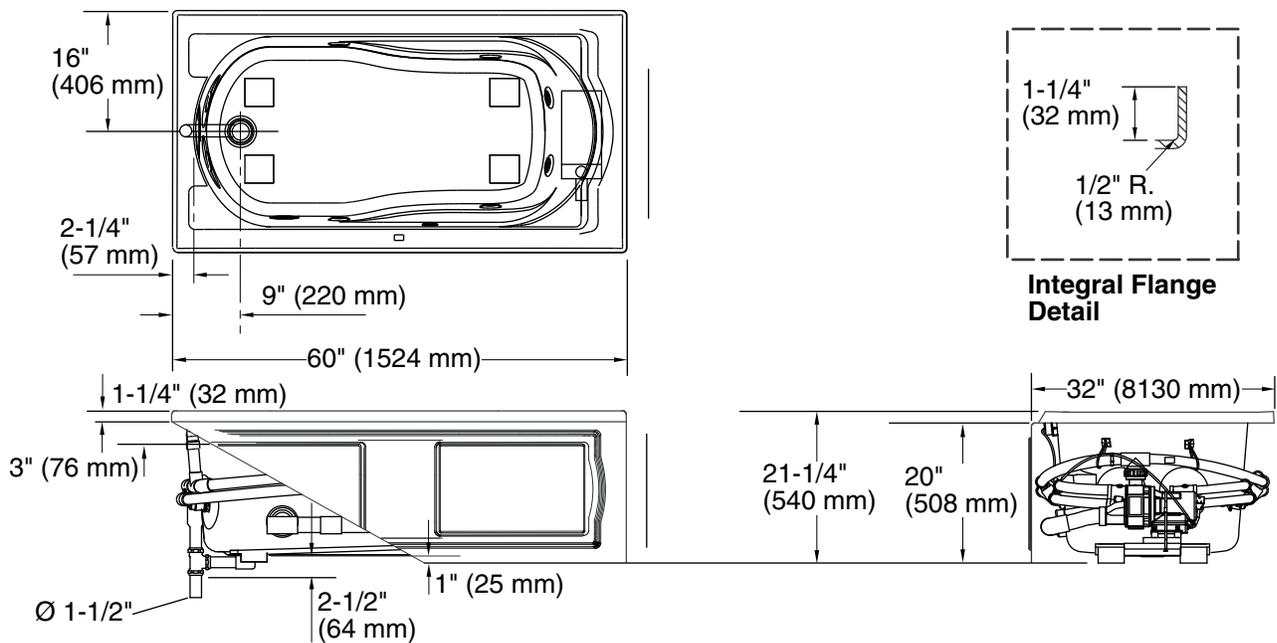

Product Diagram