


Installation Manual

3-Way Wall Mounted Shower System

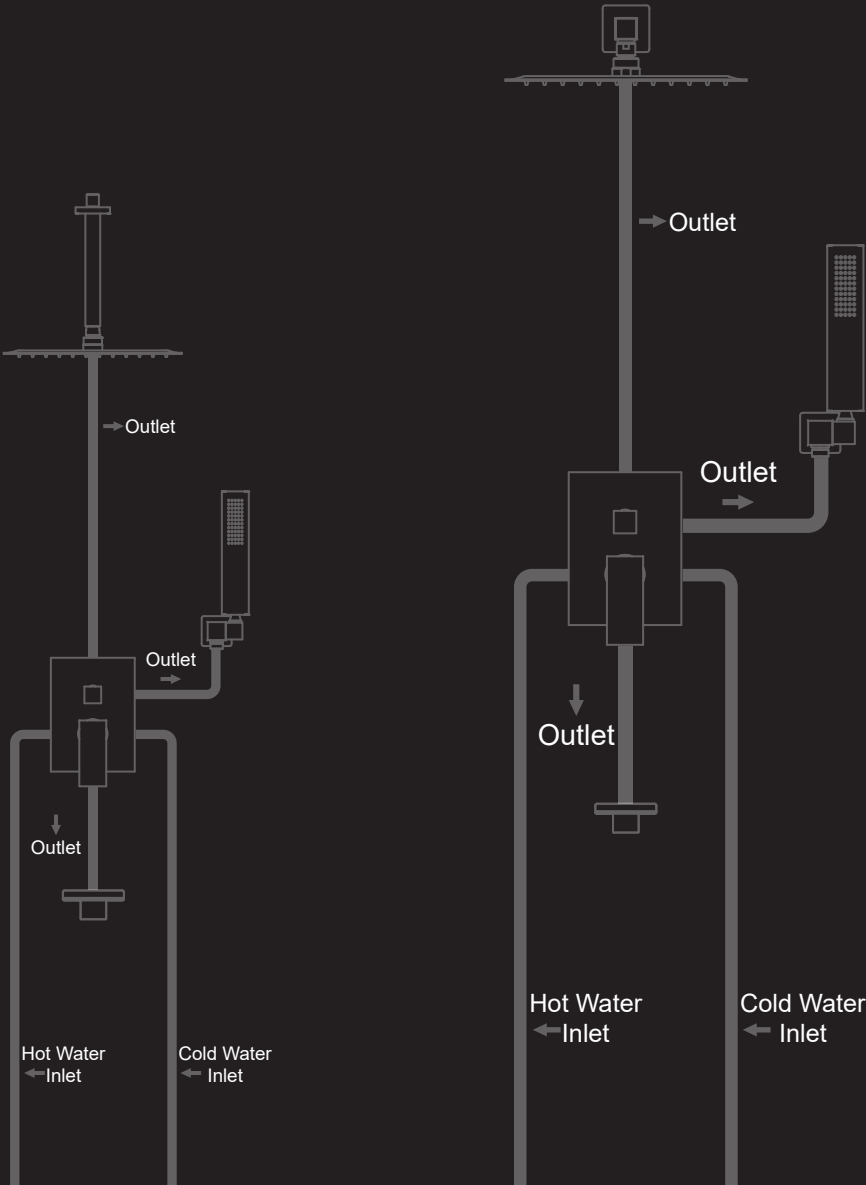

1. INSTALLATION PRECAUTIONS

1. When you open the product packaging, please check the product and accessories at first. If there is any discrepancy, please contact the company or our distributor immediately.
2. The hot and cold water supply pipe of the faucet must be properly connected. When facing the front of the faucet, the hot water supply is on the left and cold water supply is on the right. Incorrect connection will cause permanent damage to the cartridge.
3. If the accessories to be changed without affecting the use, we will not make a prior notice.
4. The impurities in the water supply pipe must be cleared before installation to avoid blockage.
5. The water pressure of the faucet is 0.05MPa - 1.0MPa (including cold water and hot water pressure)
Applicable water temperature range: 39°F - 194°F

2. PREPARATION BEFORE INSTALLATION

1. Please read the installation manual carefully before installation.
2. Installation work must be performed by a professional installer.
3. Installation tool :



Electric drill



Pencil



Screw drivers



Tape
measure



Spirit level with horizontal
and vertical indicators



Split ring pliers



Knife



Wrench



Sealant Tape




Hammer

THREE FUNCTION CONCEALED FAUCET ACCESSORIES LIST

Wall mounted shower system


NO.	Name	Quantity
1	Cover	1pcs
2	Shower arm	1pcs
3	Shower head	1pcs
4	Knob	1pcs
5	Handle	1pcs
6	Hexagon screw	2pcs
7	Handle button	2pcs
8	Faceplate	1pcs
9	Screws	4pcs
10	Metal washer	4pcs
11	Shower valve body	1pcs
12	Plastic screw sleeve	4pcs
13	Allen Key	1pcs
14	Hand shower	1pcs
15	Shower holder	1pcs
16	Cover	1pcs
17	Shower hose	1pcs
18	Plastic stopper	2pcs
19	Waterfall spout	1pcs
20	Connector	1pcs
21	Hexagon screw	2pcs
22	Plastic stopper	2pcs

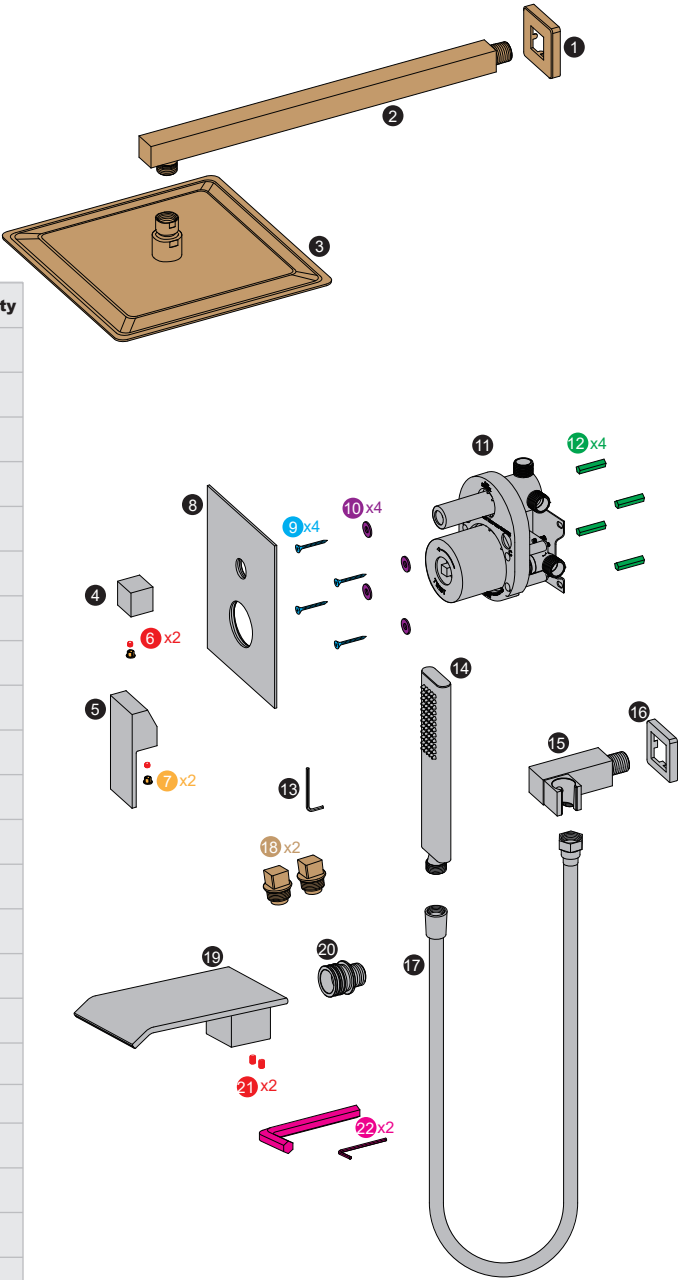

THREE FUNCTION CONCEALED FAUCET ACCESSORIES LIST


Ceiling mounted shower system

NO.	Name	Quantity
1	Cover	1pcs
2	Shower arm	1pcs
3	Shower head	1pcs
4	Knob	1pcs
5	Handle	1pcs
6	Hexagon screw	2pcs
7	Handle button	2pcs
8	Faceplate	1pcs
9	Screws	4pcs
10	Metal washer	4pcs
11	Shower valve body	1pcs
12	Plastic screw sleeve	4pcs
13	Allen Key	1pcs
14	Hand shower	1pcs
15	Shower holder	1pcs
16	Cover	1pcs
17	Shower hose	1pcs
18	Plastic stopper	2pcs
19	Waterfall spout	1pcs
20	Connector	1pcs
21	Hexagon screw	2pcs
22	Plastic stopper	2pcs

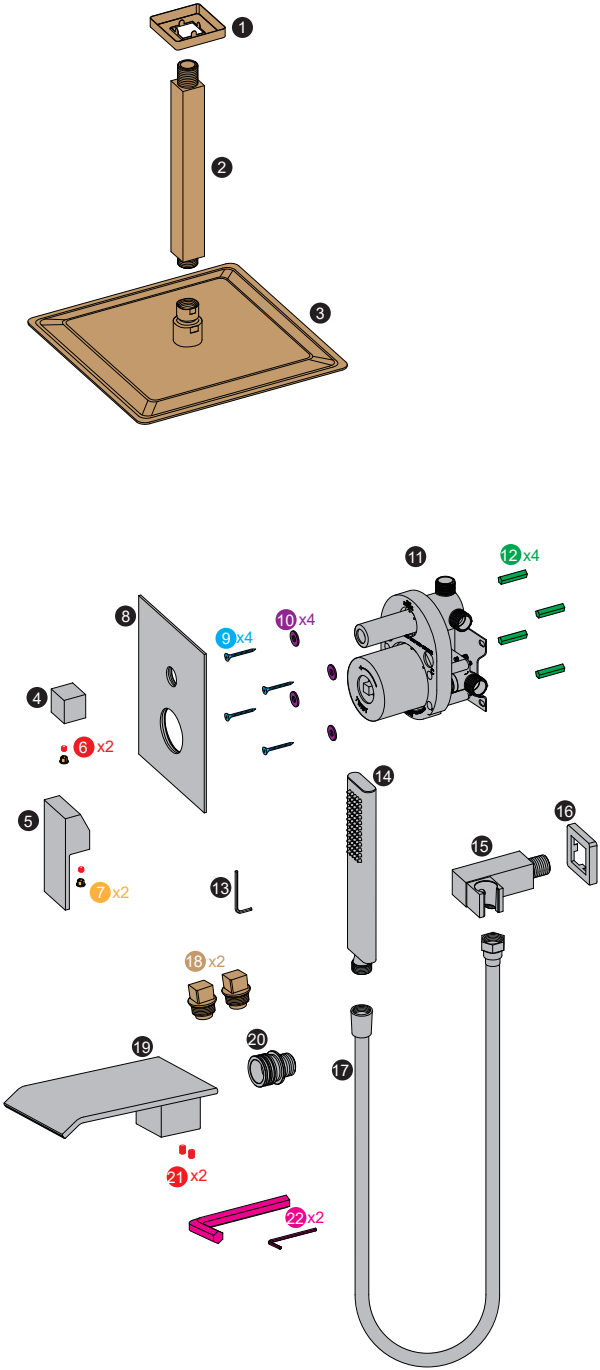


PIPE CONNECTION

Wall mounted shower system

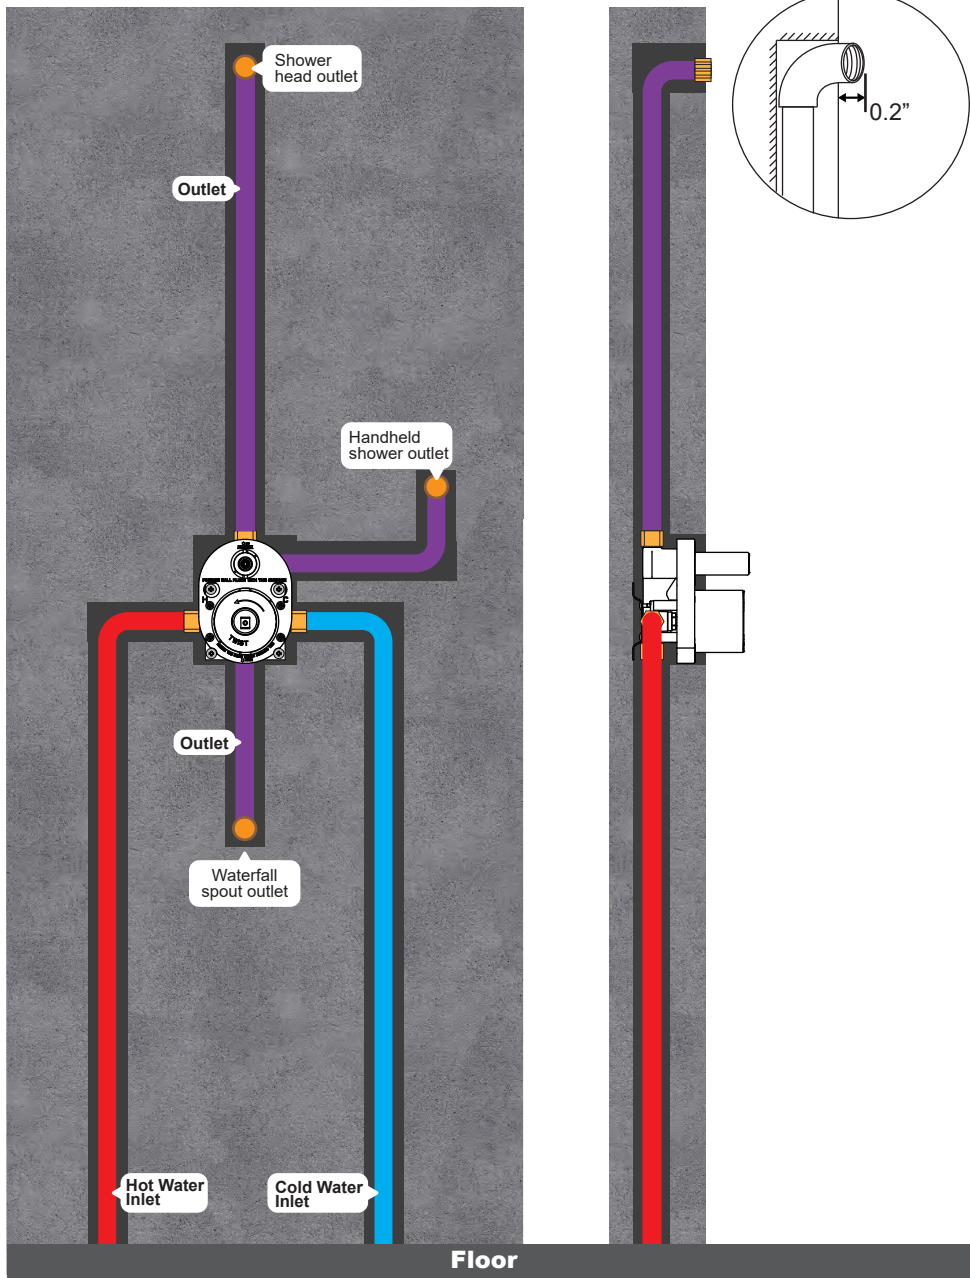


RECOMMENDED DISTANCE FOR INSTALLATION.

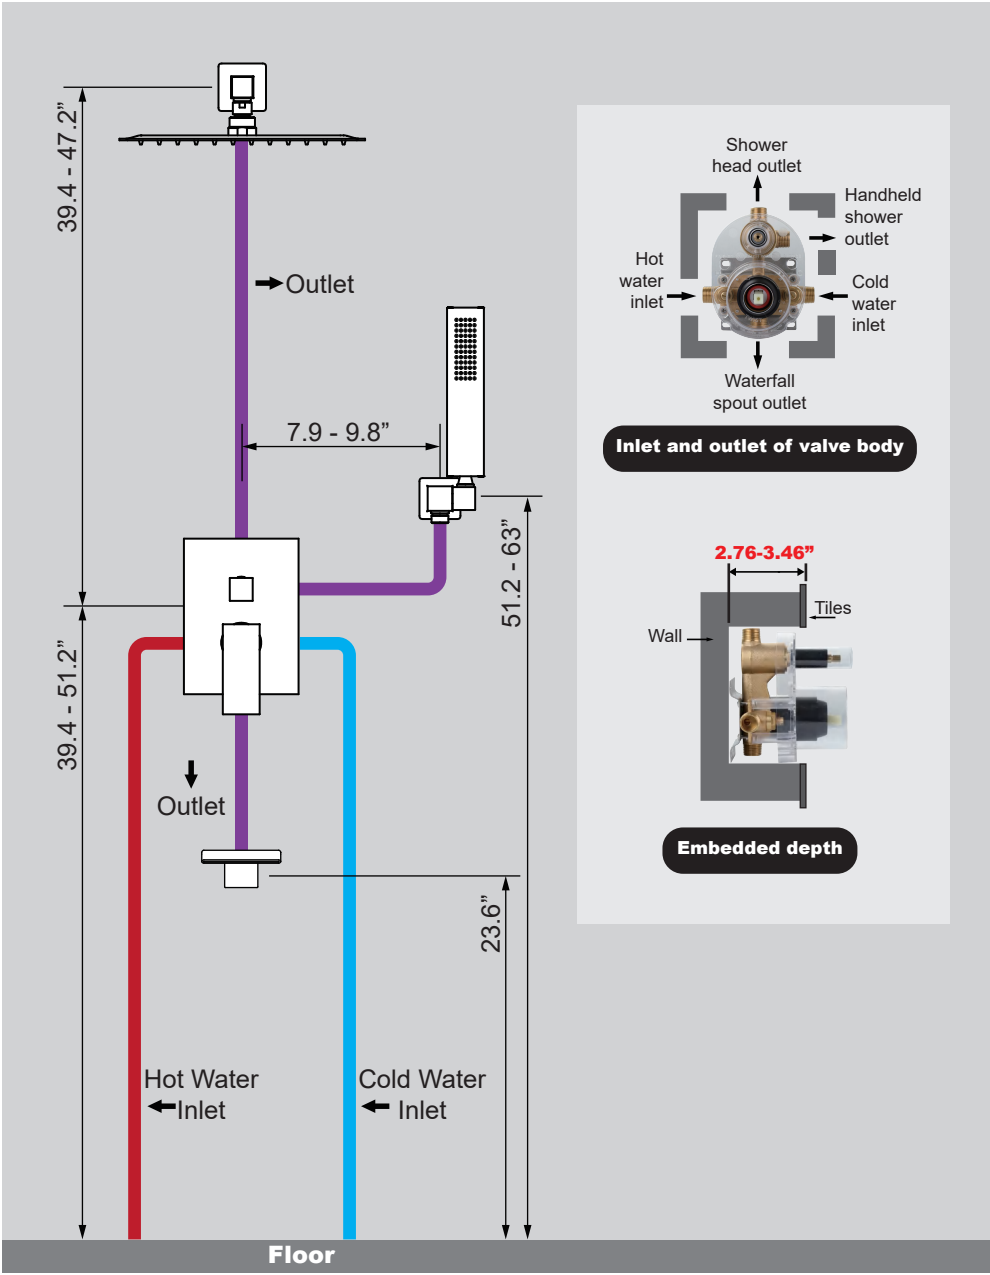


PIPE CONNECTION





Ceiling mounted shower system

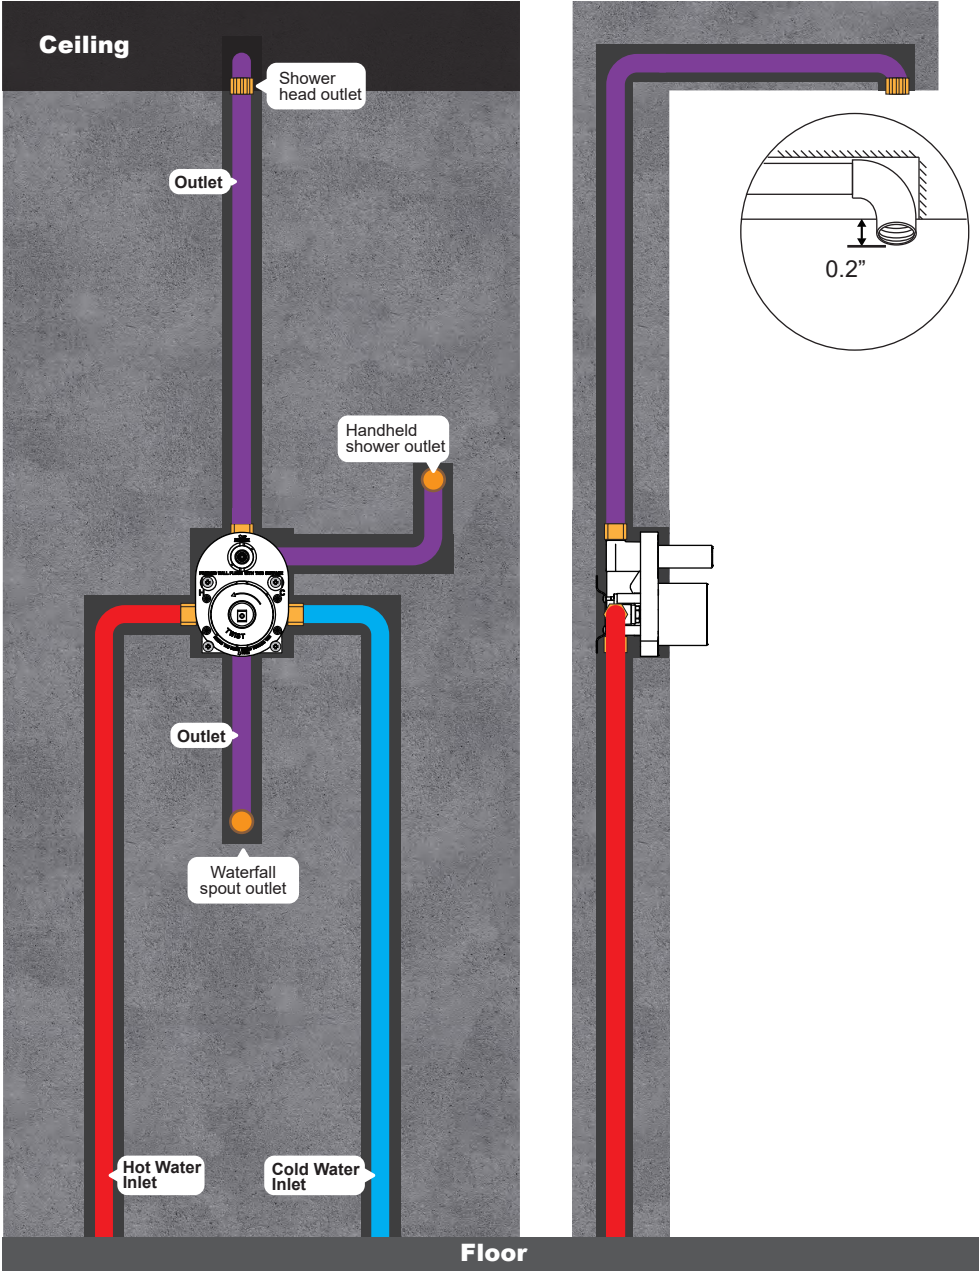

RECOMMENDED DISTANCE FOR INSTALLATION.

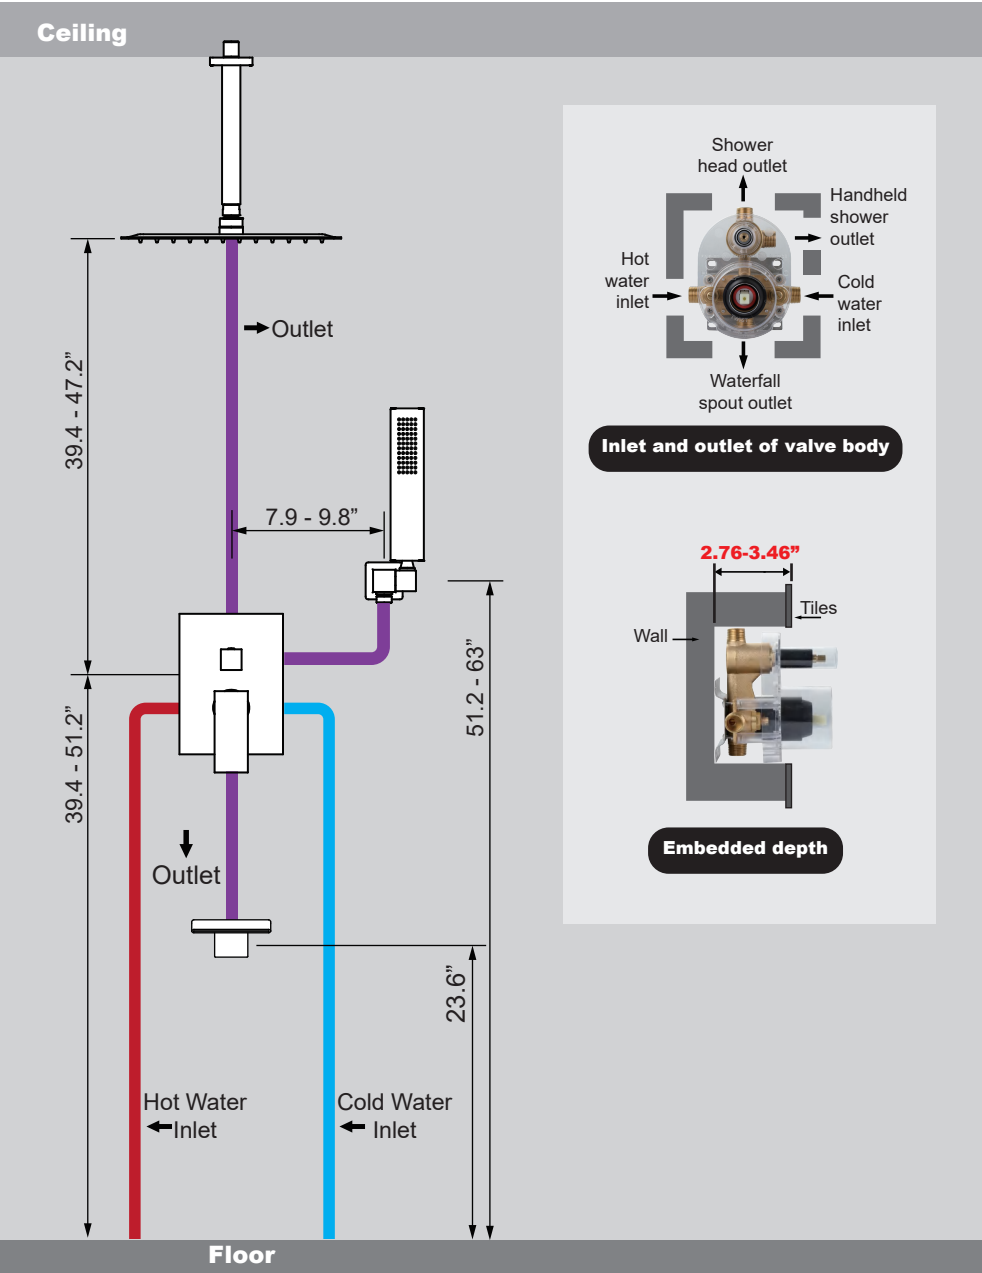


Installation Process

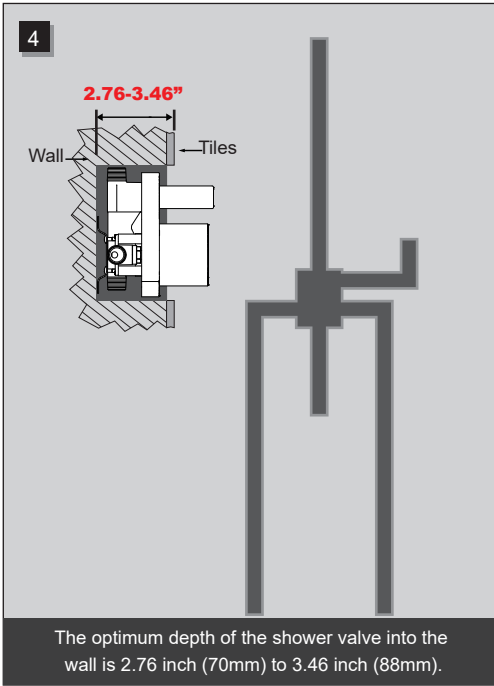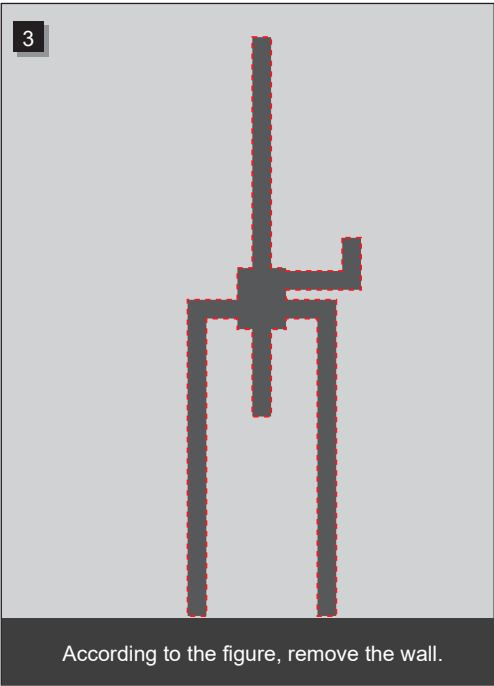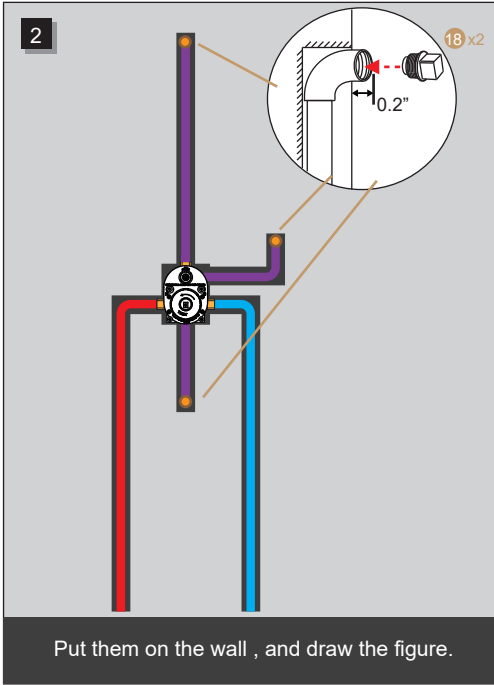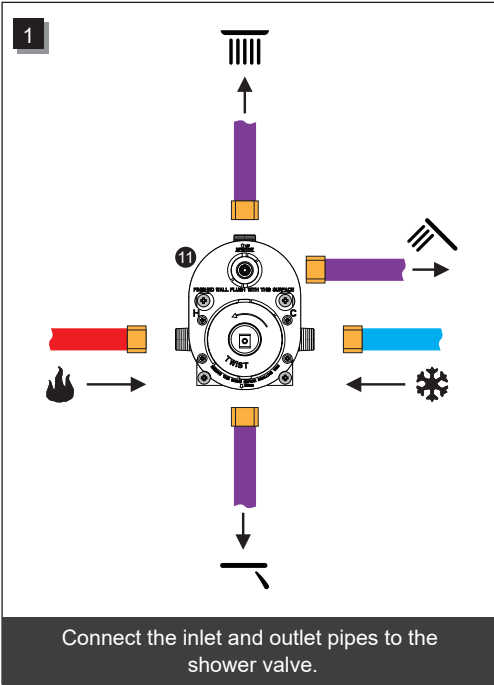


Installation Process


5



Make the marking on the 4 corners of shower valve.




Drill the hole.




Install the 4 screw sleeves into wall.

6

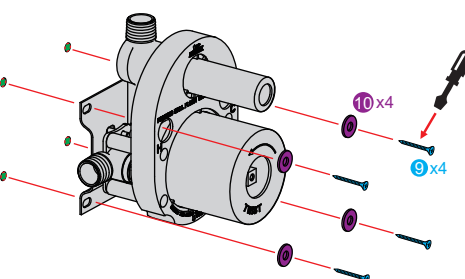


Fix the shower valve with screws.

7

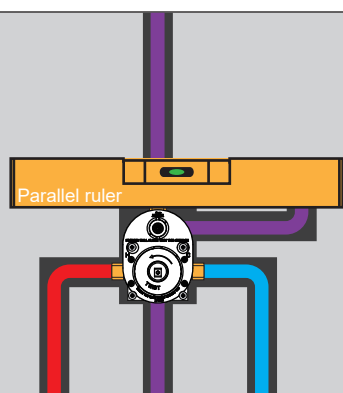


Use a parallel ruler to ensure the angle between vertical wall and valve is close to 90 degree.

8

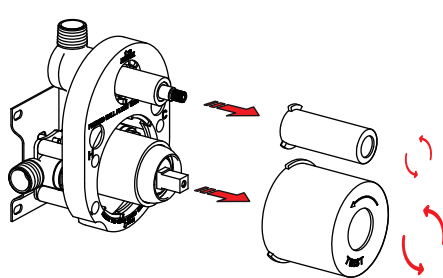

Remove the protective cover.


9

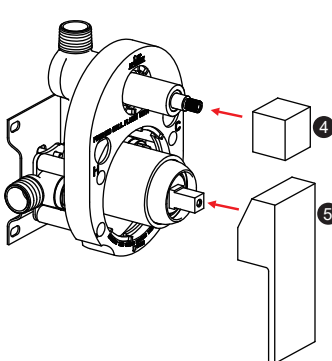

Install the handle and knob.

Installation Process

10

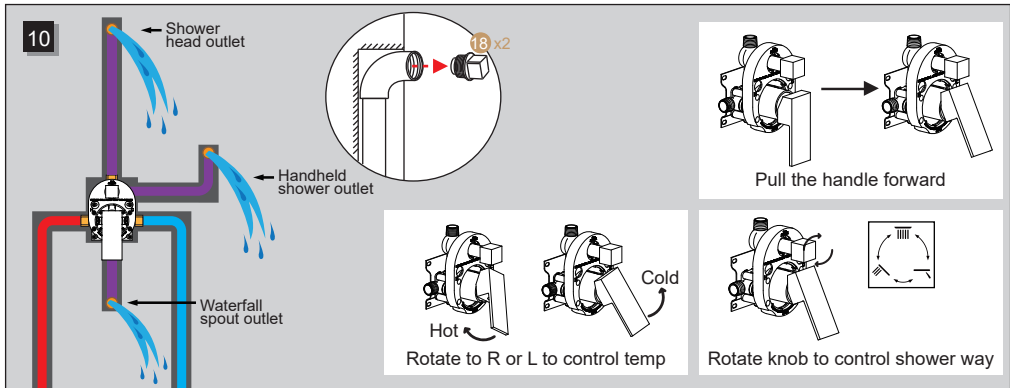

Shower head outlet

Handheld shower outlet

Waterfall spout outlet

18 x 2

Hot

Cold


Rotate to R or L to control temp

Pull the handle forward

Rotate knob to control shower way


Remove the two stoppers, operate the handle and knob to test if the water pressure is appropriate. Plug all stoppers after test.

11

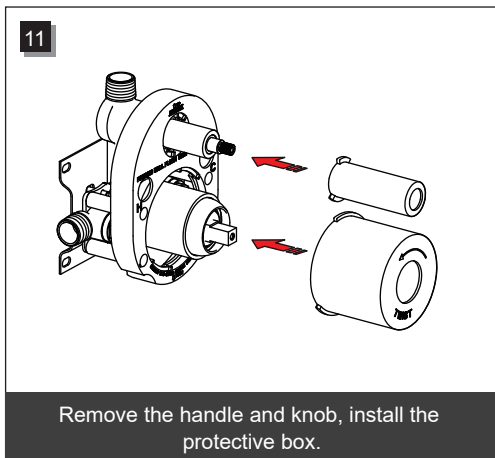

Remove the handle and knob, install the protective box.

12

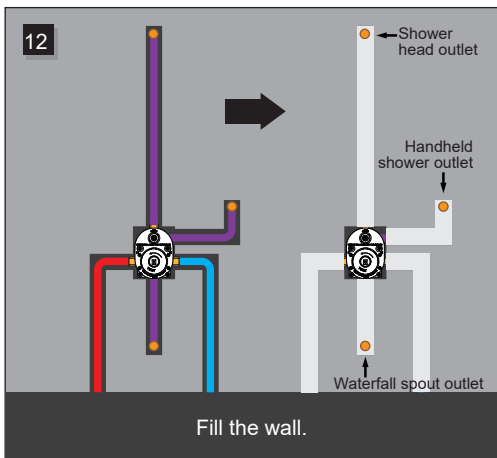


Shower head outlet

Handheld shower outlet

Waterfall spout outlet


Fill the wall.

13

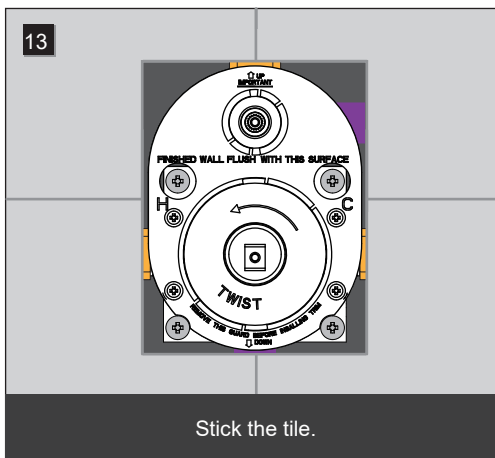






Stick the tile.

14

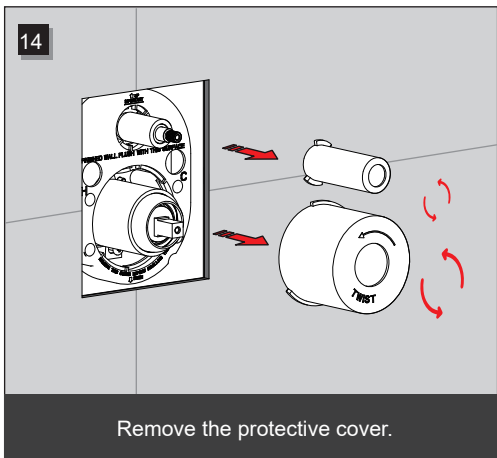


Remove the protective cover.

Installation Process

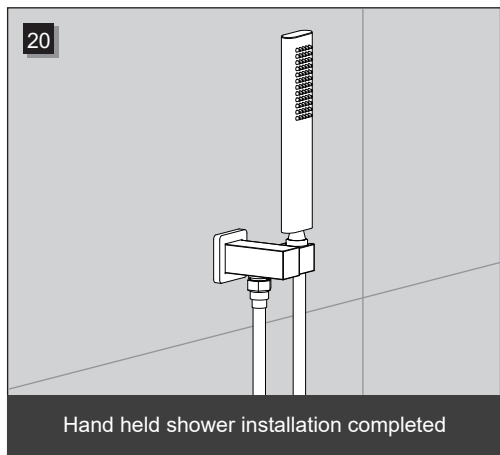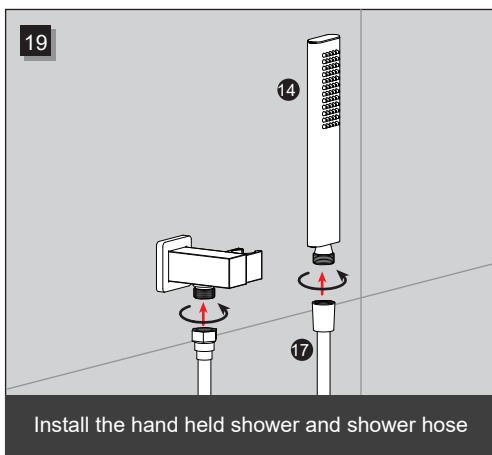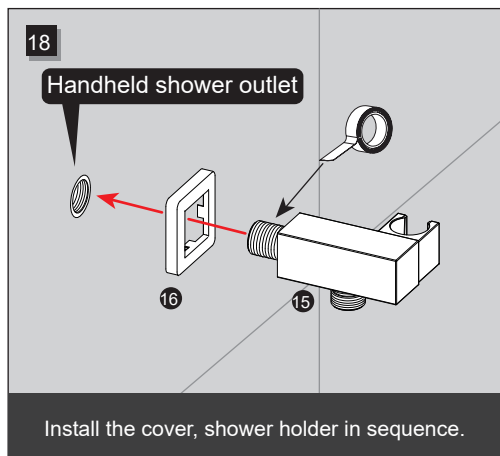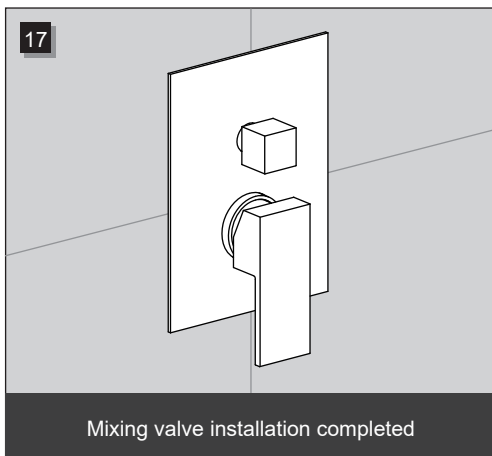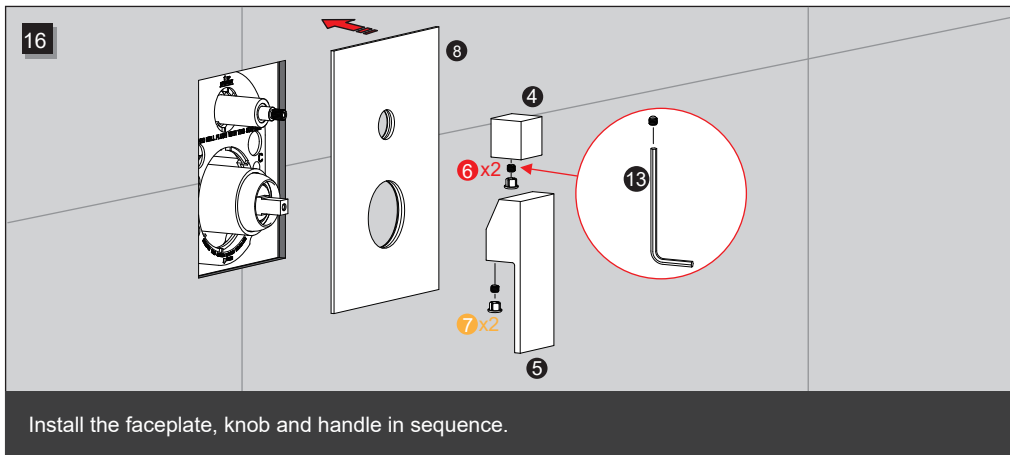


Installation Process

21 Wall mounted shower system

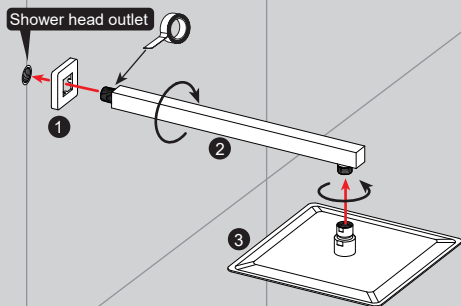

Install the cover, shower arm and shower head in sequence.


23 Ceiling mounted shower system



Install the cover, shower arm and shower head in sequence.


23

Waterfall spout outlet

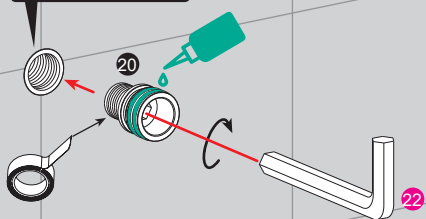


Wrap teflon tape on the connector, lubricate the O ring with silicon oil, then screw the connector into the waterfall spout outlet.

24

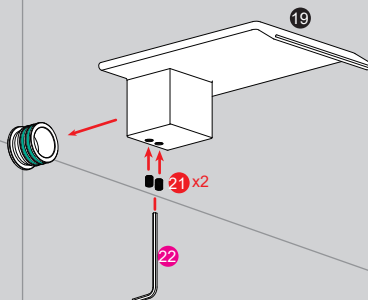


Install the waterfall spout, and lock with 2 screws.

25

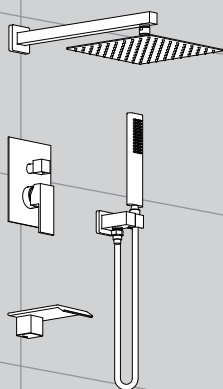

Finish installation.


26

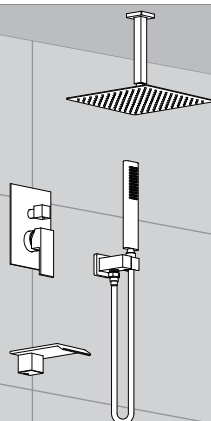

Finish installation.

ADJUSTMENT OF CHECK VALVES

The outlet water adjusting device of the left and right sides, it can adjust the water flow rate and close outlet water function when you need to repair/change cartridge.

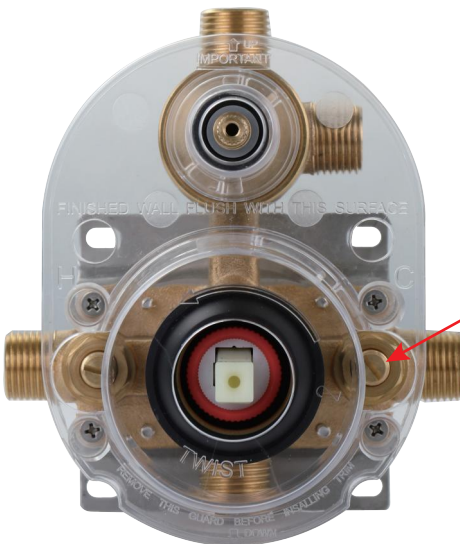

It can close water when you screw clockwise slotted screwdriver on both sides.

Note: If only close one side that it will cause faucet abnormal outlet water, for normal outlet water please make sure the adjusting position on both sides is open (counterclockwise to open).



CLEANING AND MAINTENANCE

Please follow the cleaning material manufacturer's instructions. In addition, pay attention to the following points:

- 1** Regular cleaning can prevent mineral build up on shower head and handheld shower.
- 2** Use a mild detergent such as liquid dishwashing soap and warm water for cleaning.
- 3** Do not use abrasive / harsh chemical when cleaning the fixture as they will damage and dull the finish.
- 4** Carefully read the cleaner product label to ensure the cleaner is safe for use on the material.
- 5** Test the cleaner on a small area before using on the entire surface.
- 6** Do not leave the cleaner on the fixture longer than necessary.
- 7** When using spray cleaners, spray first onto a soft cloth or sponge. Never spray directly onto the faucet as droplets can enter openings and gaps and cause damage.
- 8** After cleaning, rinse thoroughly with clean water to remove any cleaner residue.