


Assembly & Installation Instructions

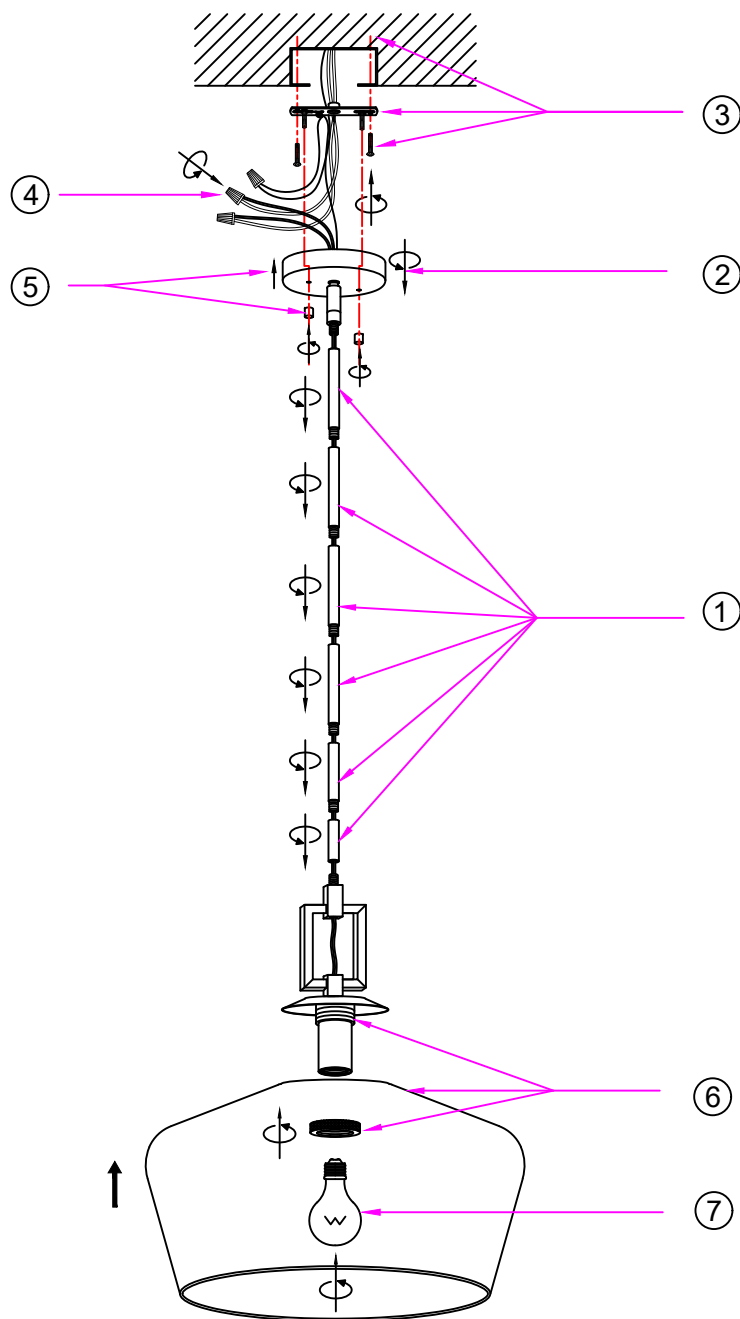

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Attach the suspension rod to the square lifting ring. Adjust the number of rods as needed to achieve the desired length.
2. Screw the ceiling plate onto the suspension rod.
3. Secure the mounting bracket to a U.S.-standard junction box with the mounting screws.
4. Connect the wires using wire connectors as follows:
Connect the BLACK wire of the main wire to the LIVE wire.
Connect the WHITE wire to the NEUTRAL wire.
Secure the fixture ground wire and external ground wire.
Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
5. Fasten the ceiling plate to the mounting bracket with the nuts.
6. Secure the glass lampshade to the lamp holder with the lamp shade ring.
Note: Gently adjust the glass lampshade to center the lamp holder before tightening the ring.
7. Install the bulb (NOT included) onto the socket as indicated.
8. Turn on the light to test for proper operation.